Discrete POWER & Signal Technologies

PN2222A MMBT2222A PZT2222A



TO-92



SOT-23
Mark: 1P



SOT-223

MMPQ2222 NMT2222



SOIC-16



SOT-6
Mark: 100

NPN General Purpose Amplifier

This device is for use as a medium power amplifier and switch requiring collector currents up to 500 mA. Sourced from Process 19.

Absolute Maximum Ratings*

TA = 25°C unless otherwise noted

Symbol	Parameter	Value	Units
V_{CEO}	Collector-Emitter Voltage	40	V
V_{CBO}	Collector-Base Voltage	75	V
V_{EBO}	Emitter-Base Voltage	6.0	V
I_C	Collector Current - Continuous	1.0	A
T_J, T_{stg}	Operating and Storage Junction Temperature Range	-55 to +150	°C

*These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

NOTES:
1) These ratings are based on a maximum junction temperature of 150 degrees C.
2) These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

NPN General Purpose Amplifier
(continued)

Electrical Characteristics
TA = 25°C unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Max	Units
OFF CHARACTERISTICS					
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage*	I_C = 10 mA, I_B = 0	40		V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	I_C = 10 µA, I_E = 0	75		V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	I_E = 10 µA, I_C = 0	6.0		V
I_{CEX}	Collector Cutoff Current	V_{CE} = 60 V, $V_{EB(OFF)}$ = 3.0 V		10	nA
I_{CBO}	Collector Cutoff Current	V_{CB} = 60 V, I_E = 0 V_{CB} = 60 V, I_E = 0, T_A = 150°C		0.01 10	µA µA
I_{EBO}	Emitter Cutoff Current	V_{EB} = 3.0 V, I_C = 0		10	nA
I_{BL}	Base Cutoff Current	V_{CE} = 60 V, $V_{EB(OFF)}$ = 3.0 V		20	nA
ON CHARACTERISTICS					
h_{FE}	DC Current Gain	I_C = 0.1 mA, V_{CE} = 10 V I_C = 1.0 mA, V_{CE} = 10 V I_C = 10 mA, V_{CE} = 10 V I_C = 10 mA, V_{CE} = 10 V, T_A = -55°C I_C = 150 mA, V_{CE} = 10 V* I_C = 150 mA, V_{CE} = 1.0 V* I_C = 500 mA, V_{CE} = 10 V*	35 50 75 35 100 50 40	 300 	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage*	I_C = 150 mA, I_B = 15 mA I_C = 500 mA, I_B = 50 mA		0.3 1.0	V V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage*	I_C = 150 mA, I_B = 1.0 mA I_C = 500 mA, I_B = 5.0 mA	0.6	1.2 2.0	V V
SMALL SIGNAL CHARACTERISTICS (except MMPQ2222 and NMT2222)					
f_T	Current Gain - Bandwidth Product	I_C = 20 mA, V_{CE} = 20 V, f = 100 MHz	300		MHz
C_{obo}	Output Capacitance	V_{CB} = 10 V, I_E = 0, f = 100 kHz		8.0	pF
C_{ibo}	Input Capacitance	V_{EB} = 0.5 V, I_C = 0, f = 100 kHz		25	pF
$rb'C_C$	Collector Base Time Constant	I_C = 20 mA, V_{CB} = 20 V, f = 31.8 MHz		150	pS
NF	Noise Figure	I_C = 100 µA, V_{CE} = 10 V, R_S = 1.0 kΩ, f = 1.0 kHz		4.0	dB
$Re(h_{ie})$	Real Part of Common-Emitter High Frequency Input Impedance	I_C = 20 mA, V_{CE} = 20 V, f = 300 MHz		60	Ω
SWITCHING CHARACTERISTICS (except MMPQ2222 and NMT2222)					
t_d	Delay Time	V_{CC} = 30 V, $V_{BE(OFF)}$ = 0.5 V,		10	ns
t_r	Rise Time	I_C = 150 mA, I_{B1} = 15 mA		25	ns
t_s	Storage Time	V_{CC} = 30 V, I_C = 150 mA,		225	ns
t_f	Fall Time	I_{B1} = I_{B2} = 15 mA		60	ns

*Pulse Test: Pulse Width≤ 300 µs, Duty Cycle≤ 2.0%

Spice Model

NPN (Is=14.34f Xti=3 Eg=1.11 Vaf=74.03 Bf=255.9 Ne=1.307 Ise=14.34f Ikf=.2847 Xtb=1.5 Br=6.092 Nc=2 Isc=0 Ikr=0 Rc=1 Cjc=7.306p Mjc=.3416 Vjc=.75 Fc=.5 Cje=22.01p Mje=.377 Vje=.75 Tr=46.91n Tf=411.1p Itf=.6 Vtf=1.7 Xtf=3 Rb=10)

NPN General Purpose Amplifier
(continued)

Thermal Characteristics
TA = 25°C unless otherwise noted

Symbol	Characteristic	Max		Units
		PN2222A	*PZT2222A	
P_D	Total Device Dissipation Derate above 25°C	625 5.0	1,000 8.0	mW mW/°C
$R_{\theta JC}$	Thermal Resistance, Junction to Case	83.3		°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	200	125	°C/W

Symbol	Characteristic	Max		Units
		**MMBT2222A	MMPQ2222	
P_D	Total Device Dissipation Derate above 25°C	350 2.8	1,000 8.0	mW mW/°C
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient Effective 4 Die Each Die	357	 125 240	°C/W °C/W °C/W

*Device mounted on FR-4 PCB 36 mm X 18 mm X 1.5 mm; mounting pad for the collector lead min. 6 cm^2

**Device mounted on FR-4 PCB 1.6" X 1.6" X 0.06."

Typical Characteristics

Typical Pulsed Current Gain vs Collector Current

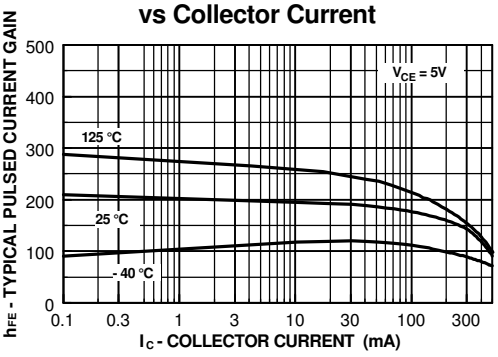

Collector-Emitter Saturation Voltage vs Collector Current

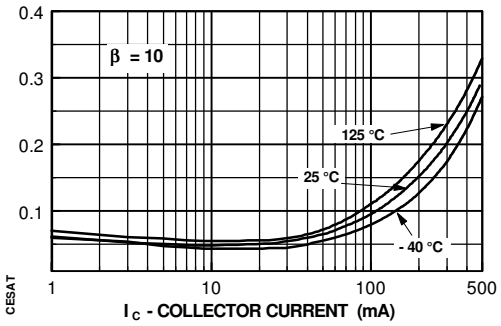

Base-Emitter Saturation Voltage vs Collector Current

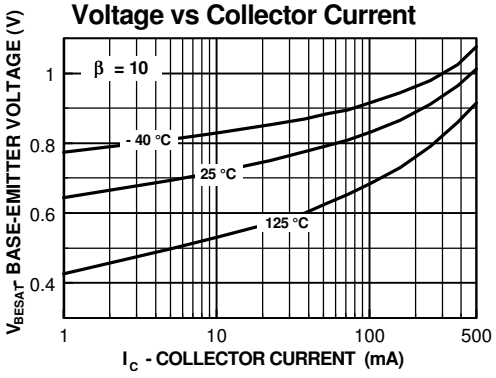

Base-Emitter ON Voltage vs Collector Current

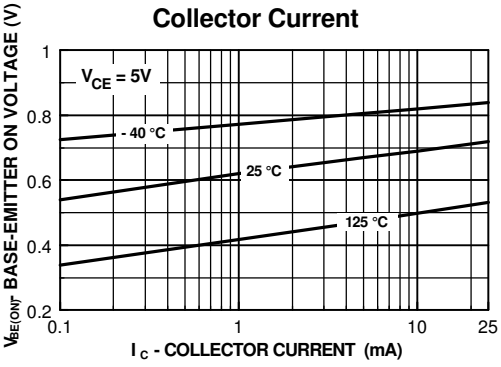

Typical Characteristics (continued)

Collector-Cutoff Current vs Ambient Temperature

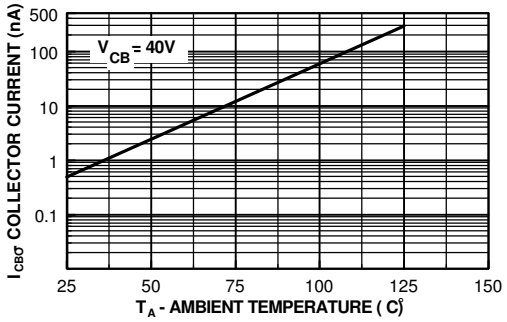

Emitter Transition and Output Capacitance vs Reverse Bias Voltage

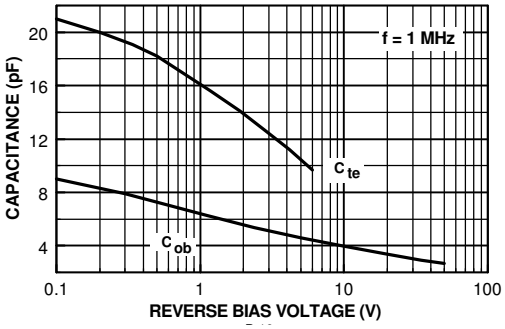

Turn On and Turn Off Times vs Collector Current

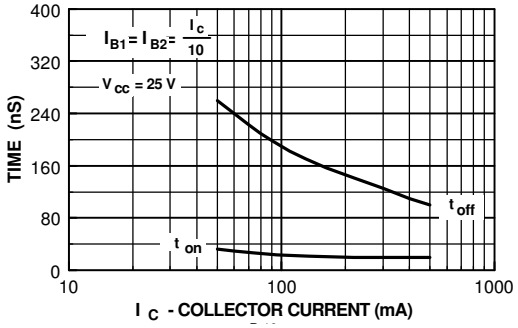

Switching Times vs Collector Current

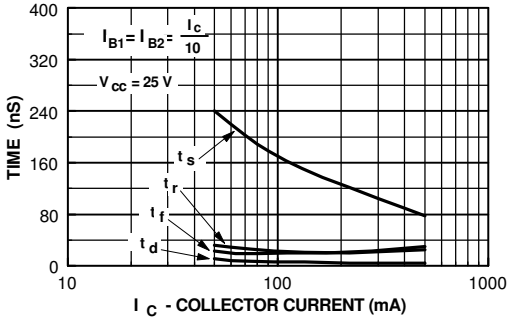

Power Dissipation vs Ambient Temperature

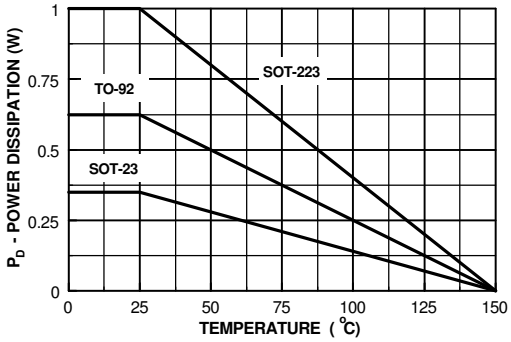

Test Circuits

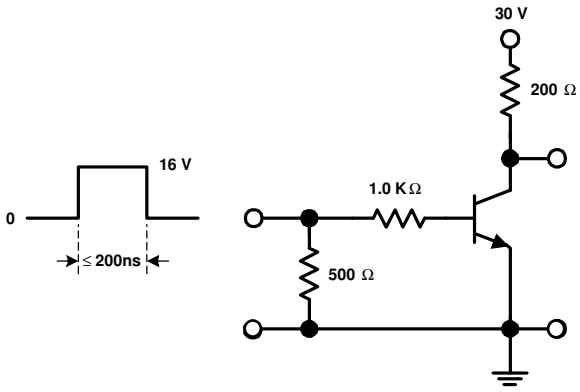

FIGURE 1: Saturated Turn-On Switching Time

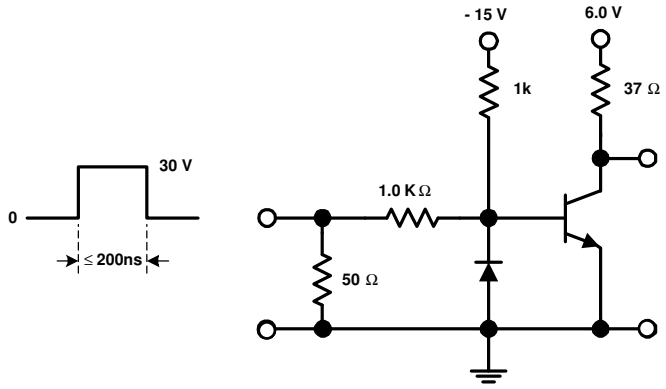

FIGURE 2: Saturated Turn-Off Switching Time

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.

National Semiconductor was acquired by Texas Instruments.

http://www.ti.com/corp/docs/investor_relations/pr_09_23_2011_national_semiconductor.html

This file is the datasheet for the following electronic components:

PZT2222A - http://www.ti.com/product/pzt2222a?HQS=TI-null-null-dscatalog-df-pf-null-wwe

PN2222A - http://www.ti.com/product/pn2222a?HQS=TI-null-null-dscatalog-df-pf-null-wwe

MMBT2222A - http://www.ti.com/product/mmbt2222a?HQS=TI-null-null-dscatalog-df-pf-null-wwe

MMPQ2222 - http://www.ti.com/product/mmpq2222?HQS=TI-null-null-dscatalog-df-pf-null-wwe

NMT2222 - http://www.ti.com/product/nmt2222?HQS=TI-null-null-dscatalog-df-pf-null-wwe

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.