BCF030T

HIGH EFFICIENCY HETEROJUNCTION POWER FET CHIP (.3 µm x 300 µm)


The BeRex BCF030T is a GaAs Power MESFET whose nominal 0.3 micron gate length and 300 micron gate width make the product ideally suited to applications requiring high OIP3 linearity and low phase noise while providing high-gain and medium power from DC to 26.5 GHz frequency range. This product is well suited for either wideband or narrow-band applications. The BCF030T is produced using state of the art metallization and devices from each wafer are screened to insure reliability. These chips utilize SI_3N_4 passivation for increased reliability.

Product Features

- 21.5 dBm Typical Output Power
- 13.5 dB Typical Power Gain @ 12 GHz
- Low Phase Noise
- 0.3 X 300 Micron Recessed Gate

Applications

- Commercial
- Military / Hi-Rel
- Test & Measurement

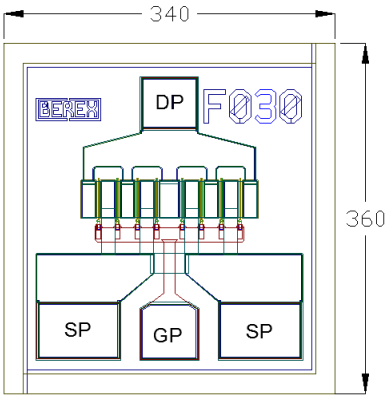

Chip dimensions : 340 X 360 microns
Gate pad(GP) : 60 X 55 microns
Drain pad(DP) : 60 X 50 microns
Source pad(SP) : 90 X 65 microns
Chip thickness : 100 microns

DC CHARACTERISTIC (T_a = 25° C)

PARAMETER/TEST CONDITIONS		MINIMUM	TYPICAL	MAXIMUM	UNIT
I_{dss}	Saturated Drain Current (V_{gs} = 0V, V_{ds} = 2V)	60	90	120	mA
Gm	Transconductance (V_{ds} = 3V, V_{gs} = 50% I_{dss})	35	50		mS
Vp	Pinch-off Voltage (I_{ds} = 300 µA, V_{ds} = 3V)	-3.5	-2.0	-0.5	V
BV_{gd}	Drain Breakdown Voltage (I_g = 0.2 mA, source open)		-15	-11	V
BV_{gs}	Source Breakdown Voltage (I_g = 0.2 mA, drain open)		-10	-7	V
R_{th}	Thermal Resistance (Au-Sn Eutectic Attach)		120		° C/W

Specifications are subject to change without notice. ©BeRex 2015

ELECTRICAL CHARACTERISTIC (V_{ds} = 8V, T_a = 25° C)

PARAMETER/TEST CONDITIONS		TEST FREQUENCY	MINIMUM	TYPICAL	MAXIMUM	UNIT
P_{1dB}	Output Power @ P_{1dB} (V_{ds} = 8V, I_{ds} = 50% I_{dss})	12 GHZ 18 GHz	19.5 19.7	21.5 21.7		dBm
G_{1dB}	Gain @ P_{1dB} (V_{ds} = 8V, I_{ds} = 50% I_{dss})	12 GHZ 18 GHz	11.5 9.5	13.5 11.5		dB
PAE	PAE @ P_{1dB} (V_{ds} = 8V, I_{ds} = 50% I_{dss})	12 GHZ 18 GHz		30.0 32.5		%
NF	Noise figure (V_{ds} = 2V, I_{ds} = 10 mA)	12 GHz		1.45		dB
Ga	Associated Gain ((V_{ds} = 2V, I_{ds} = 10 mA)	12 GHz		11		dB

ELECTRICAL CHARACTERISTIC (V_{ds} = 6V, T_a = 25° C)

PARAMETER/TEST CONDITIONS		TEST FREQUENCY	MINIMUM	TYPICAL	MAXIMUM	UNIT
P_{1dB}	Output Power @ P_{1dB} (V_{ds} = 6V, I_{ds} = 50% I_{dss})	12 GHZ 18 GHz	19 19.5	21.0 21.5		dBm
G_{1dB}	Gain @ P_{1dB} (V_{ds} = 6V, I_{ds} = 50% I_{dss})	12 GHZ 18 GHz	11.2 8.9	13.2 10.9		dB
PAE	PAE @ P_{1dB} (V_{ds} = 6V, I_{ds} = 50% I_{dss})	12 GHZ 18 GHz		38 40		%
NF	Noise figure (V_{ds} = 2V, I_{ds} = 10 mA)	12 GHz		1.45		dB
Ga	Associated Gain ((V_{ds} = 2V, I_{ds} = 10 mA)	12 GHz		11		dB


MAXIMUM RATINGS (T_a = 25° C)

PARAMETERS		ABSOLUTE	CONTINUOUS
V_{ds}	Drain-Source Voltage	12 V	8 V
V_{gs}	Gate-Source Voltage	-8 V	-4V
I_{ds}	Drain Current	I_{dss}	I_{dss}
I_{gsf}	Forward Gate Current	7.5 mA	1.2 mA
P_{in}	Input Power	16 dBm	@ 3dB compression
T_{ch}	Channel Temperature	175° C	150° C
T_{stg}	Storage Temperature	-60° C - 150° C	-60° C - 150° C
P_t	Total Power Dissipation	1.2 W	1.0 W


Exceeding any of the above Maximum Ratings will result in reduced MTTF and may cause permanent damage to the device

Specifications are subject to change without notice. ©BeRex 2015

P_{in}_P_{out}/Gain, PAE (12 GHz)

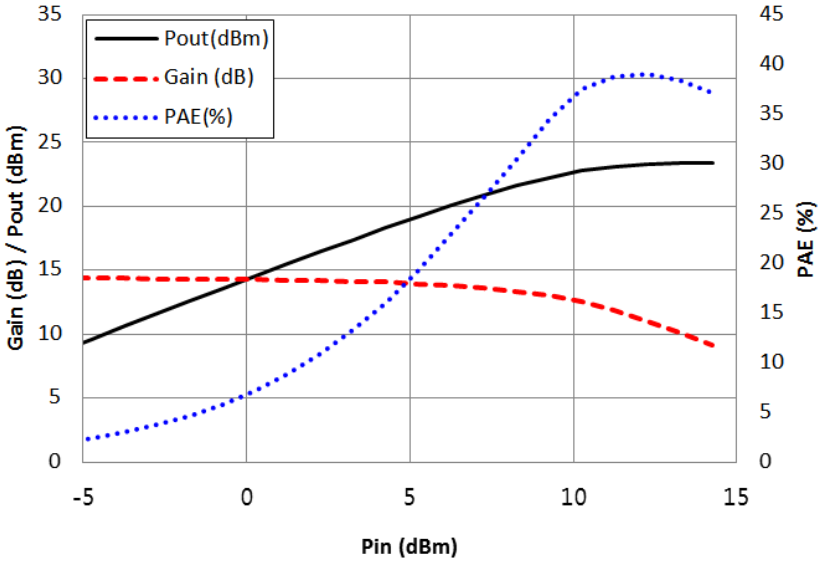


Freq. = 12 GHz, V_{ds} = 8 V, I_{ds} = 50% I_{dss}

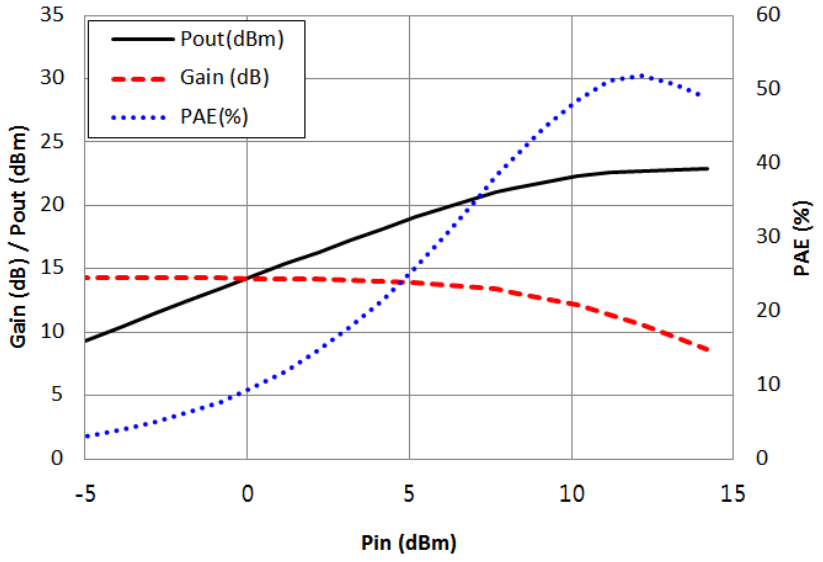


Freq. = 12 GHz, V_{ds} = 6V, I_{ds} = 50% I_{dss}

Specifications are subject to change without notice. ©BeRex 2015

P_{in}_P_{out}/Gain, PAE (18 GHz)

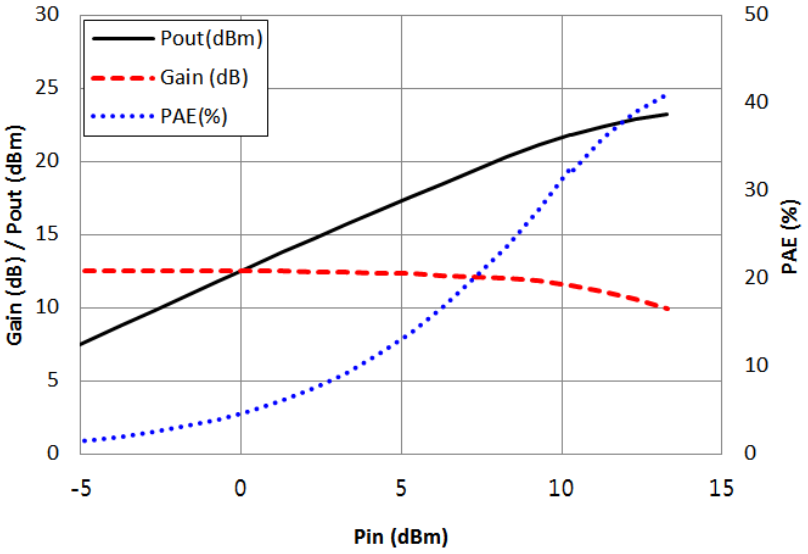


Freq. = 18 GHz, V_{ds} = 8 V, I_{ds} = 50% I_{dss}

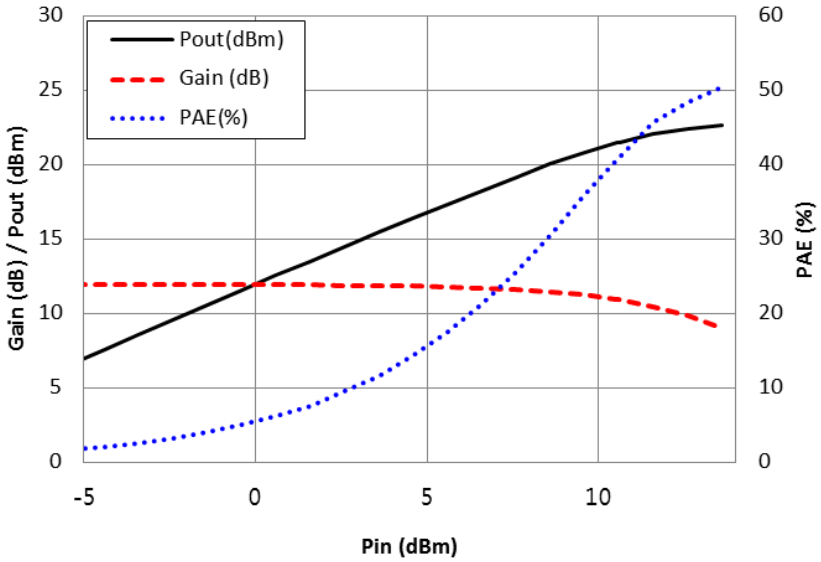

Freq. = 18 GHz, V_{ds} = 6 V, I_{ds} = 50% I_{dss}

Specifications are subject to change without notice. ©BeRex 2015

Wire Bonding Options

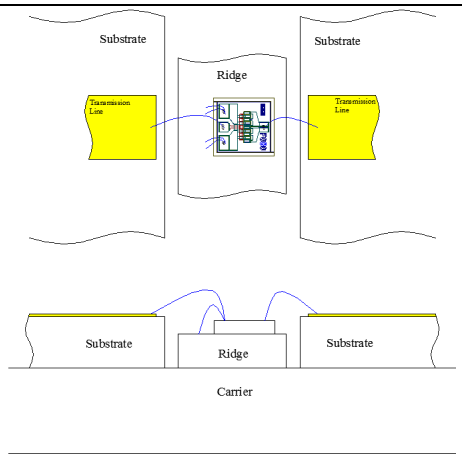

- Gold Bonding Wire information

1. Gate to input transmission line
   - Length and Height : 400 um and 250 um
   - Number of wires: 1
2. Drain to output transmission line
   - Length and Height : 350 um and 250 um
   - Number of wires: 1
3. Source to ground plate
   - Length and Height : 200 um x 250 um
   - Number of wires: 4

Note: The diameter of bonding wires: 1 mil



Proper ESD procedures should be followed when handling this device.

DIE ATTACH RECOMMENDATIONS:

BeRex recommends the "Eutectic" die attach using Au-Sn (80%-20%) pre-forms. The die attach station must have accurate temperature control, and the operation should be performed with parts no hotter than 300°C for less than 60 seconds. An inert forming gas (90% N_2-10% H_2) or clean, dry N_2 should be used.

HANDLING PRECAUTIONS:

GaAs FETs are very sensitive to and may be damaged by Electrostatic Discharge (ESD). Therefore, proper ESD precautions must be taken whenever you are handling these devices. It is critically important that all work surfaces, and assembly equipment, as well as the operator be properly grounded when handling these devices to prevent ESD damage.

STORAGE & SHIPPING:

BeRex's standard chip device shipping package consists of an antistatic "Gel-Pak", holding the chips, placed inside a sealed antistatic and moisture barrier bag. This packaging is designed to provide a reasonable measure of protection from both mechanical and ESD damage.

Chip devices should be stored in a clean, dry Nitrogen gas environment at room temperature until they are required for assembly. Only open the shipping package or perform die assembly in a work area with a class 10,000 or better clean room environment to prevent contamination of the exposed devices.

CAUTION:

THIS PRODUCT CONTAINS GALLIUM ARSENIDE (GaAs) WHICH CAN BE HAZARDOUS TO THE HUMAN BODY AND THE ENVIRONMENT. THEREFORE, IT MUST BE HANDLED WITH CARE AND IN ACCORDANCE WITH ALL GOVERNMENTAL AND COMPANY REGULATIONS FOR THE SAFE HANDLING AND DISPOSAL OF HAZARDOUS WASTE. DO NOT BURN, DESTROY, CUT, CRUSH OR CHEMICALLY DISSOLVE THE PRODUCT. DO NOT LICK THE PRODUCT OR IN ANY WAY ALLOW IT TO ENTER THE MOUTH. EXCLUDE THE PRODUCT FROM GENERAL INDUSTRIAL WASTE OR GARBAGE AND DISPOSE OF ONLY IN ACCORDANCE TO APPLICABLE LAWS AND/OR ORDINANCES.

DISCLAIMER

BEREX RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. BEREX DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN.

LIFE SUPPORT POLICY

BEREX PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES WITHOUT THE EXPRESS WRITTEN APPROVAL OF BEREX.

1. Life support devices or systems are devices or systems which (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.