UNIVERSAL INDUSTRIAL LOGIC AND INTERFACE CIRCUIT

GENERAL DESCRIPTION

The SAA1029 is a universal bipolar logic and interface IC with high noise immunity and operational stability for industrial control applications. The most fundamental industrial control functions can be accomplished with only one SAA1029 IC. Figure 1 shows the logic configuration.

The IC comprises,
(1) Gate 1: 4-input AND gate with 1 inverted input,
(2) Gate 2: 3-input AND gate with 1 inverted input and adjustable propagation delay,
(3) Gate 3: 2-input AND gate with 1 inverted input.
The SAA1029 can be used as direct interface with LOCMOS (CMOS) ICs for realizing more complex functions. Therefore, the output signal can be limited to the voltage level of the common output clamping pin Z.

The propagation delay of NAND gate 2 is adjustable from microseconds to seconds by using an external capacitor at pin C. This makes it possible to adapt the control frequency limits to the system, so the optimum dynamic noise immunity can be achieved.

All the static and dynamic circuit values (including the output voltage) are independent of the supply voltage over a wide operating range. This allows the use of a simple unstabilized power supply.

The output is held to the LOW state automatically during switching on the power supply, so a special reset pulse can be omitted.

Features

- Simple realization of the basic industrial control functions (logic functions, timing functions, memory functions).
- High dynamic and static noise immunity.
- High operation stability.
- Short-circuit protection of inputs and outputs to both V_{EE} and V_{CC}.
- Wide supply voltage range, so a simple power supply can be used.
- Wire interruption results in a safe input LOW state.
- LOCMOS (CMOS) compatible.

QUICK REFERENCE DATA

Supply voltage range	V_{CC}	14 to 31,2	V
Operating ambient temperature range	T_{amb}	−30 to + 85	°C
Input voltage HIGH	V_{IH}	6,5 to 44	V
Output voltage HIGH (without clamping)	V_{OH}	13 to 30	V
Output voltage HIGH (with clamping at pin Z)	V_{OH}	2,0 to (V_{CC} −0,7)	V
Input current	I_I	max. 10	mA
Quiescent supply current	I_{CC}	typ. 7,8	mA

PACKAGE OUTLINE

16-lead DIL; plastic (SOT38).

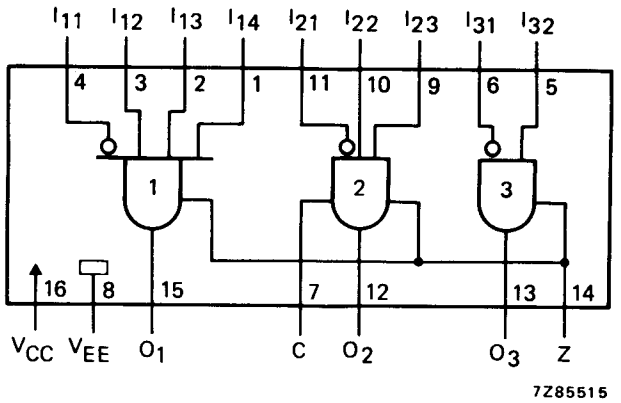

Fig. 1 Logic diagram.

Logic equations:

$O_1 = \overline{I_{11}} \cdot I_{12} \cdot I_{13} \cdot I_{14}$

$O_2 = \overline{I_{21}} \cdot I_{22} \cdot I_{23}$

$O_3 = \overline{I_{31}} \cdot I_{32}$

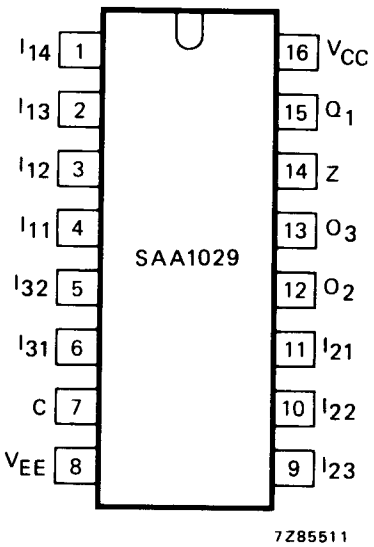

Fig. 2 Pinning diagram.

PINNING

4	I_{11}	inputs of gate 1
3	I_{12}	
2	I_{13}	
1	I_{14}	
15	O_1	output of gate 1
11	I_{21}	inputs of gate 2
10	I_{22}	
9	I_{23}	
12	O_2	output of gate 2
6	I_{31}	inputs of gate 3
5	I_{32}	
13	O_3	output of gate 3
7	C	external delay capacitor
14	Z	common output clamping
16	V_{CC}	positive supply voltage
8	V_{EE}	ground

RATINGS

Limiting values in accordance with the Absolute Maximum System (IEC 134)

Supply voltage range	V_{CC}		0 to + 35 V
Input voltage (independent of V_{CC})	V_I		−0,15 to + 44 V
Output clamping voltage (pin 14)	V_Z		0 to + 35 V
Voltage at any output (pins 12, 13 and 15)			
pin 14 (Z) open	V_O		−0,15 to V_{CC} V
pin 14 (Z) at V_Z	V_O	max.	V_Z V or V_{CC} if $V_{CC} < V_Z$
Current into any input			
d.c.	$\pm I_I$	max.	10 mA
t_p = 0,5 μs; δ = 0,1% (peak value)	$\pm I_{IM}$	max.	100 mA
Sum of input currents			
d.c.	ΣI_I		−90 to + 10 mA
t_p = 0,5 μs; δ = 0,1% (peak value)	ΣI_{IM}		−900 to + 300 mA
External applied current at any output (pins 12, 13 and 15)			
pin 14 (Z) open			
d.c.	$\pm I_O$	max.	30 mA
t_p = 0,5 μs; δ = 0,1% (peak value)	$\pm I_{OM}$	max.	500 mA
External applied current at any output (pins 12, 13 and 15)			
pin 14 (Z) at V_Z			
d.c.	I_O		−30 to + 10 mA
t_p = 0,5 μs; δ = 0,1% (peak value)	I_O		−500 to + 100 mA
Voltage at pin 7 (C)	V_C		−0,15 to + 6 V
External capacitor at pin 7 (C)	any value		
Short-circuit of outputs (pins 12, 13 and 15)			
pin 14 (Z) open	allowed to V_{CC} and V_{EE} (0 V)		
at $V_Z < V_{CC}$	allowed only to V_{EE} (0 V)		
Total power dissipation (see also Fig. 3)			
at T_{amb} = 50 °C; continuous	P_{tot}	max.	1100 mW
at T_{amb} = 65 °C; max. 1000 hours	P_{tot}	max.	1100 mW
Storage temperature range	T_{stg}		−40 to + 150 °C

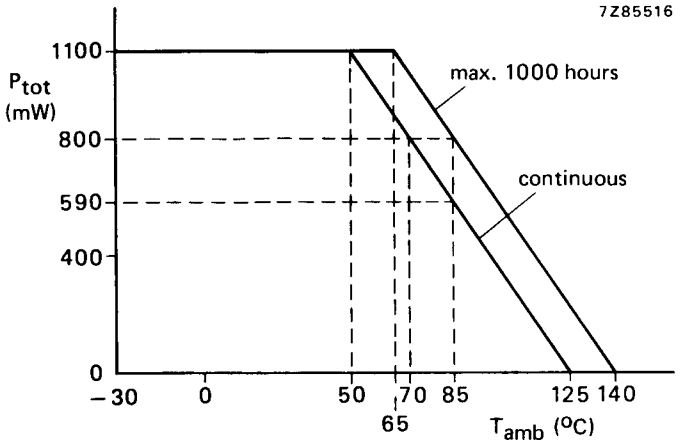

Fig. 3 Power derating curves; $R_{th\ j\text{-}a}$ = 70 K/W.

CHARACTERISTICS

At $T_{amb} = -30$ to $+85$ °C; $T_j \leqslant 125$ °C; $V_{CC} = 14$ to 31,2 V; unless otherwise specified

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage		V_{CC}	14	24	31,2	V
Quiescent supply current		I_{CC}	–	7,8	–	mA
	$V_{CC} = 31$ V; $T_{amb} = 25$ °C	I_{CC}	–	–	12,2	mA
Quiescent current ratio	$I_{CC1} = I_{CC}$ at $T_j = 125$ °C $I_{CC2} = I_{CC}$ at $T_j = 25$ °C	$\frac{I_{CC1}}{I_{CC2}}$	–	0,67	–	
Input voltage LOW		V_{IL}	–	–	5	V
Input voltage HIGH		V_{IH}	6,5	–	–	V
		V_{IH}	6,55	–	–	V
Input current LOW		$-I_{IL}$	–	–	100	μA
		$-I_{IL}$	–	–	95	μA
Input current HIGH		I_{IH}	300	–	–	μA
Rate of change of input signal		dV/dt	3	–	–	V/ms
Input current*	$V_I = 1$ V	$-I_I$	–	–	120	μA
	$V_I = 35$ V	I_I	–	–	280	μA
Output clamping voltage*	$V_Z = V_{CC} - 1$ V	V_Z	–	–	30	V
Output voltage without clamping (pin 14 open)* non-inverting input: $V_I = 5,1$ V inverting input: $V_I = 6,3$ V	$V_{CC} = 14$ V					
LOW	$I_O = 1,32$ mA	V_{OL}	–	–	1	V
	$I_O = 2,91$ mA	V_{OL}	–	–	1,5	V
HIGH	$-I_O = 5$ mA	V_{OH}	$V_{CC}-1,4$	–	–	V
Output voltage with clamping (pin 14 at V_Z)*	$V_{CC} = 31,2$ V $V_Z < V_{CC}-1$ V					
LOW	$I_O = 1,32$ mA	V_{OL}	–	–	1	V
	$I_O = 1,91$ mA	V_{OL}	–	–	1,5	V

* At $T_{amb} = 25$ °C; $V_{CC} = 24$ V; unless otherwise specified.

parameter	conditions	symbol	min.	typ.	max.	unit
HIGH	I_O = 0 mA	V_{OH}	(V_Z −0,475)	–	(V_Z + 0,225)	V
	$-I_O$ = 1 mA	V_{OH}	(V_Z −0,455)	–	(V_Z + 0,12)	V
	$-I_O$ = 3 mA	V_{OH}	(V_Z −0,41)	–	(V_Z + 0,055)	V
Output short-circuit current*						
LOW-signal	output at V_{CC}	I_{OscL}	2,95	–	9,6	mA
HIGH-signal	output at V_{EE} (0 V)	$-I_{OscH}$	10,1	–	21,9	mA
Capacitor charging current*		I_C	–	30	–	μA
Propagation delays*						
gates 1, 2 and 3						
HIGH to LOW	C = 0 (at gate 2)	t_{PHL}	–	3,5	–	μs
LOW to HIGH		t_{PLH}	–	3,5	–	μs
gate 2						
HIGH to LOW	C = 47 nF ± 1%	t_{PHL}	1,85	–	5,2	ms
LOW to HIGH	$R_{insulation} > 100$ MΩ	t_{PLH}	7,5	–	14	ms

* At T_{amb} = 25 °C; V_{CC} = 24 V; unless otherwise specified.

CHARACTERISTICS (worst case conditions)

At T_j = + 125 to + 140 °C; maximum 1000 hours

parameter	conditions	symbol	min.	typ.	max.	unit
Input voltage LOW		V_{IL}	–	–	5	V
Input voltage HIGH		V_{IH}	6,55	–	–	V
Input current	V_I = 1 to 44 V	I_I	95	–	300	μA
Change of input current overdrive of other inputs $\Sigma(-I_I) < 10$ mA	$V_I < V_{CC} - 1$ V	ΔI_I	–	–	120	μA
	$V_I > V_{CC} - 1$ V	ΔI_I	–	–	158	μA
overdrive of other inputs $\Sigma(-I_I) < 90$ mA	$V_I < V_{CC} - 1$ V	ΔI_I	–	–	280	μA
	$V_I > V_{CC} - 1$ V	ΔI_I	–	–	320	μA
Input voltage by current overdrive	$\Sigma(-I_I)$ = 10 mA	V_I	46	–	65	V
Output voltage without clamping (pin 14 open) LOW	$I_{OL} \leqslant 0{,}095$ mA	V_{OL}	–	–	0,35	V
	I_{OL} = 0,095 to 1 mA	V_{OL}	–	–	1	V
	I_{OL} = 1 to 2,5 V	V_{OL}	–	–	1,5	V
HIGH	$-I_{OH} \leqslant 5$ mA	V_{OH}	$V_{CC}-1{,}5$	–	–	V
Output voltage with clamping (pin 14 at V_Z)	V_Z = 2,5 to V_{CC} − 1 V					
HIGH	I_{OH} = 0 mA	V_{OH}	$(V_Z - 0{,}5)$	–	$(V_Z + 0{,}245)$	V
	I_{OH} = 1 mA	V_{OH}	$(V_Z - 0{,}5)$	–	$(V_Z + 0{,}15)$	V
	I_{OH} = 3 mA	V_{OH}	$(V_Z - 0{,}5)$	–	V_Z	V
	I_{OH} = 0 mA; V_Z = 0 V	V_{OH}	–	–	0,75	V
Output short-circuit current						
LOW-signal	output at V_{CC}	I_{OscL}	–	–	11	mA
HIGH-signal	output at V_{EE} (0 V)	$-I_{OscH}$	5	–	28,5	mA
HIGH-signal	output at V_{EE} (0 V); T_j = 140 °C	$-I_{OscH}$	–	–	10	mA

parameter	conditions	symbol	min.	typ.	max.	unit
Current out of pin 14 (Z) when currents are forced into outputs	$-I_O \leqslant 3$ mA	$-I_Z$	–	–	2,2	mA
	$\Sigma I_O = (I_{O1} + I_{O2} + I_{O3})$	$-I_Z$	ΣI_O	–	–	mA
Current into pin 14 (Z) when inputs are set for output to be LOW	$-I_O = 30$ mA; $V_O \leqslant V_{EE}$	I_Z	–	–	300	μA
Supply current change	input and/or output voltages are negative with respect to V_{EE}	ΔI_{CCmax}	$(0{,}3 \times \lvert I_I \rvert) + (0{,}55 \times \lvert I_O \rvert)$			mA
Propagation delays						
gates 1 and 3						
HIGH to LOW		t_{PHL}	1	–	7	μs
LOW to HIGH		t_{PLH}	1	–	7	μs
gate 2						
HIGH to LOW	without capacitor	t_{PHL}	0,1	–	4	μs
LOW to HIGH	without capacitor	t_{PLH}	0,3	–	6	μs
HIGH to LOW	with capacitor; C in μF	t_{PHL}	38 x C	–	113 x C	μs
LOW to HIGH	with capacitor; C in μF	t_{PLH}	142 x C	–	334 x C	μs
Voltage spikes output LOW	see note 1	V_{OL}	–	–	2	V

Note to the characteristics

1. V_{CC} rising from 0 to 14 V; all inputs open; internally it is guaranteed that the input threshold voltage $V_{IL} > V_{OL}$.

APPLICATION INFORMATION

The following figures (Figs 4 to 11) give some examples of the basic industrial control functions.



Fig. 4 OR function.

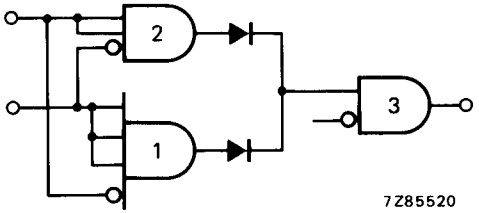

Fig. 5 EXCLUSIVE-OR function.

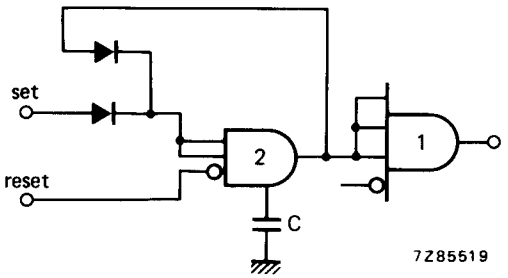

Fig. 6 Delayed memory; reset is dominating.

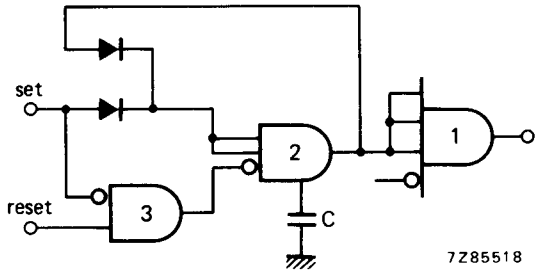

Fig. 7 Delayed memory; set is dominating.

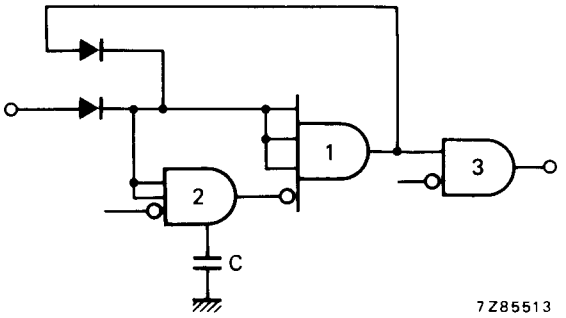

Fig. 8 Monostable flip-flop; for C = 4,7 μF, 1 s no reaction.

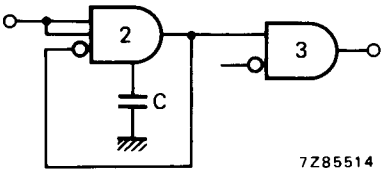

Fig. 9 Start delay function.

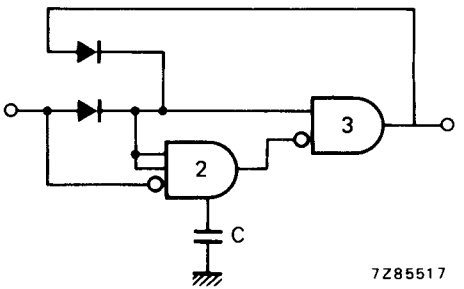

Fig. 10 Decay delay function.

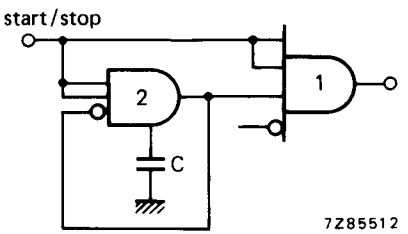

Fig. 11 Square-wave oscillator.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.