TOSHIBA PHOTOCOUPLER GaAs IRED & PHOTO-TRANSISTOR

TLP504A, TLP504A-2

PROGRAMMABLE CONTROLLERS

AC / DC-INPUT MODULE

SOLID STATE RELAY

Unit in mm

TLP504A

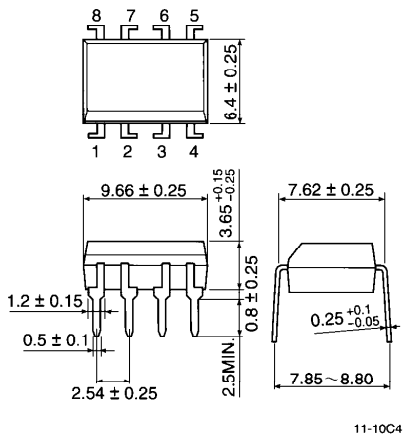

TOSHIBA 11-10C4

Weight : 0.54g

TLP504A-2

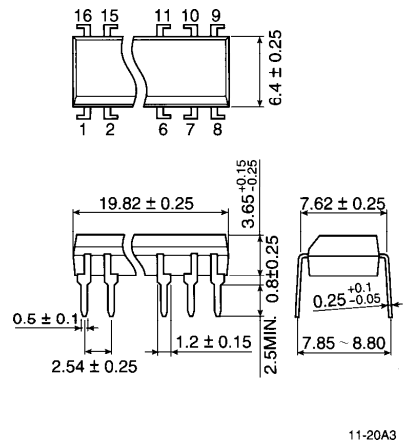

TOSHIBA 11-20A3

Weight : 1.1g

- Collector-Emitter Voltage : 55V (Min.)
- Current Transfer Ratio : 50% (Min.)
  Rank GB : 100% (Min.)
- Isolation Voltage : 2500Vrms (Min.)
- UL Recognized : UL1577,
  File No. E67349

PIN CONFIGURATIONS (TOP VIEW)

TLP504A



1, 4 : ANODE
2, 3 : CATHODE
5, 8 : EMITTER
6, 7 : COLLECTOR

TLP504A-2

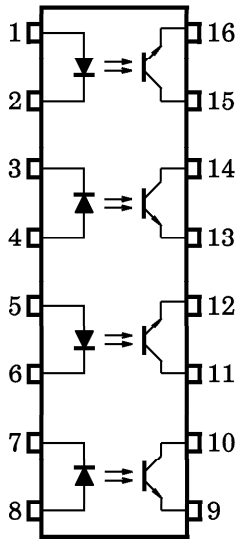

1, 4, 5, 8 : ANODE
2, 3, 6, 7 : CATHODE
9, 12, 13, 16 : EMITTER
10, 11, 14, 15 : COLLECTOR

961001EBC2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

MAXIMUM RATINGS (Ta = 25°C)

	CHARACTERISTIC	SYMBOL	RATING		UNIT
			TLP504A	TLP504A-2	
LED	Forward Current	I_F	60	50	mA
	Forward Current Derating	ΔI_F / °C	−0.7 (Ta≧39°C)	−0.5 (Ta≧25°C)	mA / °C
	Pulse Forward Current	I_{FP}	1 (100μs pulse, 100pps)		A
	Reverse Voltage	V_R	5		V
	Junction Temperature	T_j	125		°C
DETECTOR	Collector-Emitter Voltage	V_{CEO}	55		V
	Emitter-Collector Voltage	V_{ECO}	7		V
	Collector Current	I_C	50		mA
	Collector Power Dissipation (1 Circuit)	P_C	150	100	mW
	Collector Power Dissipation Derating (1 Circuit Ta≧25°C)	ΔP_C / °C	−1.5	−1.0	mW / °C
	Junction Temperature	T_j	125		°C
Storage Temperature Range		T_{stg}	−55~150		°C
Operating Temperature Range		T_{opr}	−55~100		°C
Lead Soldering Temperature		T_{sol}	260 (10s)		°C
Total Package Power Dissipation		R_T	250	150	mW
Total Package Power Dissipation Derating (Ta≧25°C)		ΔP_T / °C	−2.5	−1.5	mW / °C
Isolation Voltage		BV_S	2500 (AC, 1min., R.H.≦60%) (Note 1)		Vrms

(Note 1) Device considered a two terminal device : LED side pins shorted together and DETECTOR side pins shorted together.

RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V_{CC}	—	5	24	V
Forward Current	I_F	—	16	20	mA
Collector Current	I_C	—	1	10	mA
Operating Temperature	T_{opr}	−25	—	85	°C

961001EBC2'

- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)

	CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
LED	Forward Voltage	V_F	I_F = 10mA	1.0	1.15	1.3	V
	Reverse Current	I_R	V_R = 5V	—	—	10	μA
	Capacitance	C_T	V = 0, f = 1MHz	—	30	—	pF
DETECTOR	Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	I_C = 0.5mA	55	—	—	V
	Emitter-Collector Breakdown Voltage	$V_{(BR)ECO}$	I_E = 0.1mA	7	—	—	V
	Collector Dark Current	I_{CEO}	V_{CE} = 24V	—	10	100	nA
			V_{CE} = 24V, Ta = 85°C	—	2	50	μA
	Capacitance Collector to Emitter	C_{CE}	V = 0, f = 1MHz	—	10	—	pF

COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Current Transfer Ratio	I_C / I_F	I_F = 5mA, V_{CE} = 5V	50	—	600	%
		Rank GB	100	—	600	
Saturated CTR	$I_C / I_{F(sat)}$	I_F = 1mA, V_{CE} = 0.4V	—	60	—	%
		Rank GB	30	—	—	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	I_C = 2.4mA, I_F = 8mA	—	—	0.4	V
		I_C = 0.2mA, I_F = 1mA	—	0.2	—	
		Rank GB	—	—	0.4	

ISOLATION CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Capacitance Input to Output	C_S	V_S = 0, f = 1MHz	—	0.8	—	pF
Isolation Resistance	R_S	V_S = 500V	5×10^{10}	10^{14}	—	Ω
Isolation Voltage	BV_S	AC, 1 minute	2500	—	—	Vrms
		AC, 1 second, in oil	—	5000	—	
		DC, 1 minute, in oil	—	5000	—	Vdc

SWITCHING CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Rise Time	t_r	V_{CC} = 10V, I_C = 2mA R_L = 100Ω	—	2	—	μs
Fall Time	t_f		—	3	—	
Turn-on Time	t_{on}		—	3	—	
Turn-off Time	t_{off}		—	3	—	
Turn-on Time	t_{ON}	R_L = 1.9kΩ (Fig.1) V_{CC} = 5V, I_F = 16mA	—	2	—	μs
Storage Time	t_s		—	15	—	
Turn-off Time	t_{OFF}		—	25	—	

Fig.1 Switching Time Test Circuit

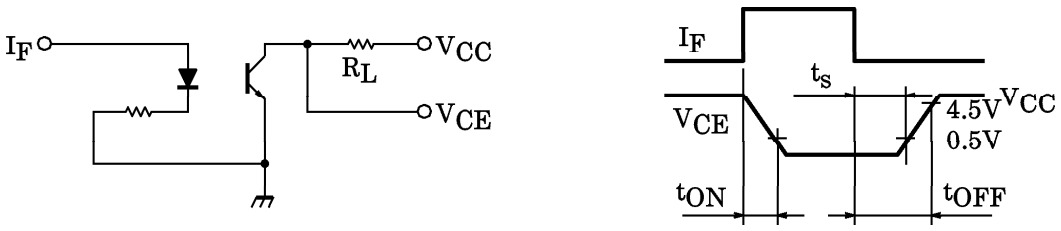

I_F – Ta

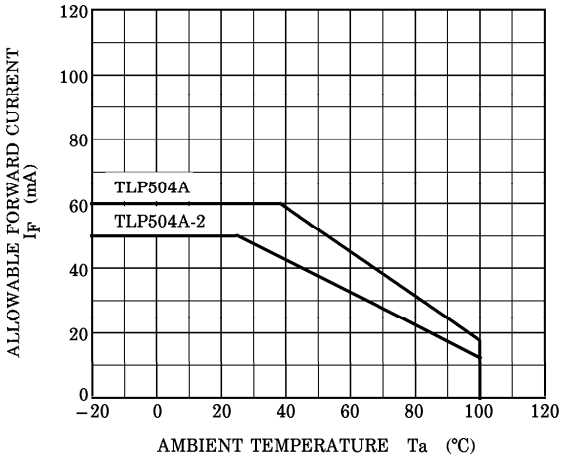

P_C – Ta

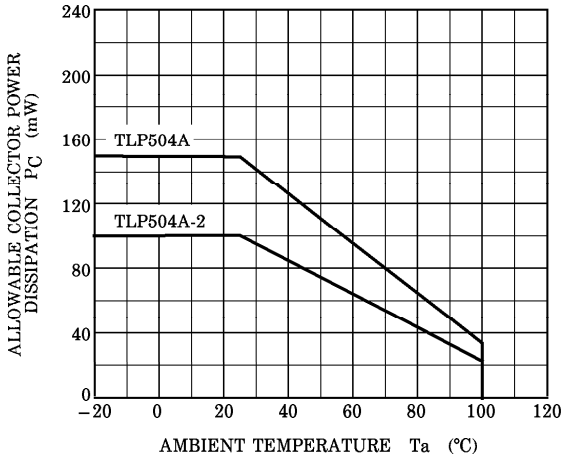

I_{FP} – D_R

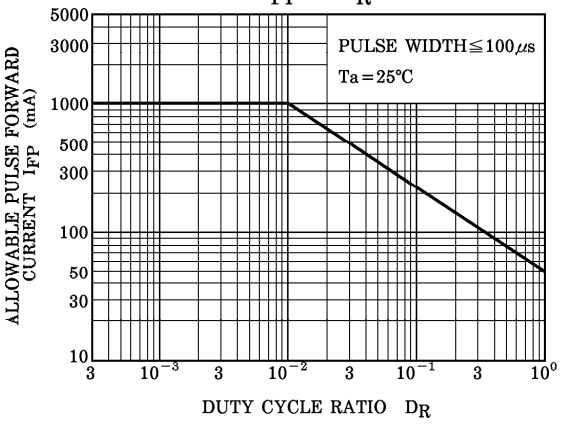

I_F – V_F

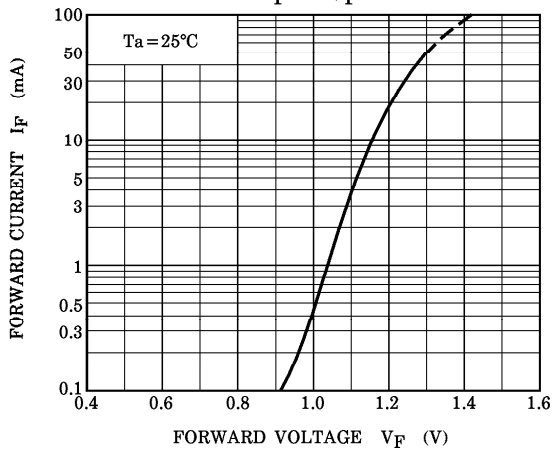

$\Delta V_F / \Delta Ta$ – I_F

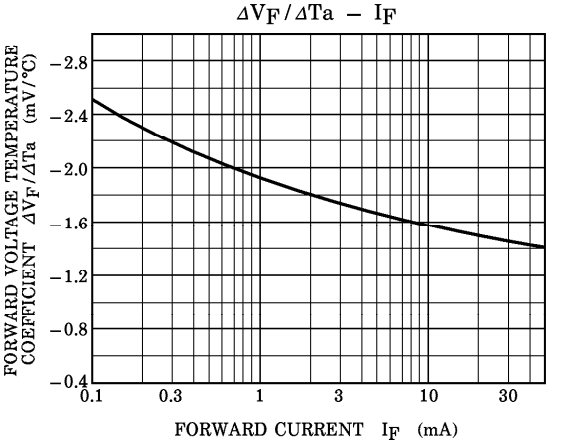

I_{FP} – V_{FP}

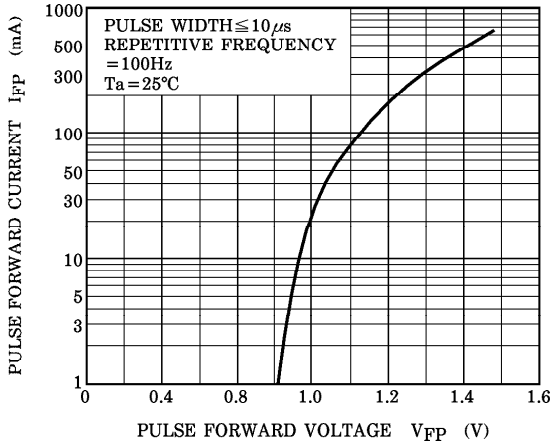

I_{CEO} – Ta

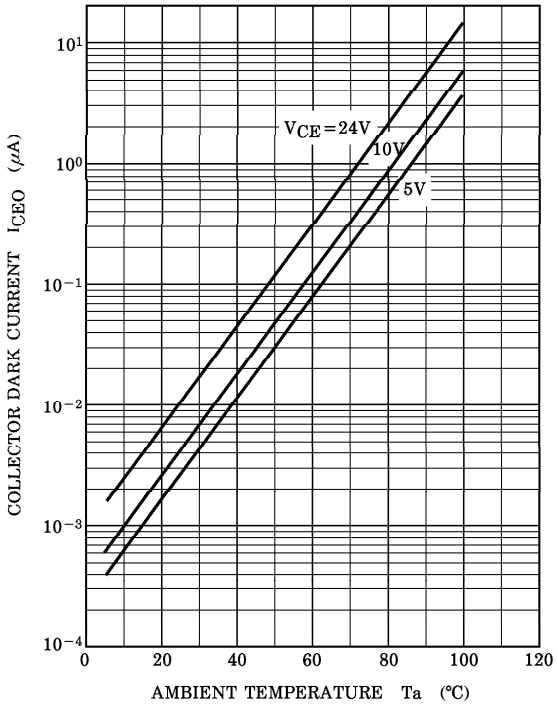

I_C – V_{CE}

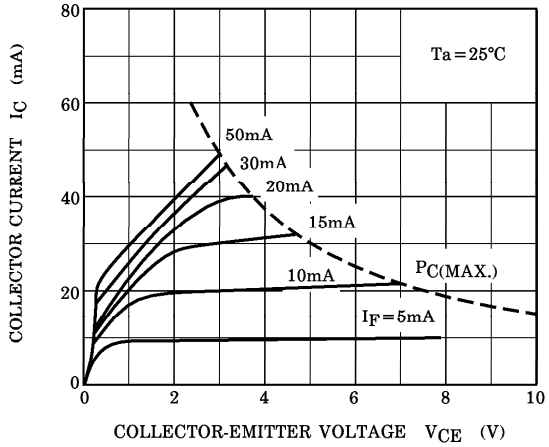

I_C – I_F

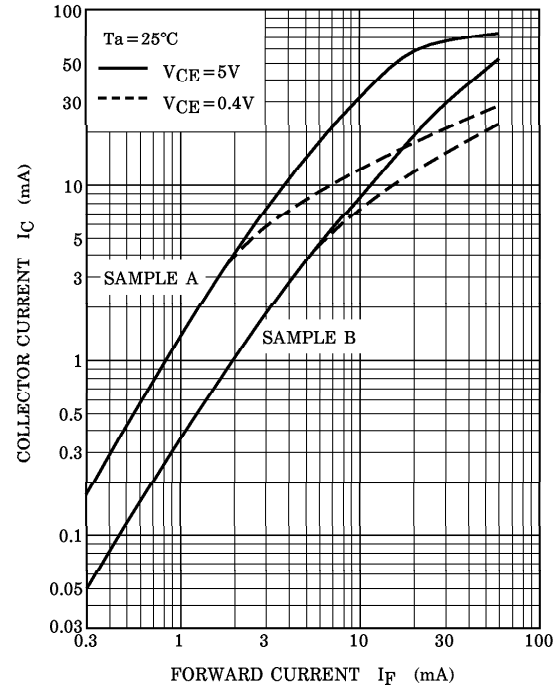

I_C – V_{CE}

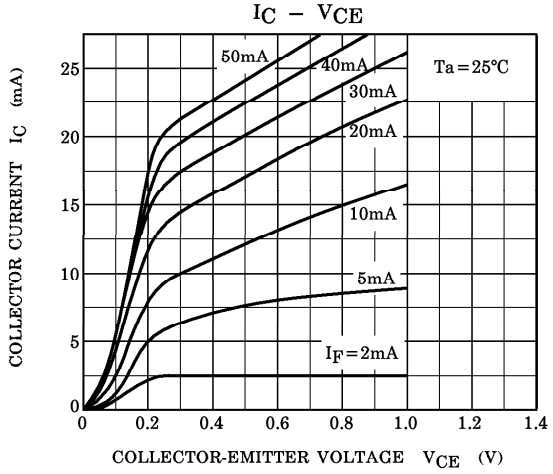

I_C / I_F – I_F

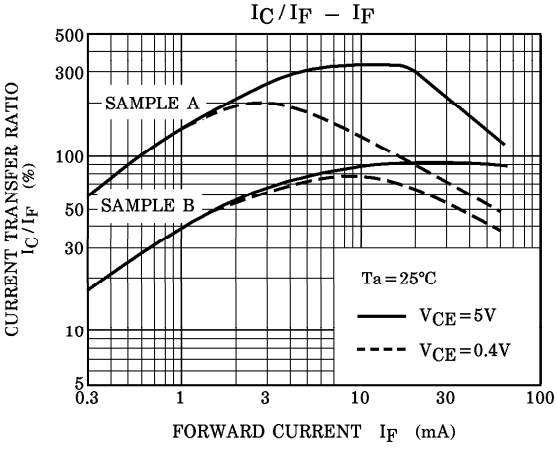

V_{CE} (sat) – Ta

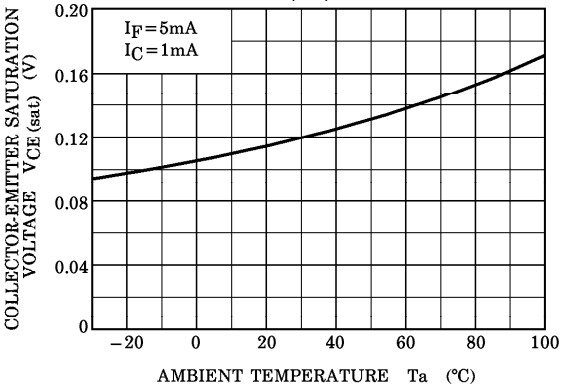

I_C – Ta

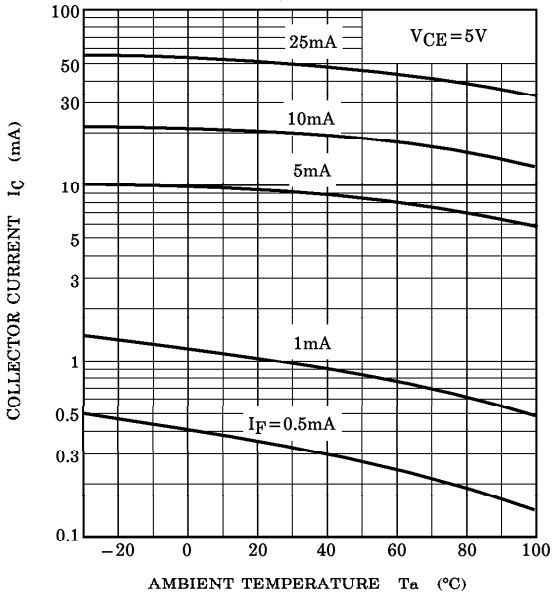

R_L – SWITCHING TIME

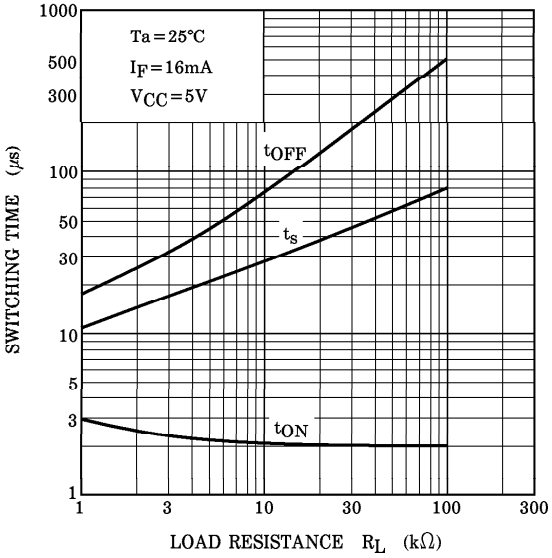

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.