
EPC2308 – Enhancement Mode Power Transistor

V_{DS} , 150 V
$R_{DS(on)}$, 6 mΩ max



EFFICIENT POWER CONVERSION

RoHS Halogen-Free

Revised June 19, 2026

Gallium Nitride's exceptionally high electron mobility and low temperature coefficient allows very low $R_{DS(on)}$, while its lateral device structure and majority carrier diode provide exceptionally low Q_G and zero Q_{RR}. The end result is a device that can handle tasks where very high switching frequency, and low on-time are beneficial as well as those where on-state losses dominate.

Application Notes:

- Easy-to-use and reliable gate, Gate Drive ON = 5 V typical, OFF = 0 V (negative voltage not needed)
- Top of FET is electrically connected to source

Questions: Ask a GaN Expert

Maximum Ratings			
PARAMETER		**VALUE**	**UNIT**
V_{DS}	Drain-to-Source Voltage (Continuous)	150	V
	Drain-to-Source Voltage (Repetitive Transient) (1)	180	
I_D	Continuous (T_J ≤125°C)	63	A
	Pulsed (25 °C, T_{PULSE} = 300 µs)	157	
V_{GS}	Gate-to-Source Voltage	6	V
	Gate-to-Source Voltage	-4	
	Gate-to-Source Voltage (Repetitive Transient) (1)	7	
T_J	Operating Temperature	-40 to 150	°C
T_{STG}	Storage Temperature	–55 to 175	

(1) Pulsed repetitively, duty cycle factor (DC_{Factor}) ≤ 1%; Figure 13;

Thermal Characteristics			
PARAMETER		**TYP**	**UNIT**
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case (Case TOP)	0.5	°C/W
$R_{\theta JB}$	Thermal Resistance, Junction-to-Board (Case BOTTOM)	2.8	
$R_{\theta JA_JEDEC}$	Thermal Resistance, Junction-to-Ambient (using JEDEC 51-2 PCB)	54	
$R_{\theta JA_EVB}$	Thermal Resistance, Junction-to-Ambient (EPC90148 EVB)	23	

Static Characteristics (T_J = 25°C unless otherwise stated)						
PARAMETER		**TEST CONDITIONS**	**MIN**	**TYP**	**MAX**	**UNIT**
BV_{DSS}	Drain-to-Source Voltage	V_{GS} = 0 V, I_D = 200 µA	150			V
I_{DSS}	Drain-Source Leakage	V_{GS} = 0 V, V_{DS} = 120 V		0.01	0.2	mA
I_{GSS}	Gate-to-Source Forward Leakage	V_{GS} = 5 V		0.015	2	
	Gate-to-Source Forward Leakage#	V_{GS} = 5 V, T_J = 125°C		0.2	4	
	Gate-to-Source Reverse Leakage	V_{GS} = -4 V		0.1	1	
$V_{GS(TH)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = 5 mA	0.8	1.2	2.5	V
$R_{DS(on)}$	Drain-Source On Resistance	V_{GS} = 5 V, I_D = 15 A		4.5	6	mΩ
V_{SD}	Source-Drain Forward Voltage#	V_{GS} = 0 V, I_S = 0.5 A		1.5		V

Defined by design. Not subject to production test.



EPC2308
Package size: 3 x 5 mm

Applications

- High density DC-DC conversion
- AC/DC
- Synchronous rectification for chargers, adaptors, and power supplies
- Solar optimizers and microinverters
- Motor drive and DC-DC for battery-operated power tools and robots
- USB fast chargers

Benefits

- Higher efficiency – lower conduction and switching losses, zero reverse recovery losses
- Ultra small footprint – higher power density
- Thermally enhanced QFN package with exposed top and ultra-low thermal resistances for cooler operations
- Wettable flanks and 0.6 mm between high voltage and low voltage pads to simplify assembly and inspection
- Moisture rating MSL1

Scan QR code or click link below for more information including reliability reports, device models, demo boards!

https://l.ead.me/EPC2308

Dynamic Characteristics# (T_J = 25°C unless otherwise stated)						
PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
C_{ISS}	Input Capacitance	V_{DS} = 75 V, V_{GS} = 0 V		1667	2377	pF
C_{RSS}	Reverse Transfer Capacitance			3.1		
C_{OSS}	Output Capacitance			401	558	
$C_{OSS(ER)}$	Effective Output Capacitance, Energy Related (Note 1)	V_{DS} = 0 to 75 V, V_{GS} = 0 V		510		
$C_{OSS(TR)}$	Effective Output Capacitance, Time Related (Note 2)			665		
R_G	Gate Resistance			0.4		Ω
Q_G	Total Gate Charge	V_{DS} = 75 V, V_{GS} = 5 V, I_D = 15 A		11.7	16	nC
Q_{GS}	Gate-to-Source Charge	V_{DS} = 75 V, I_D = 15 A		4.2		
Q_{GD}	Gate-to-Drain Charge			1		
$Q_{G(TH)}$	Gate Charge at Threshold			3		
Q_{OSS}	Output Charge	V_{DS} = 75 V, V_{GS} = 0 V		50	61	
Q_{RR}	Source-Drain Recovery Charge			0		

Defined by design. Not subject to production test.
All measurements were done with substrate connected to source.
Note 1: $C_{OSS(ER)}$ is a fixed capacitance that gives the same stored energy as C_{OSS} while V_{DS} is rising from 0 to 50% BV_{DSS}.
Note 2: $C_{OSS(TR)}$ is a fixed capacitance that gives the same charging time as C_{OSS} while V_{DS} is rising from 0 to 50% BV_{DSS}.

Figure 1: Typical Output Characteristics at 25°C

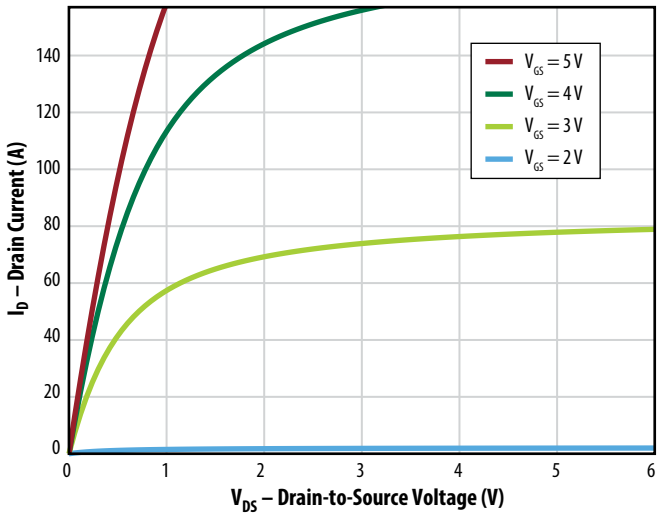


Figure 2: Typical Transfer Characteristics

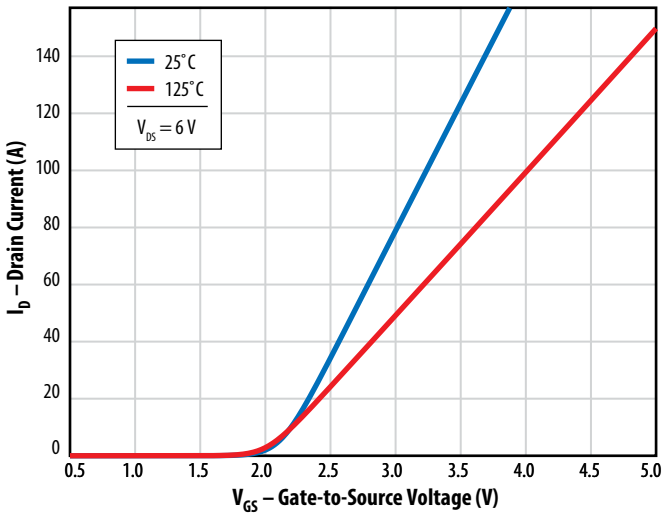


Figure 3: Typical $R_{DS(on)}$ vs. V_{GS} for Various Drain Currents

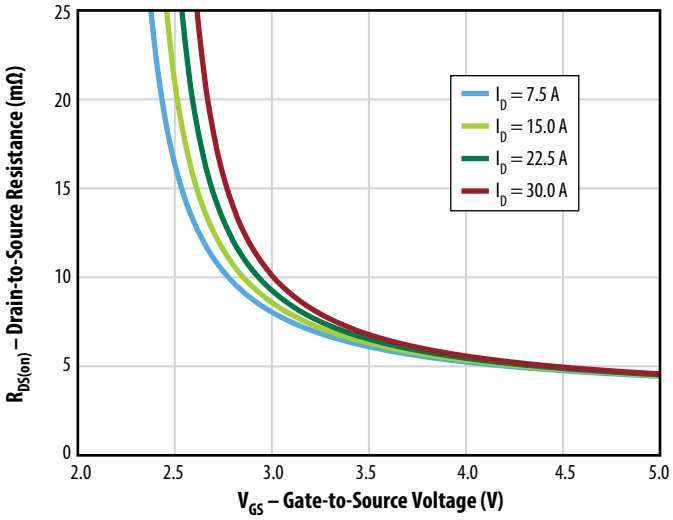


Figure 4: Typical $R_{DS(on)}$ vs. V_{GS} for Various Temperatures

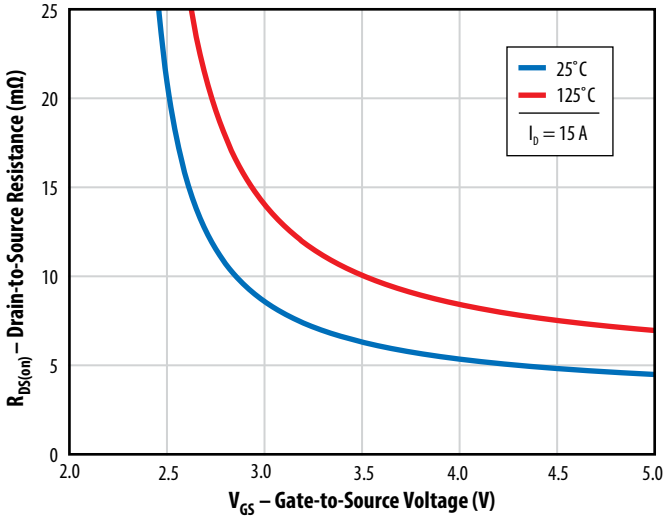


Figure 5a: Typical Capacitance (Linear Scale)

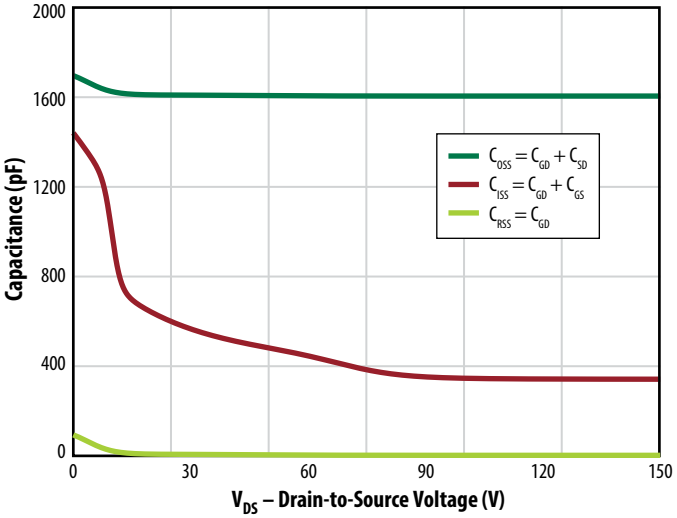


Figure 5b: Typical Capacitance (Log Scale)

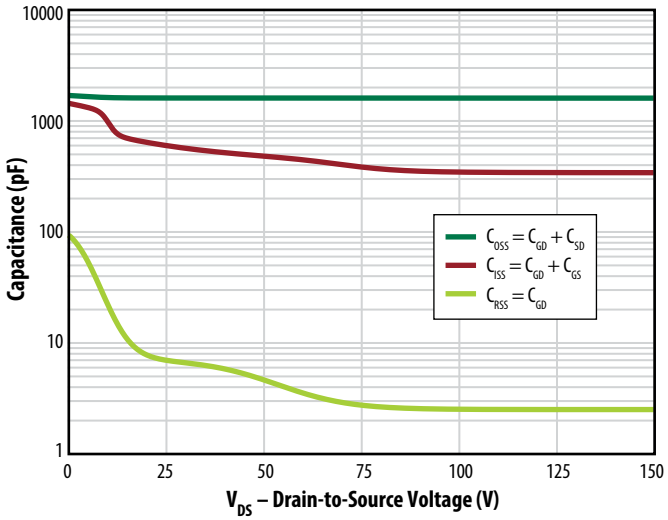


Figure 6: Typical Output Charge and C_{OSS} Stored Energy

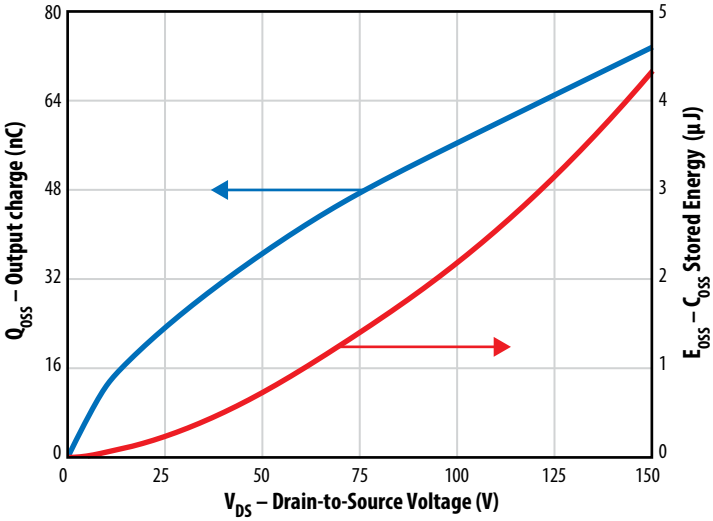


Figure 7: Typical Gate Charge

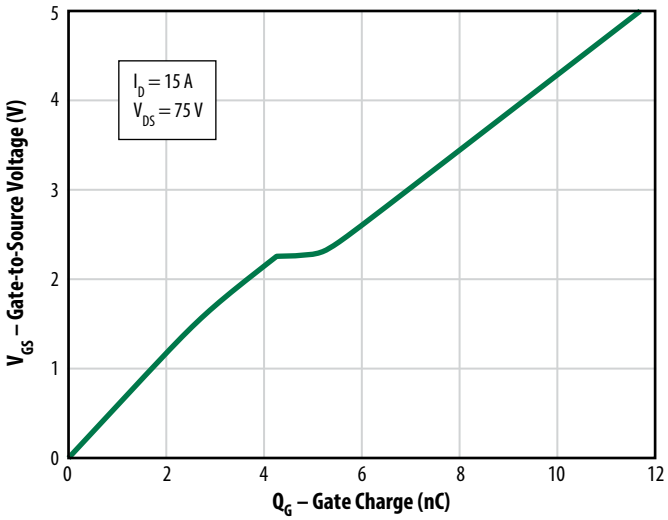


Figure 8: Typical Reverse Drain-Source Characteristics


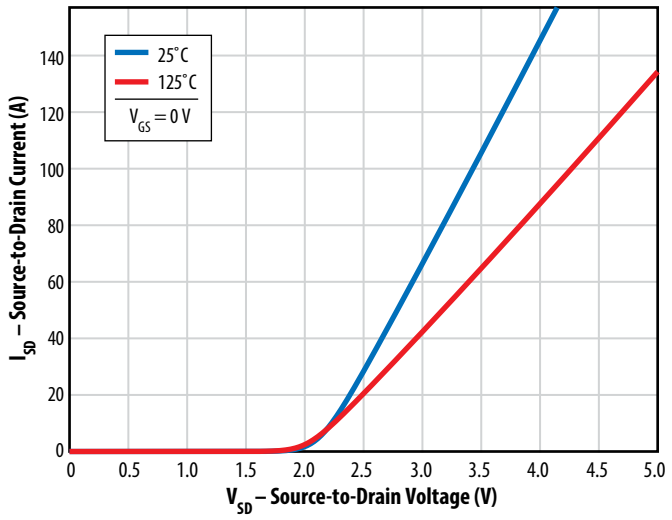


Figure 9: Typical Normalized On-State Resistance vs. Temp.

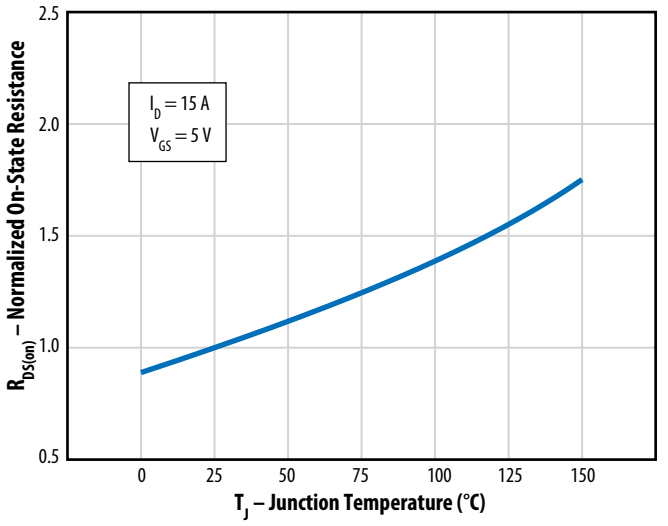

Note: Negative gate drive voltage increases the reverse drain-source voltage.
EPC recommends 0 V for OFF.

Figure 10: Typical Normalized Threshold Voltage vs. Temp.

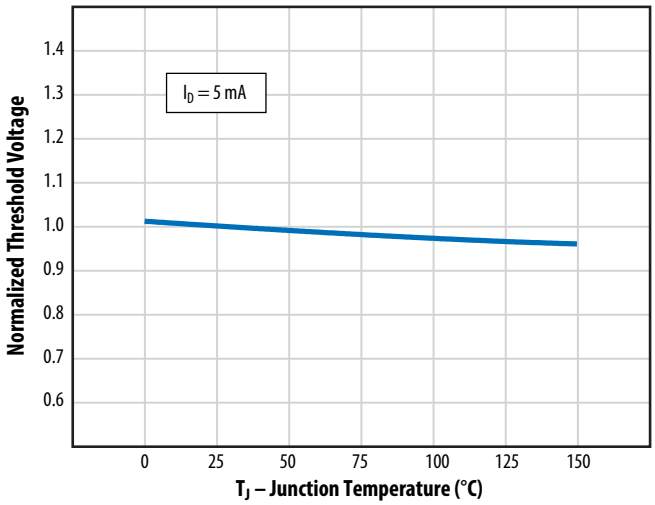


Figure 11: Safe Operating Area

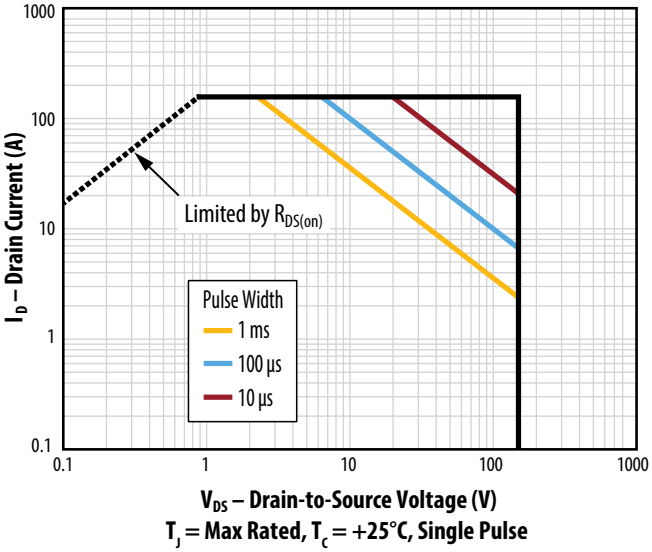
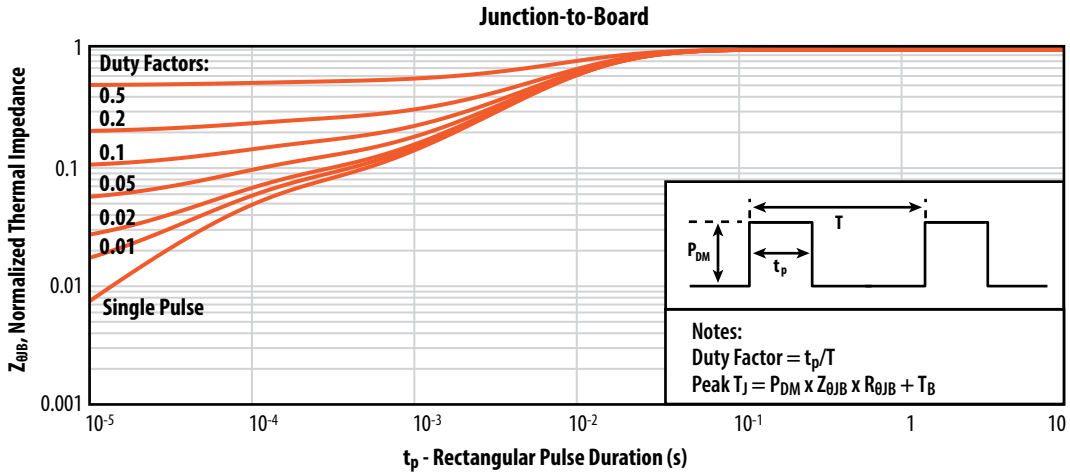


Figure 12: Typical Transient Thermal Response Curves




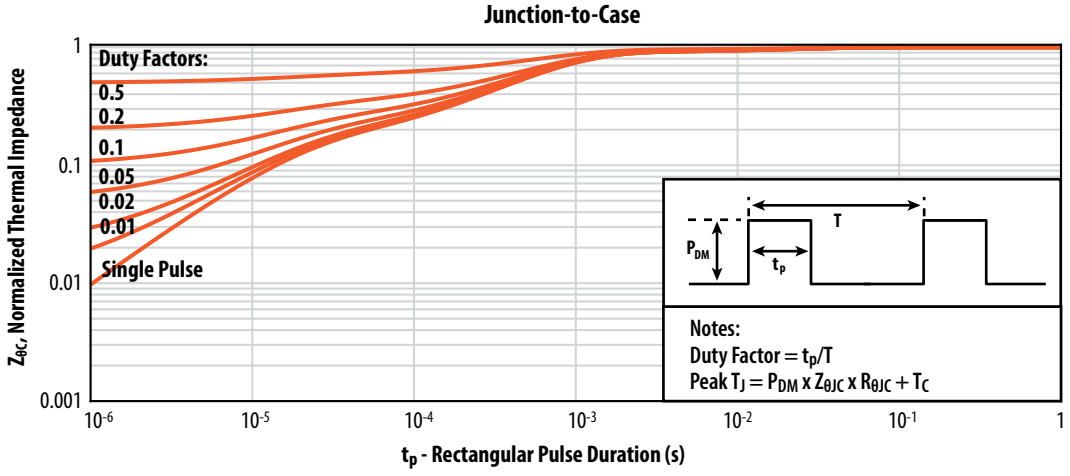


Figure 13: Duty Cycle Factor (DC_{Factor}) Illustration for Repetitive Overvoltage Specification

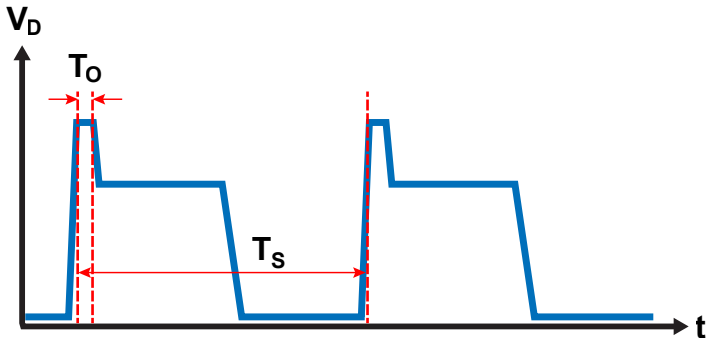

1% is the ratio between T_O (overvoltage duration) and T_S (one switching period)

LAYOUT CONSIDERATIONS

GaN transistors generally behave like power MOSFETs, but at much higher switching speeds and power densities, therefore layout considerations are very important, and care must be taken to minimize layout parasitic inductances. The recommended design utilizes the first inner layer as a power loop return path. This return path is located directly beneath the top layer's power loop allowing for the smallest physical loop size. This method is also commonly referred to as flux cancellation. Variations of this concept can be implemented by placing the bus capacitors either next to the high side device, next to the low side device, or between the low and high side devices, but in all cases the loop is closed using the first inner layer right beneath the devices.

A similar concept is also used for the gate loop, with the first inner layer used as a reference for the gate loop under the gate resistors and the relative pins of the gate driver: ground for the bottom FET and switch node for the top FET.

Furthermore, to minimize the common source inductance between power and gate loops, the power and gate loops are laid out perpendicular to each other, and a via next to the source pad closest to the gate pad is used as Kelvin connection for the gate driver return path.

The EPC90148 Half-Bridge Development Board Using EPC2308 implements our recommended vertical inner layout.

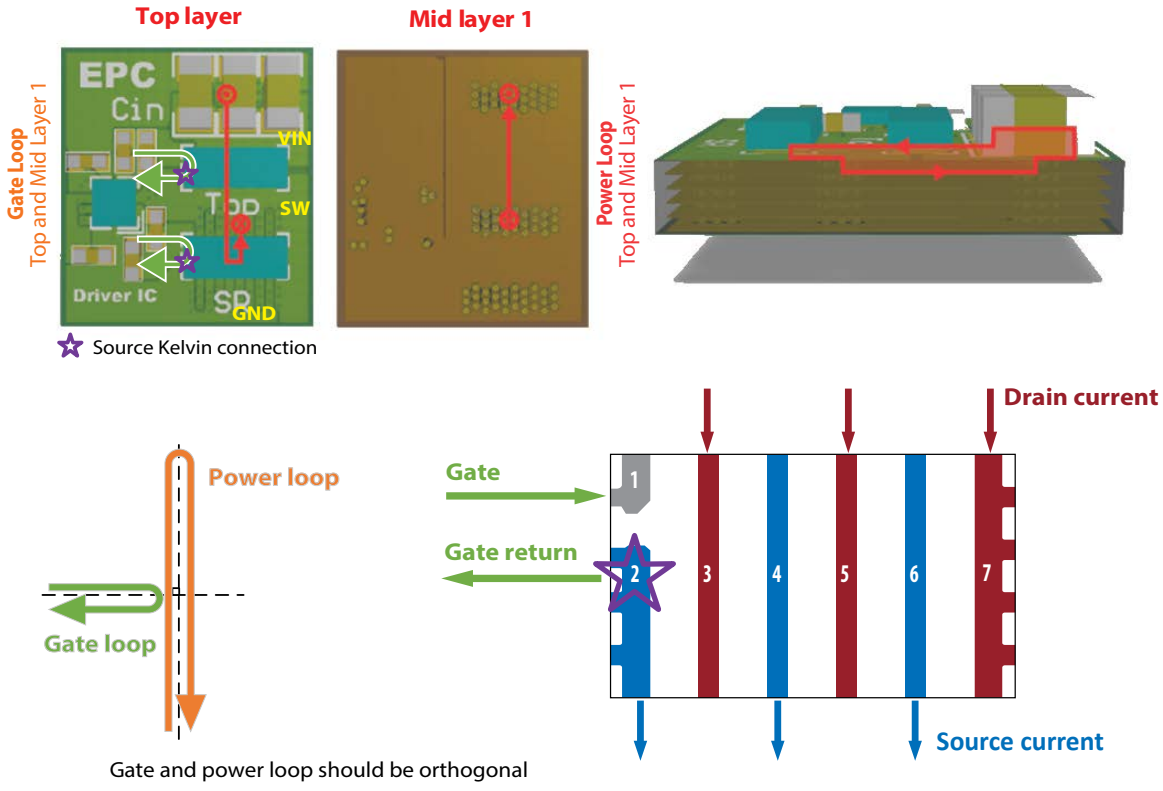



Figure 14: Inner Vertical Layout for Power and Gate Loops

Detailed recommendations on layout can be found on EPC's website: **Optimizing PCB Layout with eGaN FETs.pdf**


TYPICAL SWITCHING BEHAVIOR

The following typical switching waveforms are captured in these conditions:

- **EPC90148: 150 V, 12 A Half-Bridge Development Board Featuring EPC2308**
- Gate driver: NCP51820 with 1A source and 2A sink capability
- External $R_G(ON) = 1\ \Omega$, $R_G(OFF) = 0\ \Omega$
- $V_{IN} = 120$ V, $I_L = 30$ A

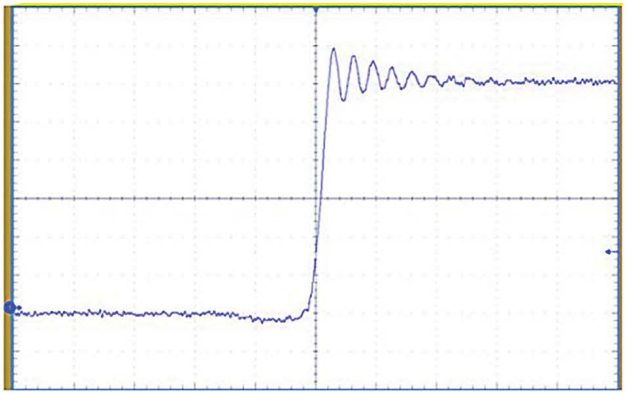

Typical turn ON: 46 V/ns

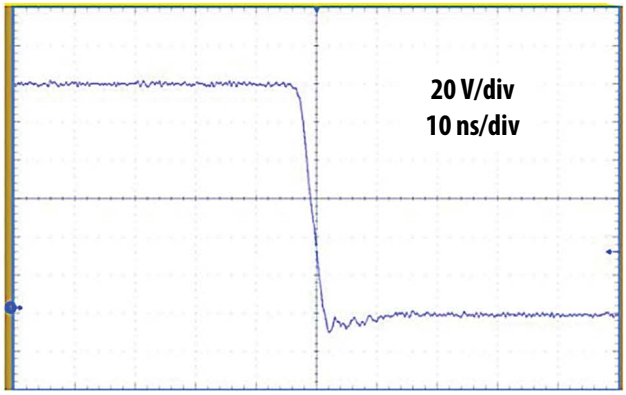

Typical turn OFF: 28 V/ns

Figure 15: Typical half-bridge voltage switching waveforms

See the **EPC90148 Half-Bridge Development Board Using EPC2308 Quick Start Guide** for more information.

TYPICAL THERMAL CONCEPT

The EPC2308 can take advantage of dual sided cooling to maximize its heat dissipation capabilities in high power density designs. ***Note that the top of EPC FETs are connected to source potential, so for half-bridge topologies the Thermal Interface Material (TIM) needs to provide electrical isolation to the heatsink.***

Recommended best practice thermal solutions are covered in detail in **How2AppNote012 - How to Get More Power Out of an eGaN Converter.pdf**.

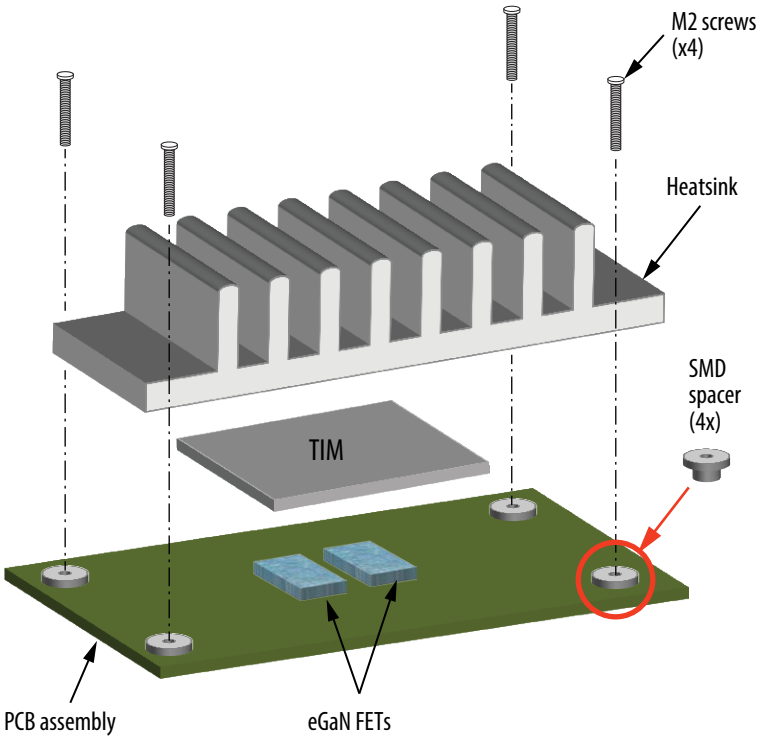


Figure 16: Exploded view of heatsink assembly using screws

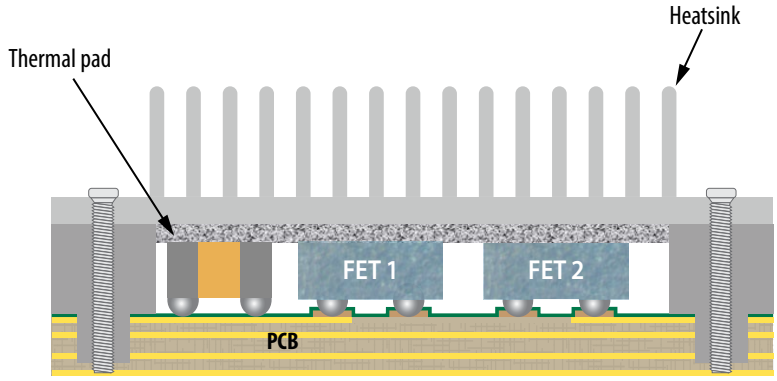



Figure 17: A cross-section image of dual sided thermal solution


Note: Connecting the heatsink to ground is recommended and can significantly improve radiated EMI


The thermal design can be optimized by using the ***GaN FET Thermal Calculator*** on EPC's website.


TAPE AND REEL


(units in mm)

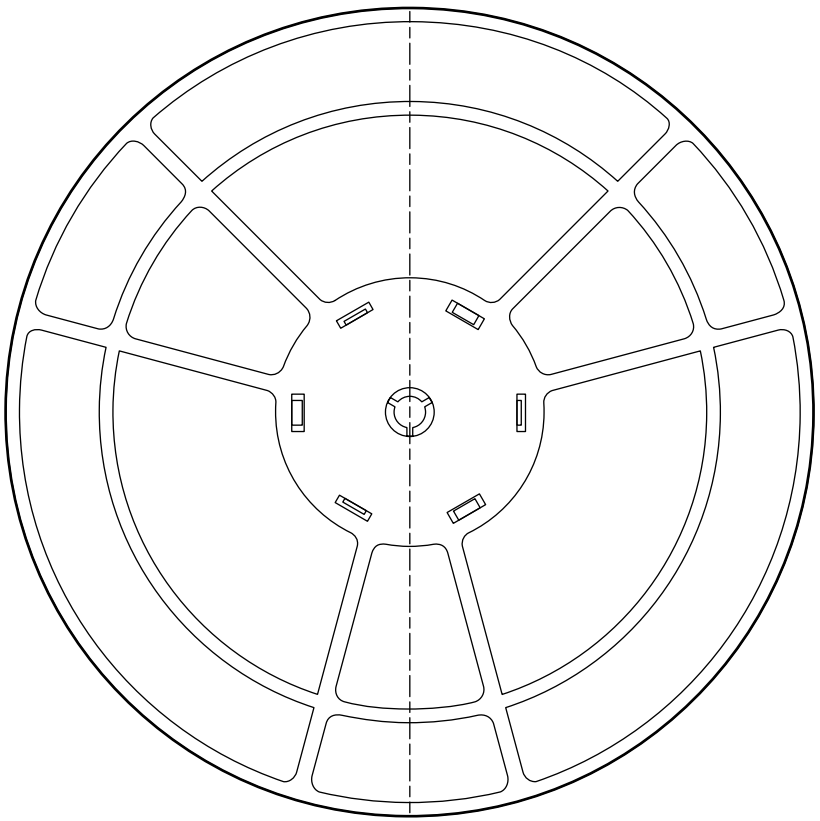




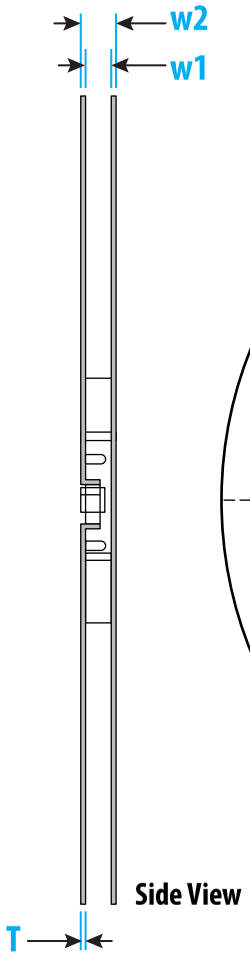

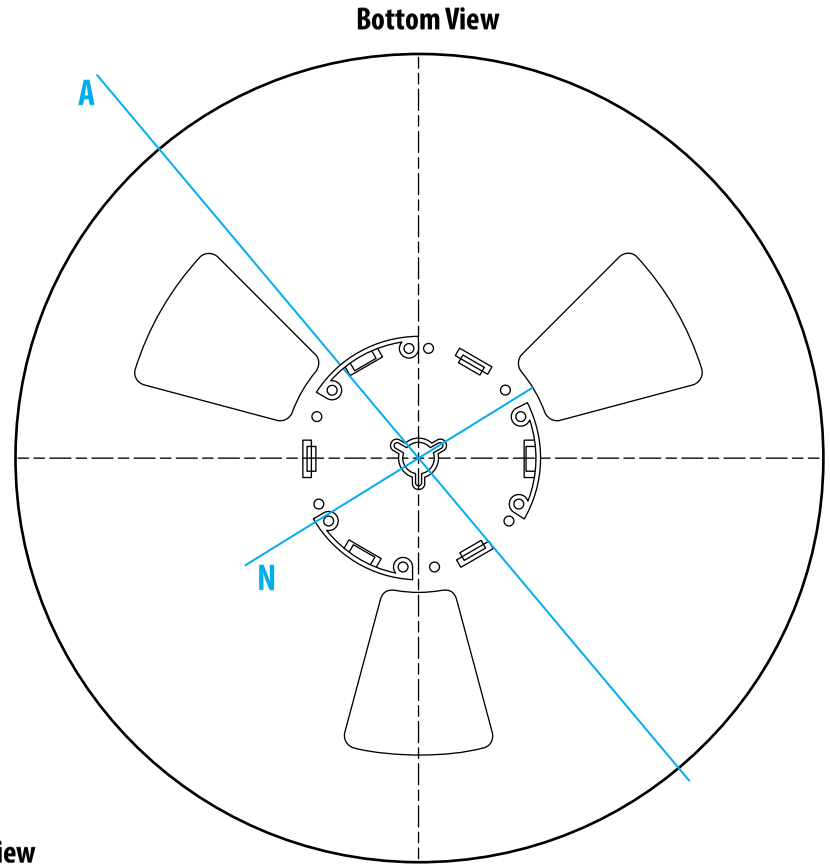






Type	A	N	C	D	w1	w2	T
8MM	Ø330±2	Ø100±2	Ø13.1±0.2	5.6±0.5	8.4+1.5	14.4	2.1±0.5
12MM	Ø330±2	Ø100±2	Ø13.1±0.2	5.6±0.5	12.4+1.5	18.4	2.1±0.5
16MM	Ø330±2	Ø100±2	Ø13.1±0.2	5.6±0.5	16.4+1.5	22.4	2.1±0.5
24MM	Ø330±2	Ø100±2	Ø13.1±0.2	5.6±0.5	24.4+1.5	30.4	2.1±0.5


Part Marking

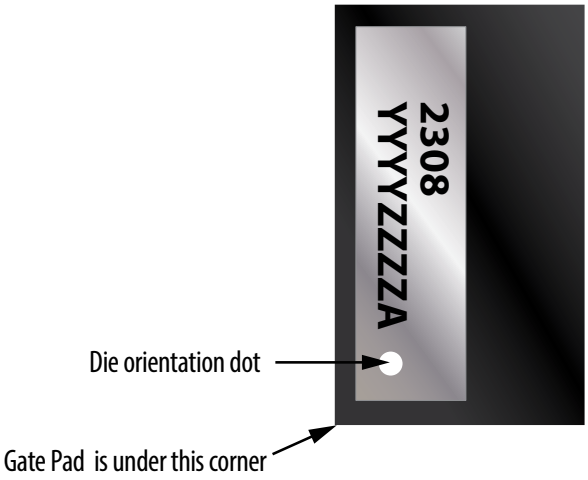


Part Number	Laser Markings	
	Part # Marking Line 1	Lot_Date Code Marking Line 2
EPC2308	2308	YYYYZZZZA


TAPE AND REEL CONFIGURATION

8 mm pitch, 12 mm wide tape on 13" reel

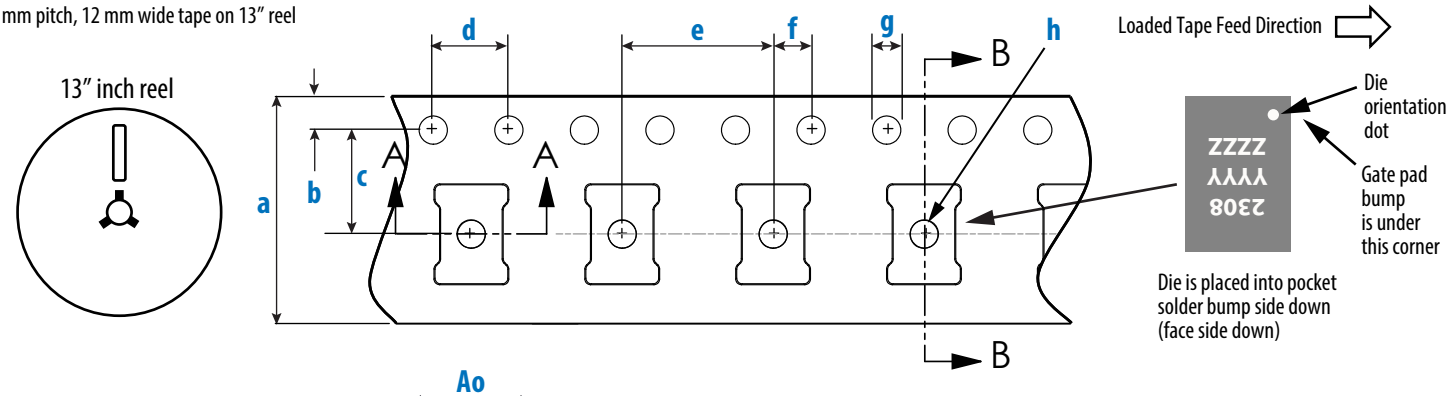



SECTION A-A

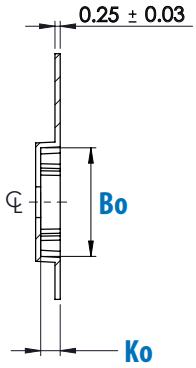



SECTION B-B

	Dimension (mm)		
EPC2308 (Note 1)	Target	MIN	MAX
a	12.00	11.80	12.20
b	1.75	1.65	1.85
c (Note 2)	5.50	5.45	5.55
d	4.00	3.90	4.10
e	8.00	7.90	8.10
f (Note 2)	2.00	1.95	2.05
g	1.50	1.50	1.60
h	1.50	1.50	1.70
Ao	3.30	3.20	3.40
Bo	5.30	5.20	5.40
Ko	0.95	0.85	1.05

Note 1: MSL 1 (moisture sensitivity level 1) classified according to IPC/JEDEC industry standard.

Note 2: Pocket position is relative to the sprocket hole measured as true position of the pocket, not the pocket hole.

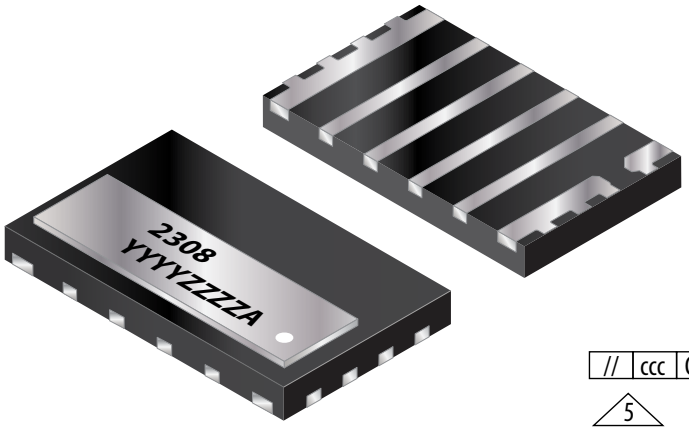

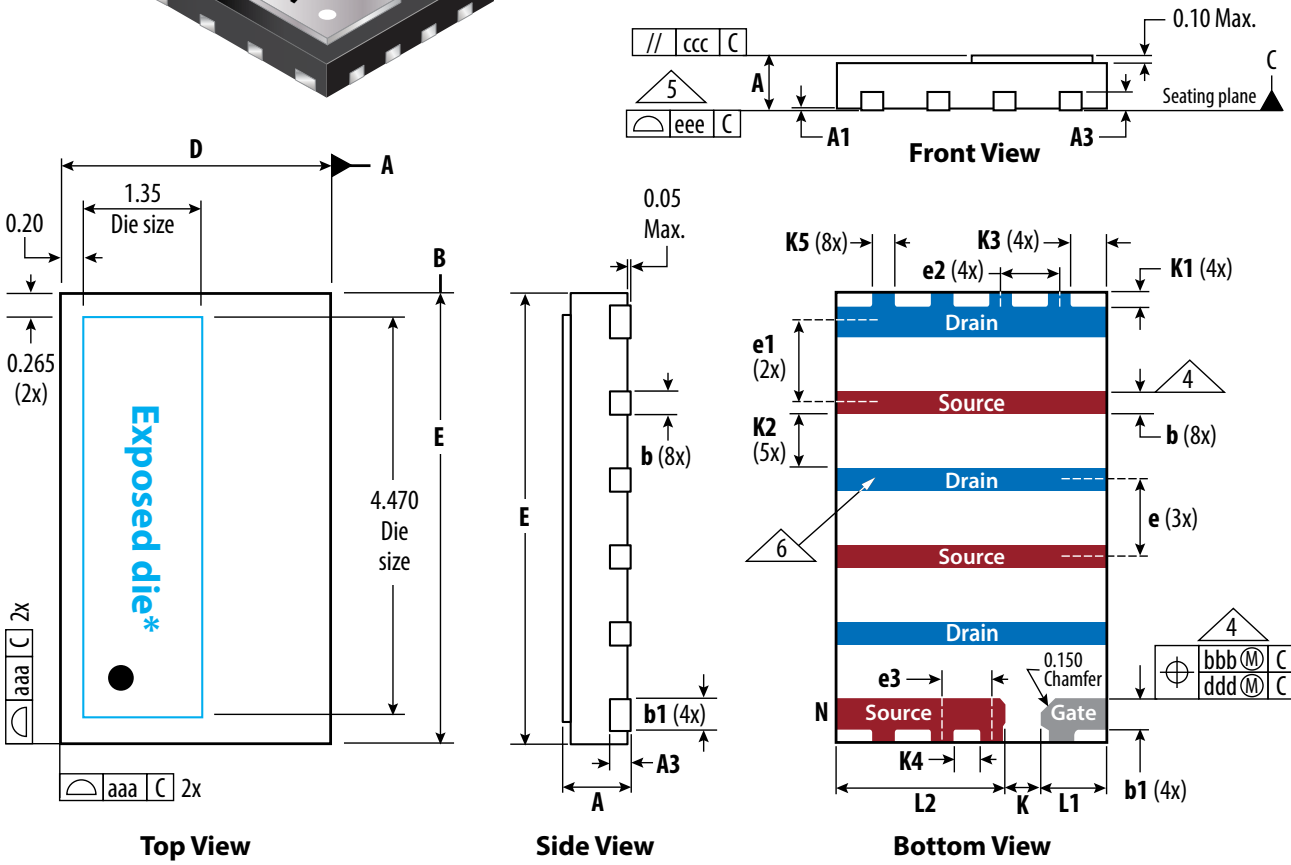

*The exposed die is the silicon substrate that is internally connected to the source. It is not recommended to use it as an electrical connection


SYMBOL	Dimension (mm)			
	MIN	Nominal	MAX	Note
A			0.70	
A1	0.00	0.02	0.05	
A3			0.25	
b	0.20	0.25	0.30	4
b1	0.30	0.35	0.40	4
D	2.90	3.00	3.10	
E	4.90	5.00	5.10	
e	0.85 BSC			
e1	0.90 BSC			
e2	0.65 BSC			
e3	0.55 BSC			
L1	0.625	0.725	0.825	
L2	1.775	1.875	1.975	

SYMBOL	Dimension (mm)			
	MIN	Nominal	MAX	Note
K	0.40 Ref			
K1	0.15 Ref			
K2	0.60 Ref			
K3	0.40 Ref			
K4	0.30 Ref			
K5	0.25 Ref			
aaa	0.05			
bbb	0.10			
ccc	0.10			
ddd	0.05			
eee	0.08			
N	7			3

Notes:

1. Dimensioning and tolerancing conform to ASME Y14.5-2009
2. All dimensions are in millimeters
3. **N** is the total number of terminals
4. Dimension **b** applies to the metalized terminal and a radius on the other end of it, dimension **b** should not be measured in that radius area.
5. Coplanarity applies to the terminals and all the other bottom surface metallization.
6. Pin plating is 100% Sn (tin) with a nominal thickness of 17.8 µm.


TRANSPARENT VIEW

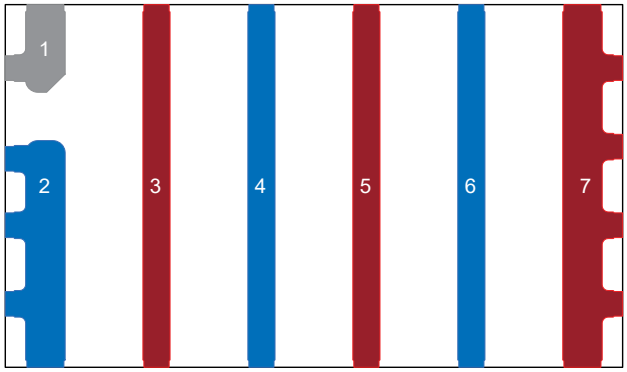

PIN	Description
1	Gate
2	Source
3	Drain
4	Source
5	Drain
6	Source
7	Drain

RECOMMENDED LAND PATTERN

(units in mm)

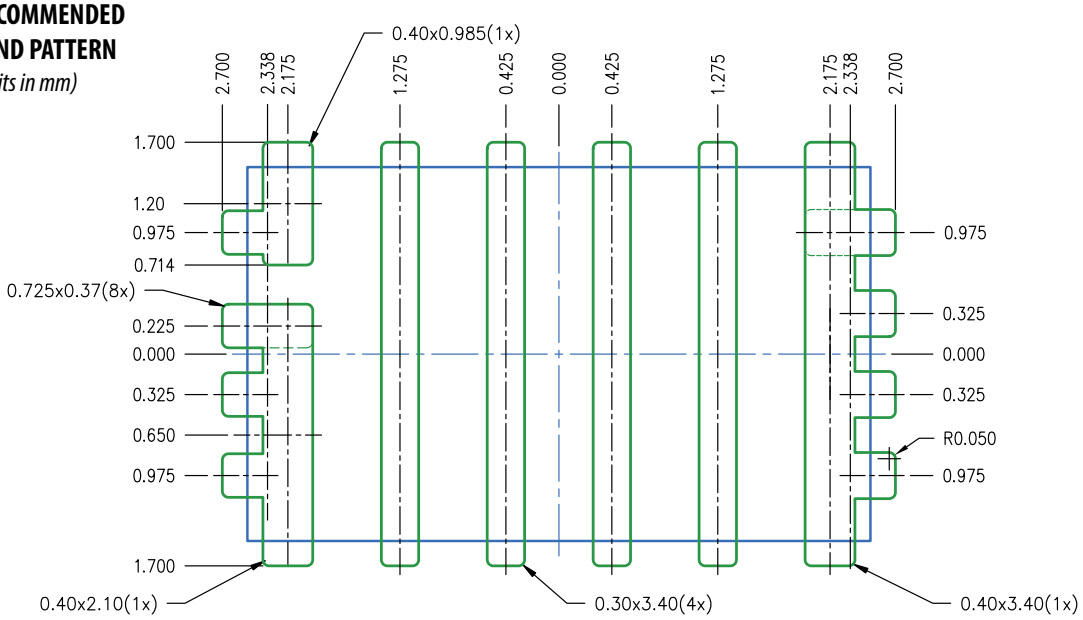

Legend:

Part outline


Mask Opening

Radius = 0.05

Land pattern is solder mask defined

RECOMMENDED STENCIL DRAWING

(units in mm)

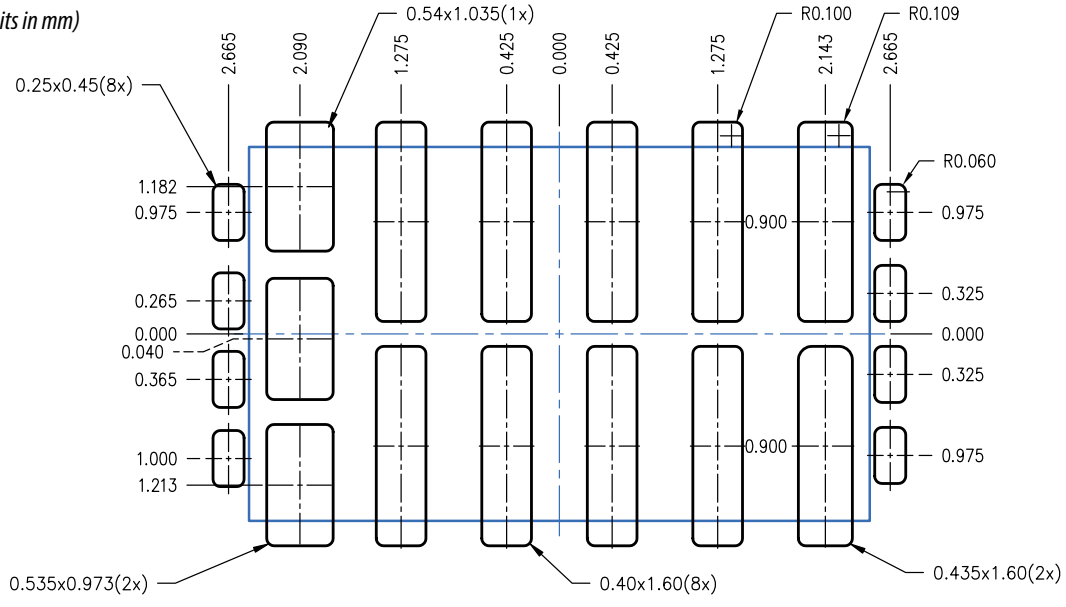

Legend:

Part outline


Stencil opening

Recommended stencil should be 4 mil (100 µm) thick, must be laser cut, openings per drawing. Intended for use with SAC305 Type 4 solder, reference 88.5% metals content.

The corner has a radius of R60.

EPC has tested this stencil design and not found any scooping issues.

RECOMMENDED COPPER DRAWING
(units in mm)

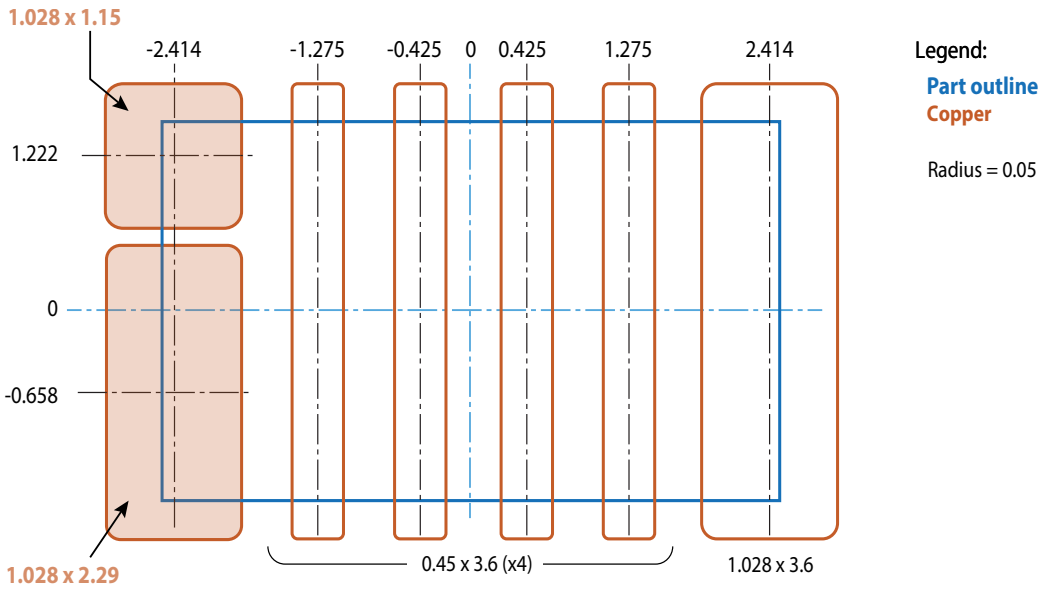

ADDITIONAL RESOURCES AVAILABLE

Solder mask defined pads are recommended for best reliability.

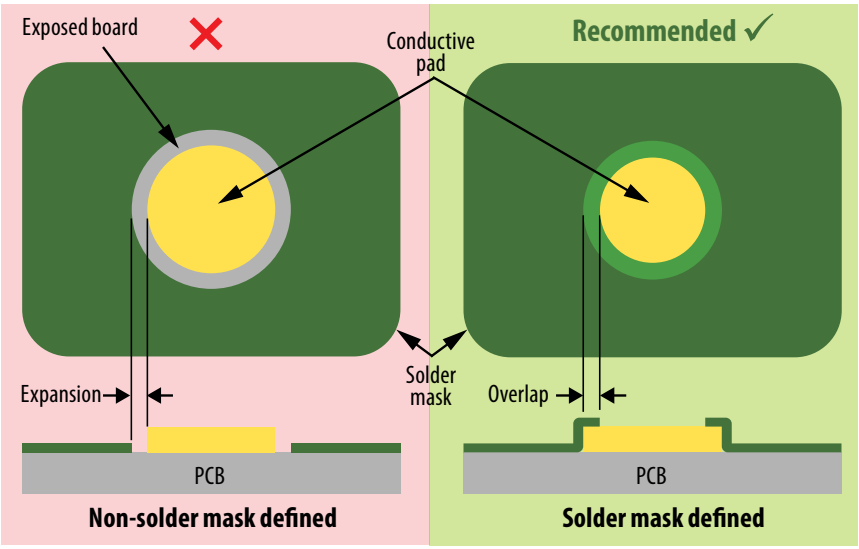


Figure 17: Solder mask defined versus non-solder mask defined pad

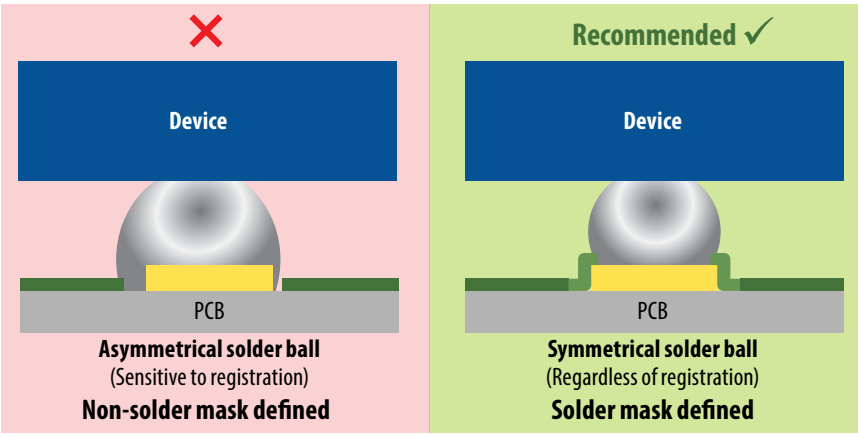


Figure 18: Effect of solder mask design on the solder ball symmetry

Additional resources available

- Assembly resources – https://epc-co.com/epc/Portals/0/epc/documents/product-training/Appnote_GaNassembly.pdf
- Library of Altium footprints for production FETs and ICs – https://epc-co.com/epc/documents/altium-files/EPC%20Altium%20Library.zip (for preliminary device Altium footprints, contact EPC)

Efficient Power Conversion Corporation (EPC) reserves the right to make changes without further notice to any products herein to improve reliability, function or design. EPC does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

eGaN® is a registered trademark of Efficient Power Conversion Corporation.
EPC Patent Listing: https://epc-co.com/epc/about-epc/patents

Information subject to change without notice.

Change Log

STATUS	VERSION	DATE	REMARK
1.3	Updated Land pattern and stencil drawings	19 June 2026	Production release
1.2	New Tape and Reel Exposed Die Figure Dimensions	20 May 2026	Production release
1.1	MSL2 changed to MSL1	29 April 2026	Production release
1.0	Production datasheet	20 November 2025	Production release

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.