Bulletin PD-20744 rev. B 02/06

International
IOR Rectifier

150EBU04

Ultrafast Soft Recovery Diode

Features
- Ultrafast Recovery
- 175°C Operating Junction Temperature
- Screw Mounting Only
- Lead-Free Plating

Benefits
- Reduced RFI and EMI
- Higher Frequency Operation
- Reduced Snubbing
- Reduced Parts Count

t_{rr} = 60ns
$I_{F(AV)}$ = 150Amp
V_R = 400V

Description/ Applications

These diodes are optimized to reduce losses and EMI/ RFI in high frequency power conditioning systems. The softness of the recovery eliminates the need for a snubber in most applications. These devices are ideally suited for HF welding, power converters and other applications where switching losses are not significant portion of the total losses.

Absolute Maximum Ratings

	Parameters	Max	Units
V_R	Cathode to Anode Voltage	400	V
$I_{F(AV)}$	Continuous Forward Current, T_C = 104°C	150	A
I_{FSM}	Single Pulse Forward Current, T_C = 25°C	1500	
I_{FRM} ①	Maximum Repetitive Forward Current	300	
T_J, T_{STG}	Operating Junction and Storage Temperatures	- 55 to 175	°C

① Square Wave, 20kHz

Case Styles



Pow*IR*tab

Electrical Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameters	Min	Typ	Max	Units	Test Conditions
V_{BR}, V_r	Breakdown Voltage, Blocking Voltage	400	-	-	V	I_R = 200µA
V_F	Forward Voltage	-	1.07	1.3	V	I_F = 150A
		-	0.9	1.1	V	I_F = 150A, T_J = 175°C
		-	0.96	1.17	V	I_F = 150A, T_J = 125°C
I_R	Reverse Leakage Current	-	-	50	µA	V_R = V_R Rated
		-	-	4	mA	T_J = 150°C, V_R = V_R Rated
C_T	Junction Capacitance	-	100	-	pF	V_R = 400V
L_S	Series Inductance	-	3.5	-	nH	Measured lead to lead 5mm from package body

Dynamic Recovery Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameters	Min	Typ	Max	Units	Test Conditions	
t_{rr}	Reverse Recovery Time	-	-	60	ns	I_F = 1.0A, di_F/dt = 200A/µs, V_R = 30V	
		-	93	-		T_J = 25°C	I_F = 150A V_R = 200V di_F/dt = 200A/µs
		-	172	-		T_J = 125°C	
I_{RRM}	Peak Recovery Current	-	11	-	A	T_J = 25°C	
		-	20	-		T_J = 125°C	
Q_{rr}	Reverse Recovery Charge	-	490	-	nC	T_J = 25°C	
			-	1740	-	T_J = 125°C	

Thermal - Mechanical Characteristics

	Parameters	Min	Typ	Max	Units
R_{thJC}	Thermal Resistance, Junction to Case			0.35	K/W
R_{thCS} ②	Thermal Resistance, Case to Heatsink		0.2		
Wt	Weight			5.02	g
			0.18		(oz)
T	Mounting Torque	1.2		2.4	N * m
		10		20	lbf.in

② Mounting Surface, Flat, Smooth and Greased

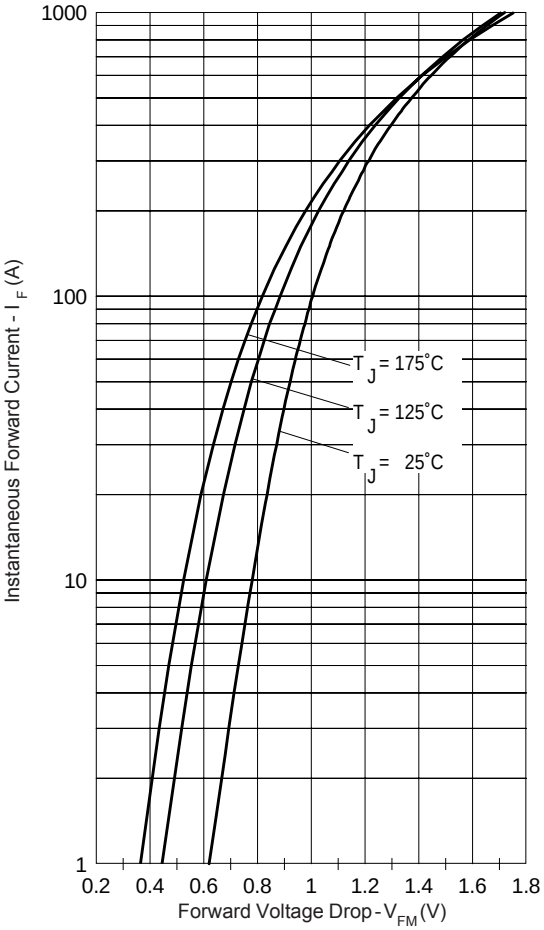

Fig. 1 - Typical Forward Voltage Drop Characteristics

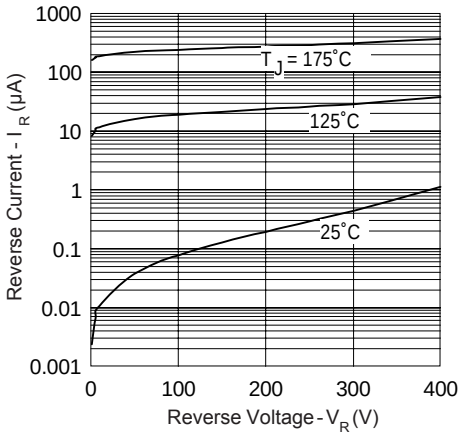

Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

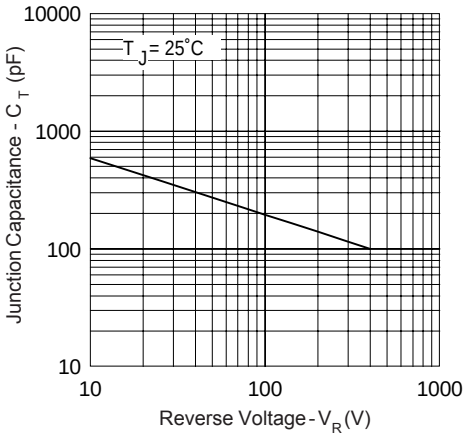

Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

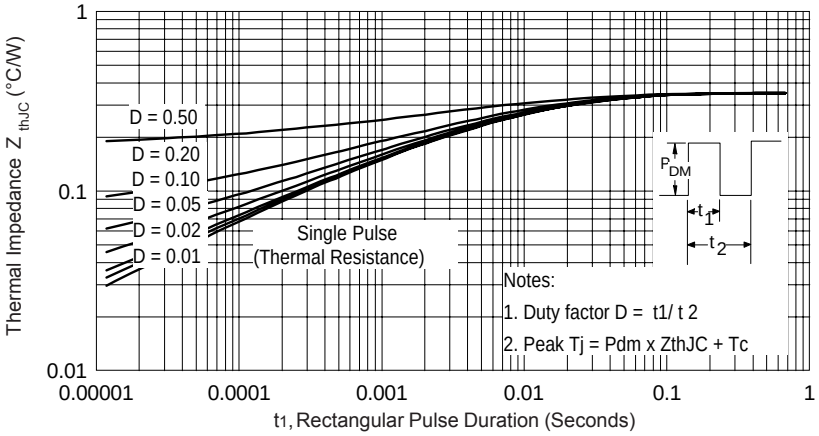

Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics

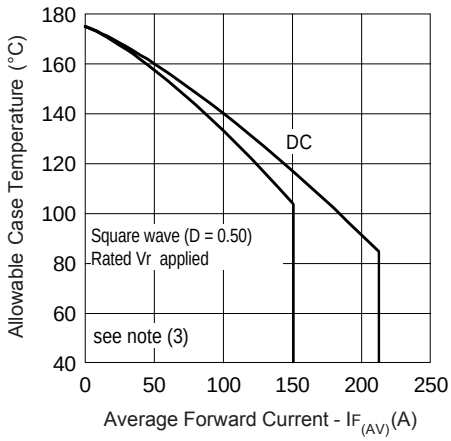

Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

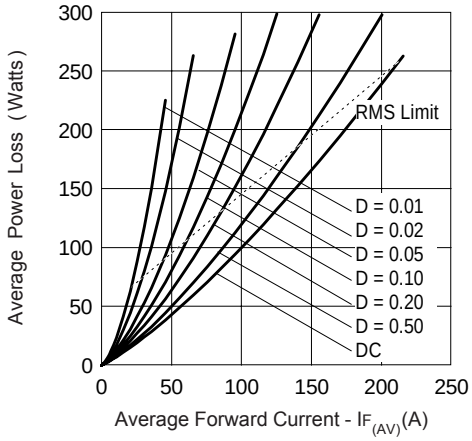

Fig. 6 - Forward Power Loss Characteristics

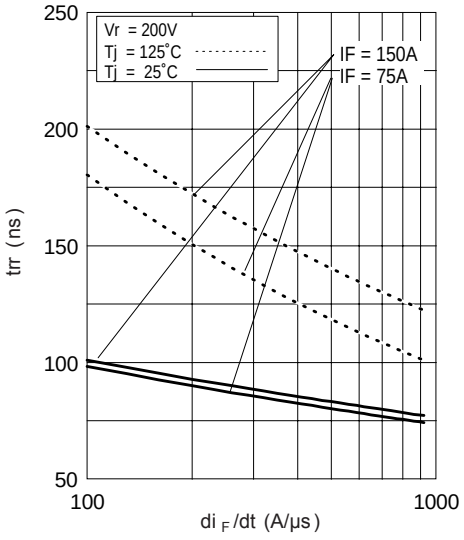

Fig. 7 - Typical Reverse Recovery time vs. di_F/dt

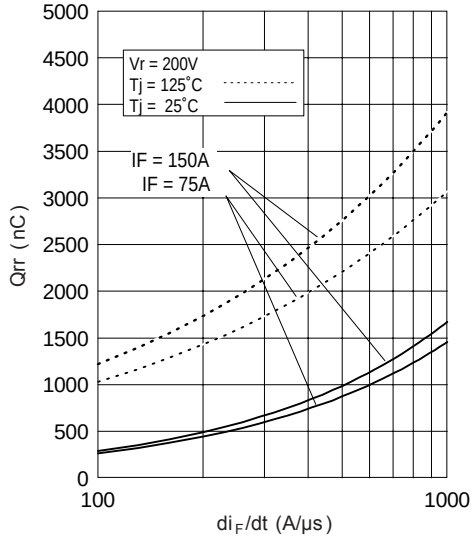

Fig. 8 - Typical Stored Charge vs. di_F/dt

(3) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;
Pd = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
Pd_{REV} = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1}$ = rated V_R

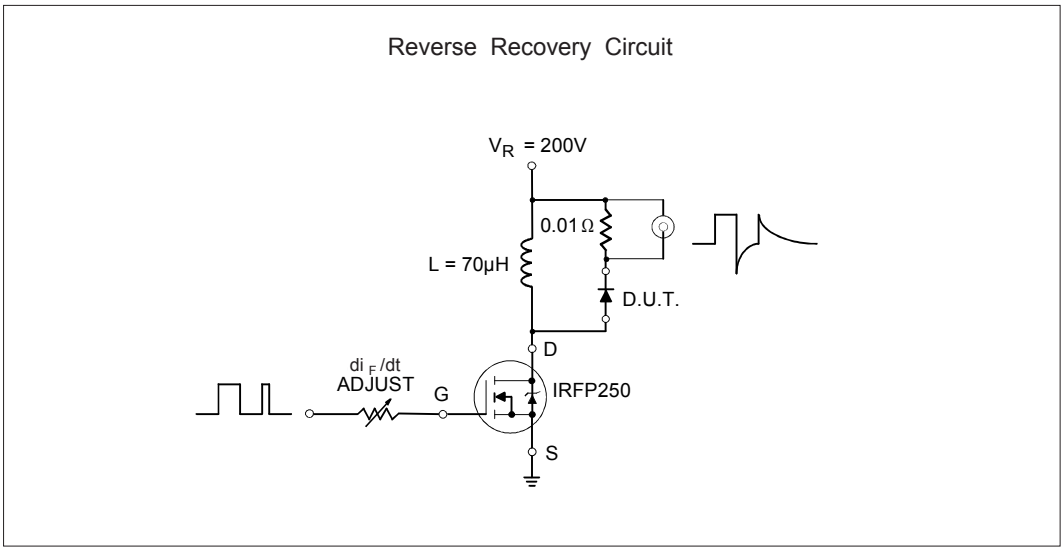

Fig. 9- Reverse Recovery Parameter Test Circuit

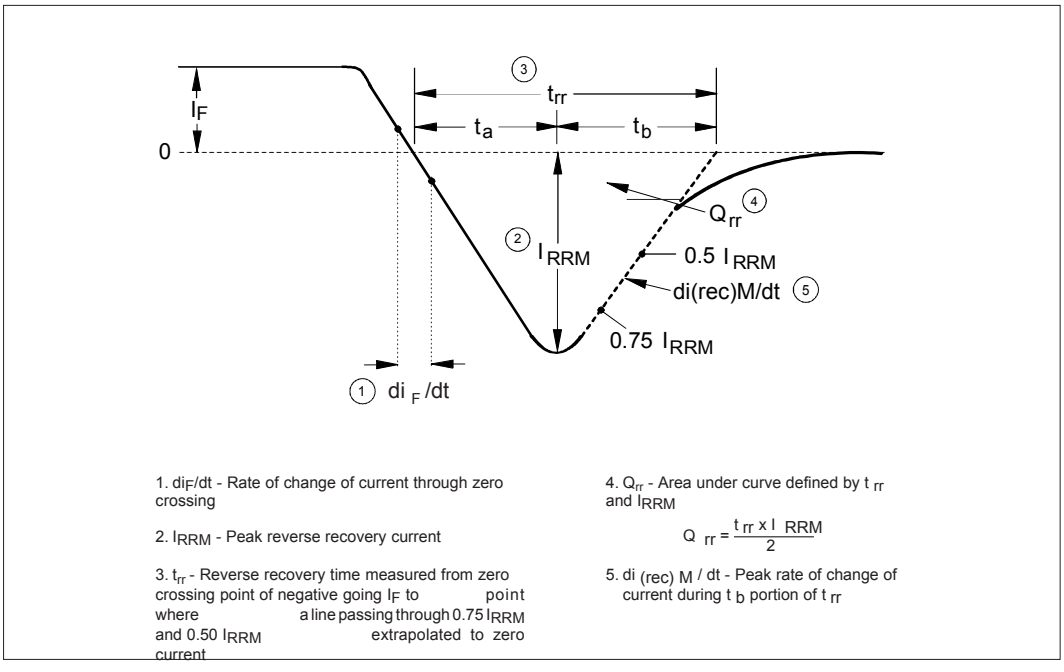

1. di_F/dt - Rate of change of current through zero crossing

2. I_{RRM} - Peak reverse recovery current

3. t_{rr} - Reverse recovery time measured from zero crossing point of negative going I_F to point where a line passing through 0.75 I_{RRM} and 0.50 I_{RRM} extrapolated to zero current

4. Q_{rr} - Area under curve defined by t_{rr} and I_{RRM}

$$Q_{rr} = \frac{t_{rr} \times I_{RRM}}{2}$$

5. $di_{(rec)M}/dt$ - Peak rate of change of current during t_b portion of t_{rr}

Fig. 10 - Reverse Recovery Waveform and Definitions

Outline Table

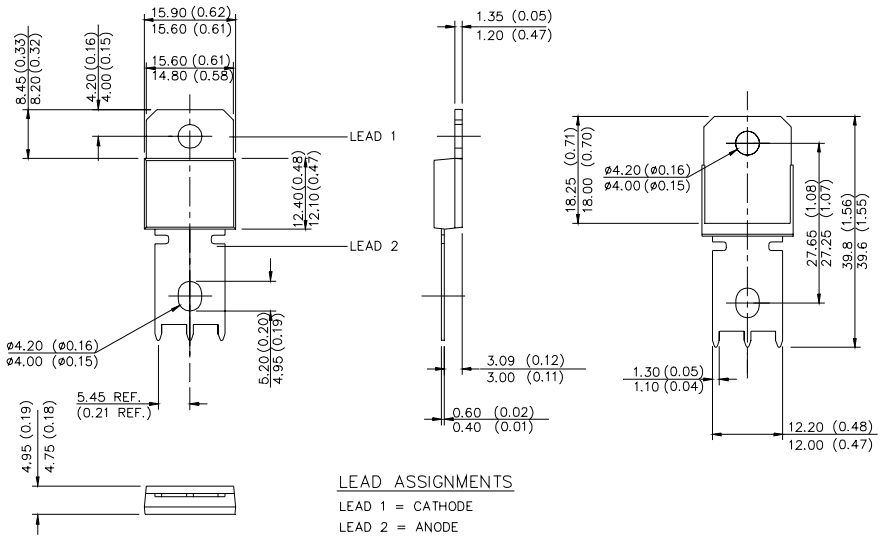

Dimensions in millimeters and (inches)

Ordering Information Table

Device Code



1	-	Current Rating	(150 = 150A)
2	-	Single Diode	
3	-	Pow***IR***tab	(Ultrafast/ Hyperfast only)
4	-	Ultrafast Recovery	
5	-	Voltage Rating	(04 = 400V)

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level and Lead-Free.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
02/06

Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.