BC556B, BC557A, B, C, BC558B, C

Amplifier Transistors


PNP Silicon


ON Semiconductor®

http://onsemi.com

Features

- Pb−Free Packages are Available*





TO−92
CASE 29
STYLE 17

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector - Emitter Voltage BC556 BC557 BC558	V_{CEO}	 −65 −45 −30	Vdc
Collector - Base Voltage BC556 BC557 BC558	V_{CBO}	 −80 −50 −30	Vdc
Emitter - Base Voltage	V_{EBO}	−5.0	Vdc
Collector Current − Continuous − Peak	I_C I_{CM}	−100 −200	mAdc
Base Current − Peak	I_{BM}	−200	mAdc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D	625 5.0	mW mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	1.5 12	W mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	−55 to +150	°C


THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction−to−Ambient	$R_{\theta JA}$	200	°C/W
Thermal Resistance, Junction−to−Case	$R_{\theta JC}$	83.3	°C/W

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

*For additional information on our Pb−Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

MARKING DIAGRAM



BC55x = Device Code
x = 6, 7, or 8
A = Assembly Location
Y = Year
WW = Work Week
▪ = Pb−Free Package
(Note: Microdot may be in either location)

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 6 of this data sheet.

© Semiconductor Components Industries, LLC, 2005

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector−Emitter Breakdown Voltage		$V_{(BR)CEO}$				V
(I_C = −2.0 mAdc, I_B = 0)	BC556		−65	−	−	
	BC557		−45	−	−	
	BC558		−30	−	−	
Collector−Base Breakdown Voltage		$V_{(BR)CBO}$				V
(I_C = −100 μAdc)	BC556		−80	−	−	
	BC557		−50	−	−	
	BC558		−30	−	−	
Emitter−Base Breakdown Voltage		$V_{(BR)EBO}$				V
(I_E = −100 μAdc, I_C = 0)	BC556		−5.0	−	−	
	BC557		−5.0	−	−	
	BC558		−5.0	−	−	
Collector−Emitter Leakage Current		I_{CES}				
(V_{CES} = −40 V)	BC556		−	−2.0	−100	nA
(V_{CES} = −20 V)	BC557		−	−2.0	−100	
	BC558		−	−2.0	−100	
(V_{CES} = −20 V, T_A = 125°C)	BC556		−	−	−4.0	μA
	BC557		−	−	−4.0	
	BC558		−	−	−4.0	
ON CHARACTERISTICS						
DC Current Gain		h_{FE}				−
(I_C = −10 μAdc, V_{CE} = −5.0 V)	A Series Device		−	90	−	
	B Series Devices		−	150	−	
	C Series Devices		−	270	−	
(I_C = −2.0 mAdc, V_{CE} = −5.0 V)	BC557		120	−	800	
	A Series Device		120	170	220	
	B Series Devices		180	290	460	
	C Series Devices		420	500	800	
(I_C = −100 mAdc, V_{CE} = −5.0 V)	A Series Device		−	120	−	
	B Series Devices		−	180	−	
	C Series Devices		−	300	−	
Collector−Emitter Saturation Voltage		$V_{CE(sat)}$				V
(I_C = −10 mAdc, I_B = −0.5 mAdc)			−	−0.075	−0.3	
(I_C = −10 mAdc, I_B = see Note 1)			−	−0.3	−0.6	
(I_C = −100 mAdc, I_B = −5.0 mAdc)			−	−0.25	−0.65	
Base−Emitter Saturation Voltage		$V_{BE(sat)}$				V
(I_C = −10 mAdc, I_B = −0.5 mAdc)			−	−0.7	−	
(I_C = −100 mAdc, I_B = −5.0 mAdc)			−	−1.0	−	
Base−Emitter On Voltage		$V_{BE(on)}$				V
(I_C = −2.0 mAdc, V_{CE} = −5.0 Vdc)			−0.55	−0.62	−0.7	
(I_C = −10 mAdc, V_{CE} = −5.0 Vdc)			−	−0.7	−0.82	
SMALL−SIGNAL CHARACTERISTICS						
Current−Gain − Bandwidth Product		f_T				MHz
(I_C = −10 mA, V_{CE} = −5.0 V, f = 100 MHz)	BC556		−	280	−	
	BC557		−	320	−	
	BC558		−	360	−	
Output Capacitance		C_{ob}	−	3.0	6.0	pF
(V_{CB} = −10 V, I_C = 0, f = 1.0 MHz)						
Noise Figure		NF				dB
(I_C = −0.2 mAdc, V_{CE} = −5.0 V,	BC556		−	2.0	10	
R_S = 2.0 kΩ, f = 1.0 kHz, Δf = 200 Hz)	BC557		−	2.0	10	
	BC558		−	2.0	10	
Small−Signal Current Gain		h_{fe}				−
(I_C = −2.0 mAdc, V_{CE} = 5.0 V, f = 1.0 kHz)	BC557		125	−	900	
	A Series Device		125	−	260	
	B Series Devices		240	−	500	
	C Series Devices		450	−	900	

1. I_C = −10 mAdc on the constant base current characteristics, which yields the point I_C = −11 mAdc, V_{CE} = −1.0 V.

BC557/BC558

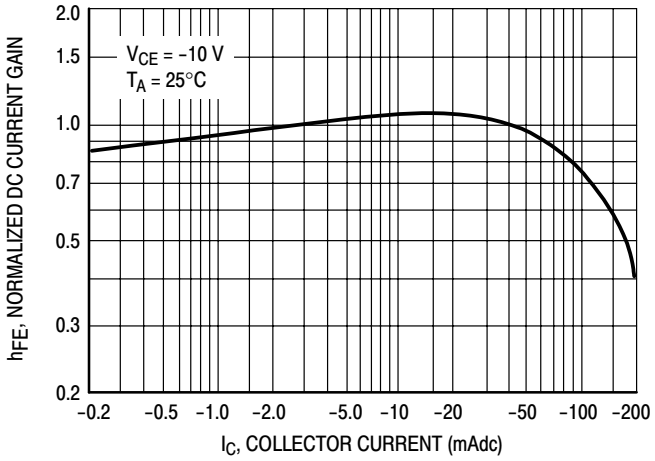


Figure 1. Normalized DC Current Gain

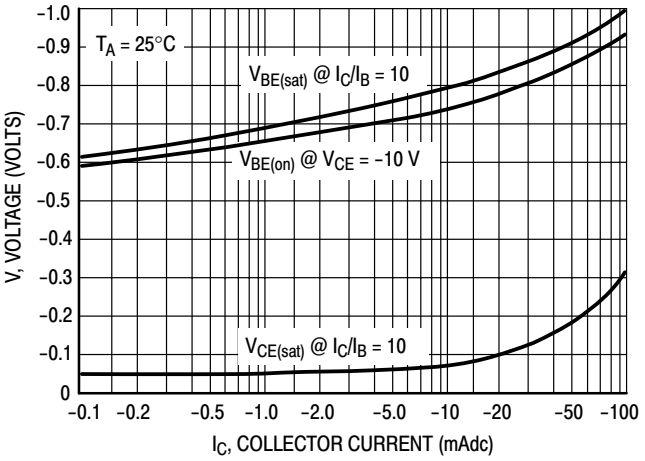


Figure 2. “Saturation” and “On” Voltages

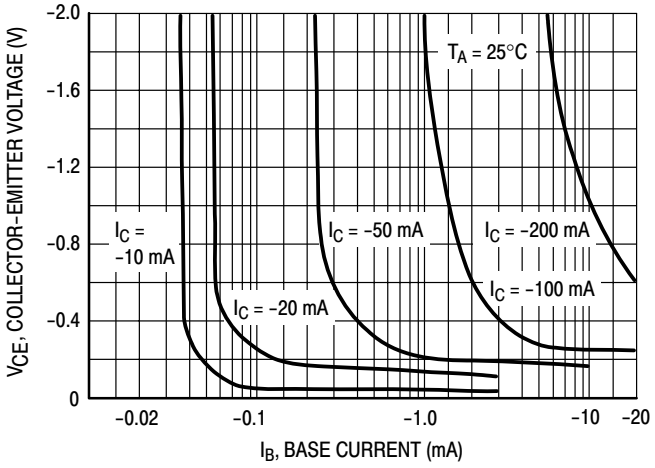


Figure 3. Collector Saturation Region

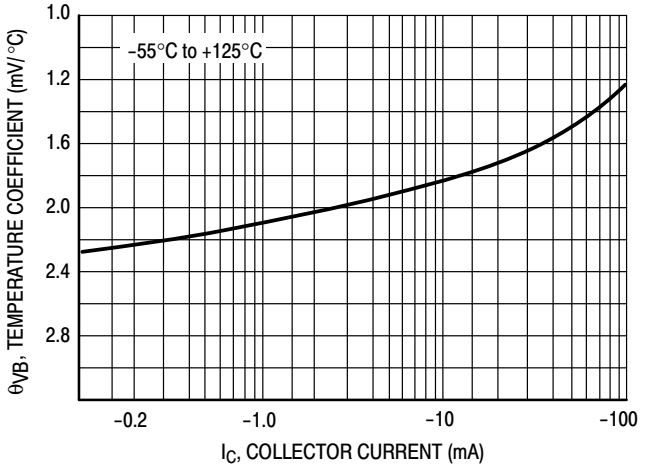


Figure 4. Base−Emitter Temperature Coefficient

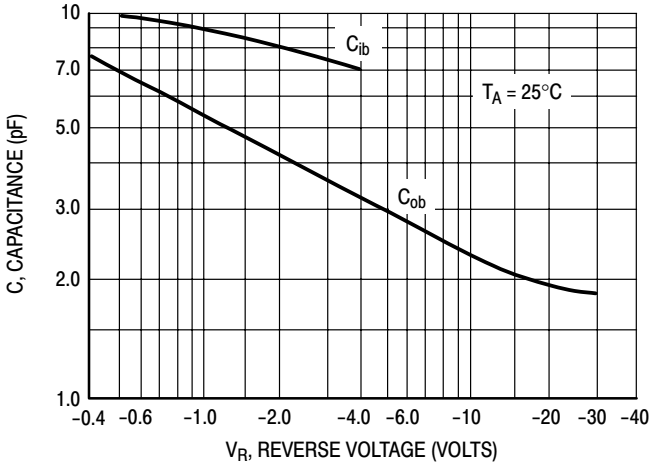


Figure 5. Capacitances

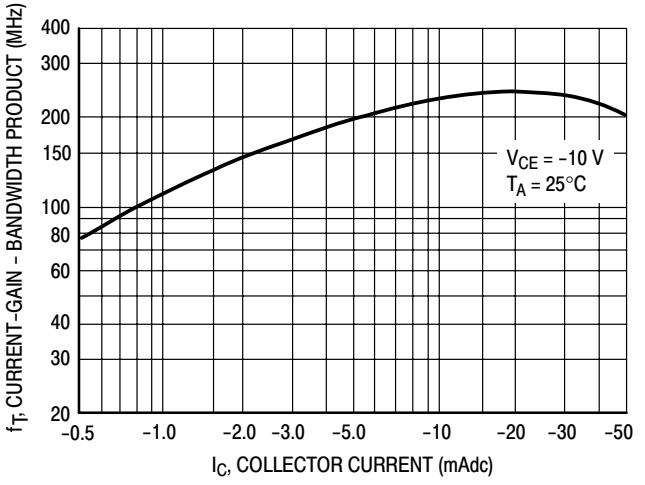


Figure 6. Current−Gain − Bandwidth Product

BC556

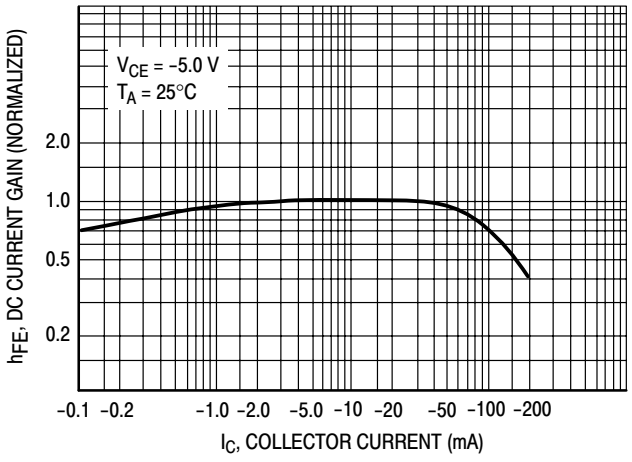


Figure 7. DC Current Gain

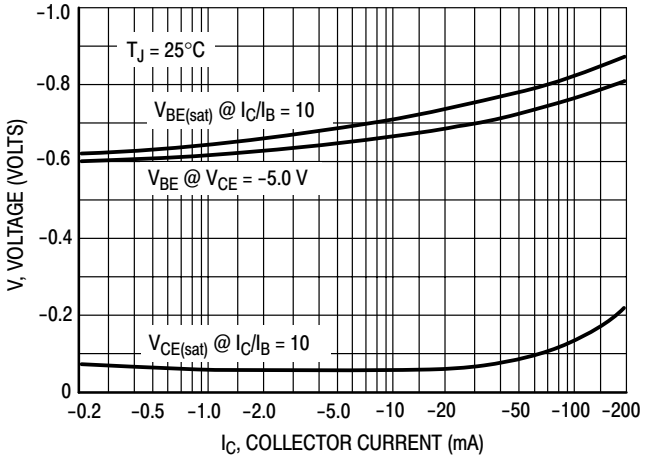


Figure 8. “On” Voltage

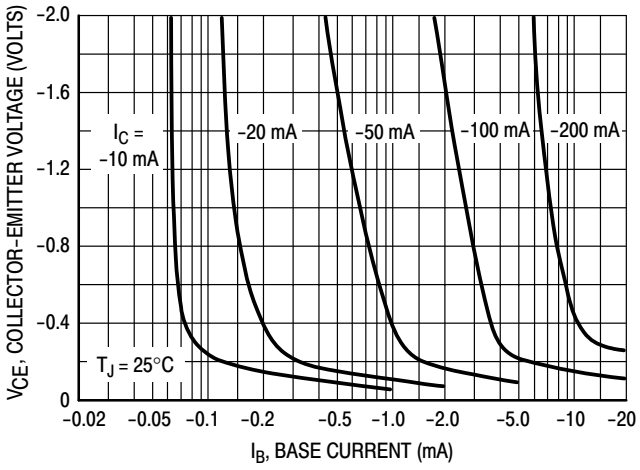


Figure 9. Collector Saturation Region

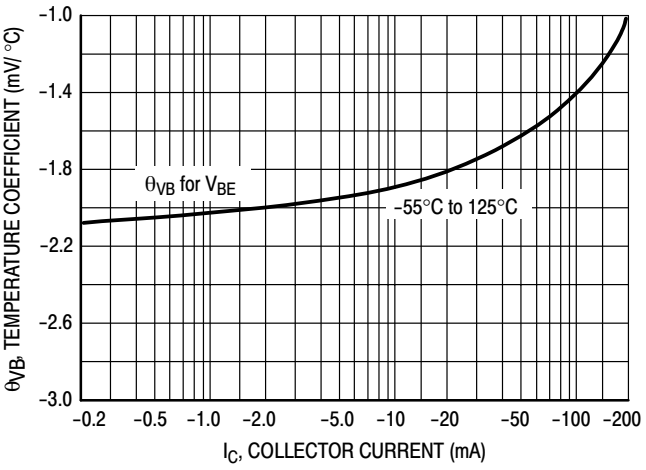


Figure 10. Base−Emitter Temperature Coefficient

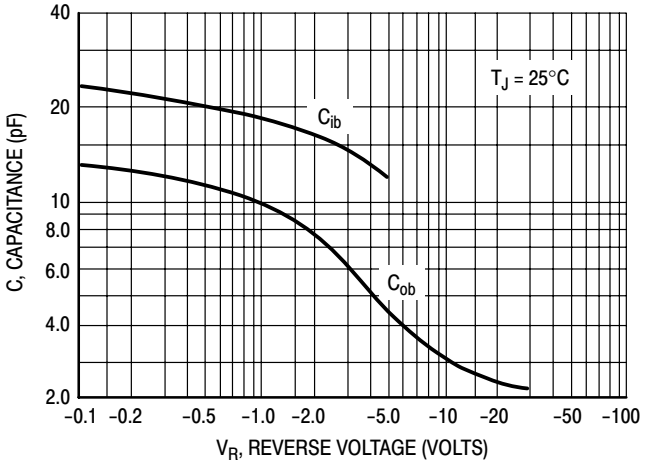


Figure 11. Capacitance

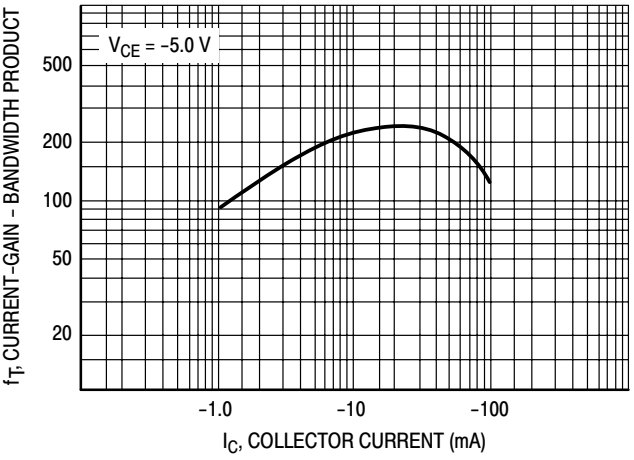


Figure 12. Current−Gain − Bandwidth Product

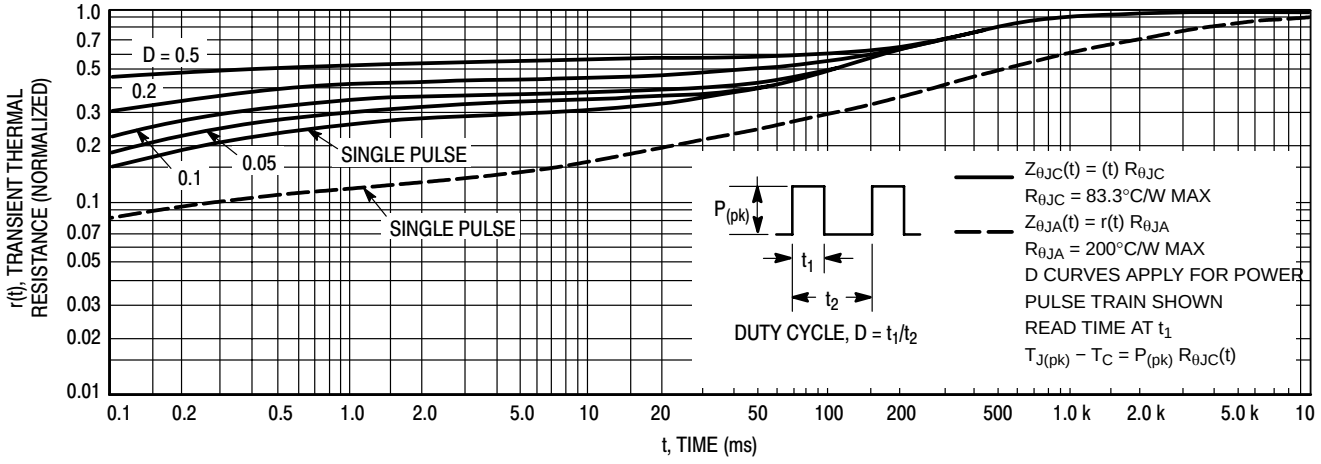


Figure 13. Thermal Response

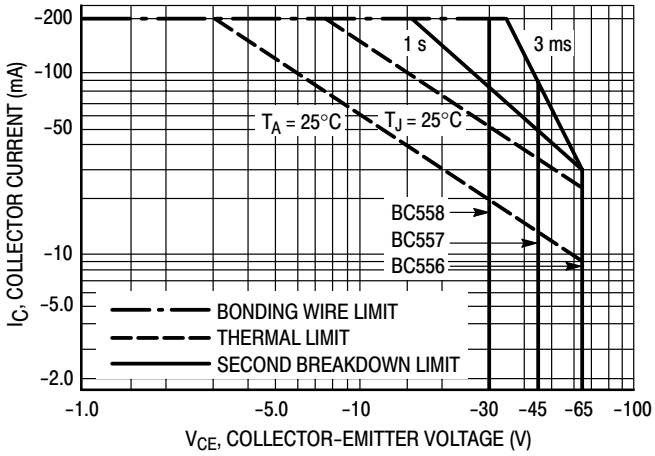


Figure 14. Active Region − Safe Operating Area

The safe operating area curves indicate I_C−V_{CE} limits of the transistor that must be observed for reliable operation. Collector load lines for specific circuits must fall below the limits indicated by the applicable curve.

The data of Figure 14 is based upon $T_{J(pk)}$ = 150°C; T_C or T_A is variable depending upon conditions. Pulse curves are valid for duty cycles to 10% provided $T_{J(pk)} \leq$ 150°C. $T_{J(pk)}$ may be calculated from the data in Figure 13. At high case or ambient temperatures, thermal limitations will reduce the power than can be handled to values less than the limitations imposed by second breakdown.


DEVICE ORDERING INFORMATION


Device	Package	Shipping†
BC556B	TO−92	5000 Units / Bulk
BC556BG	TO−92 (Pb−Free)	5000 Units / Bulk
BC556BZL1	TO−92	2000 / Ammo Box
BC556BZL1G	TO−92 (Pb−Free)	2000 / Ammo Box
BC557AZL1	TO−92	2000 / Ammo Box
BC557AZL1G	TO−92 (Pb−Free)	2000 / Ammo Box
BC557B	TO−92	5000 Units / Bulk
BC557BG	TO−92 (Pb−Free)	5000 Units / Bulk
BC557BRL1	TO−92	2000 / Tape & Reel
BC557BRL1G	TO−92 (Pb−Free)	2000 / Tape & Reel
BC557BZL1	TO−92	2000 / Ammo Box
BC557BZL1G	TO−92 (Pb−Free)	2000 / Ammo Box
BC557C	TO−92	5000 Units / Bulk
BC557CG	TO−92 (Pb−Free)	5000 Units / Bulk
BC557CZL1	TO−92	2000 / Ammo Box
BC557CZL1G	TO−92 (Pb−Free)	2000 / Ammo Box
BC558BRL	TO−92	2000 / Tape & Reel
BC558BRLG	TO−92 (Pb−Free)	2000 / Tape & Reel
BC558BRL1	TO−92	2000 / Tape & Reel
BC558BRL1G	TO−92 (Pb−Free)	2000 / Tape & Reel
BC558BZL1	TO−92	2000 / Ammo Box
BC558BZL1G	TO−92 (Pb−Free)	2000 / Ammo Box
BC558CZL1	TO−92	2000 / Ammo Box
BC558CZL1G	TO−92 (Pb−Free)	2000 / Ammo Box

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

PACKAGE DIMENSIONS

TO−92 (TO−226)
CASE 29−11
ISSUE AL

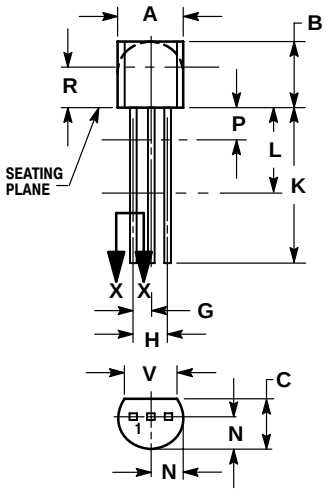



SECTION X−X

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.175	0.205	4.45	5.20
B	0.170	0.210	4.32	5.33
C	0.125	0.165	3.18	4.19
D	0.016	0.021	0.407	0.533
G	0.045	0.055	1.15	1.39
H	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500	---	12.70	---
L	0.250	---	6.35	---
N	0.080	0.105	2.04	2.66
P	---	0.100	---	2.54
R	0.115	---	2.93	---
V	0.135	---	3.43	---

STYLE 17:
PIN 1. COLLECTOR
2. BASE
3. EMITTER

ON Semiconductor and ON are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. “Typical” parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 61312, Phoenix, Arizona 85082−1312 USA
Phone: 480−829−7710 or 800−344−3860 Toll Free USA/Canada
Fax: 480−829−7709 or 800−344−3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800−282−9855 Toll Free USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center
2−9−1 Kamimeguro, Meguro−ku, Tokyo, Japan 153−0051
Phone: 81−3−5773−3850

ON Semiconductor Website: http://onsemi.com

Order Literature: http://www.onsemi.com/litorder

For additional information, please contact your local Sales Representative.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.