
Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

Dual IGBTMOD™ H-Series Module


50 Amperes/600 Volts

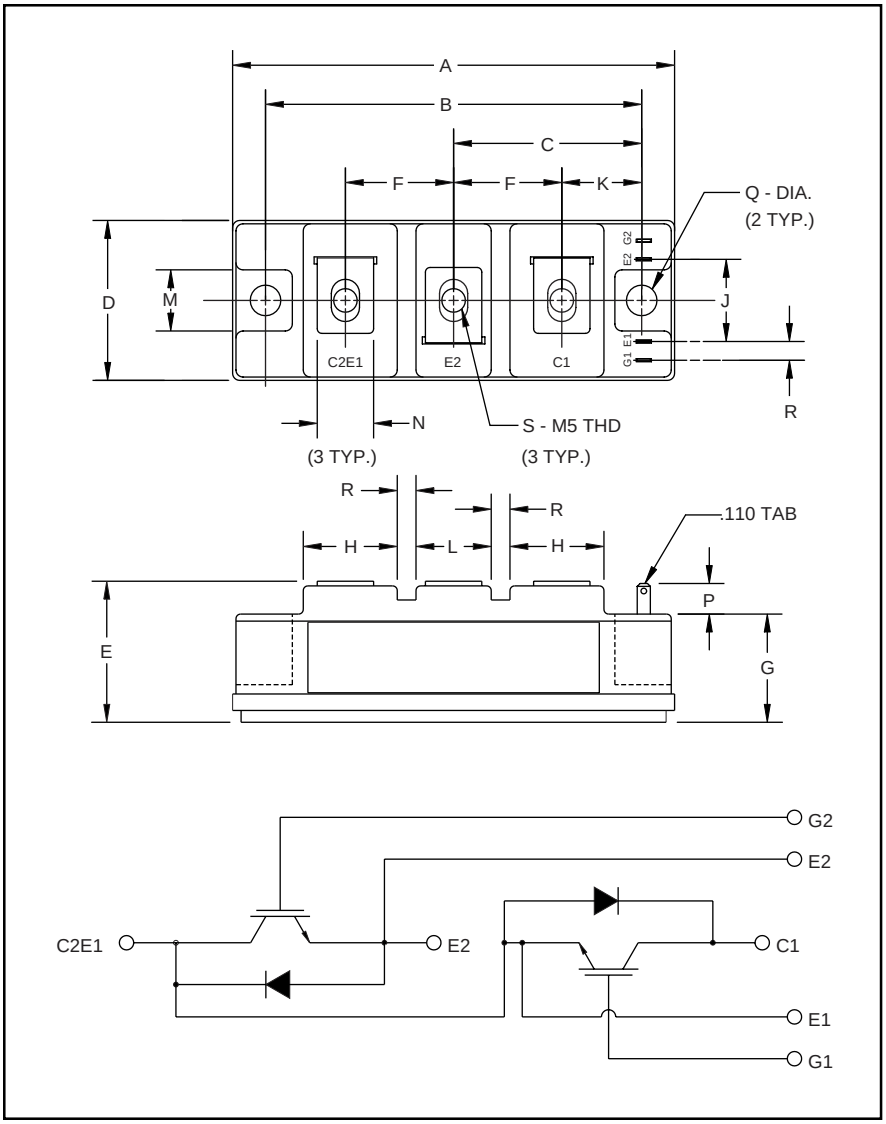

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	3.70	94.0
B	3.150±0.01	80.0±0.25
C	1.57	40.0
D	1.34	34.0
E	1.22 Max.	31.0 Max.
F	0.90	23.0
G	0.85	21.5
H	0.79	20.0
J	0.71	18.0

Dimensions	Inches	Millimeters
K	0.67	17.0
L	0.63	16.0
M	0.51	13.0
N	0.47	12.0
P	0.28	7.0
Q	0.256 Dia.	Dia. 6.5
R	0.16	4.0
S	M5 Metric	M5

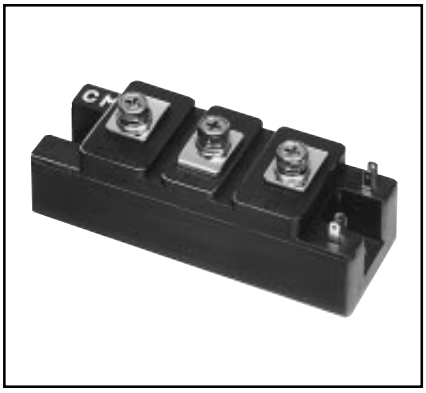

Description:
Powerex IGBTMOD™ Modules are designed for use in switching applications. Each module consists of two IGBT Transistors in a half-bridge configuration with each transistor having a reverse-connected super-fast recovery free-wheel diode. All components and interconnects are isolated from the heat sinking baseplate, offering simplified system assembly and thermal management.

Features:
- ☐ Low Drive Power
- ☐ Low $V_{CE(sat)}$
- ☐ Discrete Super-Fast Recovery (70ns) Free-Wheel Diode
- ☐ High Frequency Operation (20-25kHz)
- ☐ Isolated Baseplate for Easy Heat Sinking

Applications:
- ☐ AC Motor Control
- ☐ Motion/Servo Control
- ☐ UPS
- ☐ Welding Power Supplies
- ☐ Laser Power Supplies

Ordering Information:
Example: Select the complete part module number you desire from the table below -i.e. CM50DY-12H is a 600V (V_{CES}), 50 Ampere Dual IGBTMOD™ Power Module.

Type	Current Rating Amperes	V_{CES} Volts (x 50)
CM	50	12

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

CM50DY-12H
Dual IGBTMOD™ H-Series Module
50 Amperes/600 Volts

Absolute Maximum Ratings, T_j = 25 °C unless otherwise specified

Ratings	Symbol	CM50DY-12H	Units
Junction Temperature	T_j	–40 to 150	°C
Storage Temperature	T_{stg}	–40 to 125	°C
Collector-Emitter Voltage (G-E SHORT)	V_{CES}	600	Volts
Gate-Emitter Voltage	V_{GES}	±20	Volts
Collector Current	I_C	50	Amperes
Peak Collector Current	I_{CM}	100*	Amperes
Diode Forward Current	I_F	50	Amperes
Diode Forward Surge Current	I_{FM}	100*	Amperes
Power Dissipation	P_d	250	Watts
Max. Mounting Torque M5 Terminal Screws	–	17	in-lb
Max. Mounting Torque M6 Mounting Screws	–	26	in-lb
Module Weight (Typical)	–	190	Grams
V Isolation	V_{RMS}	2500	Volts

* Pulse width and repetition rate should be such that device junction temperature does not exceed the device rating.

Static Electrical Characteristics, T_j = 25 °C unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector-Cutoff Current	I_{CES}	$V_{CE} = V_{CES}$, V_{GE} = 0V	–	–	1.0	mA
Gate Leakage Current	I_{GES}	$V_{GE} = V_{GES}$, V_{CE} = 0V	–	–	0.5	μA
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	I_C = 5mA, V_{CE} = 10V	4.5	6.0	7.5	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	I_C = 50A, V_{GE} = 15V	–	2.1	2.8**	Volts
		I_C = 50A, V_{GE} = 15V, T_j = 150°C	–	2.15	–	Volts
Total Gate Charge	Q_G	V_{CC} = 300V, I_C = 50A, V_{GS} = 15V	–	150	–	nC
Diode Forward Voltage	V_{FM}	I_E = 50A, V_{GS} = 0V	–	–	2.8	Volts

** Pulse width and repetition rate should be such that device junction temperature rise is negligible.

Dynamic Electrical Characteristics, T_j = 25 °C unless otherwise specified


Characteristics		Symbol	Test Conditions	Min.	Typ.	Max.	Units
Input Capacitance		C_{ies}	V_{GE} = 0V, V_{CE} = 10V, f = 1MHz	–	–	5.0	nF
Output Capacitance		C_{oes}		–	–	1.8	nF
Reverse Transfer Capacitance		C_{res}		–	–	1.0	nF
Resistive	Turn-on Delay Time	$t_{d(on)}$	V_{CC} = 300V, I_C = 50A, $V_{GE1} = V_{GE2}$ = 15V, R_G = 13Ω	–	–	200	ns
Load	Rise Time	t_r		–	–	300	ns
Switching	Turn-off Delay Time	$t_{d(off)}$		–	–	200	ns
Times	Fall Time	t_f		–	–	300	ns
Diode Reverse Recovery Time		t_{rr}	I_E = 50A, di_E/dt = –100A/μs	–	–	110	ns
Diode Reverse Recovery Charge		Q_{rr}	I_E = 50A, di_E/dt = –100A/μs	–	0.14	–	μC

Thermal and Mechanical Characteristics, T_j = 25 °C unless otherwise specified


Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance, Junction to Case	$R_{th(j-c)}$	Per IGBT	–	–	0.50	°C/W
Thermal Resistance, Junction to Case	$R_{th(j-c)}$	Per FWDi	–	–	1.00	°C/W
Contact Thermal Resistance	$R_{th(c-f)}$	Per Module, Thermal Grease Applied	–	–	0.075	°C/W

CM50DY-12H
Dual IGBTMOD™ H-Series Module
50 Amperes/600 Volts


OUTPUT CHARACTERISTICS (TYPICAL)

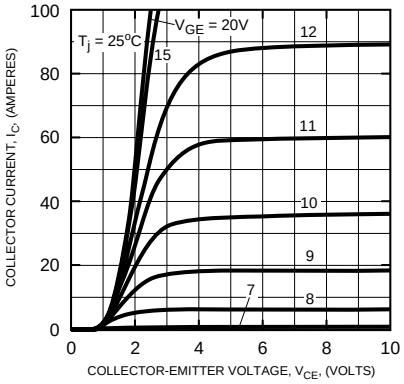


TRANSFER CHARACTERISTICS (TYPICAL)

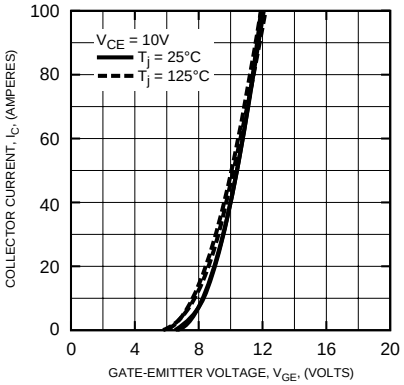


COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

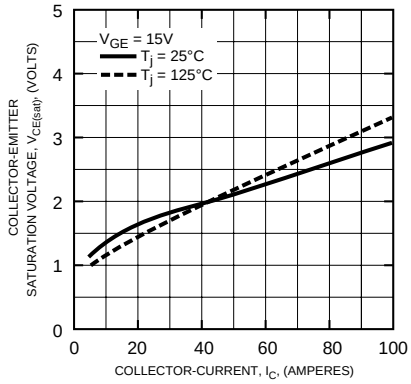


COLLECTOR-EMITTER SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

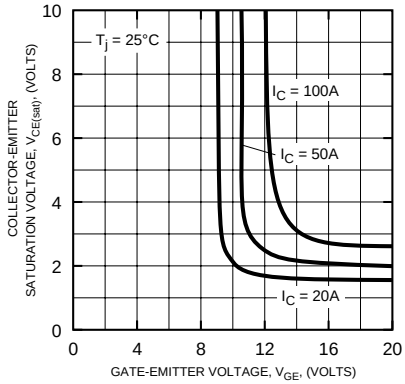


FREE-WHEEL DIODE FORWARD CHARACTERISTICS (TYPICAL)

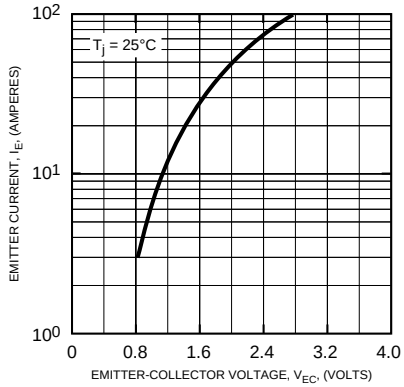


CAPACITANCE VS. V_{CE} (TYPICAL)

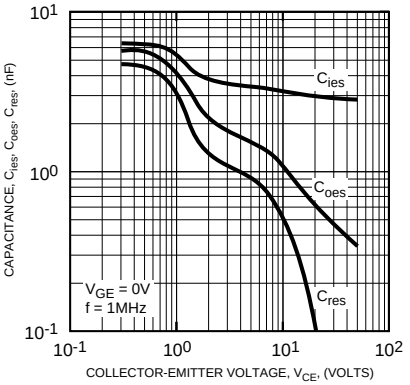


HALF-BRIDGE SWITCHING CHARACTERISTICS (TYPICAL)

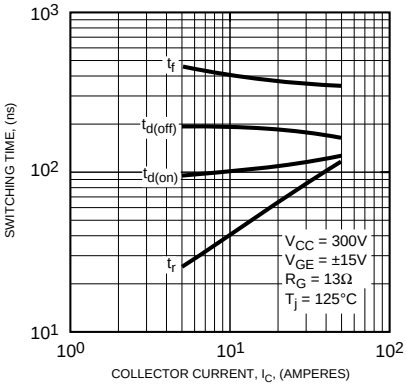

REVERSE RECOVERY CHARACTERISTICS (TYPICAL)

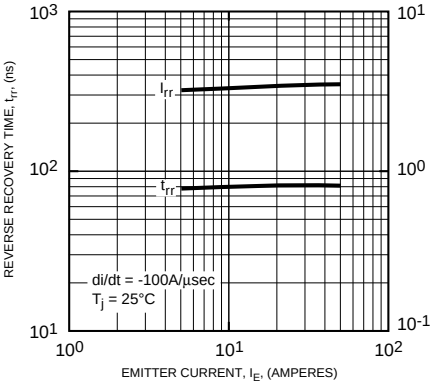


GATE CHARGE, V_{GE}

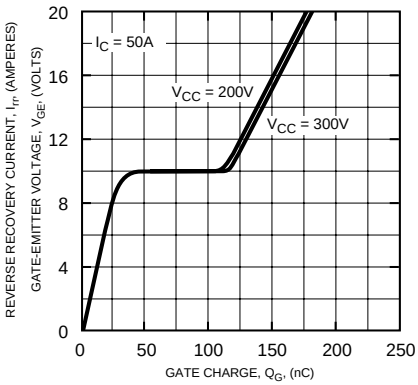


CM50DY-12H
Dual IGBTMOD™ H-Series Module
50 Amperes/600 Volts

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT)

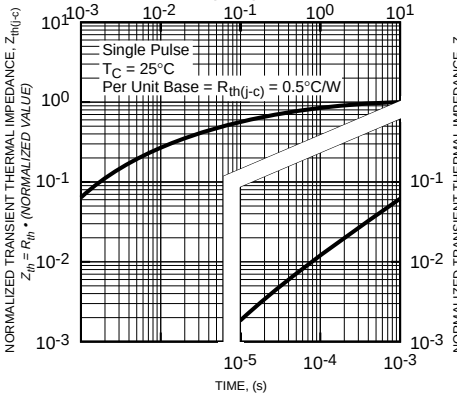

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (FWDi)

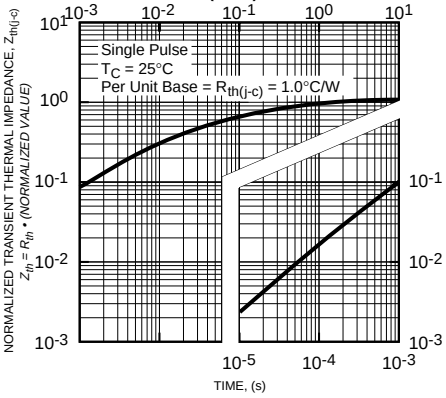

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.