

GKS-102 201 100 A 1502 W

in product series GKS-102 W

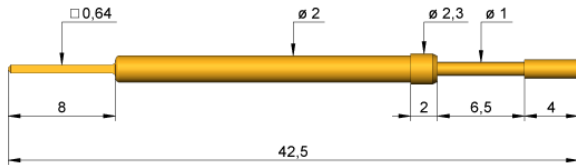


Image similar

Tip style



Image similar

Instructions

The Receptacle can be used from Grid 3,50 mm (140 Mil) up.

General data

Order designation	GKS-102 201 100 A 1502 W
Variant number	GKS-102-0019
Sub product group	Metric Standard
Series	GKS-102 W
Type of installation	plug-in
Connection type at test probe	Wire-Wrap
Quick-exchange system	no
Installation height adjustable	no
Non-rotating	no
Magnetic	yes

Mechanical data

Grid	2.54 mm
Total length	42.5 mm
Collar height	02
Probe barrel diameter	2 mm
Installation height without receptacle	12.5 mm
Working stroke	4.8 mm
Max. stroke	6.5 mm
Spring force at working stroke	1.5 N

Electrical data

Current load capacity / rated current	5 A
Resistance (Ri typical)	20 mOhm

Plunger head data

Tip style	01 needle tip, 30°, self-cleaning
Tip style diameter	1.00 mm
Tip style material	2 Steel
Tip style surface	A Gold

Operating temperature range

Temperature min.	- 40 °C
Temperature max.	+ 80 °C