
SMD General Purpose Transistor (NPN)



SOT-23

Features

- NPN Silicon Epitaxial Planar Transistor for Switching and Amplifier Applications
- RoHS compliance

Mechanical Data

Case:	SOT-23, Plastic Package
Terminals:	Solderable per MIL-STD-202G, Method 208
Weight:	0.008 gram

Maximum Ratings *(T Ambient=25ºC unless noted otherwise)*

Symbol	Description	MMBT3904	Unit	Conditions
V_{CEO}	Collector-Emitter Voltage	40	V	
V_{CBO}	Collector-Base Voltage	60	V	
V_{EBO}	Emitter-Base Voltage	6.0	V	
I_C	Collector Current	200	mA	
P_D	Total Device Power Dissipation(Note 1)	225	mW	T_A=25 ˚C
		1.8	mW/°C	Derate above 25 ˚C
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	556	°C /W	
P_D	Total Device Power Dissipation, Alumina Substrate (Note 2)	300	mW	T_A=25 ˚C
		2.4	mW/°C	Derate above 25 ˚C
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	417	°C /W	
T_J	Junction Temperature	-55 to +150	°C	
T_{STG}	Storage Temperature Range	-55 to +150	°C	

Note: 1. FR-5 Board=25.4 x 19.05 x 1.58 mm (1.0 x 0.75 x 0.062 inches.)
2. Alumina Substrate=10.16 x 7.62 x 0.61 mm (0.4 x 0.3 x 0.024 inches.) 99.5% alumina.

Electrical Characteristics *($T_{Ambient}$=25°C unless noted otherwise)*

Off Characteristics

Symbol	Description	Min.	Max.	Unit	Conditions
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage (Pulse width ≤300μs, Duty Cycle ≤2.0%)	40	-	V	I_C=1mA, I_B=0
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	60	-	V	I_C=10μA, I_E=0
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	6.0	-	V	I_E=10μA, I_C=0
I_{BL}	Base Cut-off Current	-	50	nA	V_{EB}=3V, V_{CE}=30V
I_{CEX}	Collector Cut-off Current	-	50	nA	V_{EB}=3V, V_{CE}=30V

On Characteristics

Symbol	Description	Min.	Max.	Unit	Conditions
h_{FE}	D.C. Current Gain	40	-		V_{CE}=1V, I_C=0.1mA
		70	-		V_{CE}=1V, I_C=1mA
		100	300		V_{CE}=1V, I_C=10mA
		60	-		V_{CE}=1V, I_C=50mA
		30	-		V_{CE}=1V, I_C=100mA
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	-	0.2	V	I_C=10mA, I_B=1mA
		-	0.3		I_C=50mA, I_B=5mA
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	0.65	0.85	V	I_C=10mA, I_B=1mA
		-	0.95		I_C=50mA, I_B=5mA

Small-signal Characteristics

Symbol	Description	Min.	Max.	Unit	Conditions
f_T	Current Gain-Bandwidth Product	300	-	MHz	V_{CE}=20V, I_C=10mA, f=100MHz
C_{OBO}	Output Capacitance	-	4.0	pF	V_{CB}=5V, f=1.0MHz, I_E=0
C_{IBO}	Input Capacitance	-	8.0	pF	V_{EB}=0.5V, f=1.0MHz, I_C=0
h_{ie}	Input Impedance	1.0	10	kohms	V_{CE}=10V, I_C=1mA, f=1kHz
h_{re}	Voltage Feedback Ratio	0.5	8.0	x 10^{-4}	V_{CE}=10V, I_C=1mA, f=1kHz
h_{fe}	Small-Signal Current Gain	100	400	-	V_{CE}=10V, I_C=1mA, f=1kHz
h_{oe}	Output Admittance	1.0	40	UMHOS	V_{CE}=10V, I_C=1mA, f=1kHz
NF	Noise Figure	-	5.0	dB	V_{CE}=5V, I_C=100μA, Rs=1.0kohms, f=1kHz

Switching Characteristics

Symbol	Description	Min.	Max.	Unit	Conditions
t_d	Delay Time	-	35	ns	V_{CC}=3V, V_{BE}=-0.5V I_C=10mA, I_{B1}=1mA
t_r	Rise Time	-	35		
t_s	Storage Time	-	200		V_{CC}=3V, I_C=10mA, I_{B1}= I_{B2}=1mA
t_f	Fall Time	-	50		

Equivalent Test Circuit

Fig.1- Delay and Rise Time


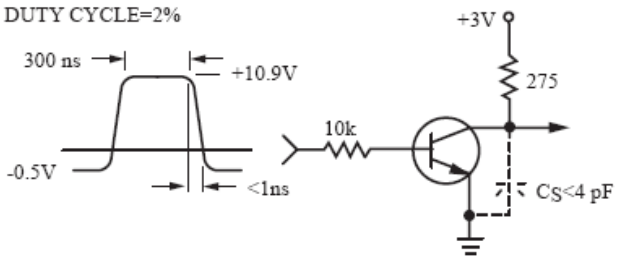


Fig.2- Storage and Fall Time

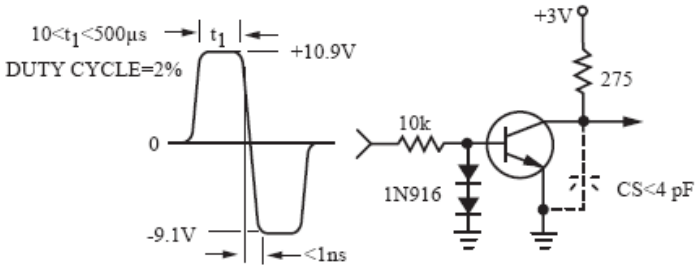

Total Shunt Capacitance of test jig and connectors

Typical Characteristics Curves (▬ T_J =25°C --- T_J =125°C)

Fig.3- Capacitance

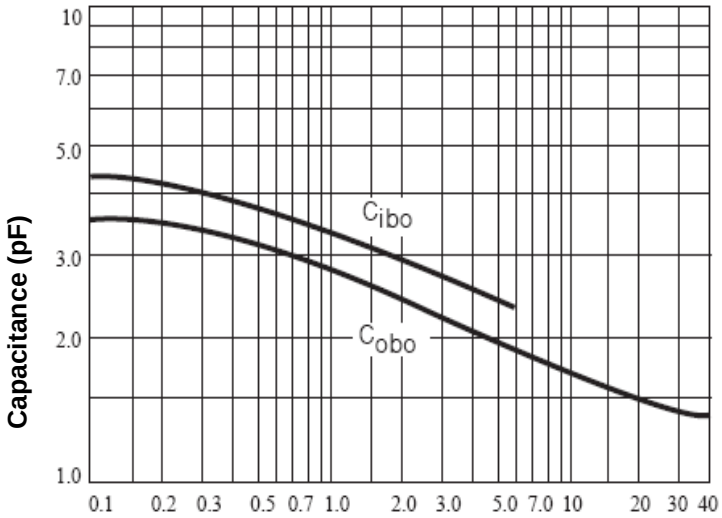


Fig.4- Charge Data

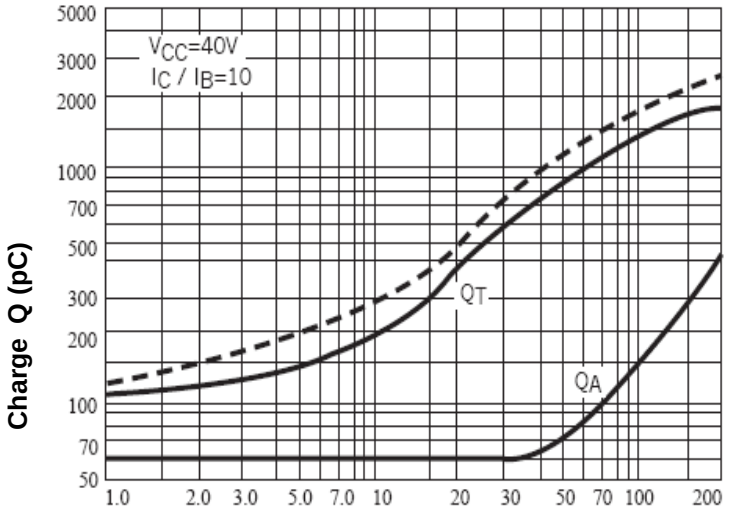


Fig.5- Turn-On Time

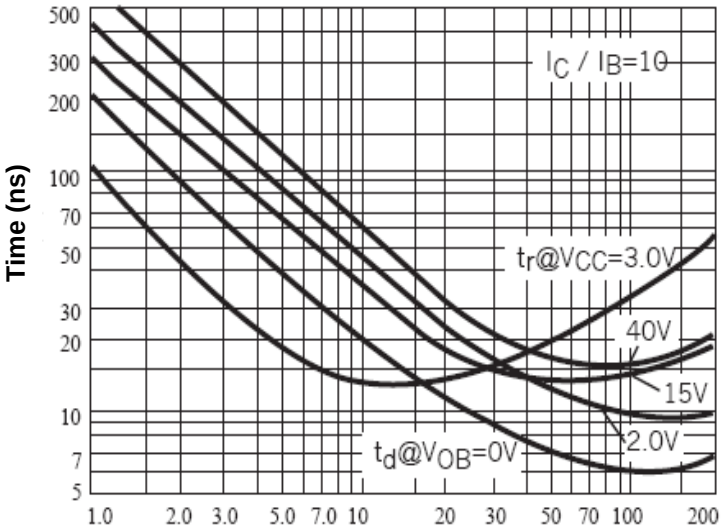


Fig.6- Rise Time

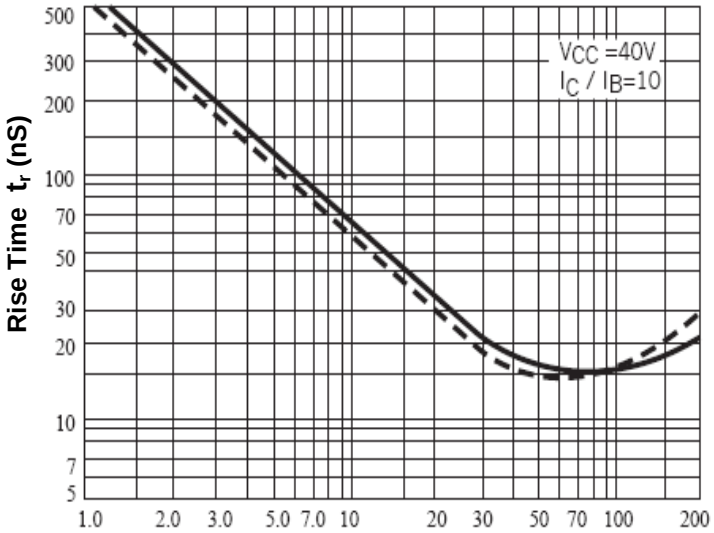


Fig.7- Storage Time


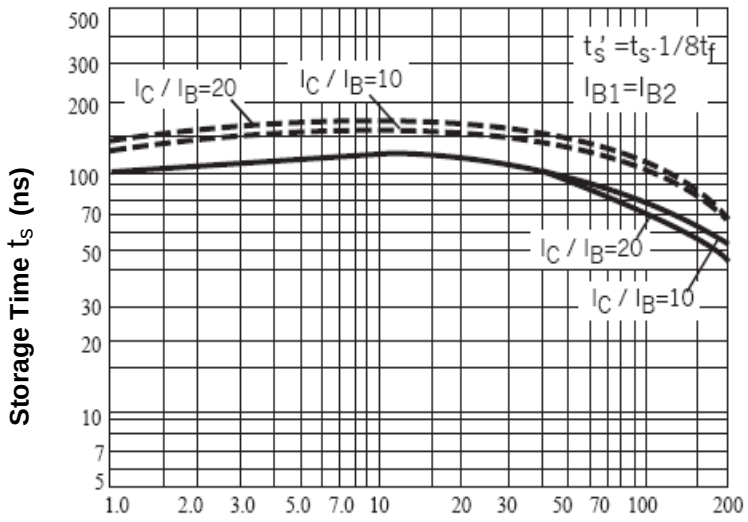


Fig.8- Fall Time

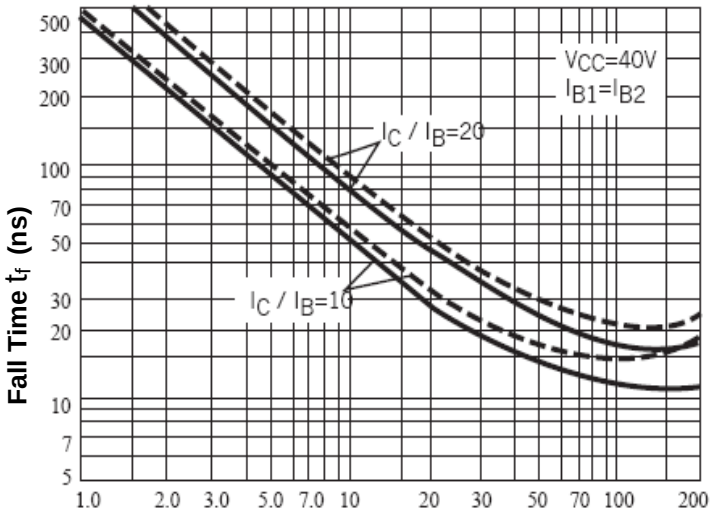

Typical Audio Small-Signal Characteristics Noise Figure Variations

(V_{CE}=5.0 V. T_A=25°C, Bandwidth=1.0Hz)

Fig.9- Noise Figure


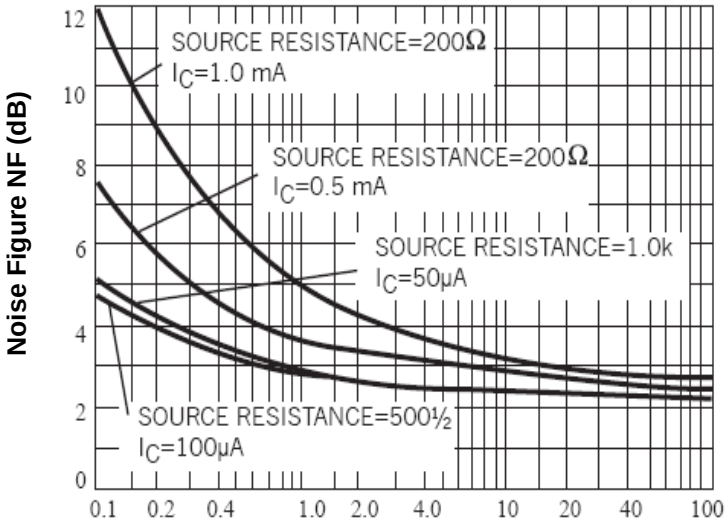


Fig.10- Noise Figure

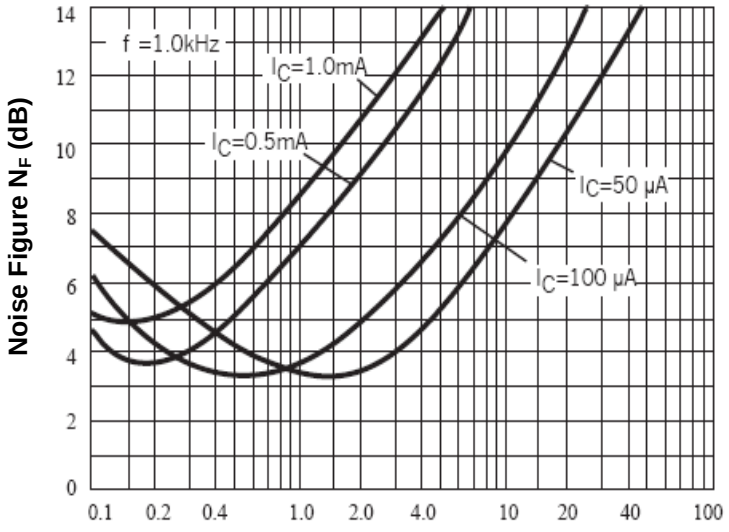

h Parameters (V_{CE}=10V, f=1.0kHz, T_A=25°C)

Fig.11- Current Gain

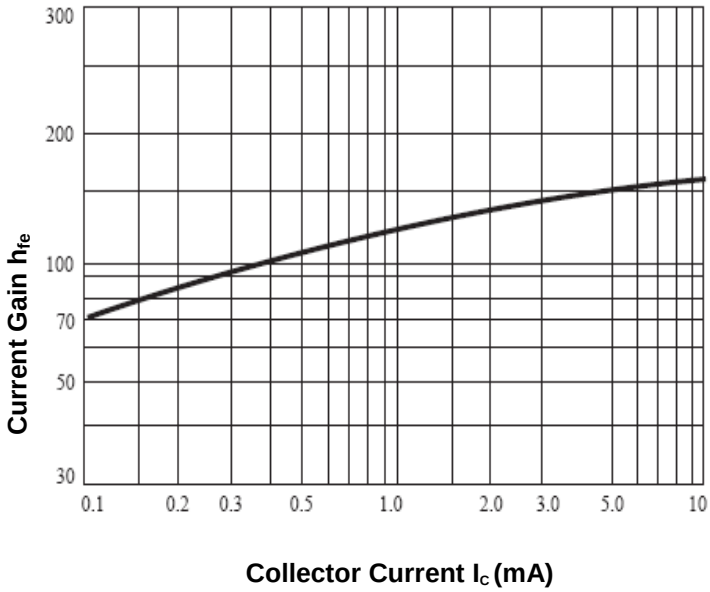


Fig.12- Output Admittance

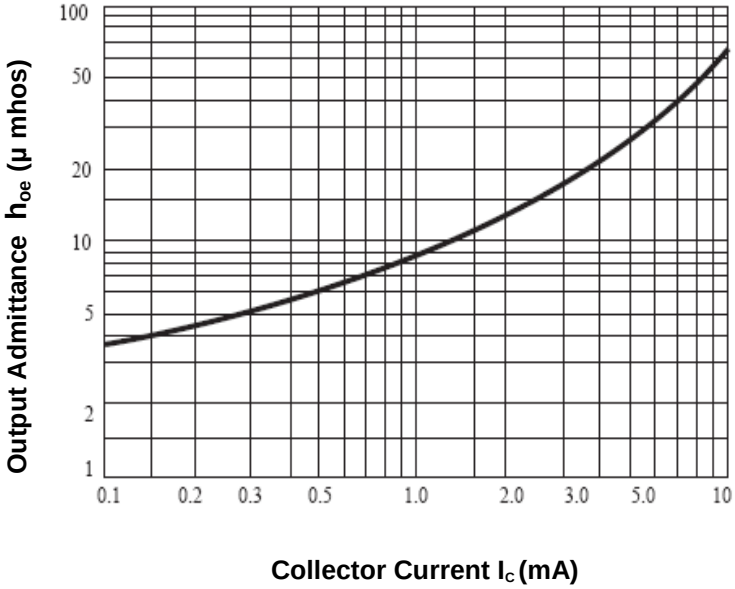


Fig.13- Input Impedance


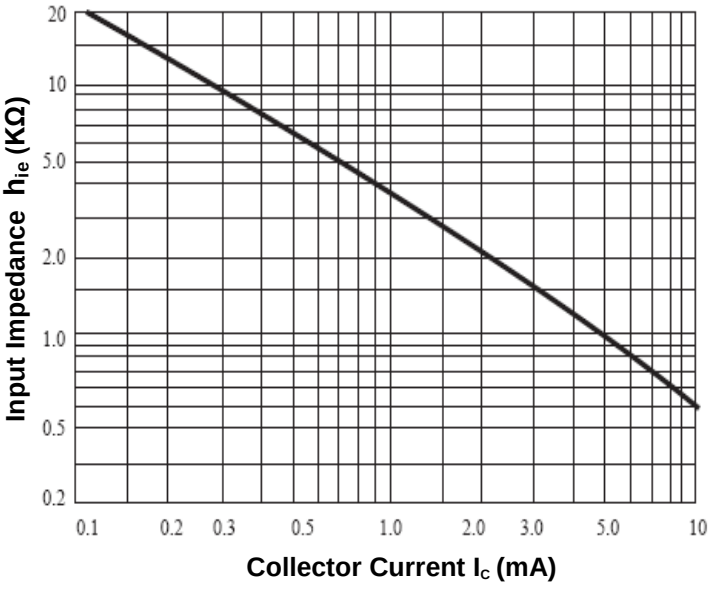


Fig.14- Voltage Feedback Ratio

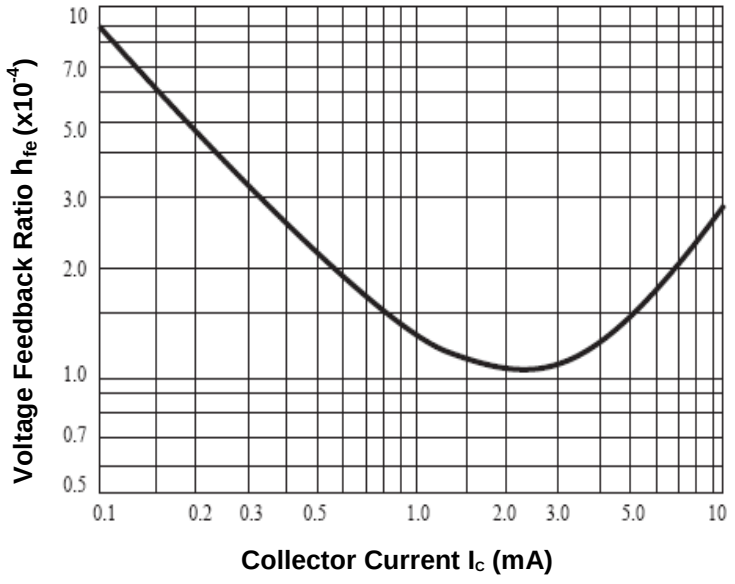

Typical Static Characteristics

Fig.15- DC Current Gain

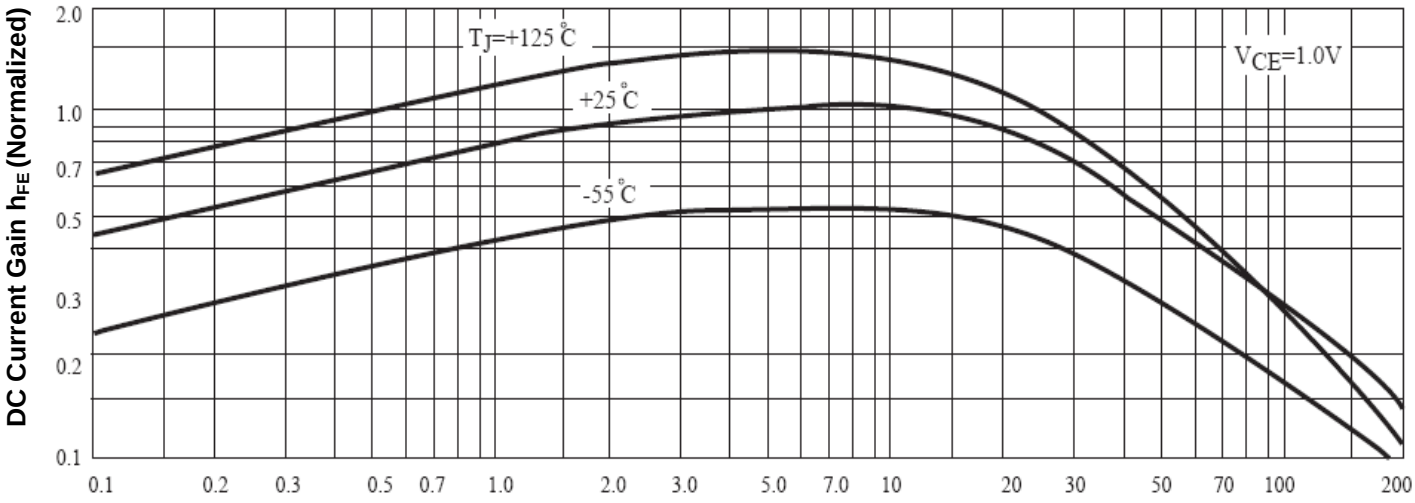


Fig.16- Collector Saturation Region

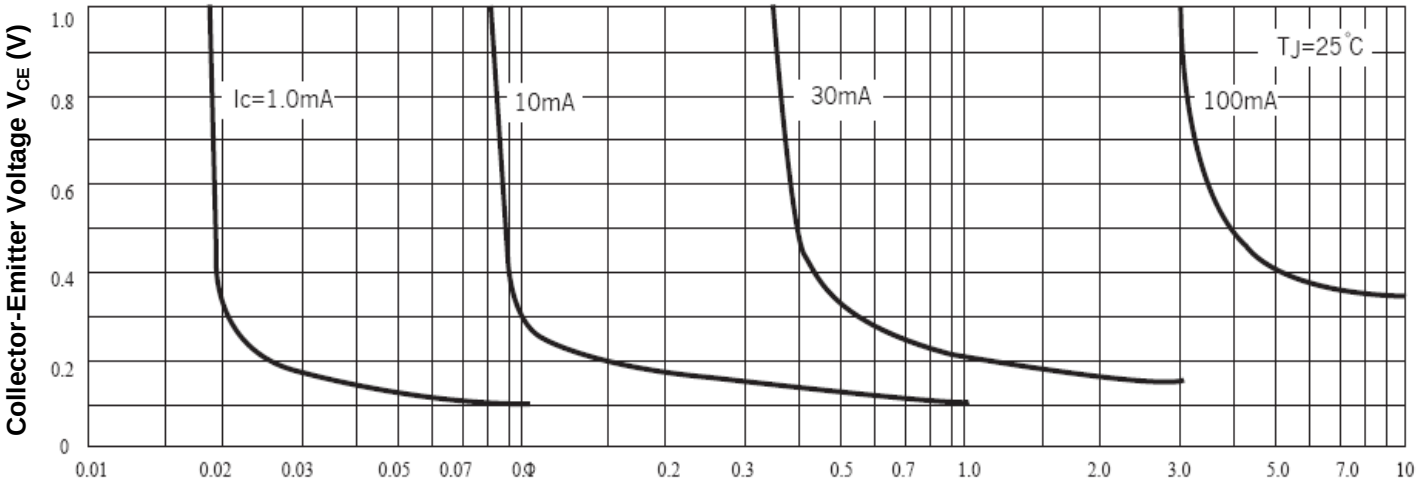


Fig.17- "On" Voltage


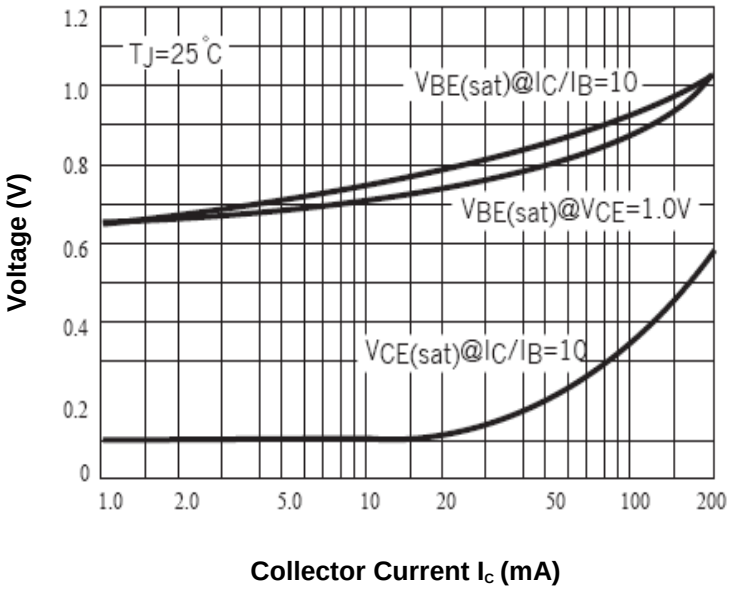



Fig.18- Temperature Coefficients

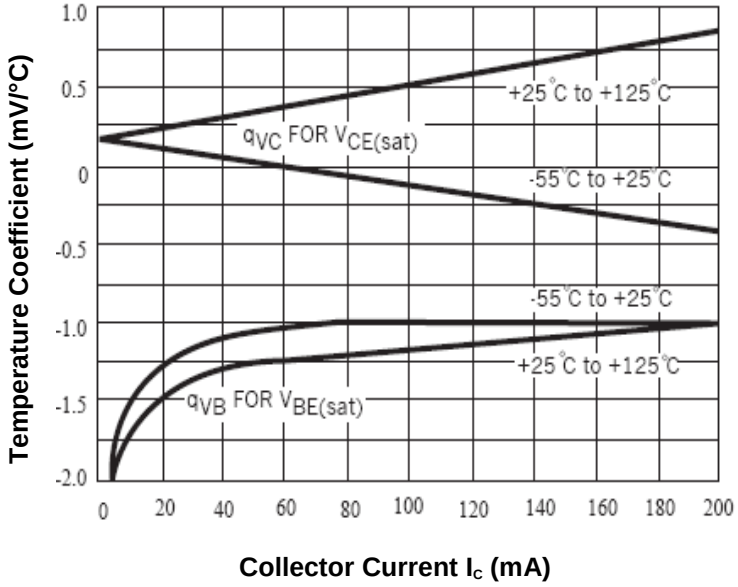


Device Marking: MMBT3904=1A/1AM/ZC

Dimensions in mm

SOT-23



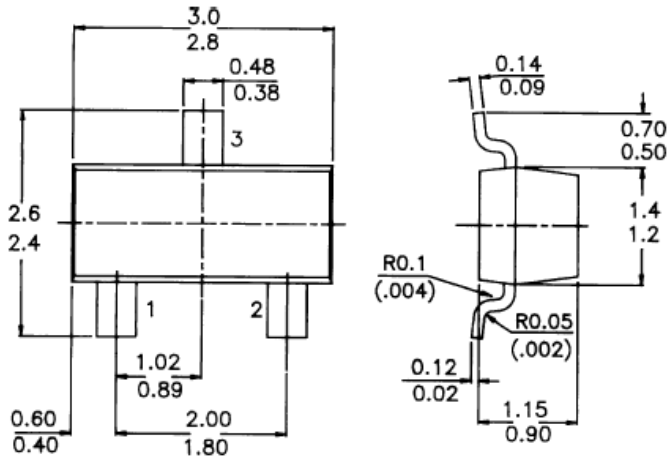

How to contact us

US HEADQUARTERS
28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162
Tel: (800)-TAITRON (800)-824-8766 (661)-257-6060
Fax: (800)-TAITFAX (800)-824-8329 (661)-257-6415
Email: taitron@taitroncomponents.com
Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.
BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO
C.P. 42970 MEXICO
Tel: +52-55-5560-1519
Fax: +52-55-5560-2190

TAITRON COMPONENTS INCORPORATED TAIWAN, TAIPEI
6F., No.190, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, Taiwan R.O.C.
Tel: 886-2-2913-6238
Fax: 886-2-2913-6239

TAITRON COMPONENT TECHNOLOGY, SHANGHAI CORPORATION
METROBANK PLAZA,1160 WEST YAN'AN ROAD, SUITE 1503, SHANGHAI,200052, CHINA
Tel: +86-21-5424-9942
Fax: +86-21-2302-5027

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.