1.5A LOW DROPOUT VOLTAGE CMOS REGULATOR

Description

The PAM3116 is a 1.5A CMOS LDO regulator that features a low quiescent current and low dropout voltages, as well as over temperature shutdown. The PAM3116 is stable with a ceramic output capacitor of 4.7µF or higher.

This family of regulators can provide either a stand-alone power supply solution or act as a post regulator for switch mode power supplies. They are particularly suitable for applications requiring low input and output voltages.

PAM3116 is available in SOP-8 package.

Features

- High Output Current Up to 1.5A
- Output Voltage Available in ADJ(0.8V)
- Stable with a Ceramic Output Capacitor
- Dropout Voltage: 300mV@1.5A, Vo = 3.3V
- Low Quiescent Current
- Over Temperature Shutdown
- Short Circuit Protection
- Low Temperature Coefficient
- Standard SOP-8 Packages
- Pb-Free Package

Pin Assignments

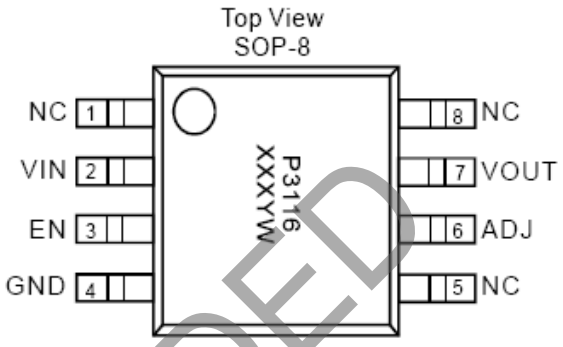

Applications

- LCD TV/Monitors
- Set-top Box
- IPhone Charger
- Communication Devices

Typical Applications Circuit

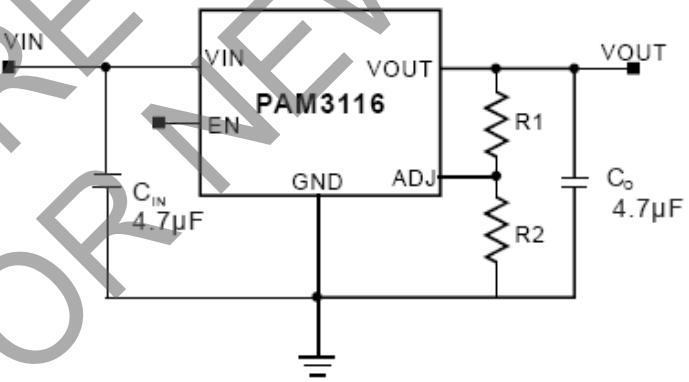

V_{OUT} = 0.8 x (1+R1/R2)

NOT RECOMMENDED FOR NEW DESIGN

© Diodes Incorporated

Pin Description

Pin Name	Pin Number	Function
	SOP-8	
VIN	2	Supply Input Voltage.
EN	3	Chip Enable
ADJ	6	Set the output voltage by the feedback resistors.
VOUT	7	Output Voltage.
NC	1, 5, 8	No Internal Connection.
GND	4	Ground

Functional Block Diagram

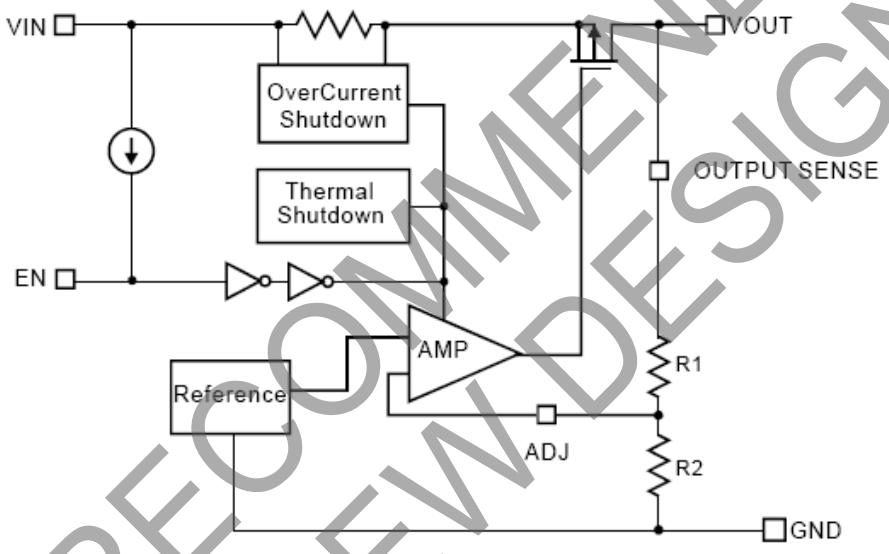

Absolute Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

These are stress ratings only and functional operation is not implied. Exposure to absolute maximum ratings for prolonged time periods may affect device reliability. All voltages are with respect to ground.

Parameter	Rating	Unit
Input Voltage	6.5	V
Output Pin Voltage	-0.3 to V_{IN} +0.3	V
EN, ADJ, OUTPUT SENSE Pin Voltage	-0.3 to V_{IN} +0.3	V
Maximum Output Current	$P_D/(V_{IN}–V_O)$	—
Storage Temperature	-65 to +150	°C
Maximum Junction Temperature	150	°C
Lead Soldering Temperature	300, (5sec)	°C

NOT RECOMMENDED FOR NEW DESIGN

© Diodes Incorporated

Recommended Operating Conditions (@T_A = +25°C, unless otherwise specified.)

Parameter	Rating	Unit
Maximum Supply Voltage	6	V
Ambient Temperature Range	-40 to +85	°C
Junction Temperature Range	-40 to +125	

Thermal Information

Parameter	Symbol	Package	Max	Unit
Thermal Resistance (Junction to Case)	θ_{JC}	SOP-8	11	°C/W
Thermal Resistance (Junction to Ambient)	θ_{JA}	SOP-8	90	°C/W
Internal Power Dissipation	P_D	SOP-8	1100	mW

Electrical Characteristics (@T_A = +25°C, V_{IN} = V_O +1V, C_{IN} = 4.7µF, C_O = 4.7µF, unless otherwise specified.)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Units
Input Voltage Range	V_{IN}			2.5		6.0	V
Output Voltage Range	V_O			0.8		5	V
ADJ Reference Voltage	V_{REF}	I_O = 1mA		0.788	0.8	0.812	V
Output Voltage Accuracy	V_O	I_O = 1mA		-1.5		1.5	%
Output Current	I_O	V_O > 0.8V		1500			mA
Output Current Limit	I_{LIM}	V_O > 0.8V		1500	2500		mA
Short Circuit Current	I_{SC}	I_O = 0mA			700		mA
Dropout Voltage	V_{DROP}	I_O = 1.5A	0.8V ≤ V_O < 2.5V			1700	mV
			V_O ≥ 2.5V		300	400	
Quiescent Current	I_Q	I_O = 0mA			90	150	µA
Line Regulation	LNR	I_O = 1mA, V_{IN} = V_O +1 to V_O +2		-0.4		0.4	%/V
Load Regulation	LDR	I_O = 1mA to 1500mA		-1.0	0.2	+1.0	%
Temperature Coefficient	T_C				40		ppm/°C
Over Temperature Shutdown	OTS	I_O = 1mA			150		°C
Over Temperature Hysteresis	OTH	I_O = 1mA			40		°C
Power Supply Ripple Rejection	PSRR	I_O = 100mA, V_O = 1.2mA	f = 100Hz		70		dB
			f = 1kHz		65		
			f = 10kHz		50		
Output Noise	Vn	f = 10Hz to 100kHz, I_O = 10mA			50		μV_{RMS}
EN Input High Threshold	V_{EH}	V_{IN} = 2.5V to 5V		1.5			V
EN Input Low Threshold	V_{EL}	V_{IN} = 2.5V to 5V				0.3	V
EN Input High Bias Current	I_{EH}	V_{EN} = 5V, V_{IN} = 5V				0.5	µA
EN Input Low Bias Current	I_{EL}	V_{EN} = 0V, V_{IN} = 5V				0.5	µA
Shutdown Current	I_{SD}	V_{EN} = 0V				1	µA

NOT RECOMMENDED FOR NEW DESIGN

© Diodes Incorporated

Typical Performance Characteristics (@T_A = +25°C, C_{IN} =2.2µF, C_O = 4.7µF, unless otherwise specified.)

1. Output Voltage vs Output Current

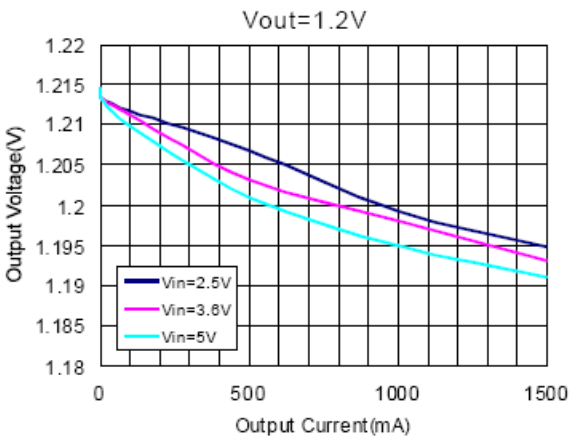

2. Output Voltage vs Output Current

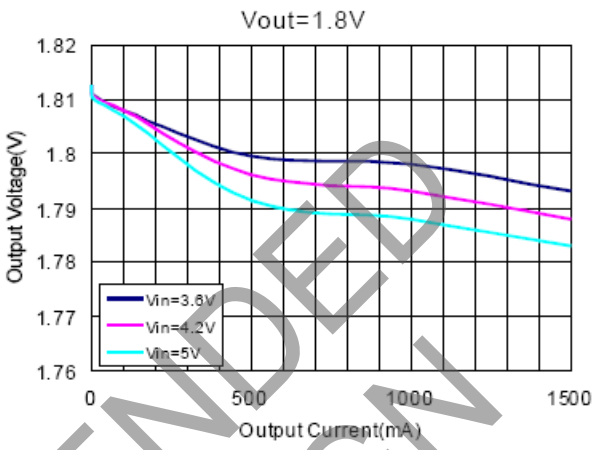

3. Output Voltage vs Output Current

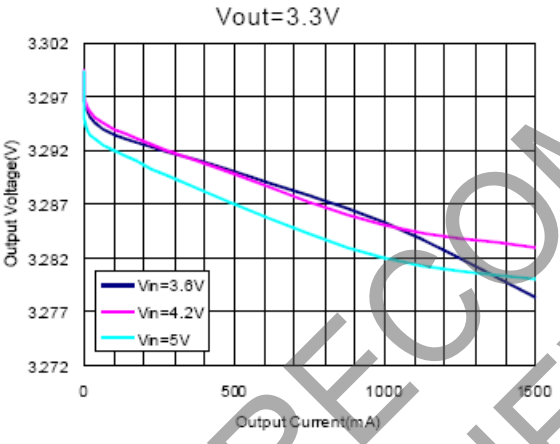

4. Output Voltage vs Output Current

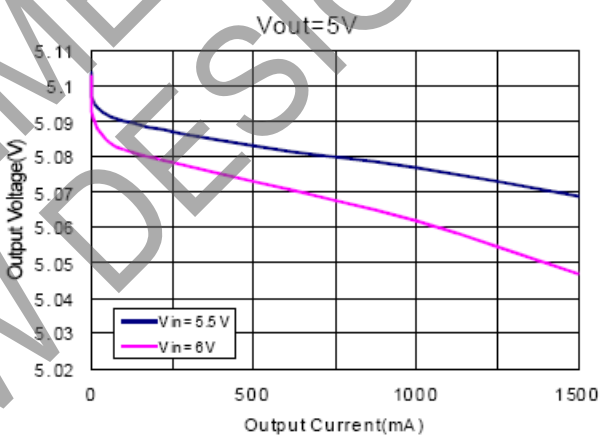

5. Quiescent Current vs Input Voltage

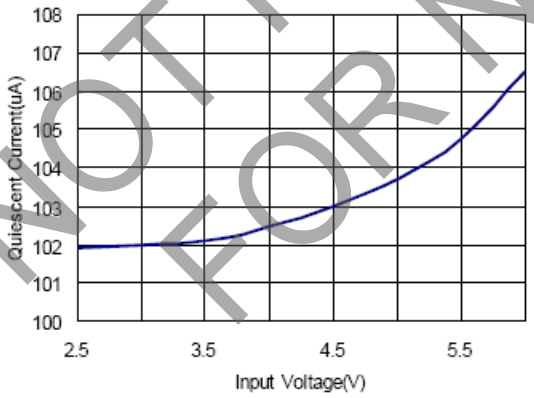

6. Dropout Voltage vs Output Current

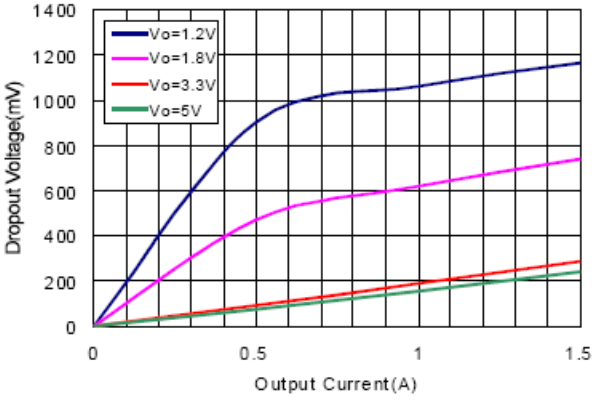

NOT RECOMMENDED FOR NEW DESIGN

© Diodes Incorporated

Typical Performance Characteristics (cont.) (@T_A = +25°C, C_{IN} =4.7µF, C_O = 4.7µF, unless otherwise specified.)

7. Line Transient

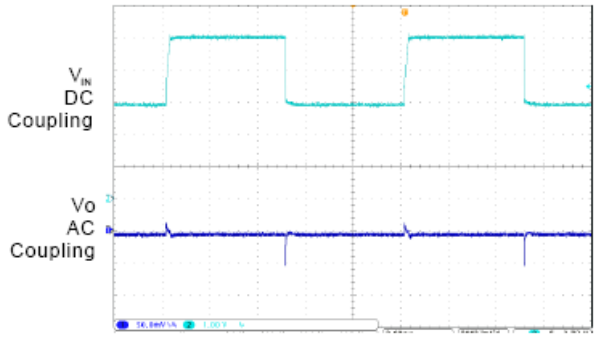

Vo=1.2V, V_{IN}=3V to 5V, Io=100mA

8. Line Transient

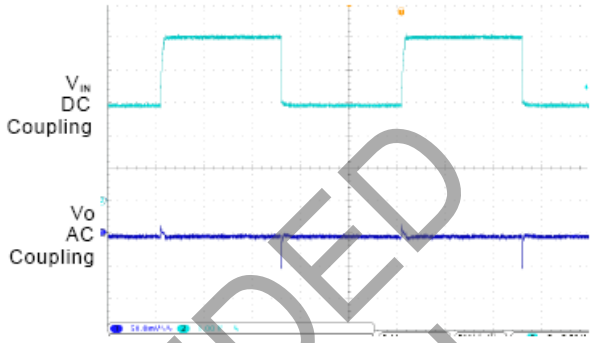

Vo=1.8V, V_{IN}=3V to 5V, Io=100mA

9. Line Transient

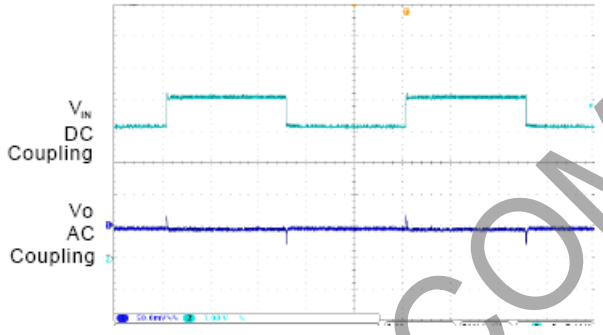

Vo=3.3V, V_{IN}=4V to 5V, Io=100mA

10. Line Transient

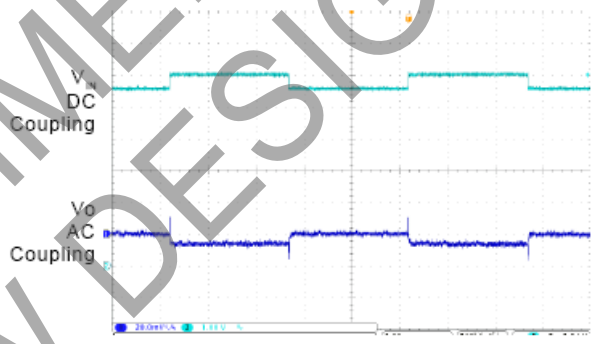

Vo=5V, V_{IN}=5.5V to 6V, Io=100mA

11. Load Transient

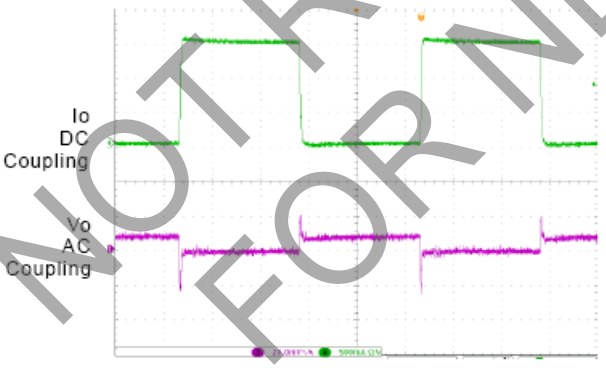

Vo=1.2V, V_{IN}=3V, Io=0A to1.5A

12. Load Transient

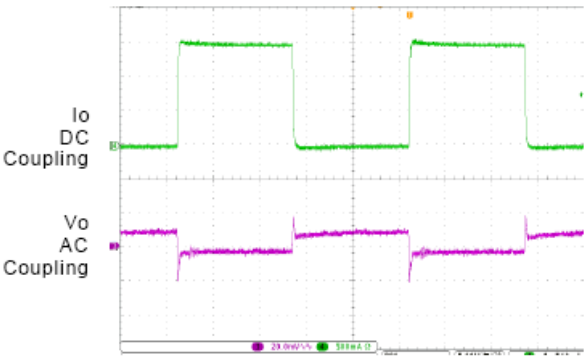

Vo=1.8V, V_{IN}=3.6V, Io=0A to1.5A

NOT RECOMMENDED FOR NEW DESIGN

© Diodes Incorporated

Typical Performance Characteristics (cont.) (@T_A = +25°C, C_{IN} =4.7µF, C_O = 4.7µF, unless otherwise specified.)

13. Load Transient

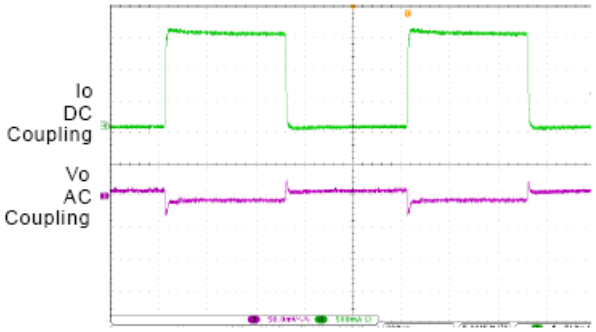

Vo=3.3V, V_{IN}=5V, Io=0A to1.5A

14. Load Transient

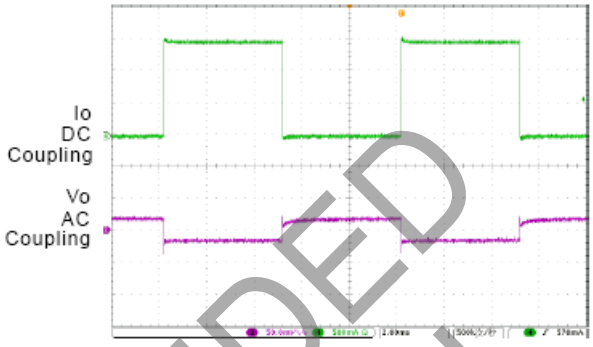

Vo=5V, V_{IN}=5.5V, Io=0A to1.5A

15. PSRR

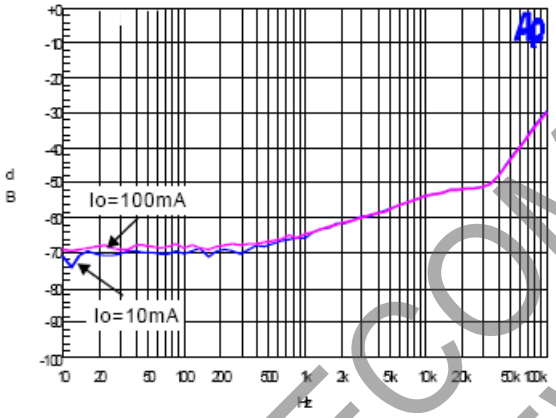

Vo=1.2V, V_{IN}=3V,Vpp=200mV

16. PSRR

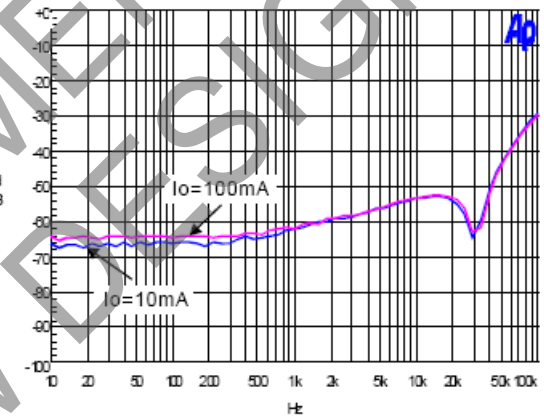

Vo=1.8V, V_{IN}=3V,Vpp=200mV

17. PSRR

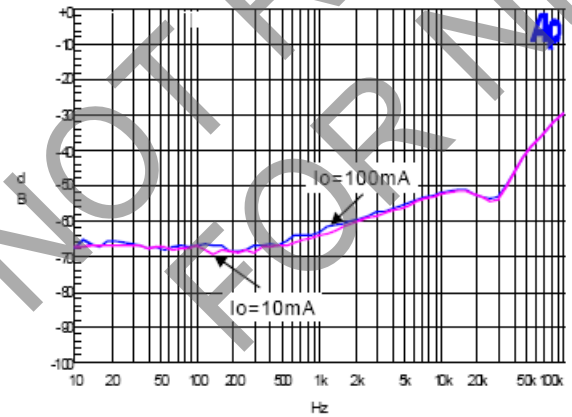

Vo=3.3V, V_{IN}=4V,Vpp=200mV

18. PSRR

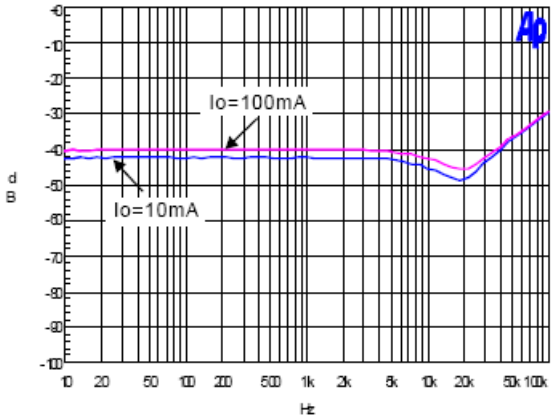

Vo=5V, V_{IN}=5.5V,Vpp=200mV

NOT RECOMMENDED FOR NEW DESIGN

© Diodes Incorporated

Application Information

The PAM3116 family of low-dropout (LDO) regulators have several features that allow them to apply to a wide range of applications. The family operates with very low input voltage and low dropout voltage (typically 300mV at full load), making it an efficient stand-alone power supply or post regulator for battery or switch mode power supplies. The 1.5A output current make the PAM3116 family suitable for powering many microprocessors and FPGA suppl ies. The PAM3116 family also has low output noise (typically 50μVRMS with 4.7μF output capacitor), making it ideal for use in telecom equipment.

External Capacitor Requirements

A 4.7μF or larger ceramic input bypass capacitor, connected between V_{IN} and GND and located close to the PAM3116, is required for stability. A 4.7μF minimum value capacitor from V_O to GND is also required. To improve transient response, noise rejection, and ripple rejection, an additional 1 0μF or larger, low ESR capacitor is recommended at the output. A higher-value, low ESR output capacitor may be necessary if large, fast-rise-time load transients are anticipated and the device is located several inches from the power source, especially if the minimum input voltage of 2.5V is used.

Regulator Protection

The PAM3116 features internal current limiting, thermal protection and short circuit protection. During normal operation, the PAM3116 limits output current to about 2.5A. When current limiting engages, the output voltage scales back linearly until the over current condition ends. While current limiting is designed to prevent gross device failure, care should be taken not to exceed the power dissipation ratings of the package. If the temperature of the device exceeds +150°C, thermal-protection circuitry will shut down. Once the device has cooled down to approximately +40°C below the high temp trip point, regulator operation resumes. The short circuit current of the PAM3116 is about 0.7A when its output pin is shorted to ground.

Thermal Information

The amount of heat that an LDO linear regulator generates is:

$$P_D = (V_{IN} - V_O)I_O$$

All integrated circuits have a maximum allowable junction temperature ($T_{J(MAX)}$) above which normal operation is not assured. A system designer must design the operating environment so that the operating junction temperature (T_J) does not exceed the maximum junction temperature ($T_{J(MAX)}$). The two main environmental variables that a designer can use to improve thermal performance are air flow and external heat sinks. The purpose of thi s information is to aid the designer in determining the proper operating environment for a linear regulator that is operating at a specific power level.

In general, the maximum expected power ($P_{D(MAX)}$) consumed by a linear regulator is computed as:

Where:

- $V_{I(AVG)}$ is the average input voltage.
- $V_{O(AVG)}$ is the average output voltage.
- $I_{O(AVG)}$ is the average output current.
- $I_{(Q)}$ is the quiescent current.

For most LDO regulators, the quiescent current is insignificant compared to the average output current; therefore, the term $V_{I(AVG)}$ xI_Q can be neglected. The operating junction temperature is computed by adding the ambient temperature (T_A) and the increase in temperature due to the regulator's power dissipation. The temperature rise is computed by multiplying the maximum expected power dissipation by the sum of the thermal resistances between the junction and the case ($R_{\theta JC}$), the case to heatsink ($R_{\theta CS}$), and the heatsink to ambient ($R_{\theta SA}$). Thermal resistances are measures of how effectively an object dissipates heat. Typically, the larger the device, the more surface area available for power dissipation so that the object's thermal resistance will be lowers.

NOT RECOMMENDED FOR NEW DESIGN

© Diodes Incorporated

Application Information (cont.)

Setting the Output Voltage

The internal reference is 0.8V (Typical). The output voltage is calculated as below:

$$V_O = 0.8x\left(1+\frac{R1}{R2}\right)$$

The output voltage is given by Table 1.

Table 1: Resistor selection for output voltage setting.

V_O	R1	R2
1.2V	56k	110k
1.5V	130k	150k
1.8V	150k	120k
2.5V	215k	100k
3.3V	374k	120k
5.0V	620k	120k

Ordering Information

PAM3116 X X X XXX X

Pin Configuration	Package Type	Number of Pins	Output Voltage	Shipping Package
B Type: 1. NC 2. VIN 3. EN 4. GND 5. NC 6. ADJ 7. VOUT 8. NC	L: SOP-8	B: 8	ADJ: Adjustable (0.8V-5.0V)	R: Tape & Reel

Part Number	Output Voltage	Marking	Package Type	Standard Package
PAM3116BLBADJR	Adjustable	P3116 XXXYW	SOP-8	2500 Units/Tape&Reel

NOT RECOMMENDED FOR NEW DESIGN

© Diodes Incorporated

Marking Information

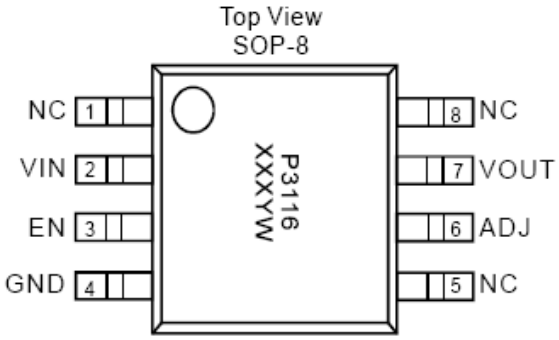

V: Voltage Code
X: Internal Code
Y: Year
W: Week

Package Outline Dimensions (All dimensions in mm.)

SOP-8

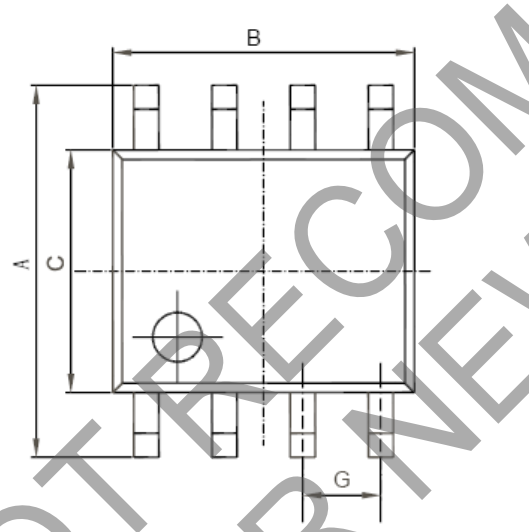

REF	DIMENSIONS	
	Millimeters	
	Min	Max
A	5.80	6.20
B	4.80	5.00
C	3.80	4.00
D	0°	8°
E	0.40	0.90
F	0.19	0.25
M	0.10	0.25
H	0.35	0.49
L	1.35	1.75
J	0.375 REF	
K	45°	
G	1.27 TYP	

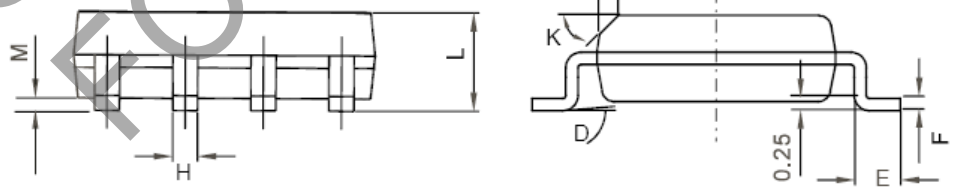

NOT RECOMMENDED FOR NEW DESIGN

© Diodes Incorporated

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2017, Diodes Incorporated

www.diodes.com

NOT RECOMMENDED FOR NEW DESIGN

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.