
TOSHIBA Field-Effect Transistor Silicon P-Channel MOS Type (U-MOSⅥ)

SSM6J213FE

○ Power Management Switch Applications

- 1.5-V drive
- Low ON-resistance: $R_{DS(ON)}$ = 250 mΩ (max) (@V_{GS} = -1.5 V)
  $R_{DS(ON)}$ = 178 mΩ (max) (@V_{GS} = -1.8 V)
  $R_{DS(ON)}$ = 133 mΩ (max) (@V_{GS} = -2.5 V)
  $R_{DS(ON)}$ = 103 mΩ (max) (@V_{GS} = -4.5 V)

Unit: mm

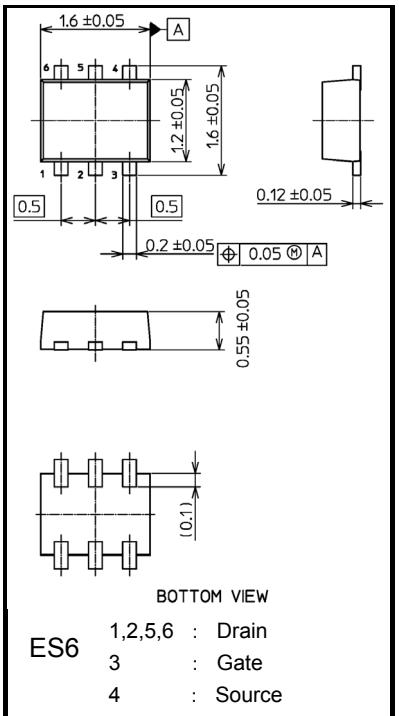

ES6
1,2,5,6 : Drain
3 : Gate
4 : Source

JEDEC	—
JEITA	—
TOSHIBA	2-2N1J

Weight: 3mg (typ.)

Absolute Maximum Ratings (Ta = 25°C)


Characteristic		Symbol	Rating	Unit
Drain-source voltage		V_{DSS}	-20	V
Gate-source voltage		V_{GSS}	± 8	V
Drain current	DC	I_D (Note 1)	-2.6	A
	Pulse	I_{DP} (Note 1)	-5.2	
Power dissipation		P_D (Note 2)	500	mW
		t = 10s	700	
Channel temperature		T_{ch}	150	°C
Storage temperature range		T_{stg}	−55 to 150	°C

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.
Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook (“Handling Precautions”/“Derating Concept and Methods”) and individual reliability data (i.e. reliability test report and estimated failure rate, etc).


Note 1: The channel temperature should not exceed 150°C during use.

Note 2: Mounted on a FR4 board.
(25.4 mm × 25.4 mm × 1.6 mm, Cu Pad: 645 mm^2)

Marking (Top View)



Equivalent Circuit



Start of commercial production
2011-01

Electrical Characteristics (Ta = 25°C)


Characteristic		Symbol	Test Conditions		Min	Typ.	Max	Unit
Drain-source breakdown voltage		$V_{(BR)\ DSS}$	I_D = -1 mA, V_{GS} = 0 V		-20	—	—	V
		$V_{(BR)\ DSX}$	I_D = -1 mA, V_{GS} = 5 V	(Note 4)	-15	—	—	V
Drain cut-off current		I_{DSS}	V_{DS} = -20 V, V_{GS} = 0 V		—	—	-1	μA
Gate leakage current		I_{GSS}	V_{GS} = ±8 V, V_{DS} = 0 V		—	—	±1	μA
Gate threshold voltage		V_{th}	V_{DS} = -3 V, I_D = -1 mA		-0.3	—	-1.0	V
Forward transfer admittance		$\|Y_{fs}\|$	V_{DS} = -3 V, I_D = -1.0 A	(Note 3)	2.8	5.6	—	S
Drain–source ON-resistance		$R_{DS\ (ON)}$	I_D = -1.5 A, V_{GS} = -4.5 V	(Note 3)	—	88.5	103	mΩ
			I_D = -1.0 A, V_{GS} = -2.5 V	(Note 3)	—	107.5	133	
			I_D = -0.5 A, V_{GS} = -1.8 V	(Note 3)	—	130	178	
			I_D = -0.25 A, V_{GS} = -1.5 V	(Note 3)	—	151	250	
Input capacitance		C_{iss}	V_{DS} = -10 V, V_{GS} = 0 V f = 1 MHz		—	290	—	pF
Output capacitance		C_{oss}			—	44	—	
Reverse transfer capacitance		C_{rss}			—	32	—	
Switching time	Turn-on time	t_{on}	V_{DD} = -10 V, I_D = -0.5 A V_{GS} = 0 to -2.5 V, R_G = 4.7 Ω		—	12.0	—	ns
	Turn-off time	t_{off}			—	46.2	—	
Total gate charge		Q_g	V_{DD} = -10 V, I_D = -2.0 A, V_{GS} = -4.5 V		—	4.7	—	nC
Gate-source charge		Q_{gs1}			—	0.4	—	
Gate-drain charge		Q_{gd}			—	1.0	—	
Drain-source forward voltage		V_{DSF}	I_D = 2.6 A, V_{GS} = 0 V	(Note 3)	—	0.89	1.2	V

Note3: Pulse test

Note4: If a forward bias is applied between gate and source, this device enters $V_{(BR)DSX}$ mode. Note that the drain-source breakdown voltage is lowered in this mode.


Switching Time Test Circuit

(a) Test Circuit

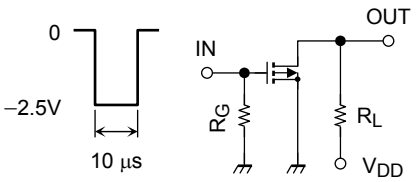

V_{DD} = -10 V
R_G = 4.7 Ω
Duty ≤ 1%
V_{IN}: t_r, t_f < 5 ns
Common Source
Ta = 25°C

(b) V_{IN} and (c) V_{OUT}

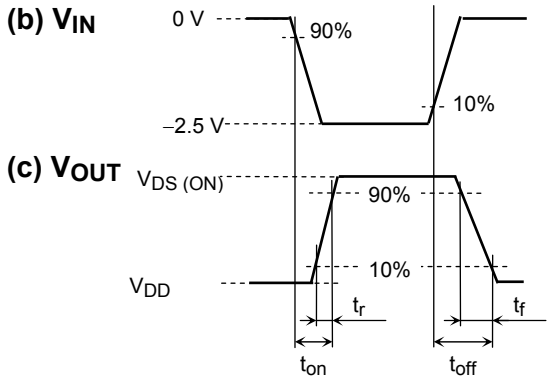

Notice on Usage

V_{th} can be expressed as the voltage between gate and source when the low operating current value is I_D = -1 mA for this product. For normal switching operation, $V_{GS\ (on)}$ requires a higher voltage than V_{th} and $V_{GS\ (off)}$ requires a lower voltage than V_{th}. (The relationship can be established as follows: $V_{GS\ (off)} < V_{th} < V_{GS\ (on)}$.)


Take this into consideration when using the device.

Handling Precaution


When handling individual devices that are not yet mounted on a circuit board, make sure that the environment is protected against electrostatic discharge. Operators should wear antistatic clothing, and containers and other objects that come into direct contact with devices should be made of antistatic materials.

Thermal resistance $R_{th\ (ch\text{-}a)}$ and power dissipation P_D vary depending on board material, board area, board thickness and pad area. When using this device, please take heat dissipation into consideration


I_D – V_{DS}

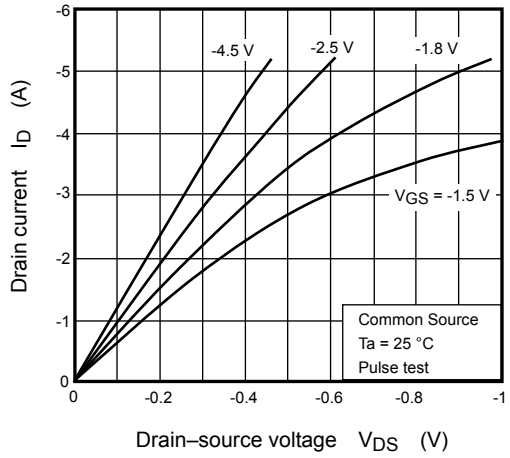


I_D – V_{GS}

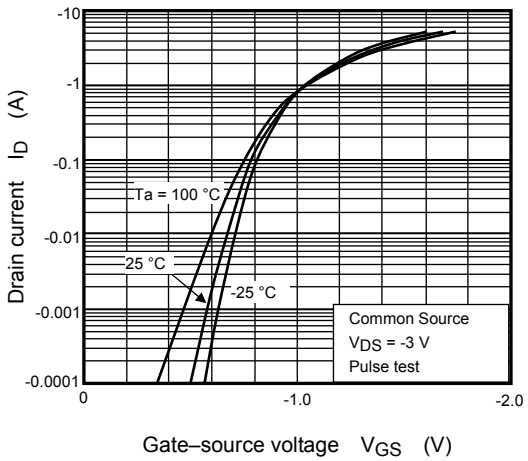


$R_{DS\ (ON)}$ – V_{GS}

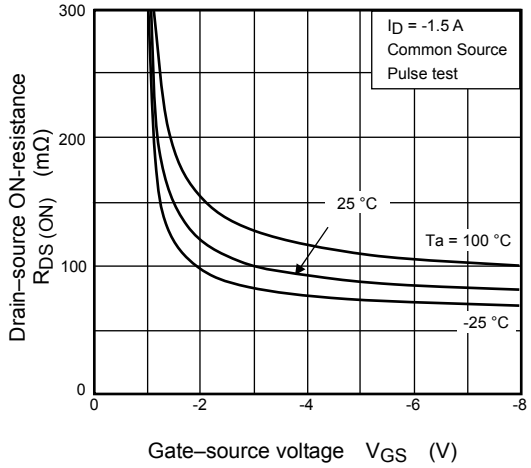


$R_{DS\ (ON)}$ – I_D

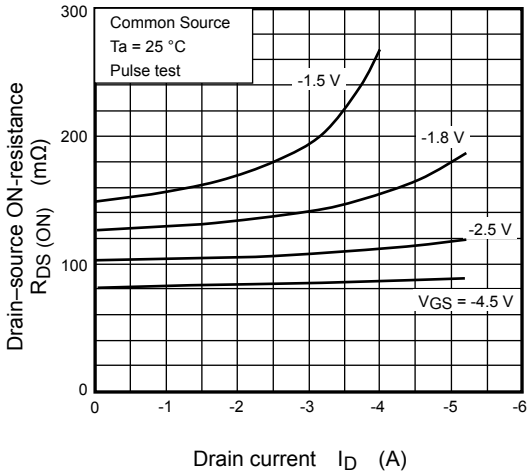



$R_{DS\ (ON)}$ – Ta

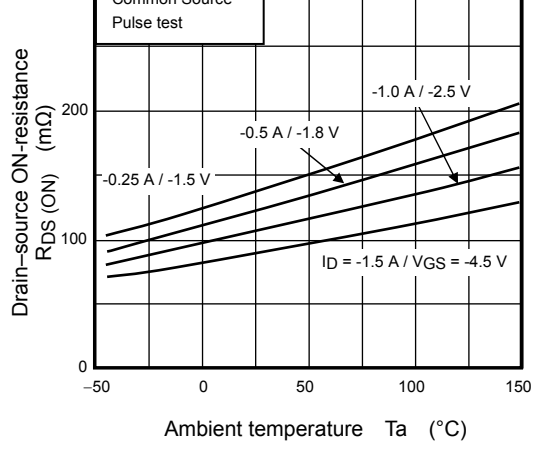



V_{th} – Ta

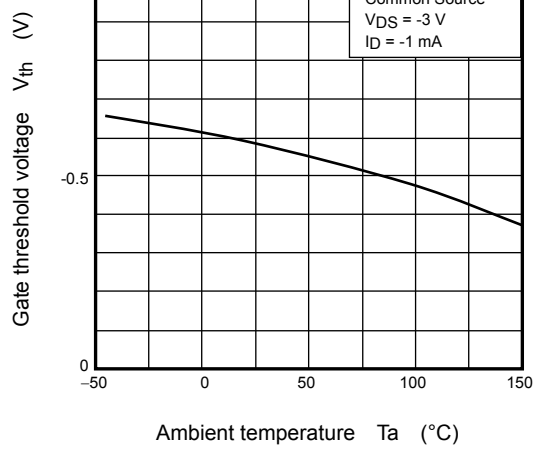


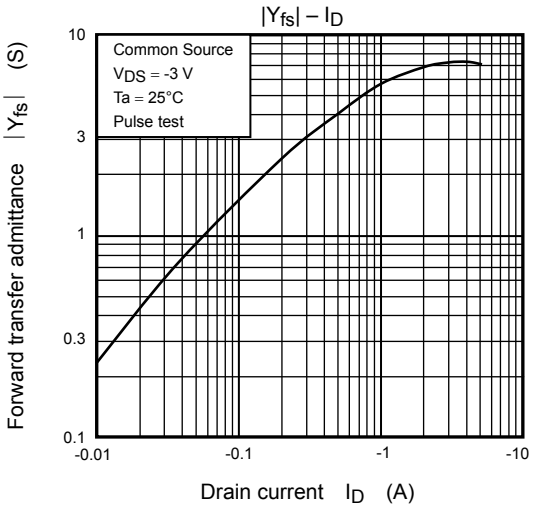
|Yfs| – ID
Common Source
VDS = -3 V
Ta = 25°C
Pulse test
Forward transfer admittance |Yfs| (S)
Drain current ID (A)
10
3
1
0.3
0.1
-0.01
-0.1
-1
-10

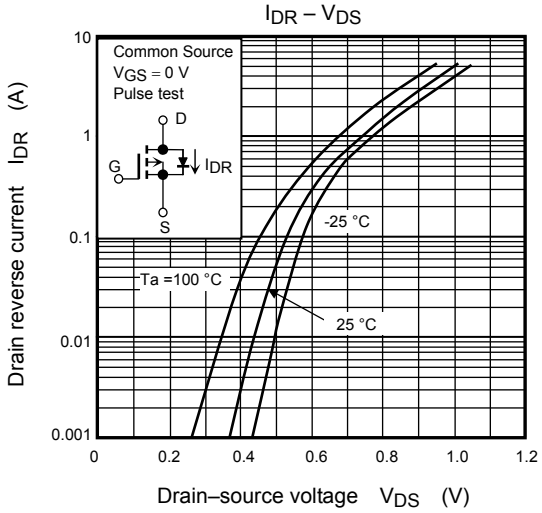

IDR – VDS
Common Source
VGS = 0 V
Pulse test
D
G
S
IDR
-25 °C
Ta =100 °C
25 °C
Drain reverse current IDR (A)
Drain–source voltage VDS (V)
10
1
0.1
0.01
0.001
0
0.2
0.4
0.6
0.8
1.0
1.2

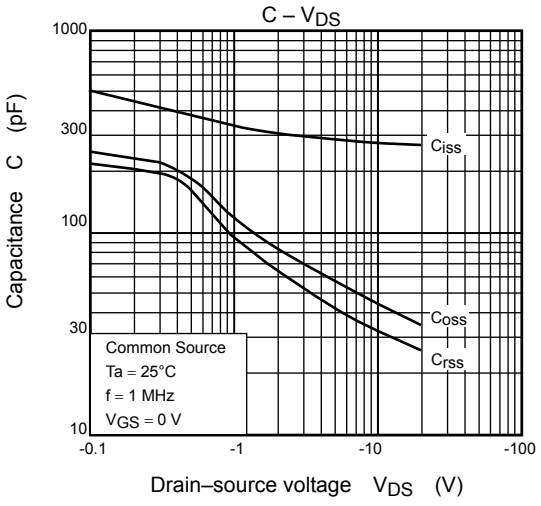
C – VDS
Ciss
Coss
Crss
Common Source
Ta = 25°C
f = 1 MHz
VGS = 0 V
Capacitance C (pF)
Drain–source voltage VDS (V)
1000
300
100
30
10
-0.1
-1
-10
-100

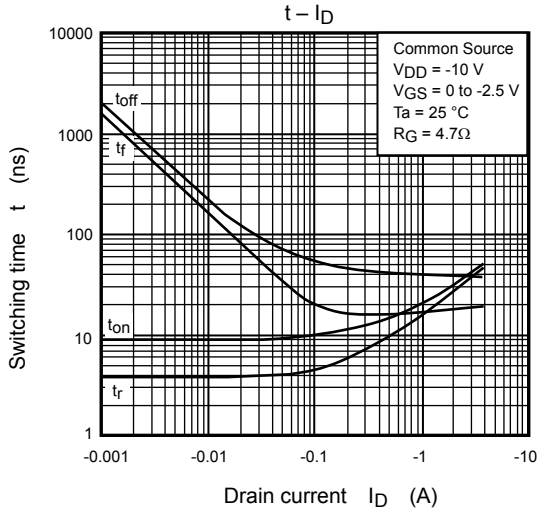

t – ID
Common Source
VDD = -10 V
VGS = 0 to -2.5 V
Ta = 25 °C
RG = 4.7Ω
toff
tf
ton
tr
Switching time t (ns)
Drain current ID (A)
10000
1000
100
10
1
-0.001
-0.01
-0.1
-1
-10

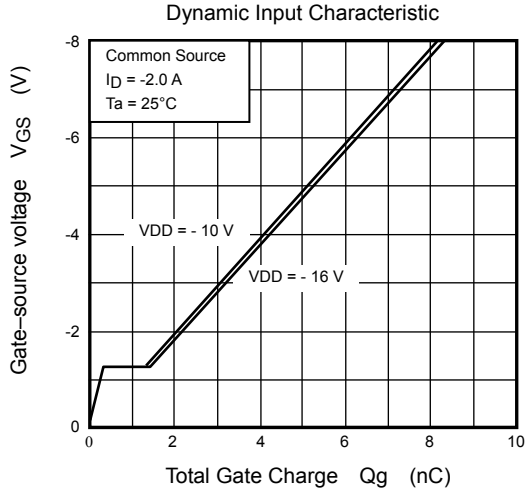
Dynamic Input Characteristic
Common Source
ID = -2.0 A
Ta = 25°C
VDD = - 10 V
VDD = - 16 V
Gate–source voltage VGS (V)
Total Gate Charge Qg (nC)
-8
-6
-4
-2
0
0
2
4
6
8
10

$R_{th} – t_w$

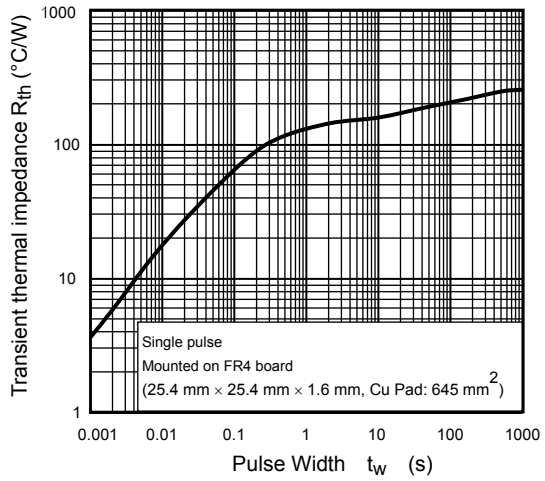
Transient thermal impedance R_{th} (°C/W)
1000
100
10
1
0.001
0.01
0.1
1
10
100
1000
Pulse Width t_w (s)
Single pulse
Mounted on FR4 board
(25.4 mm × 25.4 mm × 1.6 mm, Cu Pad: 645 mm^2)

$P_D – Ta$

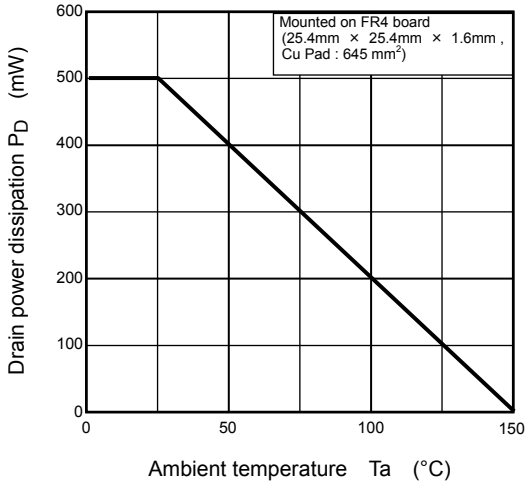
Drain power dissipation P_D (mW)
600
500
400
300
200
100
0
0
50
100
150
Ambient temperature Ta (°C)
Mounted on FR4 board
(25.4mm × 25.4mm × 1.6mm ,
Cu Pad : 645 mm^2)

RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before customers use the Product, create designs including the Product, or incorporate the Product into their own applications, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application with which the Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- **PRODUCT IS NEITHER INTENDED NOR WARRANTED FOR USE IN EQUIPMENTS OR SYSTEMS THAT REQUIRE EXTRAORDINARILY HIGH LEVELS OF QUALITY AND/OR RELIABILITY, AND/OR A MALFUNCTION OR FAILURE OF WHICH MAY CAUSE LOSS OF HUMAN LIFE, BODILY INJURY, SERIOUS PROPERTY DAMAGE AND/OR SERIOUS PUBLIC IMPACT ("UNINTENDED USE").** Except for specific applications as expressly stated in this document, Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, Class 3 medical devices, equipment used for automobiles, and military vehicles and munitions. **IF YOU USE PRODUCT FOR UNINTENDED USE, TOSHIBA ASSUMES NO LIABILITY FOR PRODUCT.** For details, please contact your TOSHIBA sales representative or contact us via our website.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the applicable export laws and regulations including, without limitation, the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. **TOSHIBA ASSUMES NO LIABILITY FOR DAMAGES OR LOSSES OCCURRING AS A RESULT OF NONCOMPLIANCE WITH APPLICABLE LAWS AND REGULATIONS.**

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.