2N7002K
SOT-23 Plastic-Encapsulate MOSFETS

V_{DSS}	60 V
I_D	340 mA
$R_{DS(ON)}$	1.7 Ω


FEATURES

* High density cell design for low $R_{DS(ON)}$
* Voltage controlled small signal switch
* Rugged and reliable
* High saturation current capability
* ESD protected (2KV HBM)


7002

SOT-23

1. GATE
2. SOURCE
3. DRAIN



Equivalent Circuit



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Maximum ratings (T_a=25℃ unless otherwise noted)


Symbol	Parameter	Value	Units
V_{DS}	Drain-Source voltage	60	V
V_{GS}	Gate-Source voltage	20	V
I_D	Drain Current	340	mA
P_D	Power Dissipation	0.35	W
T_J	Junction Temperature	150	℃
T_{stg}	Storage Temperature	-55-150	℃
$R_{\theta JA}$	Thermal Resistance fromJunction to Ambient	357	℃ /W

Electrical Characteristics


Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Static Characteristics						
Drain-Source Breakdown Voltage	V_{DS}	V_{GS} = 0V, I_D =250μA	60			V
Gate Threshold Voltage*	$V_{GS(th)}$	V_{DS} =V_{GS}, I_D =250uA	1		2.5	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} =48V,V_{GS} = 0V			1	μA
Gate –Source leakage current	I_{GSS1}	V_{GS} =±20V, V_{DS} = 0V			±10	μA
	I_{GSS2}	V_{GS} =±10V, V_{DS} = 0V			±200	nA
	I_{GSS3}	V_{GS} =±5V, V_{DS} = 0V			±100	nA
Drain-Source On-Resistance*	$R_{DS(on)}$	V_{GS} = 4.5V, I_D =200mA			5.0	Ω
		V_{GS} =10V,I_D =300mA		1.7	4.0	Ω
Diode Forward Voltage	V_{SD}	V_{GS}=0V, I_S=300mA			1.5	V
Recovered charge	Q_r	V_{GS}=0V,I_S=300mA,V_R=25V, dI_S/dt=-100A/μS		30		nC
Dynamic Characteristics**						
Input Capacitance	C_{iss}	V_{DS} =10V,V_{GS} =0V,f =1MHz			40	pF
Output Capacitance	C_{oss}				30	pF
Reverse Transfer Capacitance	C_{rss}				10	pF
Switching Characteristics**						
Turn-On Delay Time	$t_{d(on)}$	V_{GS}=10V,V_{DD}=50V,R_G=50Ω, R_{GS}=50Ω, R_L=250Ω			10	ns
Turn-Off Delay Time	$t_{d(off)}$				15	ns
Reverse recovery Time	t_{rr}	V_{GS}=0V,I_S=300mA,V_R=25V, dI_S/dt=-100A/μS		30		ns
GATE-SOURCE ZENER DIODE						
Gate-Source Breakdown Voltage	BV_{GSO}	I_{gs}=±1mA (Open Drain)	±21.5		±30	V

RATING AND CHARACTERISTIC CURVES


Output Characteristics

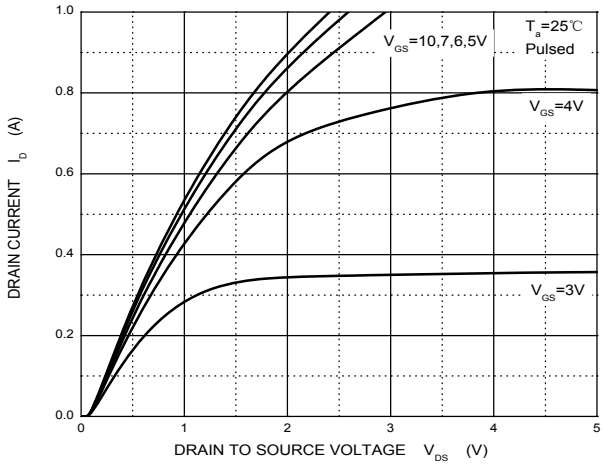


Transfer Characteristics

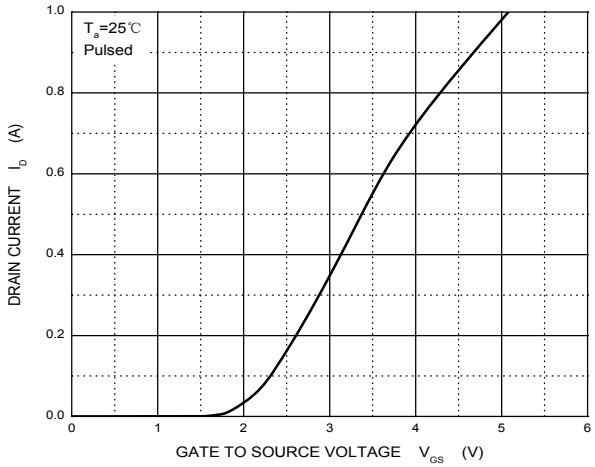


$R_{DS(ON)}$ — I_D

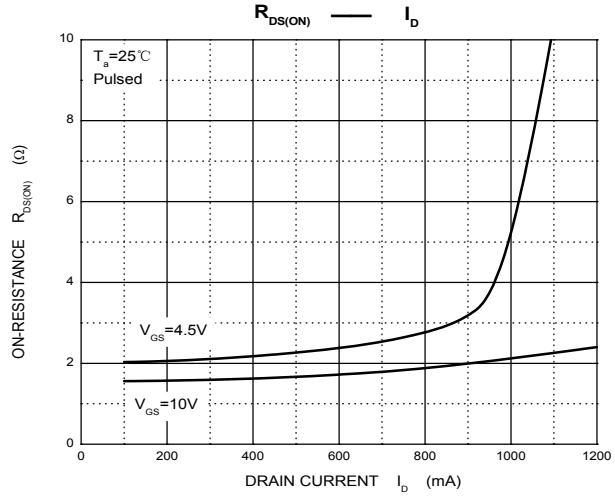

$R_{DS(ON)}$ — V_{GS}

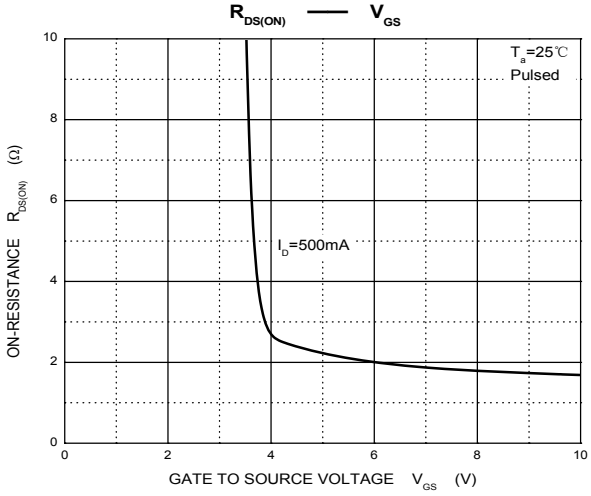


I_S — V_{SD}

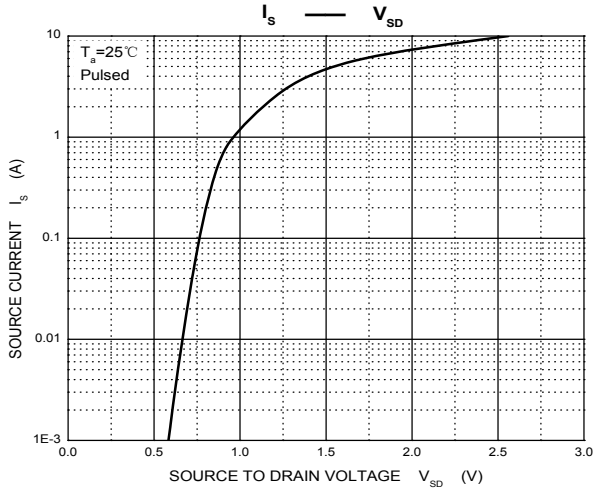

Soldering parameters


Reflow Condition		Pb-Free assembly (see as bellow)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150℃
	-Temperature Max($T_{s(max)}$)	+200℃
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3℃/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3℃/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217℃
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_p)		+260(+0/-5)℃
Time within 5℃ of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6℃/sec. Max
Time 25℃ to Peak Temp (T_P)		8 min. Max
Do not exceed		+260℃


FIG5: Reflow condition

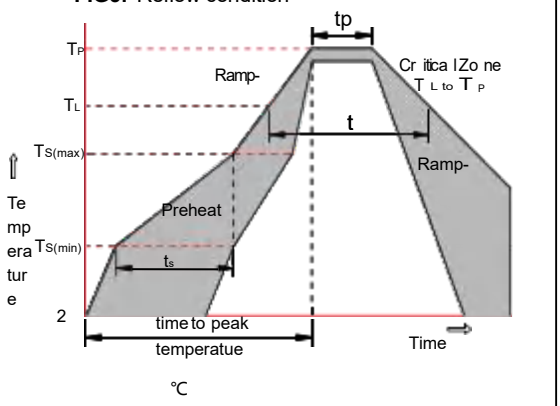

Package Dimensions & Suggested Pad Layout

SOT23

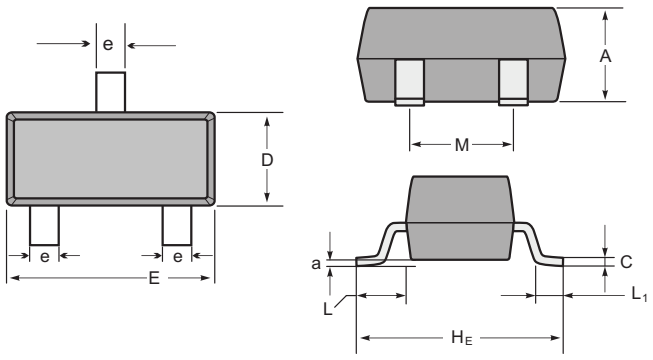

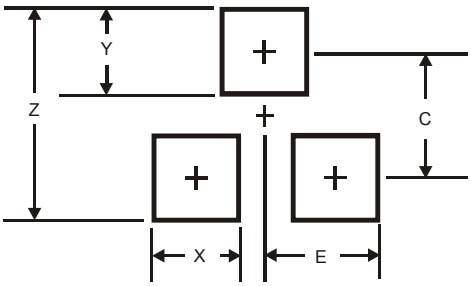


SOT-23 mechanical data

UNIT		A	C	D	E	H_E	e	M	L	L_1	a
mm	max	1.1	0.15	1.4	3.0	2.6	0.5	1.95	0.55 (ref)	0.36 (ref)	0.0
	min	0.9	0.08	1.2	2.8	2.2	0.3	1.7			0.15
mil	max	43	6	55	118	102	20	77	22 (ref)	14 (ref)	0.0
	min	35	3	47	110	87	12	67			6

Dimensions	SOT23
Z	2.9
X	0.8
Y	0.9
C	2.0
E	1.35

Tape & rell specification

Tape

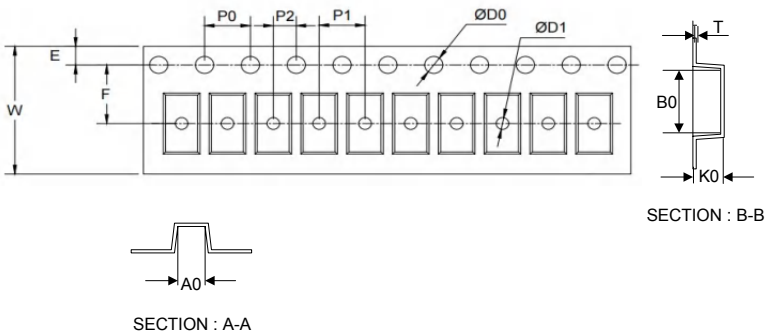



SECTION : B-B

SECTION : A-A

Symbol	Dimension (mm)
P0	4.00±0.10
P1	4.00±0.10
P2	2.00±0.10
D0	1.55±0.10
D1	1.05±0.10
E	1.55±0.10
F	3.60±0.10
W	8.00±0.10
A0	3.80±0.20
B0	3.25±0.20
K0	1.45±0.10
T	0.25±0.05

7” Reel





D2	178.0±3.0
D3	55Min.
D4	R24.0±3.0
G	R82.0±3.0
I	13.0±2.0
W1	11.0±3.0

Quantity: 3000PCS

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.