SI2319

P-Ch 40V Fast Switching MOSFETs

V_{DSS}	-40 V
I_D	-4 A
$R_{DS(ON)}$	63mΩ

2319

Description


The SI2319 is the high cell density trenched P-ch MOSFETs, which provides excellent RDSON and efficiency for most of the small power switching and load switch applications.

The SI2319 meet the RoHS and Green Product requirement with full function reliability approved.

Features


Green Device Available
Super Low Gate Charge
Excellent Cdv/dt effect decline
Advanced high cell density Trench technology

SOT-23



1. GATE
2. SOURCE
3. DRAIN

Equivalent Circuit



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings

Parameter		Symbol	Value	Units
Drain-Source Voltage		V_{DS}	-40	V
Gate-Source Voltage		V_{GS}	±20	V
Continuous Drain Current	T_A = 25°C	I_D	-4	A
Pulsed Drain Current[1]		I_{DM}	-20	A
Power Dissipation	T_A = 25°C	P_D	1.2	W
Operating Junction and Storage Temperature Range		T_J ,T_{STG}	-55 to 150	°C

Thermal Characteristics

Parameter	Symbol	Value	Units
Thermal Resistance from Junction to Ambient [2]	$R_{\theta JA}$	104	°C/W

Electrical Characteristics (T_J=25℃unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Static Characteristics						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS}= 0V, I_D= -250μA	-40	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS}= -40V, V_{GS}= 0V	-	-	-1	μA
Gate-Body Leakage	I_{GSS}	V_{DS}= 0V, V_{GS}= ±20V	-	-	±100	nA
Gate-Threshold Voltage	$V_{GS(th)}$	V_{DS}= V_{GS}, I_D= -250μA	-1.2	-1.5	-2.5	V
Drain-Source on-Resistance[3]	$R_{DS(on)}$	V_{GS}= -10V,I_D= -5A	-	63	85	mΩ
		V_{GS}= -4.5V,I_D= -4A	-	80	125	
Dynamic Characteristics[4]						
Input Capacitance	C_{iss}	V_{GS} = 0V ,V_{DS} = -20V, f=1.0MHz	-	553	-	pF
Output Capacitance	C_{oss}		-	50	-	
Reverse Transfer Capacitance	C_{rss}		-	42	-	
Switching Characteristics[4]						
Total Gate Charge	Q_g	V_{GS}= -10V ,V_{DS}= -20V, I_D= -5A	-	11.8	-	nC
Gate-Source Charge	Q_{gs}		-	2.2	-	
Gate-Drain Charge	Q_{gd}		-	3	-	
Turn-on Delay Time	$t_{d(on)}$	V_{DS}= -20V, V_{GS}= -10V R_L= 2.5Ω, R_G= 3Ω	-	7	-	ns
Rise Time	t_r		-	6.5	-	
Turn-off Delay Time	$t_{d(off)}$		-	24	-	
Fall Time	t_f		-	7.8	-	
Drain-Source Body Diode Characteristics						
Body Diode voltage[3]	V_{DS}	I_S= -5A,V_{GS}=0V	-	-	-1.2	V
Continuous Source Current	I_S		-	-	-4	A

Notes:

1. Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}$=150°C.
2. The data tested by surface mounted on a 1 inch2 FR-4 board with 2OZ copper, The value in any given application depends on the user's specific board design.
3. Pulse Test: Pulse width≤300μs, duty cycle≤2%.
4. This value is guaranteed by design hence it is not included in the production test.

RATING AND CHARACTERISTIC CURVES

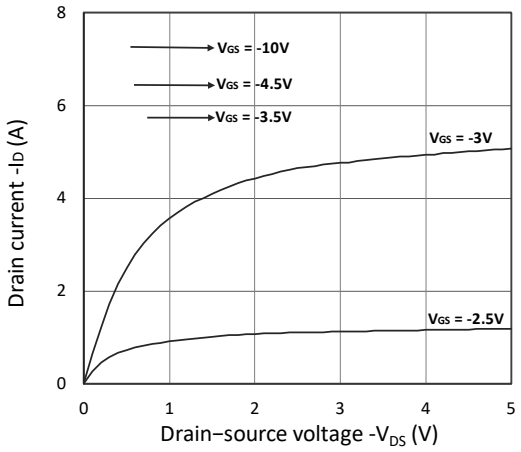


Figure 1. Output Characteristics

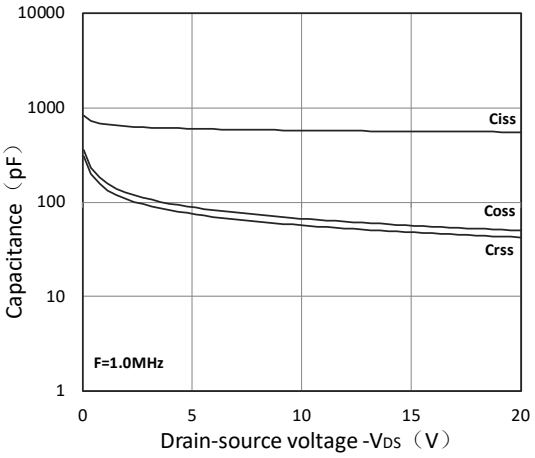


Figure 7. Capacitance Characteristics

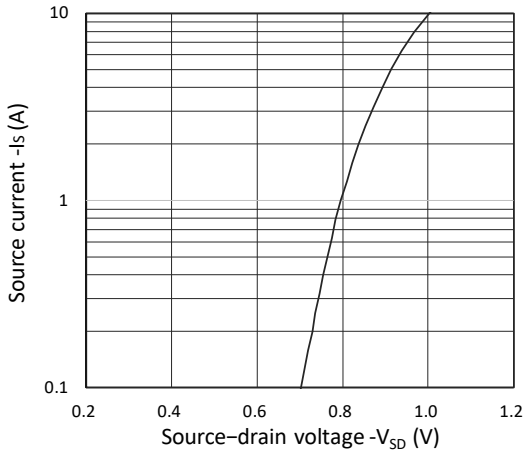


Figure 3. Forward Characteristics of Reverse

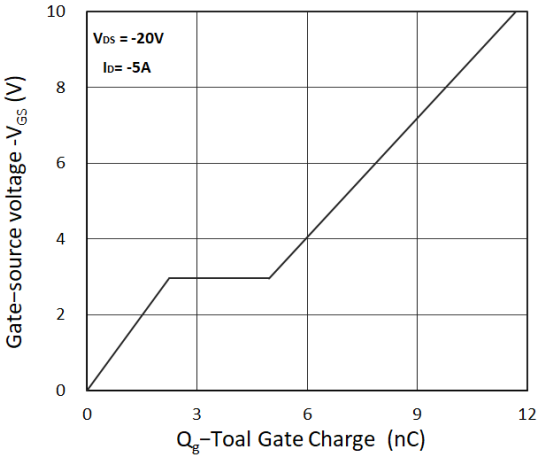


Figure 3. Gate Charge Characteristics

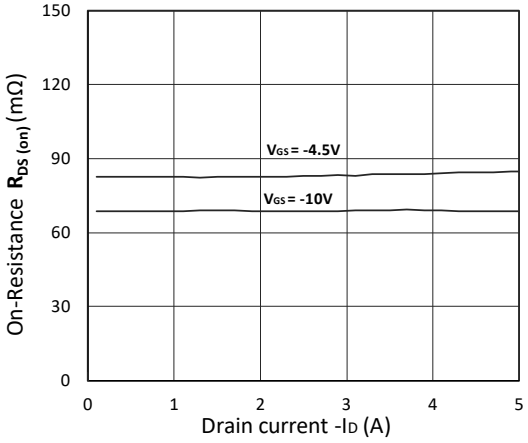


Figure 5. $R_{DS(ON)}$ vs. I_D


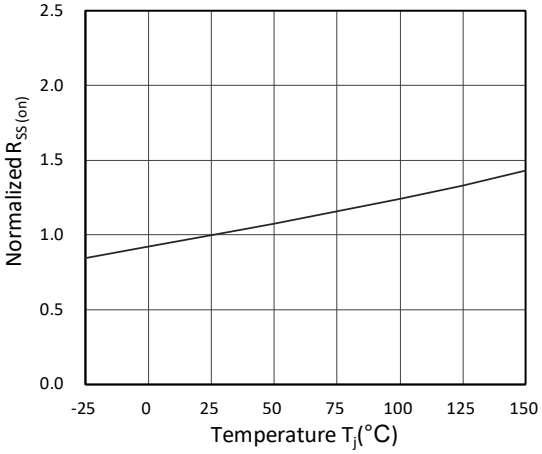


Figure 6. Normalized $R_{DS(on)}$ vs. Temperature

Soldering parameters


Reflow Condition		Pb-Free assembly (see as bellow)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150℃
	-Temperature Max($T_{s(max)}$)	+200℃
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3℃/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3℃/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217℃
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_p)		+260(+0/-5)℃
Time within 5℃ of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6℃/sec. Max
Time 25℃ to Peak Temp (T_P)		8 min. Max
Do not exceed		+260℃


FIG5: Reflow condition

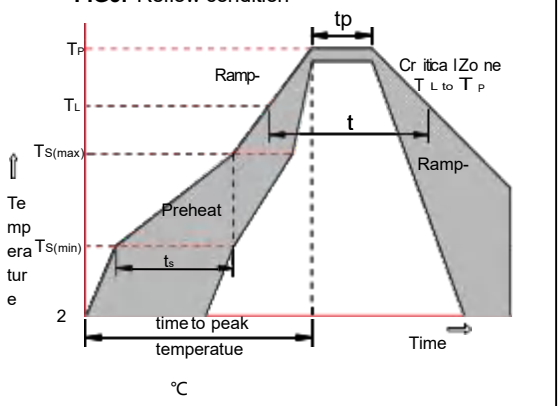

Package Dimensions & Suggested Pad Layout

SOT23

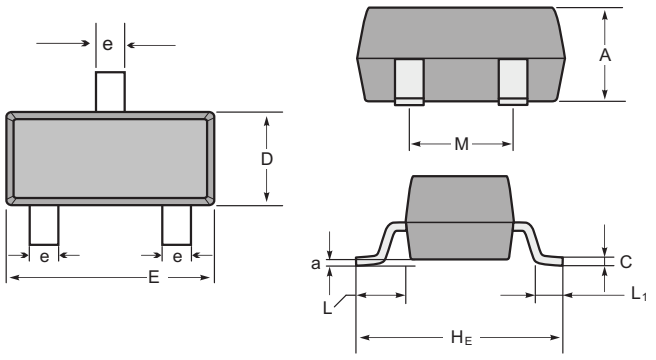

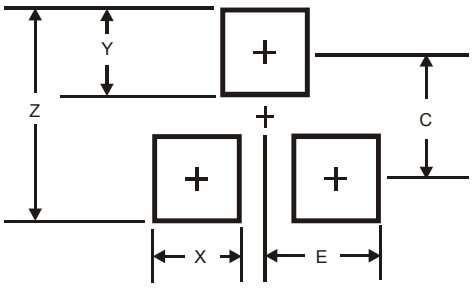


SOT-23 mechanical data

UNIT		A	C	D	E	H_E	e	M	L	L_1	a
mm	max	1.1	0.15	1.4	3.0	2.6	0.5	1.95	0.55 (ref)	0.36 (ref)	0.0
	min	0.9	0.08	1.2	2.8	2.2	0.3	1.7			0.15
mil	max	43	6	55	118	102	20	77	22 (ref)	14 (ref)	0.0
	min	35	3	47	110	87	12	67			6

Dimensions	SOT23
Z	2.9
X	0.8
Y	0.9
C	2.0
E	1.35


Tape & rell specification

Tape

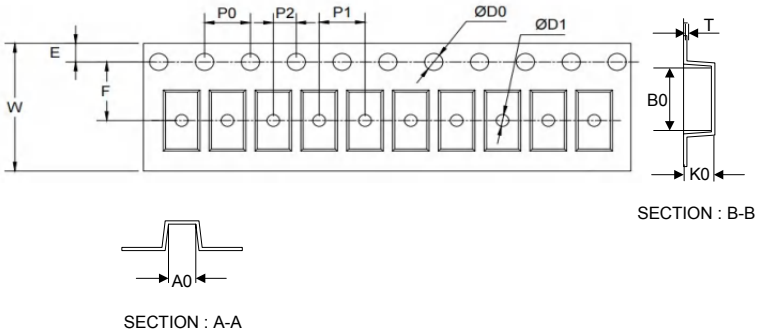

Symbol	Dimension (mm)
P0	4.00±0.10
P1	4.00±0.10
P2	2.00±0.10
D0	1.55±0.10
D1	1.05±0.10
E	1.55±0.10
F	3.60±0.10
W	8.00±0.10
A0	3.80±0.20
B0	3.25±0.20
K0	1.45±0.10
T	0.25±0.05

7” Reel

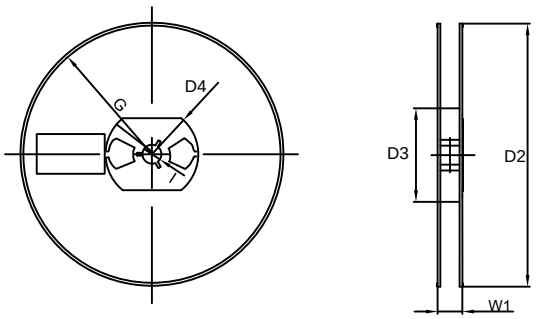

D2	178.0±3.0
D3	55Min.
D4	R24.0±3.0
G	R82.0±3.0
I	13.0±2.0
W1	11.0±3.0

Quantity: 3000PCS

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.