MIC2219

Dynamically Adjustable Dual μCap LDO

General Description

The MIC2219 is a dual μCap low dropout regulator. The first regulator is capable of sourcing 150mA, while the second regulator can source up to 300mA.

Ideal for battery operated applications, the MIC2219 offers 1% accuracy, extremely low dropout voltage (80mV @ 100mA), and extremely low ground current, only 48μA total. Equipped with TTL logic compatible enable pins, the MIC2219 can be put into a zero-off-mode current state, drawing no current when disabled. Separate enable pins allow individual control of each output voltage.

The additional feature incorporated in the MIC2219 is bringing out the feedback nodes to two external pins, allowing for dynamic adjustment of the LDO output voltages.

The MIC2219 is a μCap design, operating with very small ceramic output capacitors for stability, reducing required board space and component cost.

The MIC2219 is available in fixed output voltages in the 10-pin 3mm × 3mm MLF™ leadless package.


Features

- Input voltage range: 2.25V to 5.5V
- Stable with ceramic output capacitor
- 2 LDO outputs
  - Output 1 - 150mA output current
  - Output 2 - 300mA output current
- Feedback pins externally accessible
- Low dropout voltage of 80mV @ 100mA
- **Ultra-low quiescent current of 48μA total (24μA/LDO)**
- High output accuracy:
  - +1.0% initial accuracy
  - +2.0% over temperature
- Thermal shutdown protection
- Current limit protection
- **Tiny 10-pin 3mm × 3mm MLF™ package**

Applications

- Cellular phones
- Wireless modems
- PDAs
- LEDs

Typical Application

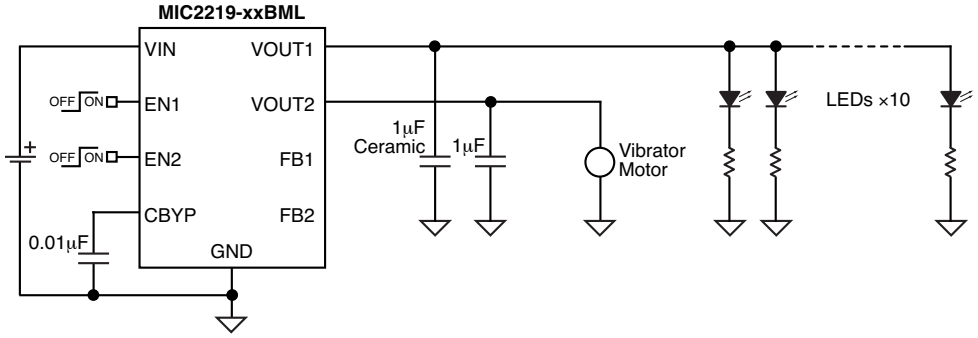

MIC2219 Typical Cell Phone Application


MicroLeadFrame and MLF are trademarks of Amkor Technology, Inc.

Ordering Information

Part Number			Voltage*	Junction	
Full Part Number	Standard	Pb-Free	(Vo1/Vo2)	Temp. Range	Package
MIC2219-3.0/3.3BML	MIC2219-PSBML	MIC2219-PSYML	3.0V/3.3V	–40°C to +125°C	10-Pin 3×3 MLF™

*For other output voltage options, contact Micrel marketing.

Pin Configuration

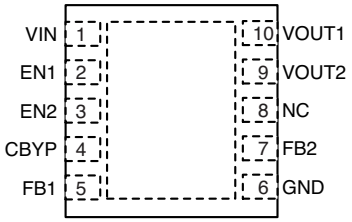

10-Pin 3mm × 3mm MLF™ (ML)
(Top View)

Voltage	Code
Adj.	A
1.5	F
1.6	W
1.8	G
1.85	D
1.9	Y
2.0	H
2.1	E
2.5	J
2.6	K
2.7	L
2.8	M
2.850	N
2.9	O
3.0	P
3.1	Q
3.2	R
3.3	S
3.4	T
3.5	U
3.6	V

Table 1. Voltage Codes

Pin Description

Pin Number	Pin Name	Pin Function
1	VIN	Supply Input: (VIN1 and VIN2 are internally tied together.)
2	EN1	Enable Input to Regulator 1: Enables regulator 1 output. Active high input. High = on, low = off. Do not leave floating.
3	EN2	Enable Input to Regulator 2: Enables regulator 2 output. Active high input. High = on, low = off. Do not leave floating.
4	CBYP	Reference Bypass: Connect external 0.01μF to GND to reduce output noise. May be left open.
5	FB1	Feedback Node (OUT1). Connected to internal feedback resistor divider network.
6	GND	Ground: Connect externally to Exposed Pad.
7	FB2	Feedback Node (OUT2). Connected to internal feedback resistor divider network.
8	N/C	No Connection.
9	VOUT2	Output of Regulator 2: 300mA output current.
10	VOUT1	Output of Regulator 1: 150mA output current.
EP	GND	Ground: Internally connected to the Exposed Pad. Connect externally to pin 6.

Absolute Maximum Rating (Note 1)

Supply Input Voltage (V_{IN}) ..... 0V to 7V
Enable Input Voltage (V_{EN}) ..... 0V to 7V
Power Dissipation (P_D) ..... Internally Limited, **Note 3**
Junction Temperature ..... –40°C to +125°C
Storage Temperature (T_S) ..... –65°C to 150°C
Lead Temperature (soldering, 5 sec.) ..... 260°C

Operating Ratings (Note 2)

Supply Input Voltage (V_{IN}) ..... 2.25V to 5.5V
Enable Input Voltage (V_{EN}) ..... 0V to Vin
Junction Temperature (T_J) ..... –40°C to +125°C
Package Thermal Resistance
MLF™-10 (θ_{JA}) ..... 60°C/W
MLF™-10 (θ_{JC}) 1" square 2 oz. copper ..... 2°C/W

Electrical Characteristics (Note 4)

$V_{IN} = V_{OUT}$ +1.0V for higher output of the regulator pair; C_{OUT} = 1.0µF, I_{OUT} = 100µA; T_J = 25°C, **bold** values indicate –40°C ≤ T_J ≤ +125°C; unless noted.

Parameter	Conditions	Min	Typ	Max	Units
Output Voltage Accuracy	Variation from nominal V_{OUT}	–1.0 **–2.0**		+1.0 **+2.0**	% %
Output Voltage Temp. Coefficient			40		ppm/C
Line Regulation; **Note 5**	$V_{IN} = V_{OUT}$ +1V to 5.5V	–0.3 **–0.6**	0.02	0.3 **0.6**	%/V
Load Regulation	I_{OUT} = 100µA to 150mA (regulator 1 and 2)		0.2	1.0	%
	I_{OUT} = 100µA to 300mA (regulator 2)			1.5	%
Dropout Voltage; **Note 6**	I_{OUT} = 150mA (regulator 1 and 2)		120	190 **250**	mV mV
	I_{OUT} = 300mA (regulator 2)		240	340 **420**	mV
Ground Pin Current	$I_{OUT1} = I_{OUT2}$ = 0µA		48	65 **80**	µA µA
	I_{OUT1} = 150mA & I_{OUT2} = 300mA		60		µA
Ground Pin Current in Shutdown	V_{EN} ≤ 0.4V			**1.0**	µA
Ripple Rejection	f = 1kHz; C_{OUT} = 1.0µF ceramic; C_{BYP} = 10nF		60		dB
	f = 1kHz; C_{OUT} = 1.0µF ceramic; C_{BYP} = 10nF		40		dB
Current Limit	V_{OUT} = 0V (regulator 1)	150	280	460	mA
	V_{OUT} = 0V (regulator 2)	300	450	700	mA
Output Voltage Noise	C_{OUT} =1µF, C_{BYP} =0.01µF, 10Hz to 100kHz		30		µVrms
Feedback Inputs					
FB1	Resistance value, output1, V_{OUT} to FB1		830		kΩ
	Resistance value, output1, FB1 to GND		580		kΩ
FB2	Resistance value, output2, V_{OUT} to FB2		972		kΩ
	Resistance value, output2, FB2 to GND		580		kΩ
Enable Input					
Enable Input Voltage	Logic low (regulator shutdown)			**0.6**	V
	Logic high (regulator enabled)	**1.8**			V
Enable Input Current	V_{IL} < 0.6V (regulator shutdown)	–1	0.01	+1	µA
	V_{IH} > 1.8V (regulator enabled)	–1	0.01	+1	µA

Note 1. Exceeding maximum rating may damage the device.

Note 2. The device is not guaranteed to work outside its operating rating.

Note 3. The maximum allowable power dissipation of any T_A (ambient temperature) is $P_{D(max)} = (T_{J(max)} - T_A) / \theta_{JA}$. Exceeding the maximum allowable power dissipation will result in excessive die temperature, and the regulator will go into thermal shutdown.


Note 4. Specification for packaged product only.

Note 5. Minimum input for line regulation test is set to V_{OUT} + 1V relative to the highest output voltage.


Note 6. Dropout voltage is defined as the input-to-output differential at which the output voltage drops 2% below its nominal value measured at 1V differential. For outputs below 2.25V, dropout voltage is the input-to-output voltage differential with the minimum input voltage 2.25V. Minimum input operating voltage is 2.25V.

Typical Characteristics


PSRR Output 1




PSRR Output 2




Spectral Noise Density Output 1

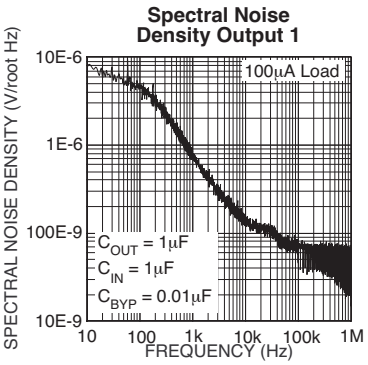


Spectral Noise Density Output 2

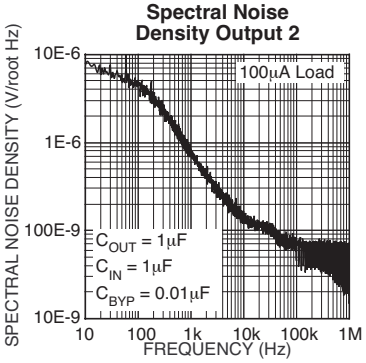


Dropout Characteristics Output 1




Dropout Characteristics Output 2




Dropout Voltage Output 1




Dropout Voltage Output 2




Ground Current vs. Supply Voltage




Ground Current vs. Output 1 Current



Ground Current vs. Output 2 Current




Ground Pin Current




Typical Characteristics (cont.)


Ground Current vs. Output Current




Ground Current vs. Output Current




Ground Current vs. Output Current




Ground Current vs. Output Current




Output Voltage vs. Load Current

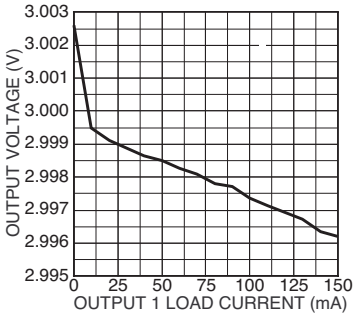


Output Voltage vs. Load Current

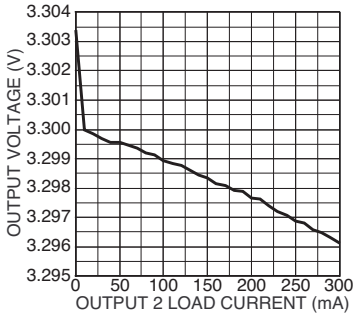


Output Voltage 1 vs. Temperature



Output Voltage 2 vs. Temperature

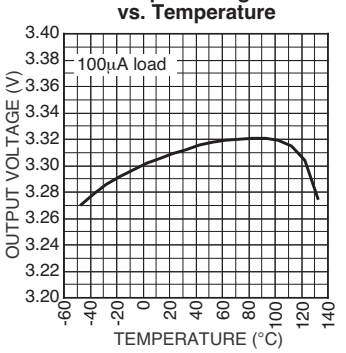


Enable Voltage Threshold vs. Supply Voltage




Functional Characteristics


Enable Characteristics

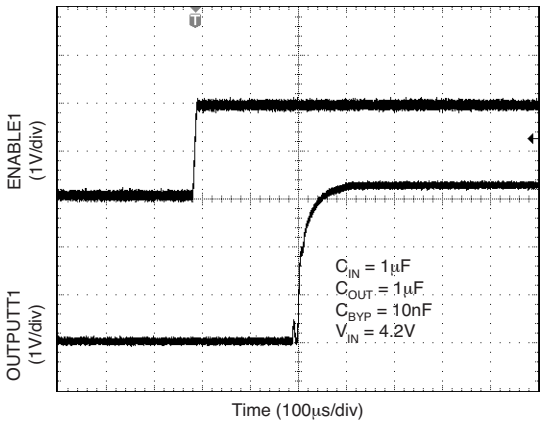


Load Transient Response (LDO 1)

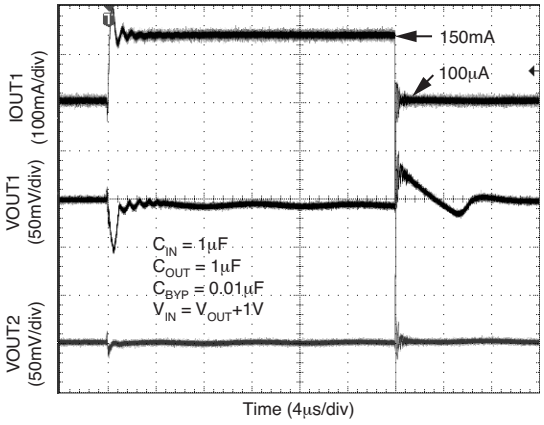

Load Transient Response (LDO 2)

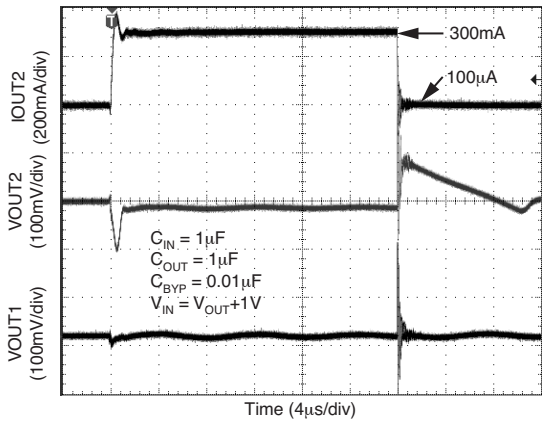

Functional Diagram

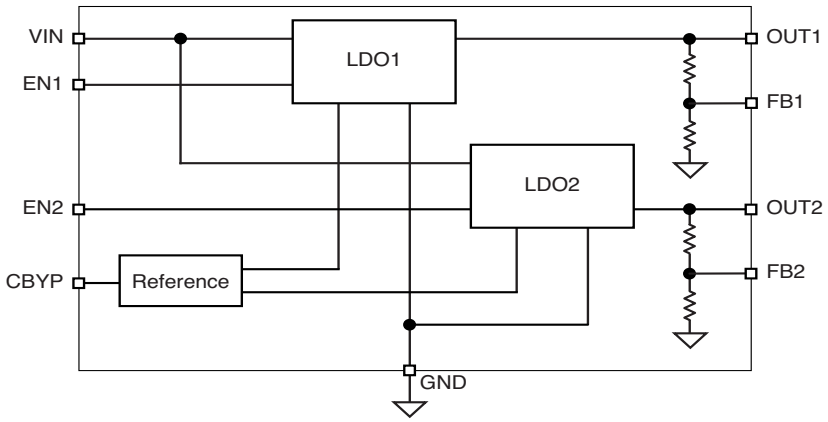

MIC2219 Fixed Voltage Block Diagram

Functional Description

The MIC2219 is a high performance, low quiescent current power management IC consisting of two μCap low-dropout regulators. The first regulator is capable of sourcing 150mA at output voltages from 1.25V to 5V. The second regulator is capable of sourcing 300mA of current at output voltages from 1.25V to 5V.

Enable 1 and 2

The enable inputs allow for logic control of both output voltages with individual enable inputs. The enable input is active high, requiring 1.8V for guaranteed operation. The enable input is CMOS logic and cannot by left floating.

Input Capacitor

Good bypassing is recommended from input to ground to help improve AC performance. A 1μF capacitor or greater located close to the IC is recommended.

Bypass Capacitor


The internal reference voltage of the MIC2219 can be bypassed with a capacitor to ground to reduce output noise and increase power supply rejection (PSRR). A quick-start feature allows for quick turn-on of the output voltage regardless of the size of the capacitor. The recommended nominal bypass capacitor is 0.01μF, but it can be increased without limit.

Output Capacitor

Each regulator output requires a 1μF ceramic output capacitor for stability. The output capacitor value can be increased to improve transient response, but performance has been optimized for a 1μF ceramic type output capacitor.

X7R/X5R dielectric-type ceramic capacitors are recommended because of their temperature performance. X7R-type capacitors change capacitance by 15% over their operating temperature range and are the most stable type of ceramic capacitors. Z5U and Y5V dielectric capacitors change value by as much as 50% and 60% respectively over their operating temperature ranges. To use a ceramic chip capacitor with Y5V dielectric, the value must be much higher than an X7R ceramic capacitor to ensure the same minimum capacitance over the equivalent operating temperature range.

Package Information

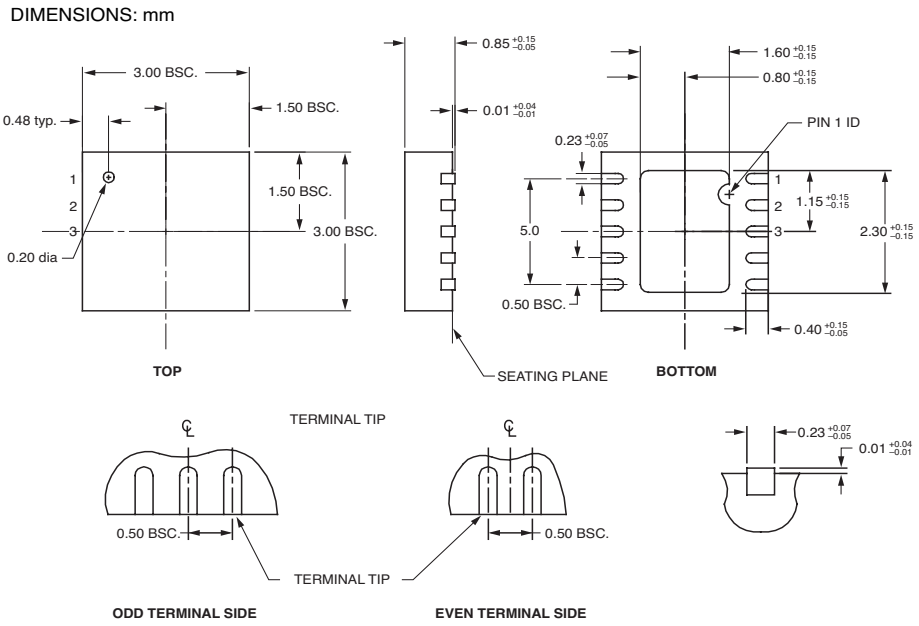

10-Lead MLF™ (ML)

MICREL INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB http://www.micrel.com

This information furnished by Micrel in this data sheet is believed to be accurate and reliable. However no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2003 Micrel, Incorporated.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.