V_{DSS}	1200V
I_D	26 A
$R_{DS(ON)}$	121 mΩ

FEATURES

- High Speed Switching
- High Blocking Voltage with Low $R_{DS(on)}$
- Easy to Parallel
- Simple to Drive
- RoHS Compliant


BENEFITS

- Increased Power Density
- Faster Operating Frequency
- Reduction of Heat Sink Requirements
- Higher Efficiency
- Reduced EMI


APPLICATION


- Power Factor Correction Modules
- Switch Mode Power Supplies
- DC-AC Inverters
- High Voltage DC/DC Converters



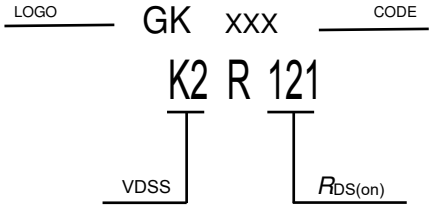

TO-247





ABSOLUTE MAXIMUM RATINGS (T_C = 25°C, unless otherwise specified)

Symbol	Parameter	Test Conditions	Value	Unit
V_{DS}	Drain-Source Voltage		1200	V
I_D	Continuous Drain Current	V_{GS}=18V T_c=25°C T_c=100°C	 26 18	A
I_{DM}	Peak Drain Current	Pulse width t_p limited by T_{jmax}	48	A
V_{GSmax}	Gate-Source Voltage, max. Transient Voltage	t_p≤0.5μs, D<0.001	-10/+22	V
V_{GSmax}	Gate-Source Voltage		-8/+22	V
V_{GSop}	Recommend Gate-Source Voltage		-4/+18	V
P_{tot}	Power Dissipation	T_c=25°C T_c=100°C	161 80	W
E_{AS}	Non-Repetitive Avalanche Switching Energy	V_{DD}=50V, L=1mH, I_D=23A	264	mJ
E_{AR}	Repetitive Avalanche Energy	V_{DD}=50V, L=660μH, I_D=23A	174	mJ
t_{SC}	Short-Circuit Withstand Time	V_{DD}=800V, V_{GS}=18V, $V_{DS,peak}$ < 1200V	1.8	μs
T_j	Operating Junction Temperature		-40~175	°C
T_{stg}	Storage Temperature		-40~150	°C
T_{sold}	Soldering Temperature	1.6mm (0.063") from case for 10s	260	°C
M	Mounting Torque	M3 screw	0.6	Nm

ELECTRICAL CHARACTERISTICS (T_C=25°C, unless otherwise specified)

Static Characteristics

Symbol	Parameter	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	I_D=100μA, V_{GS}=0V	1200			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=1200V, V_{GS}=0V		1	10	μA
I_{GSS}	Gate-Source Leakage Current	V_{DS}=0V, V_{GS}=18V			250	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}, I_D=2.5mA T_j=25°C T_j=175°C	2	2.8 2.0	4	V
$R_{DS(on)}$	Drain-Source On-State Resistance	V_{GS}=18V, I_D=10A T_j=25°C T_j=175°C		121 206	160	mΩ
g_{fs}	Forward Transconductance	V_{DS}=20V, I_D=10A		6		S

Dynamic Characteristics

Symbol	Parameter	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
C_{iss}	Input Capacitance	V_{DS}=1000V, f=1MHz, V_{GS}=0V		692		pF
C_{oss}	Output Capacitance			39		pF
C_{rss}	Reverse Transfer Capacitance			4		pF
E_{oss}	C_{oss} Stored Energy			23		μJ
$R_{G(int)}$	Internal Gate Resistance	f=1MHz		1.9		Ω
Q_g	Total Gate Charge	V_{DS}=800V, I_D=10A, V_{GS}=-4/18V		37		nC
Q_{gs}	Gate to Source Charge			9		nC
Q_{gd}	Gate to Drain Charge			13		nC

Thermal Characteristics

Symbol	Parameter	Value			Unit
		Min.	Typ.	Max.	
$R_{th(j-c)}$	Thermal Resistance from Junction to Case		0.93		°C/W

ELECTRICAL CHARACTERISTICS (T_C=25°C, unless otherwise specified)

Switching Characteristics

Symbol	Parameter	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
$t_{d(on)}$	Turn-On Delay Time	V_{DD}=800V, I_D=10A, V_{GS}=-4V/18V, $R_{G(ext)}$=2.5Ω, L=200μH, T_j=25°C		11		ns
t_r	Rise Time			23		ns
$t_{d(off)}$	Turn-Off Delay Time			16		ns
t_f	Fall Time			15		ns
E_{on}	Turn-On Energy			189		μJ
E_{off}	Turn-Off Energy			33		μJ
$t_{d(on)}$	Turn-On Delay Time	V_{DD}=800V, I_D=10A, V_{GS}=-4V/18V, $R_{G(ext)}$=2.5Ω, L=200μH, T_j=175°C		10		ns
t_r	Rise Time			25		ns
$t_{d(off)}$	Turn-Off Delay Time			17		ns
t_f	Fall Time			15		ns
E_{on}	Turn-On Energy			252		μJ
E_{off}	Turn-Off Energy			40		μJ

Reverse Diode Characteristics

Symbol	Parameter	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
V_{SD}	Diode Forward Voltage	V_{GS}=-4V, I_{SD}=5A T_j=25°C T_j=175°C V_{GS}=-4V, I_{SD}=10A T_j=25°C T_j=175°C		 4.0 3.6 4.6 4.0		V
I_S	Continuous Diode Forward Current	V_{GS}=-4V T_c=25°C T_c=100°C		 25 16		A

ELECTRICAL CHARACTERISTICS (T_C =25°C, unless otherwise specified)

Reverse Diode Characteristics (Continued)

Symbol	Parameter	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
t_{rr}	Reverse Recovery Time	V_{GS}=-4V, I_{SD}=10A, V_R=800V, di/dt=1094A/μs, T_j=25°C		46		ns
Q_{rr}	Reverse Recovery Charge			135		nC
I_{rrm}	Peak Reverse Recovery Current			6.4		A
t_{rr}	Reverse Recovery Time	V_{GS}=-4V, I_{SD}=10A, V_R=800V, di/dt=1080A/μs, T_j=175°C		50		ns
Q_{rr}	Reverse Recovery Charge			252		nC
I_{rrm}	Peak Reverse Recovery Current			8.9		A

RATING AND CHARACTERISTIC CURVES

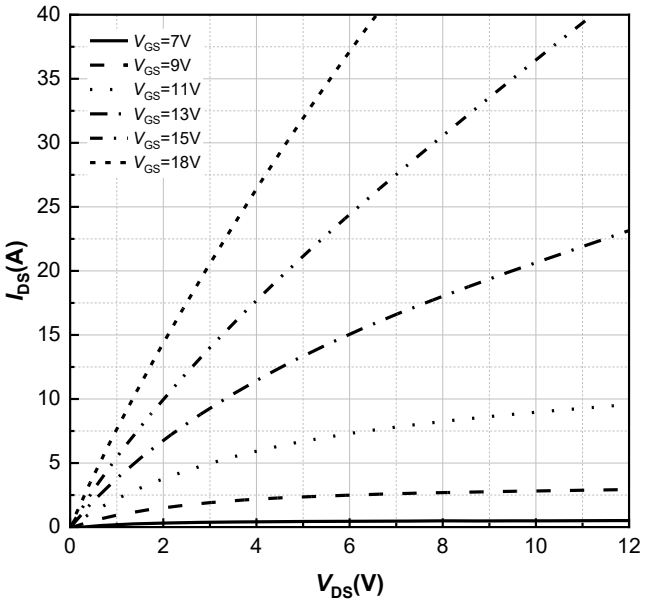


Figure 1. **Output Characteristics T_j=-40°C**

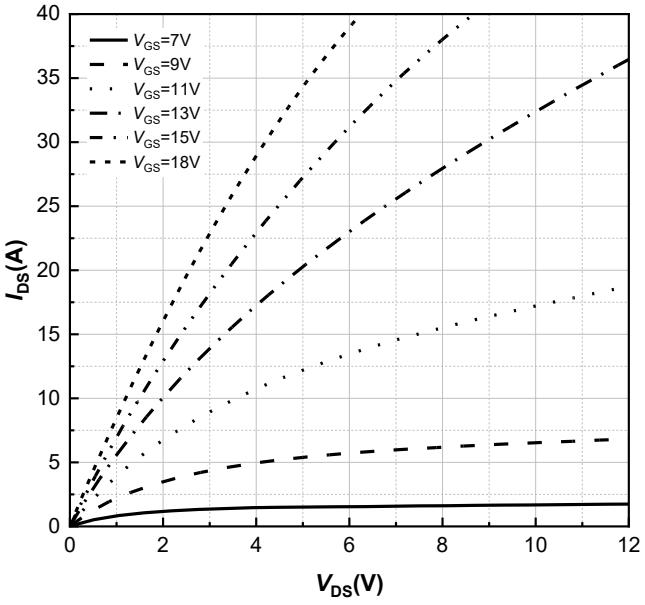


Figure 2. **Output Characteristics T_j=25°C**

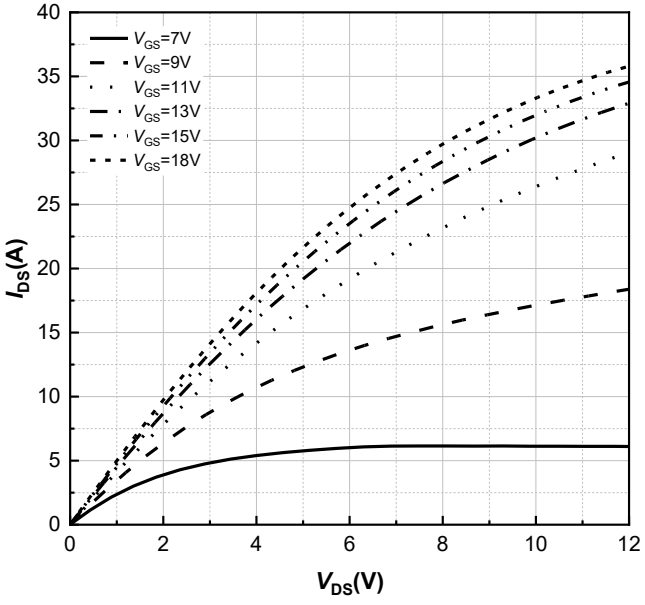


Figure 3. **Output Characteristics T_j=175°C**

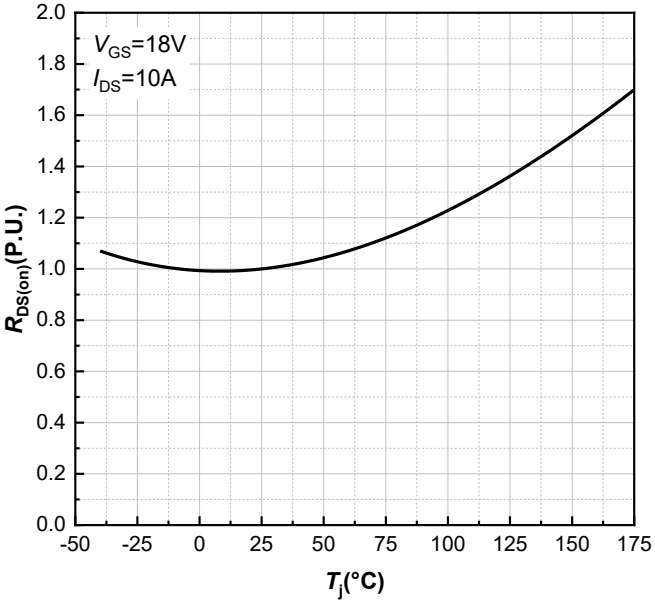


Figure 4. **Normalized On-Resistance vs. Temperature**

RATING AND CHARACTERISTIC CURVES

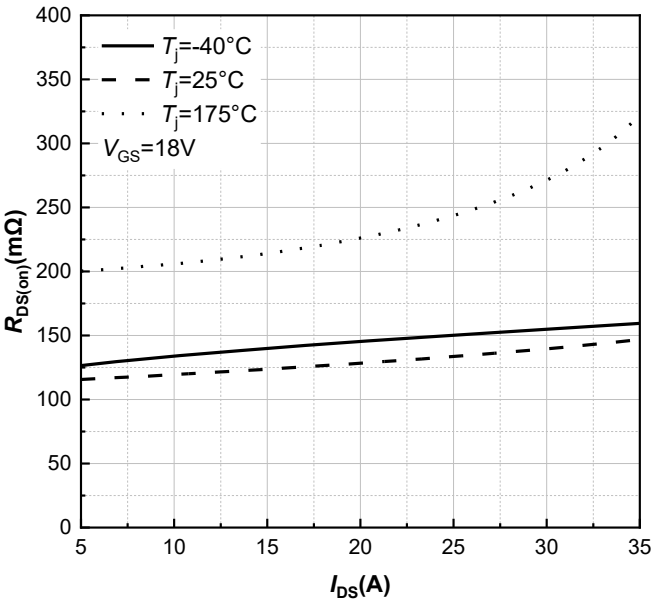


Figure 5. **On-Resistance vs. Drain Current For Various Temperatures**

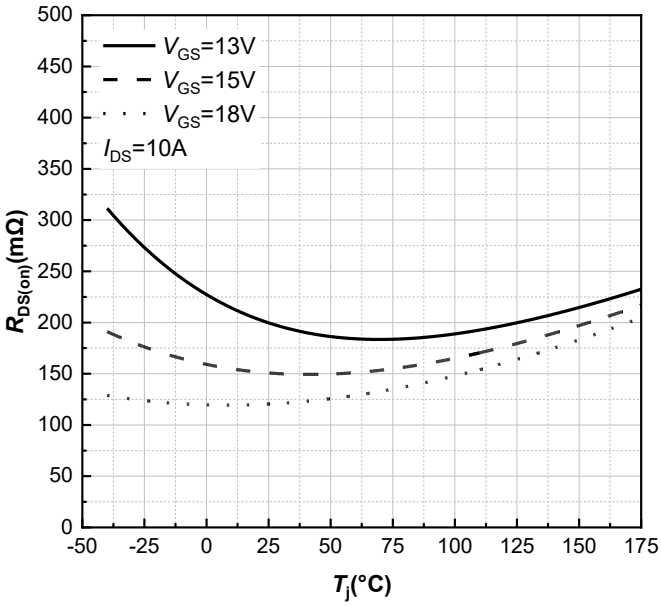


Figure 6. **On-Resistance vs. Temperature For Various Gate Voltage**

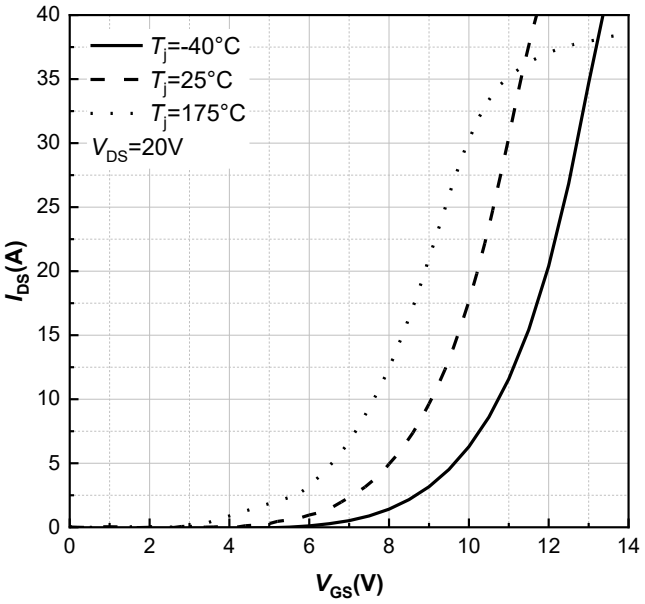


Figure 7. **Transfer Characteristic for Various Junction Temperatures**

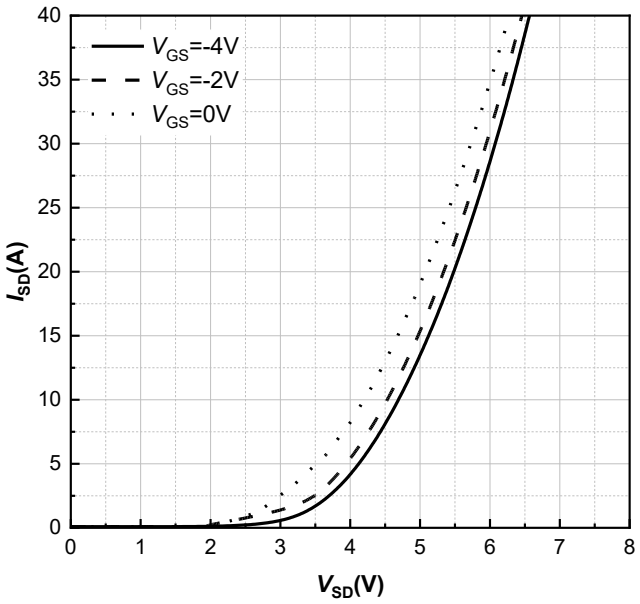


Figure 8. **Body Diode Characteristic T_j=-40°C**

RATING AND CHARACTERISTIC CURVES

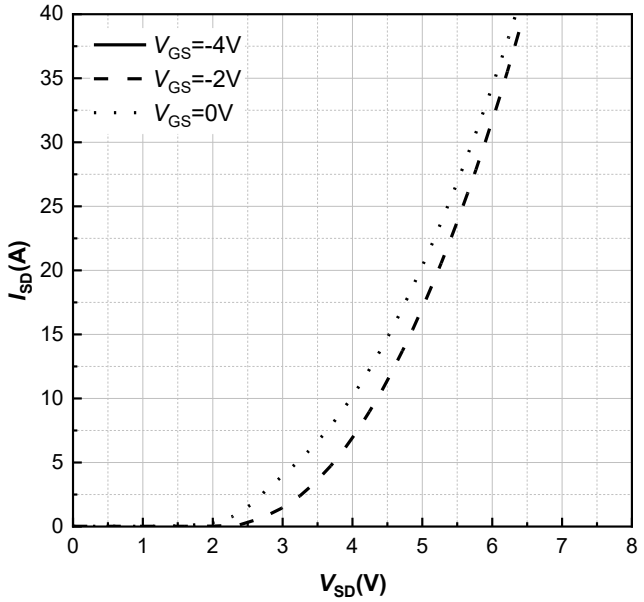


Figure 9. **Body Diode Characteristic T_j=25°C**

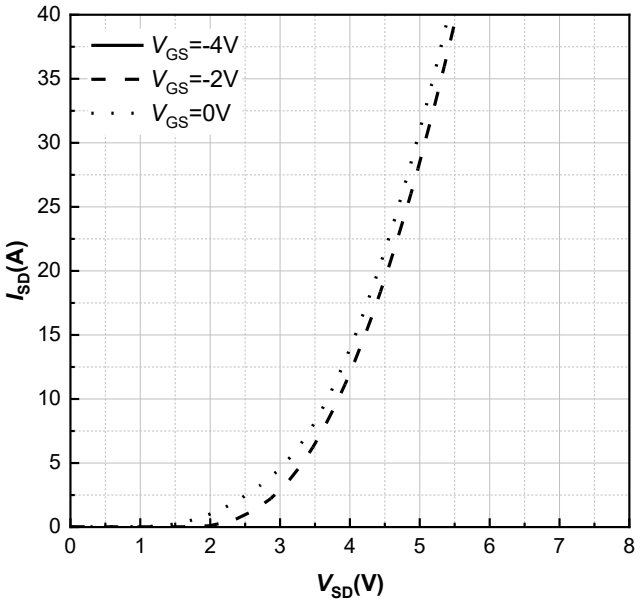


Figure 10. **Body Diode Characteristic T_j=175°C**

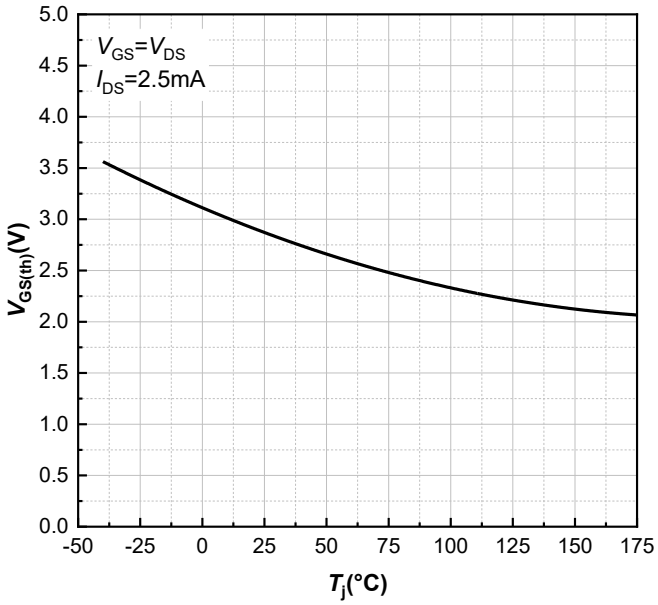


Figure 11. **Threshold Voltage vs. Temperature**

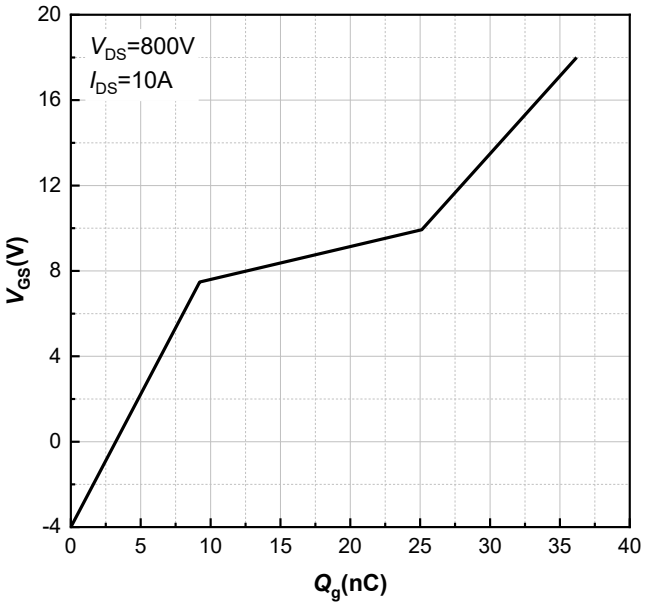


Figure 12. **Gate Charge Characteristics**

RATING AND CHARACTERISTIC CURVES

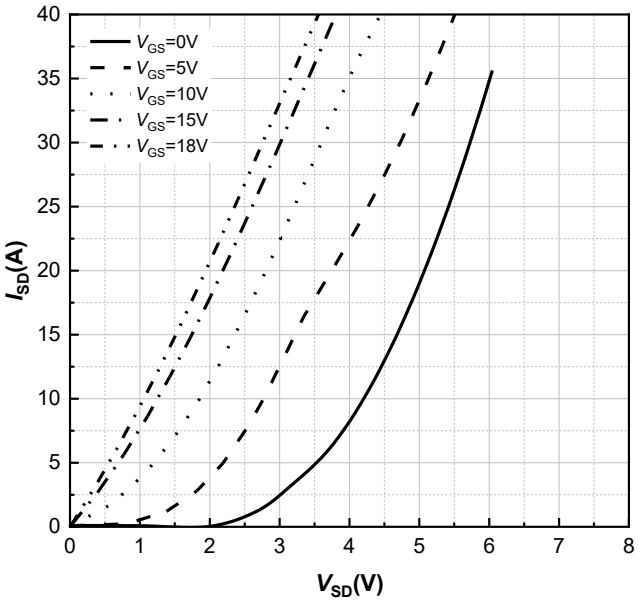


Figure 13. **3rd Quadrant Characteristic T_j=-40°C**

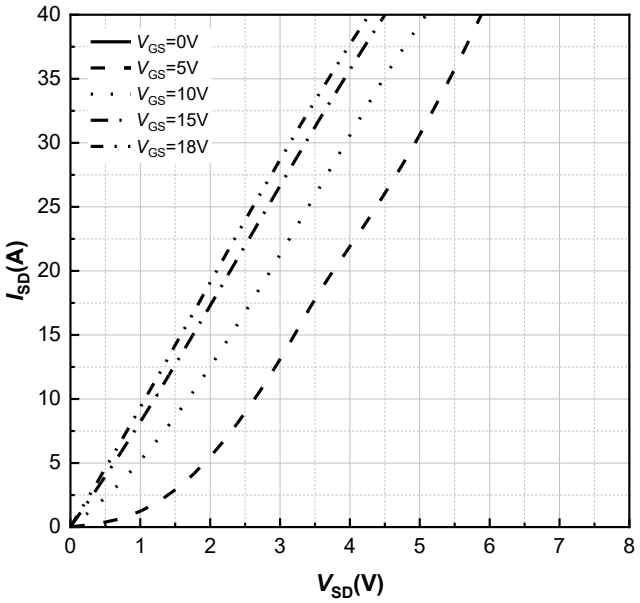


Figure 14. **3rd Quadrant Characteristic T_j=25°C**

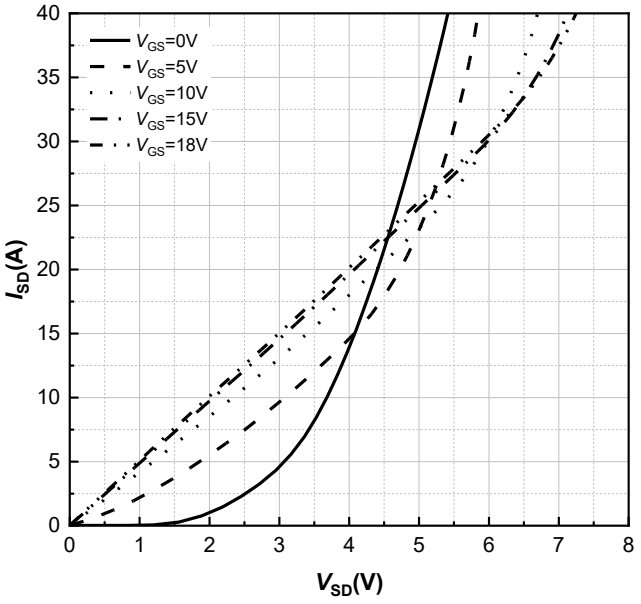


Figure 15. **3rd Quadrant Characteristic T_j=175°C**

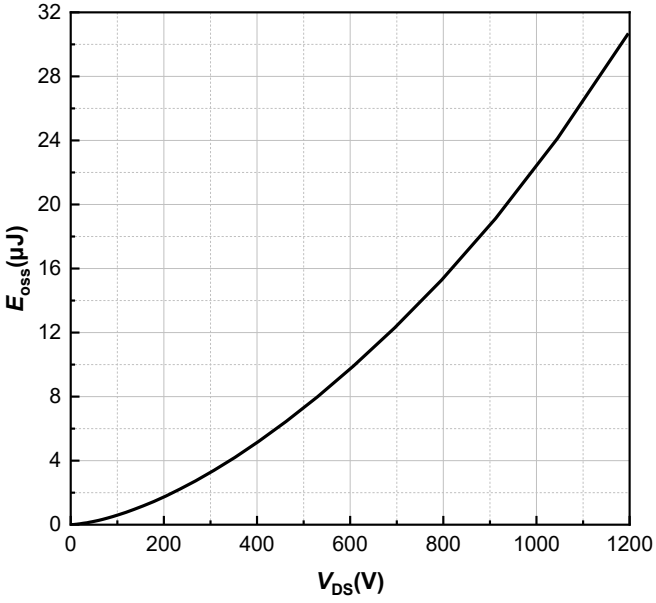


Figure 16. **Output Capacitor Stored Energy**

RATING AND CHARACTERISTIC CURVES

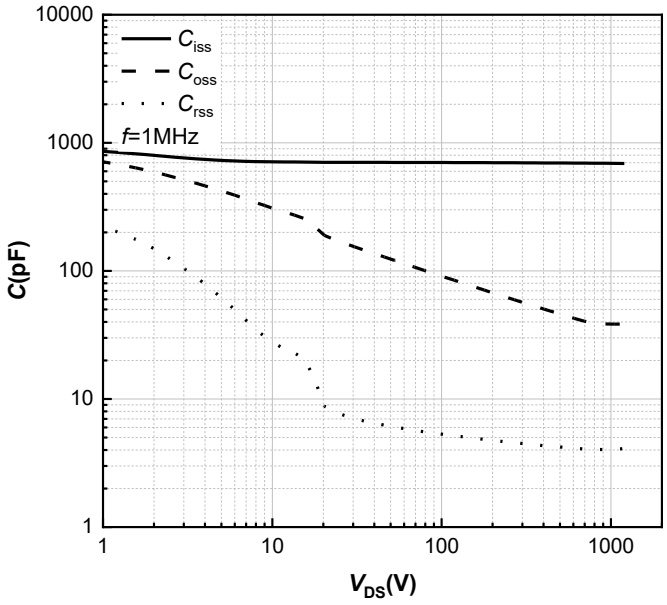


Figure 17. **Capacitances vs. Drain-Source**

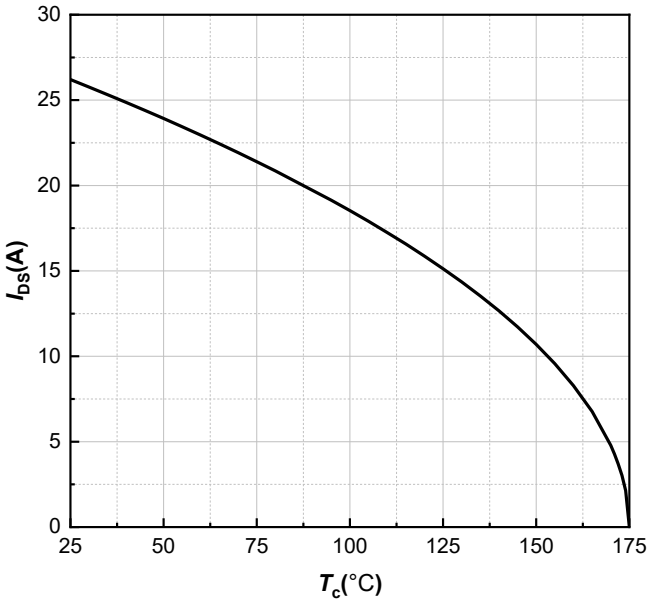


Figure 18. **Continuous Drain Current Derating vs. Case Temperature**

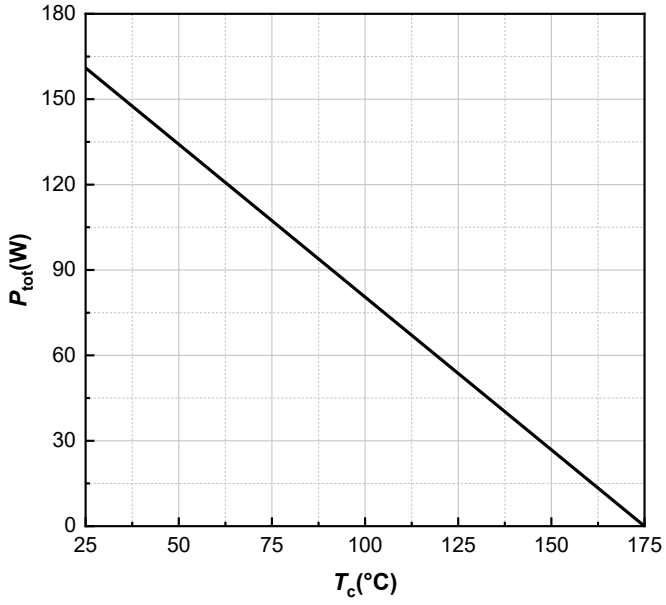


Figure 19. **Maximum Power Dissipation Derating vs. Case Temperature**

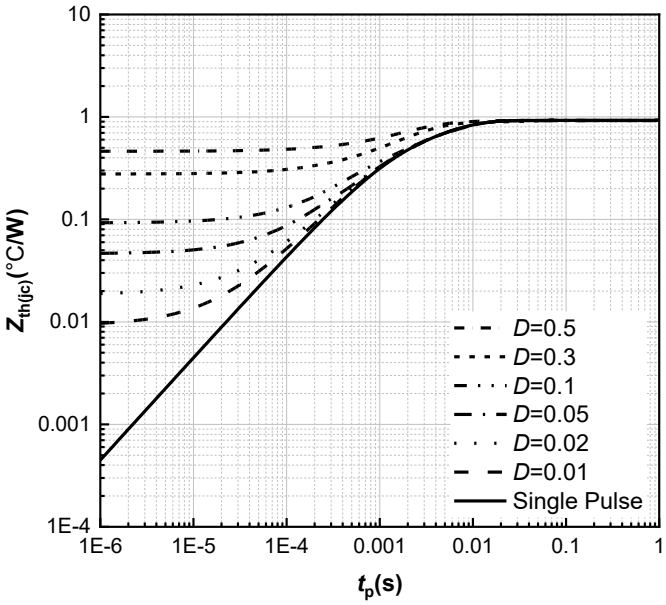


Figure 20. **Transient Thermal Impedance**

RATING AND CHARACTERISTIC CURVES

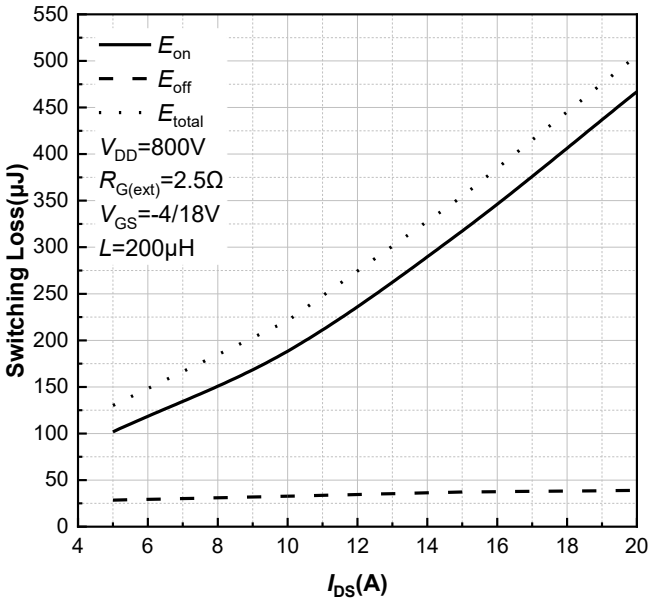


Figure 21. **Clamped Inductive Switching Energy vs. Drain Current T_j=25°C**

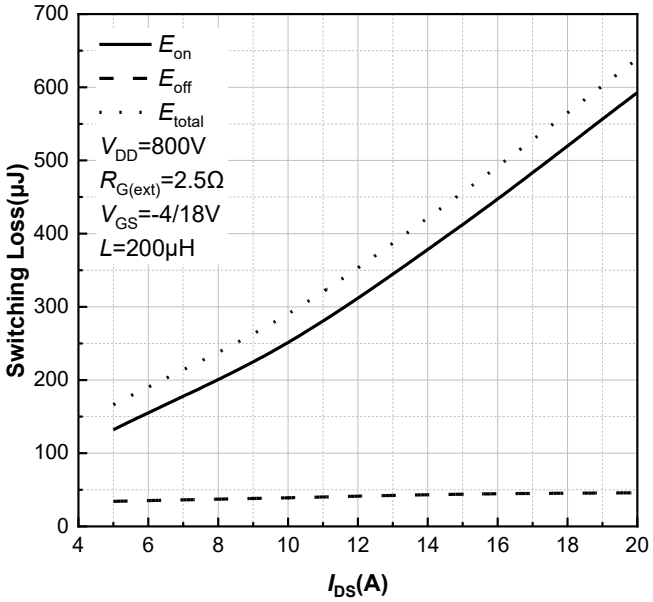


Figure 22. **Clamped Inductive Switching Energy vs. Drain Current T_j=175°C**

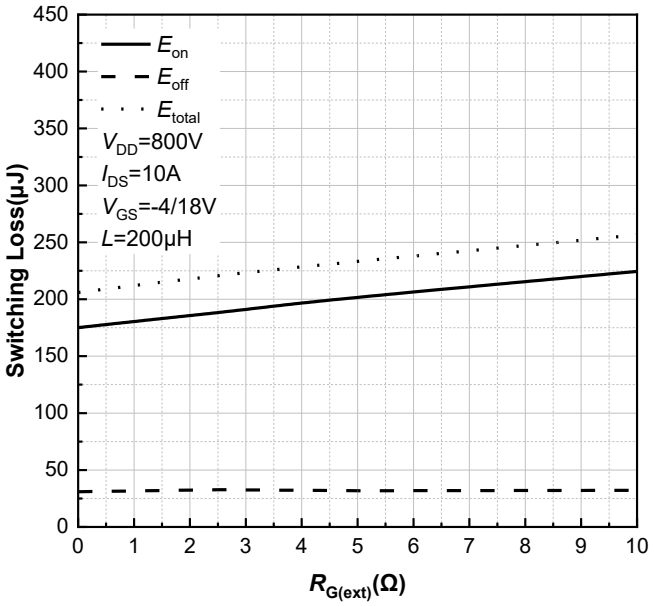


Figure 23. **Clamped Inductive Switching Energy vs. $R_{G(ext)}$ T_j=25°C**

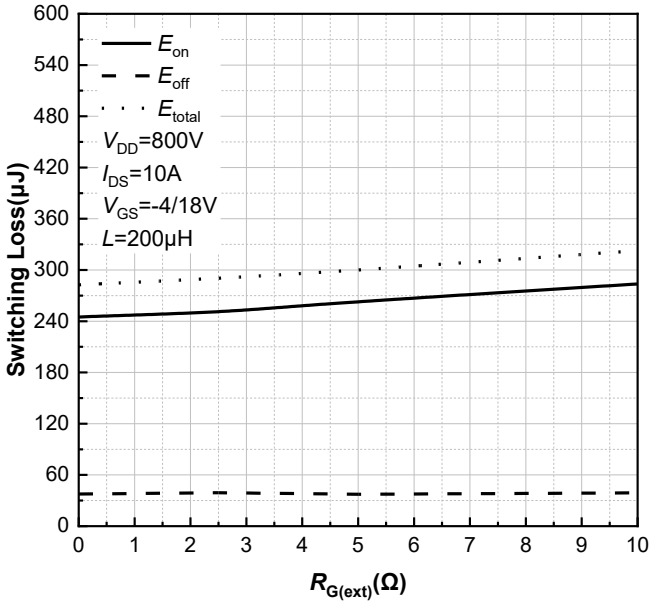


Figure 24. **Clamped Inductive Switching Energy vs. $R_{G(ext)}$ T_j=175°C**

RATING AND CHARACTERISTIC CURVES

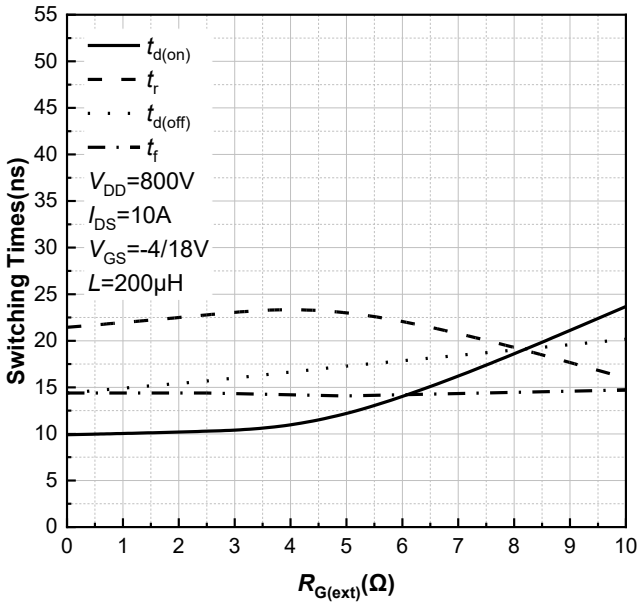


Figure 25. **Switching Times vs. $R_{G(ext)}$ T_j=25°C**

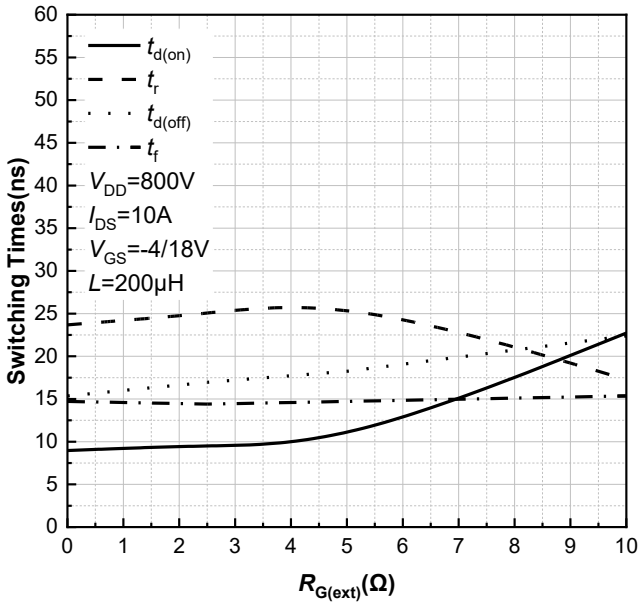


Figure 26. **Switching Times vs. $R_{G(ext)}$ T_j=175°C**


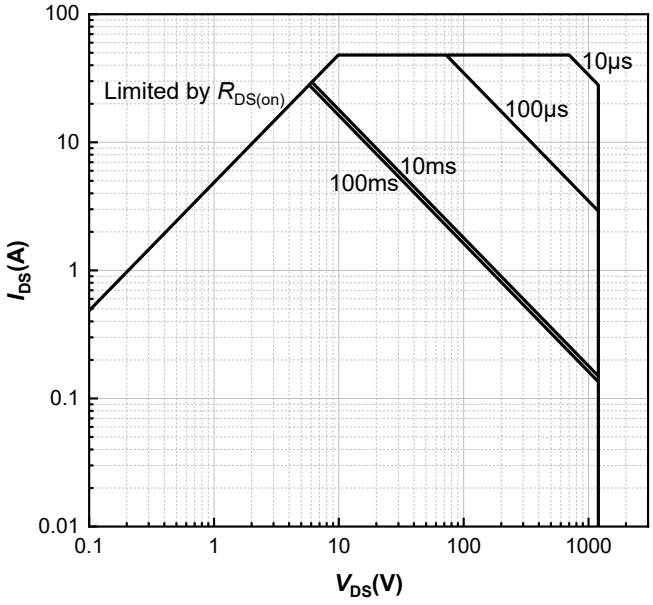


Figure 27. **Safe Operating Area**


Soldering parameters

Reflow Condition		Pb-Free assembly (see as bellow)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150℃
	-Temperature Max($T_{s(max)}$)	+200℃
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3℃/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3℃/sec. Max
Reflow	-Temperature(T_L)(Liquid us)	+217℃
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_p)		+260(+0/-5)℃
Time within 5℃ of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6℃/sec. Max
Time 25℃ to Peak Temp (T_P)		8 min. Max
Do not exceed		+260℃

FIG5: Reflow condition

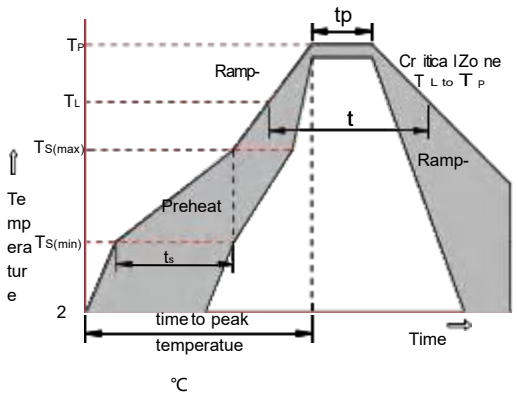

Package Dimensions & Suggested Pad Layout

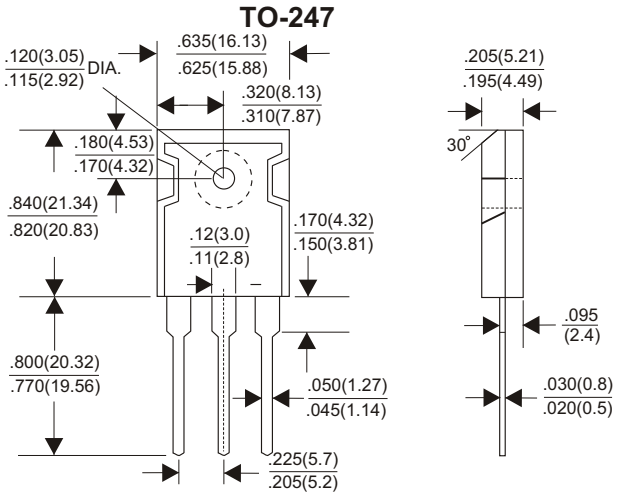

Dimensions in inches and (millimeters)

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.