VOLTAGE REGULATOR

NO. EA-022-120404

OUTLINE

The Rx5RL Series are CMOS-based voltage regulator ICs with high accuracy output voltage and ultra-low quiescent current. Each of these ICs consists of a voltage reference unit, an error amplifier, a driver transistor, and resistors for setting output voltage. The output voltage is fixed with high accuracy.

Three types of packages, TO-92 (Discontinued), SOT-89 (Mini-power Mold), SOT-23-5 (Mini-mold), are available.

FEATURES


- Supply Current ..... Typ. 1.1μA (V_{OUT}=3.0V, V_{IN}=5.0V)
- Dropout Voltage ..... Typ. 0.04V (I_{OUT}=1mA, V_{OUT}=2.8V)
- Input Voltage Range ..... Max. 10.0V
- Output Voltage Range ..... 2.0V to 6.0V (0.1V steps)
  (For other voltages, please refer to MARK INFORMATIONS.)
- Output Voltage Accuracy ..... ±2.5%
- Temperature-Drift Coefficient of Output Voltage ..... Typ. ± 100ppm/°C
- Line Regulation ..... Typ. 0.05%/V
- Packages ..... SOT-23-5 (Mini-mold), SOT-89 (Mini-power Mold), TO-92 (Discontinued)

APPLICATIONS

- Power source for battery-powered equipment
- Power source for cameras, video instruments such as camcorders, VCRs, and hand- held communication equipment
- Precision voltage references

BLOCK DIAGRAMS

Rx5RL

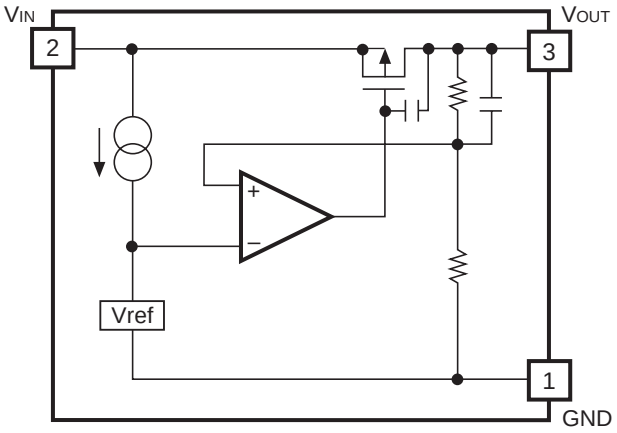

SELECTION GUIDE


The output voltage and package for the ICs can be selected at the user's request.

Product Name	Package	Quantity per Reel	Pb Free	Halogen Free
RN5RLxxAA-TR-FE	SOT-23-5	3,000 pcs	Yes	Yes
RH5RLxxAA-T1-FE	SOT-89	1,000 pcs	Yes	Yes
RE5RLxxAA-TR-F	TO-92 (Discontinued)	2,500 pcs	Yes	No


xx: The output voltage can be designated in the range from 2.0V (20) to 6.0V (60) in 0.1V steps.
(For other voltages, please refer to MARK INFORMATIONS.)

PIN CONFIGURATION


● SOT-23-5



● SOT-89



● TO-92



PIN DESCRIPTION

● **SOT-23-5**

Pin No	Symbol	Pin Description
1	GND	Ground Pin
2	V_{IN}	Input Pin
3	V_{OUT}	Output Pin
4	NC	No Connection
5	NC	No Connection

● **SOT-89**

Pin No	Symbol	Pin Description
1	GND	Ground Pin
2	V_{IN}	Input Pin
3	V_{OUT}	Output Pin

● **TO-92 (Discontinued)**

Pin No	Symbol	Pin Description
1	GND	Ground Pin
2	V_{IN}	Input Pin
3	V_{OUT}	Output Pin

ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating	Unit
V_{IN}	Input Voltage	12	V
V_{OUT}	Output Voltage	−0.3 to V_{IN}+0.3	V
I_{OUT}	Output Current	150	mA
P_D	Power Dissipation* (SOT-23-5)	420	mW
	Power Dissipation* (SOT-89)	900	
	Power Dissipation* (TO-92) (Discontinued)	300	
Topt	Operating Temperature Range	−40 to 85	°C
Tstg	Storage Temperature Range	−55 to 125	°C
Tsolder	Lead Temperature (Soldering)	260°C,10s	

∗) For Power Dissipation, please refer to PACKAGE INFORMATION.

ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field.
The functional operation at or over these absolute maximum ratings is not assured.

RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

ELECTRICAL CHARACTERISTICS

• Rx5RL20A

Topt=25°C

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V_{OUT}	Output Voltage	V_{IN}=4.0V 10μA≤I_{OUT}≤10mA	1.950	2.000	2.050	V
I_{OUT}	Output Current	V_{IN}=4.0V	25	35		mA
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation	V_{IN}=4.0V 1mA≤I_{OUT}≤35mA		30	45	mV
V_{DIF}	Dropout Voltage	I_{OUT}=1mA		60	90	mV
I_{SS}	Quiescent Current	V_{IN}=4.0V		1.0	3.0	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation	I_{OUT}=1mA V_{OUT}+0.5V≤V_{IN}≤10V		0.05	0.20	%/V
V_{IN}	Input Voltage				10	V
$\frac{\Delta V_{OUT}}{\Delta Topt}$	Output Voltage Temperature Coefficient	I_{OUT}=10mA –40°C≤Topt≤85°C		±100		ppm/°C

• Rx5RL30A

Topt=25°C

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V_{OUT}	Output Voltage	V_{IN}=5.0V 10μA≤I_{OUT}≤10mA	2.925	3.000	3.075	V
I_{OUT}	Output Current	V_{IN}=5.0V	35	50		mA
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation	V_{IN}=5.0V 1mA≤I_{OUT}≤50mA		40	60	mV
V_{DIF}	Dropout Voltage	I_{OUT}=1mA		40	60	mV
I_{SS}	Quiescent Current	V_{IN}=5.0V		1.1	3.3	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation	I_{OUT}=1mA V_{OUT}+0.5V≤V_{IN}≤10V		0.05	0.20	%/V
V_{IN}	Input Voltage				10	V
$\frac{\Delta V_{OUT}}{\Delta Topt}$	Output Voltage Temperature Coefficient	I_{OUT}=10mA –40°C≤Topt≤85°C		±100		ppm/°C

• **Rx5RL40A**

Topt=25°C

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V_{OUT}	Output Voltage	V_{IN}=6.0V 10μA≤I_{OUT}≤10mA	3.900	4.000	4.100	V
I_{OUT}	Output Current	V_{IN}=6.0V	45	65		mA
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation	V_{IN}=6.0V 1mA≤I_{OUT}≤65mA		50	75	mV
V_{DIF}	Dropout Voltage	I_{OUT}=1mA		25	38	mV
I_{SS}	Quiescent Current	V_{IN}=6.0V		1.2	3.6	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation	I_{OUT}=1mA V_{OUT}+0.5V≤V_{IN}≤10V		0.05	0.20	%/V
V_{IN}	Input Voltage				10	V
$\frac{\Delta V_{OUT}}{\Delta Topt}$	Output Voltage Temperature Coefficient	I_{OUT}=10mA –40°C≤Topt≤85°C		±100		ppm/°C

• **Rx5RL50A**

Topt=25°C

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V_{OUT}	Output Voltage	V_{IN}=7.0V 10μA≤I_{OUT}≤10mA	4.875	5.000	5.125	V
I_{OUT}	Output Current	V_{IN}=7.0V	55	80		mA
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation	V_{IN}=7.0V 1mA≤I_{OUT}≤80mA		60	90	mV
V_{DIF}	Dropout Voltage	I_{OUT}=1mA		25	38	mV
I_{SS}	Quiescent Current	V_{IN}=7.0V		1.3	3.9	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation	I_{OUT}=1mA V_{OUT}+0.5V≤V_{IN}≤10V		0.05	0.20	%/V
V_{IN}	Input Voltage				10	V
$\frac{\Delta V_{OUT}}{\Delta Topt}$	Output Voltage Temperature Coefficient	I_{OUT}=10mA –40°C≤Topt≤85°C		±100		ppm/°C

• **Rx5RL60A**

Topt=25°C

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V_{OUT}	Output Voltage	V_{IN}=8.0V 10μA≤I_{OUT}≤10mA	5.850	6.000	6.150	V
I_{OUT}	Output Current	V_{IN}=8.0V	55	80		mA
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation	V_{IN}=8.0V 1mA≤I_{OUT}≤80mA		60	90	mV
V_{DIF}	Dropout Voltage	I_{OUT}=1mA		25	38	mV
I_{SS}	Quiescent Current	V_{IN}=8.0V		1.3	3.9	μA
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation	I_{OUT}=1mA V_{OUT}+0.5V≤V_{IN}≤10V		0.05	0.20	%/V
V_{IN}	Input Voltage				10	V
$\frac{\Delta V_{OUT}}{\Delta Topt}$	Output Voltage Temperature Coefficient	I_{OUT}=10mA –40°C≤Topt≤85°C		±100		ppm/°C

ELECTRICAL CHARACTEISTICS BY OUTPUT VOLTAGE

Part Number	Output Voltage				OutputCurrent			Load Regulation			Dropout Voltage		
	V_{OUT}(V)				I_{OUT}(mA)			ΔV_{OUT}(mV)			V_{DIF} (mV)		
	Conditions	Min.	Typ.	Max.	Conditions	Min.	Typ.	Conditions	Typ.	Max.	Conditions	Typ.	Max.
Rx5RL20A	V_{IN}– V_{OUT} =2.0V 10μA≤ I_{OUT} ≤10mA	1.950	2.000	2.050	V_{IN}– V_{OUT} =2.0V	25	35	V_{IN}– V_{OUT} =2.0V 1mA≤ I_{OUT} ≤35mA	30	45	I_{OUT} =1mA	60	90
Rx5RL21A		2.048	2.100	2.152									
Rx5RL22A		2.145	2.200	2.255									
Rx5RL23A		2.243	2.300	2.357								50	75
Rx5RL24A		2.340	2.400	2.460									
Rx5RL25A		2.438	2.500	2.562									
Rx5RL26A		2.535	2.600	2.665									
Rx5RL27A		2.633	2.700	2.767								40	60
Rx5RL28A		2.730	2.800	2.870									
Rx5RL29A		2.828	2.900	2.972									
Rx5RL30A		2.925	3.000	3.075		35	50	V_{IN}– V_{OUT} =2.0V 1mA≤ I_{OUT} ≤50mA	40	60		35	53
Rx5RL31A		3.023	3.100	3.177									
Rx5RL32A		3.120	3.200	3.280									
Rx5RL33A		3.218	3.300	3.382									
Rx5RL34A		3.315	3.400	3.485									
Rx5RL35A		3.413	3.500	3.587								30	45
Rx5RL36A		3.510	3.600	3.690									
Rx5RL37A		3.608	3.700	3.792									
Rx5RL38A		3.705	3.800	3.895									
Rx5RL39A		3.803	3.900	3.997									
Rx5RL40A		3.900	4.000	4.100		45	65	V_{IN}– V_{OUT} =2.0V 1mA≤ I_{OUT} ≤65mA	50	70		25	38
Rx5RL41A		3.998	4.100	4.202									
Rx5RL42A		4.095	4.200	4.305									
Rx5RL43A		4.193	4.300	4.407									
Rx5RL44A		4.290	4.400	4.510									
Rx5RL45A		4.388	4.500	4.612									
Rx5RL46A		4.485	4.600	4.715									
Rx5RL47A		4.583	4.700	4.817									
Rx5RL48A		4.680	4.800	4.920									
Rx5RL49A		4.778	4.900	5.022									
Rx5RL50A		4.875	5.000	5.125		55	80	V_{IN}– V_{OUT} =2.0V 1mA≤ I_{OUT} ≤80mA	60	90			
Rx5RL51A		4.973	5.100	5.227									
Rx5RL52A		5.070	5.200	5.330									
Rx5RL53A		5.168	5.300	5.432									
Rx5RL54A		5.265	5.400	5.535									
Rx5RL55A		5.363	5.500	5.637									
Rx5RL56A		5.460	5.600	5.740									
Rx5RL57A		5.558	5.700	5.842									
Rx5RL58A		5.655	5.800	5.945									
Rx5RL59A		5.753	5.900	6.047									
Rx5RL60A		5.850	6.000	6.150									

Topt=25˚C

Quiescent Current			Line Regulation			Input Voltage	Output Voltage Tempco.	
Iss(μA)			ΔVOUT/ΔVIN(%/V)			VIN(V)	ΔVOUT/ΔT(ppm/˚C)	
Conditions	Typ.	Max.	Conditions	Typ.	Max.	Max.	Conditions	Typ.
VIN VOUT =2.0V	1.0	3.0	IOUT =1mA VOUT+ 0.5V≤ VIN≤ ≤10V	0.05	0.2	10	IOUT =10mA −40˚C≤ Topt 85˚C	±100
	1.1	3.3						
	1.2	3.6						
	1.3	3.9						

OPERATION

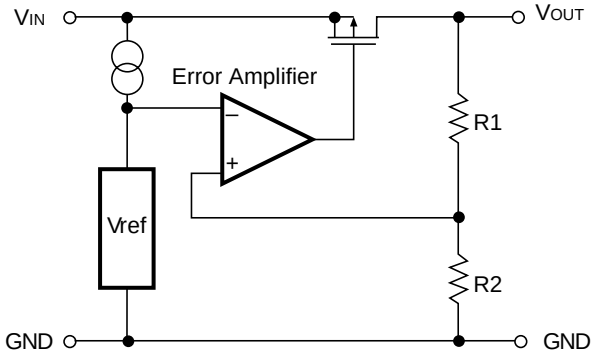


FIG. 1 Brock Diagram

Output voltage, VOUT divided at the node between Registers R1 and R2 is compared with the reference voltage by the error amplifier, so that a constant voltage is output.

TEST CIRCUITS

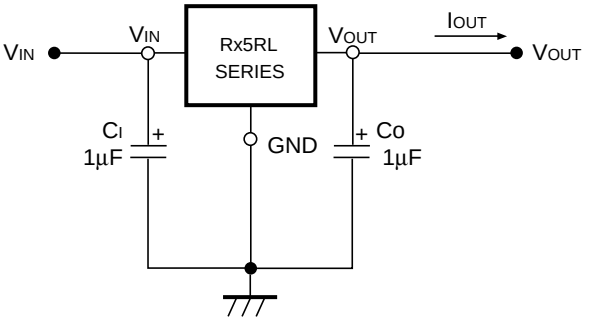


FIG. 2 Test Circuit

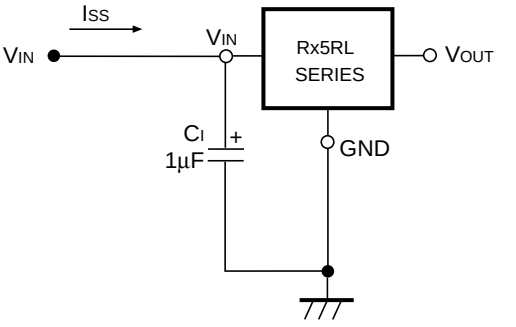


FIG. 3 Quiescent Current Test Circuit


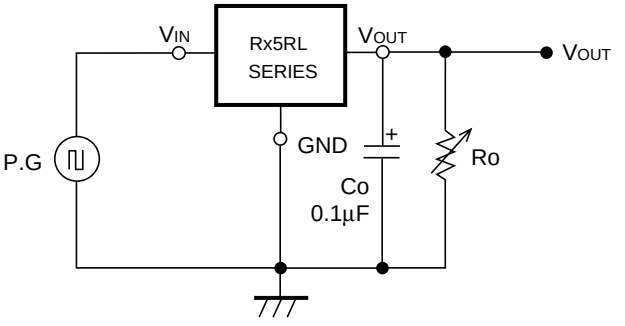


FIG. 4 Line Transient Response Test Circuit


TYPICAL CHARACTERISTICS

1) Output Voltage vs. Output Current


Rx5RL30A

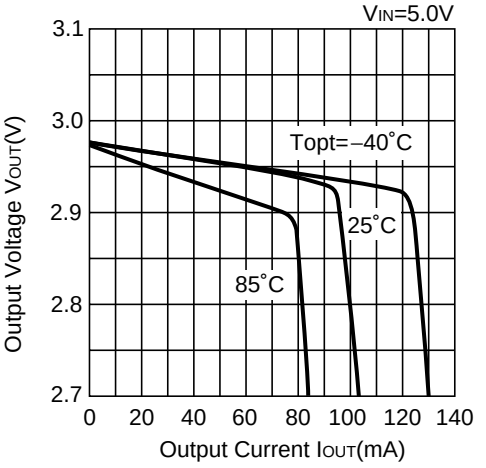

Rx5RL40A

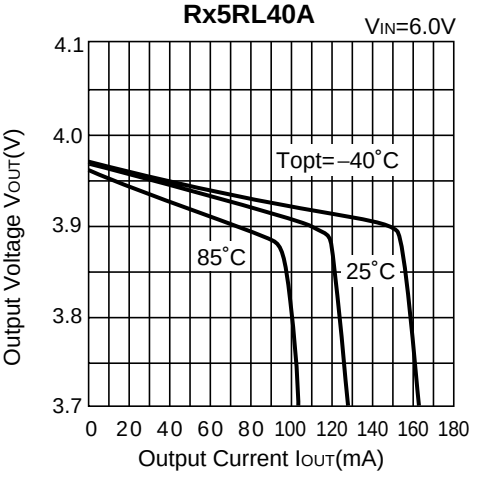


Rx5RL50A

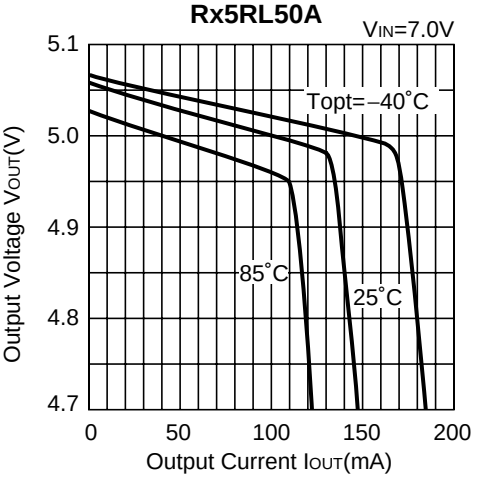



2) Output Voltage vs. Input Voltage


Rx5RL30A

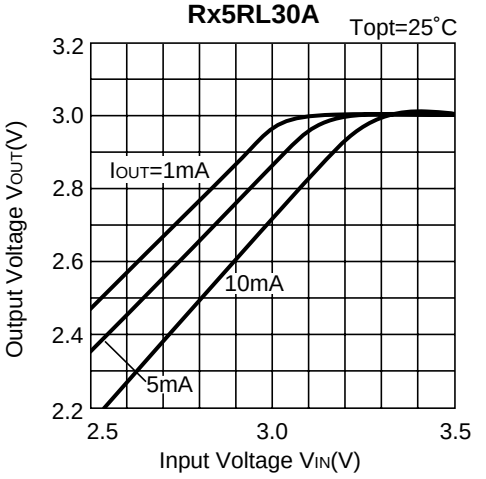



Rx5RL30A

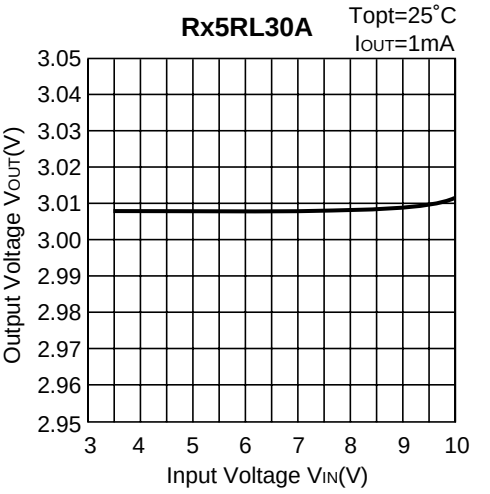

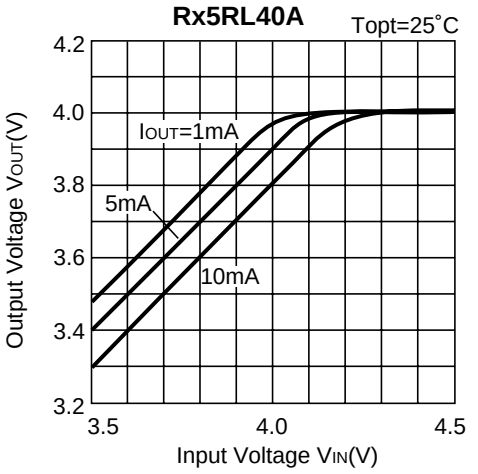


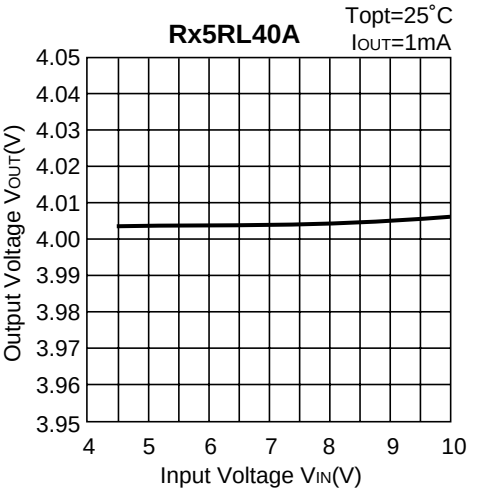


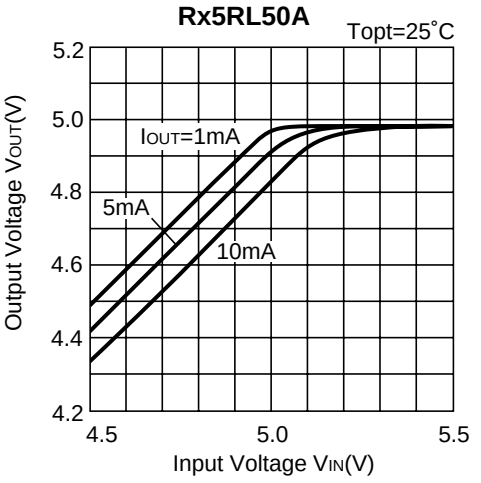

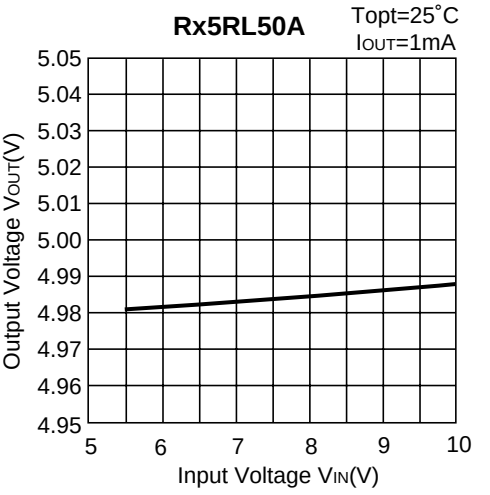


3) Dropout Voltage vs. Output Curret

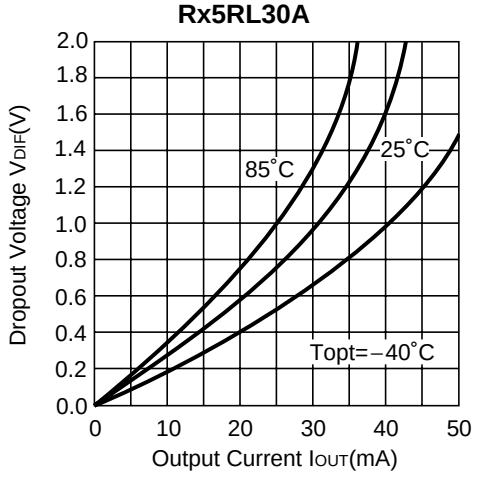

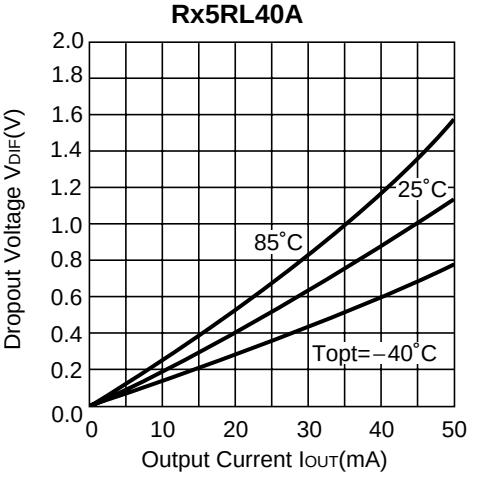


Rx5RL50A

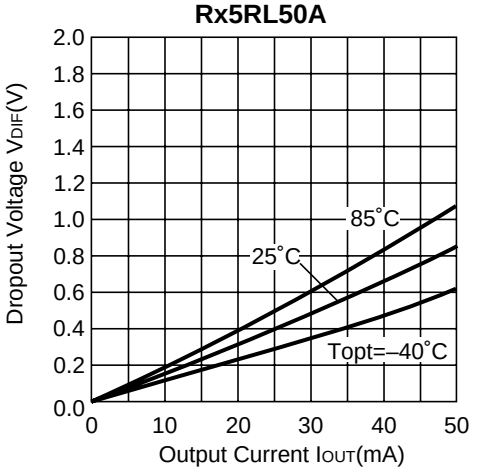


4) Output Voltage vs.Temperature


Rx5RL30A V_{IN}=5.0V I_{OUT}=10mA

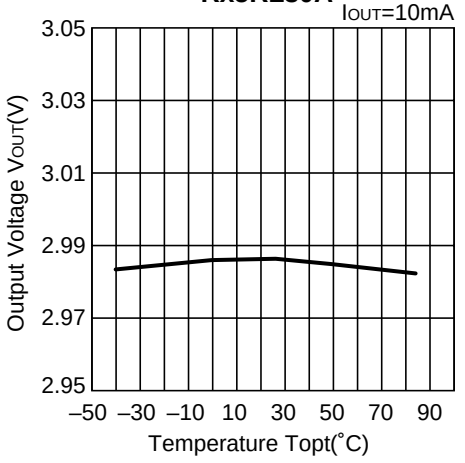

Rx5RL40A V_{IN}=6.0V I_{OUT}=10mA

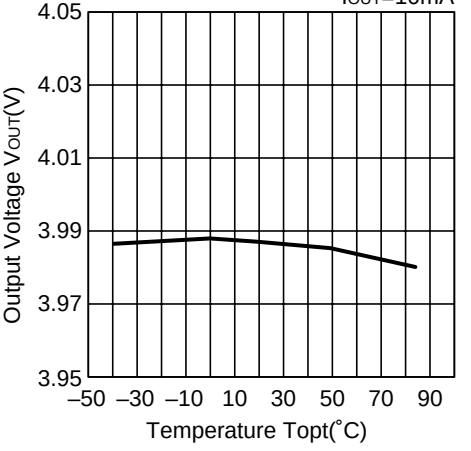


Rx5RL50A V_{IN}=7.0V I_{OUT}=10mA

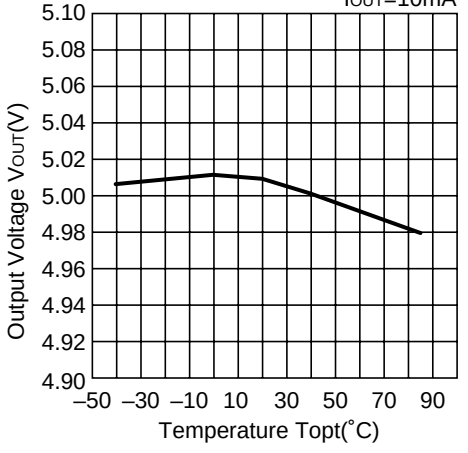


5) Quiescent Current vs. Input Voltage


Rx5RL30C

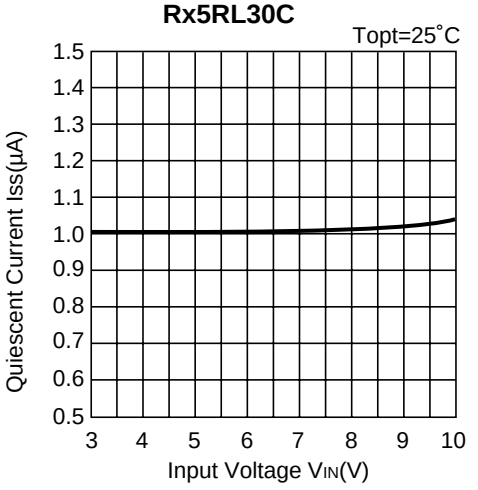

Rx5RL40A

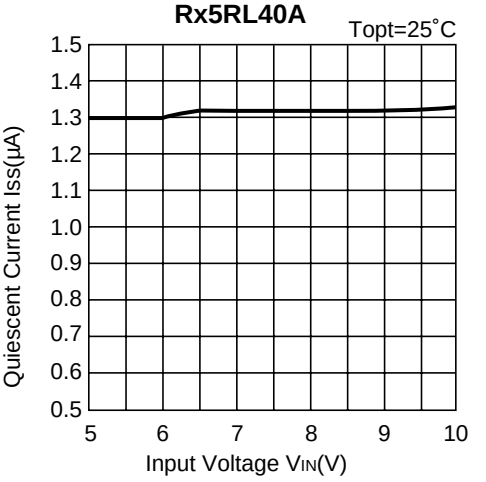


Rx5RL50A

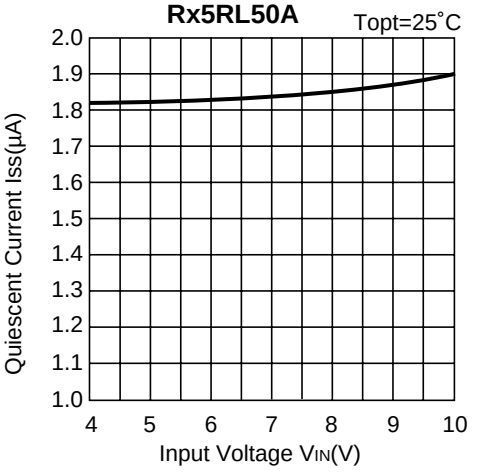


6) Quiescent Current vs. Temperature


Rx5RL30A

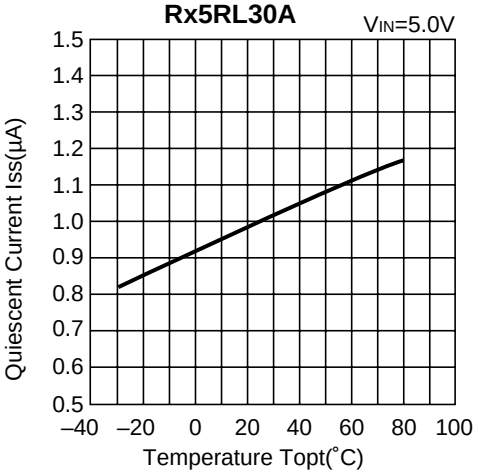


Rx5RL40A

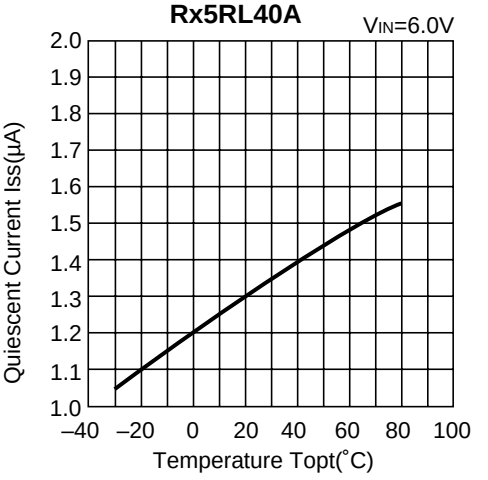


Rx5RL50A

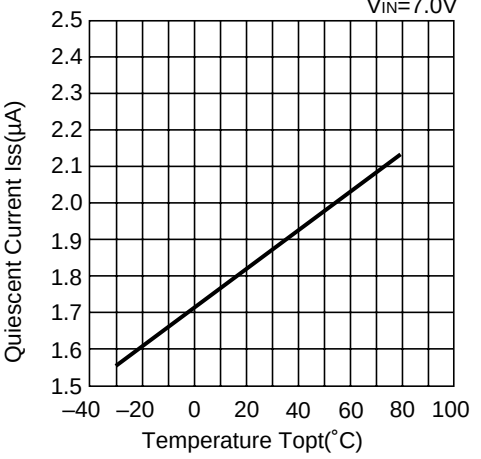


7) Dropout Voltage vs. Set Output Voltage

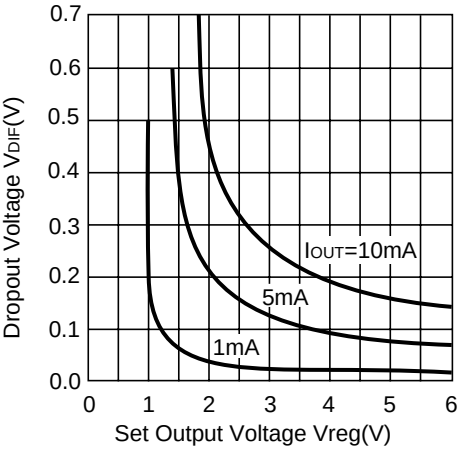


8) Line Transient Response (1)

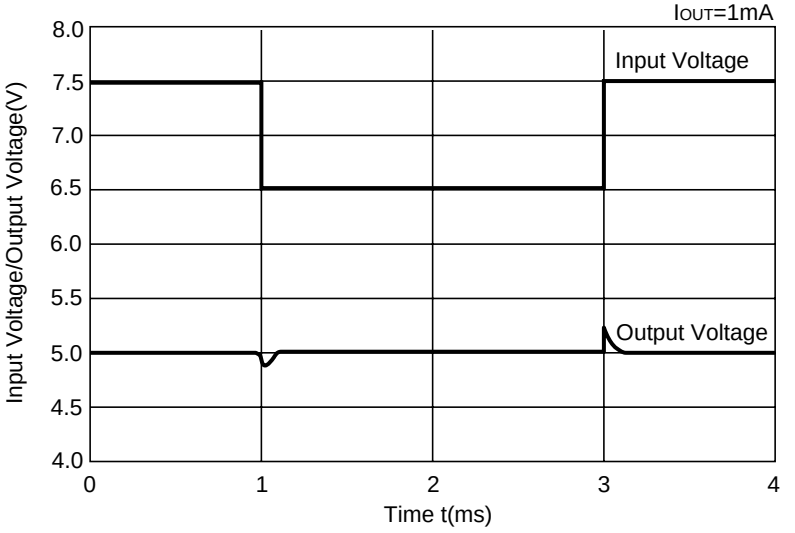

9) Line Transient Response (2)

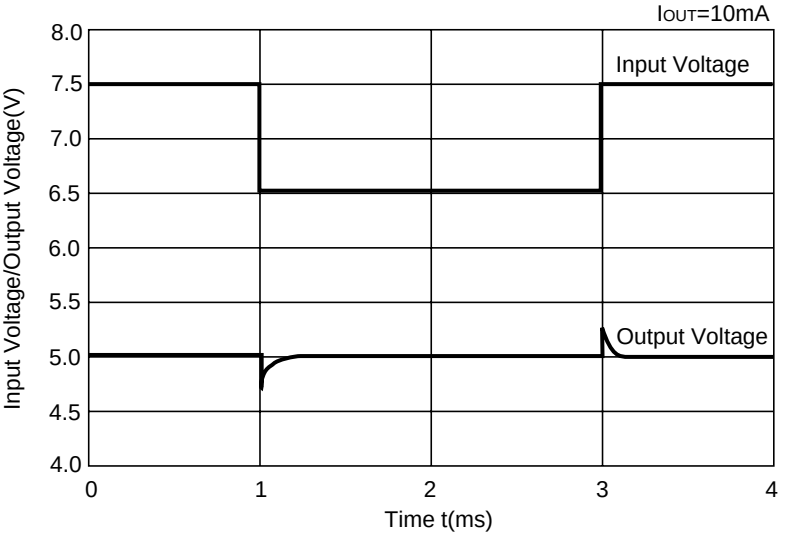

TYPICAL APPLICATION

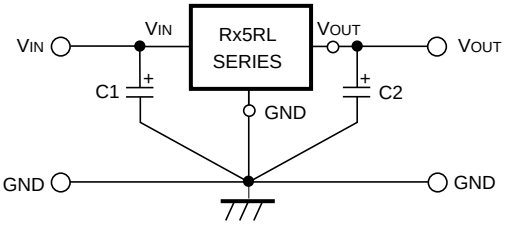


In Rx5RL Series, a constant voltage can be obtained without using Capacitors C1 and C2. However, when the wire connected to Vin is long, use Capacitor C1. Output noise can be reduced by using Capacitor C2.

Insert Capacitors C1 and C2 with the capacitance of 0.1µF to 2.0µF between Input/Output Pins and GND Pin with minimum wiring.

APPLICATION CIRCUITS

• VOLTAGE BOOST CIRCUIT

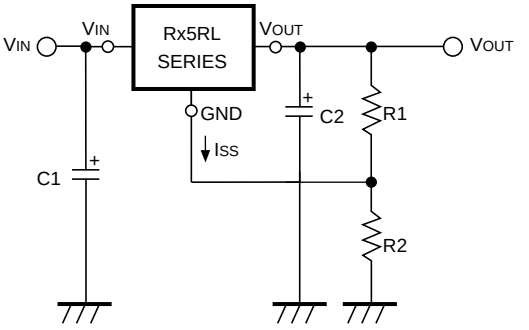

The output voltage can be obtained by the following formula :


$$V_{OUT} = Vreg^{*1} \cdot (1 + R2/R1) + I_{SS} R \cdot 2$$

Since the quiescent current of Rx5RE Series is so small that the resistances of R1 and R2 can be set as large as several hundreds kΩ and therefore the supply current of "Voltage Boost Circuit" itself can be reduced.

Furthermore, since Rx5RL Series are operated by a constant voltage, the supply current of "Voltage Boost Circuit" is not substantially affected by the input voltage.

∗1) Vreg : Set Output Voltage of Rx5RL Series.


• DUAL POWER SUPPLY CIRCUIT

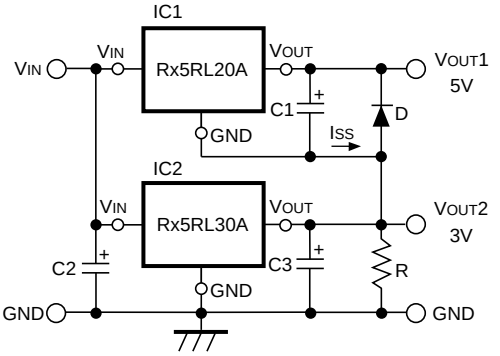

As shown in the circuit diagram, a dual power supply circuit can be constructed by using two Rx5RL Series.


This circuit diagram shows a dual power supply circuit with an output of 3V and an output of 5V. When the minimum output current of IC2 is larger than I_{SS} of IC1, Resistor R is unnecessary. Diode D is a protection diode for the case where $V_{OUT}2$ becomes larger than $V_{OUT}1$.

• CURRENT BOOST CIRCUIT

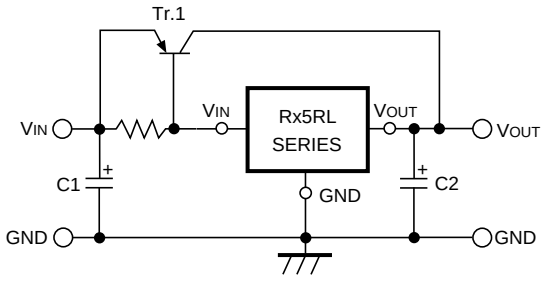

Output current of 60mA or more can be obtained by the current boost circuit constructed as shown in this circuit diagram.

• CURRENT BOOST CIRCUIT WITH OVERCURRENT LIMIT CIRCUIT

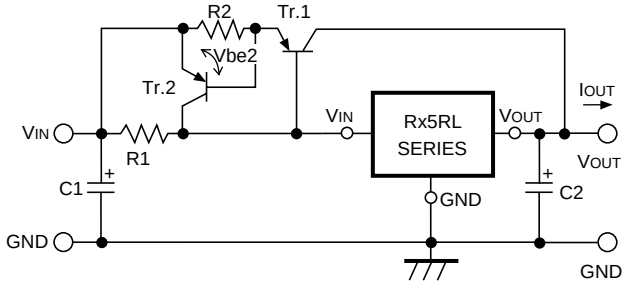


A circuit for protecting Tr.1 from the destruction caused by output short-circuit or overcurrent is shown in this circuit diagram.

When the voltage reduction caused by the current (≒ IOUT) which flows through R2 reaches Vbe2 of Tr.2 by additionally providing the current boost circuit with Tr.2 and R2, Tr.2 is turned on and the base current of Tr.1 is increased, so that the output current is limited.

Current limit of overcurrent limit circuit is obtained as follows :

$$I_{OUT} \fallingdotseq Vbe2/R2$$

• CURRENT SOURCE

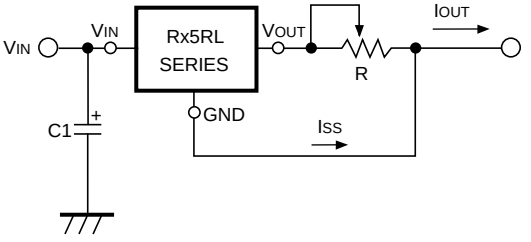

A current source with the structure as shown in this circuit diagram can be used. Output Current IOUT is obtained as follows :

$$I_{OUT} = Vreg^{*1}/R + I_{SS}$$

Output current, IOUT should not exceed its allowable current.

∗1) Vreg : Set output voltage of Rx5RL Series.

1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to our sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of our company.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under our company's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. The X-ray exposure can influence functions and characteristics of the products. Confirm the product functions and characteristics in the evaluation stage.
9. WLCSP products should be used in light shielded environments. The light exposure can influence functions and characteristics of the products under operation or storage.
10. There can be variation in the marking when different AOI (Automated Optical Inspection) equipment is used. In the case of recognizing the marking characteristic with AOI, please contact our sales or our distributor before attempting to use AOI.
11. Please contact our sales representatives should you have any questions or comments concerning the products or the technical information.

NISSHINBO

Nisshinbo Micro Devices Inc.

Official website
https://www.nisshinbo-microdevices.co.jp/en/
Purchase information
https://www.nisshinbo-microdevices.co.jp/en/buy/

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.