TPS7A20C 300mA, Low-Noise, Fast-Settling LDO

1 Features

- Fast settling when used with low output capacitance and inductance
- Low output voltage noise: 7μV_{RMS}
  - No noise-bypass capacitor required
- High PSRR: 58dB at 100kHz, 20mA
- Very low I_Q: 11μA
- Input voltage range: 1.6V to 6.0V
- Output voltage range: 0.8V to 5.5V
- Output voltage tolerance: ±1.5% (max)
- Very low dropout:
  - 140mV (max) at 300mA (V_{OUT} = 3.3V)
- Low inrush current
- Smart enable pulldown
- Stable with 0.75μF minimum output capacitance
- Package:
  - 0.616mm × 0.616mm DSBGA

2 Applications

- Image sensors
- Smartphones and tablets
- IP network cameras
- Portable medical equipment
- Smart meters and field transmitters
- Motor drives
- Wearables

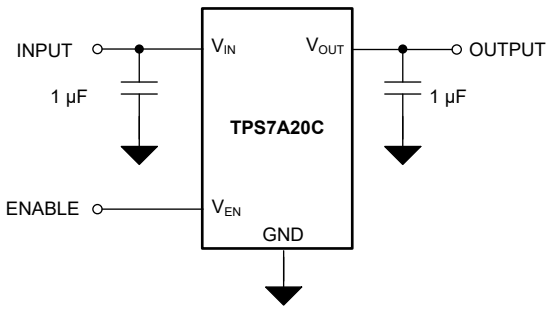

Simplified Application Schematic

3 Description

The TPS7A20C is an ultra-small, low-dropout (LDO) linear regulator that sources 300mA of output current. This LDO is designed to power sensitive loads such as image sensors. When used with low output capacitance and inductance, the device provides low noise, high PSRR, and excellent load and line transient performance. Using innovative design techniques, the TPS7A20C offers ultra-low noise performance without the addition of a noise-bypass capacitor. The TPS7A20C also provides the advantage of low quiescent current, which is useful in battery-powered applications. The 1.6V to 6.0V input voltage range and 0.8V to 5.5V output range are appropriate for a wide variety of applications. The device uses a precision reference circuit to provide a maximum accuracy of 1.5% over load, line, and temperature variations.

The TPS7A20C features an internal soft-start circuit to lower the inrush current, thus minimizing the input voltage drop during start-up. The device is stable with small ceramic capacitors, allowing for a small overall solution size.

The TPS7A20C has a smart enable input circuit with an internally controlled pulldown resistor. This resistor keeps the LDO disabled and helps eliminate the external components used to pulldown the EN pin. The LDO remains disabled even when the EN pin is left floating.

Package Information

PART NUMBER	PACKAGE(1)	PACKAGE SIZE(2)
TPS7A20C	YCK (DSBGA, 4)	0.616mm × 0.616mm

(1) For more information, see the *Mechanical, Packaging, and Orderable Information*.
(2) The package size (length × width) is a nominal value and includes pins, where applicable.

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

Table of Contents

1 Features....1
2 Applications....1
3 Description....1
4 Pin Configuration and Functions....3
5 Specifications....4
5.1 Absolute Maximum Ratings....4
5.2 ESD Ratings....4
5.3 Recommended Operating Conditions....4
5.4 Thermal Information....5
5.5 Electrical Characteristics....5
5.6 Switching Characteristics....6
5.7 Typical Characteristics....7
6 Detailed Description....14
6.1 Overview....14
6.2 Functional Block Diagram....14
6.3 Feature Description....15
6.4 Device Functional Modes....17
7 Application and Implementation....18
7.1 Application Information....18
7.2 Typical Application....22
7.3 Power Supply Recommendations....23
7.4 Layout....23
8 Device and Documentation Support....24
8.1 Device Support....24
8.2 Receiving Notification of Documentation Updates....24
8.3 Support Resources....24
8.4 Trademarks....24
8.5 Electrostatic Discharge Caution....24
8.6 Glossary....24
9 Revision History....24
10 Mechanical, Packaging, and Orderable Information....24
10.1 Mechanical Data....25

Copyright © 2025 Texas Instruments Incorporated

4 Pin Configuration and Functions



Figure 4-1. YCK Package, 4-Pin DSBGA (Top View)



Figure 4-2. YCK Package, 4-Pin DSBGA (Bottom View)

Pin Functions: DSBGA

PIN		I/O	DESCRIPTION
NO.	NAME		
A1	IN	I	Input voltage supply. For best transient response and to minimize input impedance, use the nominal value or larger capacitor from IN to ground. See the *Recommended Operating Conditions* table. Place the input capacitor as close to the IN and GND pins of the device as possible.
A2	OUT	O	Regulated output voltage. A low equivalent series resistance (ESR) capacitor is required from OUT to ground for stability. For best transient response, see the *Input and Output Capacitor Requirements* section. Place the output capacitor as close to the OUT and GND pins of the device as possible.
B1	EN	I	Enable input. A low voltage (< $V_{EN(LOW)}$) on this input turns the regulator off and discharges the output pin to GND. A high voltage (> $V_{EN(HI)}$) on this pin enables the regulator output. This pin has an internal 500kΩ pulldown resistor to hold the regulator off by default. When V_{EN} > $V_{EN(HI)}$, the 500kΩ pulldown is disconnected to reduce input current.
B2	GND	—	Common ground.

Copyright © 2025 Texas Instruments Incorporated

5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1) (3)

		MIN	MAX	UNIT
Voltage	V_{IN}	–0.3	6.5	V
	V_{OUT}	–0.3	6.5 or V_{IN} + 0.3 (2)	
	V_{EN}	–0.3	6.5	
Current	Maximum output(4)	Internally limited		A
Temperature	Operating junction, T_J	–40	150	°C
	Storage, T_{stg}	–65	150	

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
(2) The maximum value of V_{OUT} is the lesser of 6.5V or (V_{IN} + 0.3V).
(3) All voltages are with respect to the GND pin.
(4) Internal thermal shutdown circuitry protects the device from permanent damage.

5.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001(1)	±2000	V
		Charged-device model (CDM), per JEDEC specification JESD22-C101(2)	±750	

(1) JEDEC document JEP155 states that 500V HBM allows safemanufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250V CDM allows safemanufacturing with a standard ESD control process.

5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)(1)

		MIN	NOM	MAX	UNIT
V_{IN}	Input supply voltage	1.6		6.0	V
V_{EN}	Enable input voltage	0		6.0	V
V_{OUT}	Nominal output voltage range	0.8		5.5	V
I_{OUT}	Output current	0		300	mA
C_{IN}	Input capacitor(2)		1		µF
C_{OUT}	Output capacitance(3)	0.75		10	µF
ESR	Output capacitor effective series resistance plus OUT-to-capacitor trace effective series resistance	5		50	mΩ
T_J	Operating junction temperature	–40		125	°C

(1) All voltages are with respect to GND.
(2) An input capacitor is not required for LDO stability. However, an input capacitor with an effective value of 0.47µF minimum is recommended to counteract the effect of source resistance and inductance, which may in some cases cause symptoms of system-level instability such as ringing or oscillation, especially in the presence of load transients. Using an input capacitor at least equal to the output capacitor is generally good practice.
(3) To help achieve fast settling and avoid instability, the output capacitance (including tolerance, bias voltage, temperature variations, etc.) should fall within the specified range.

Copyright © 2025 Texas Instruments Incorporated

5.4 Thermal Information

THERMAL METRIC[1]		TPS7A20C YCK (DSBGA) 4 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	201.4	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	2.8	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	69.3	°C/W
ψ_{JT}	Junction-to-top characterization parameter	1.4	°C/W
ψ_{JB}	Junction-to-board characterization parameter	69.2	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application note.

5.5 Electrical Characteristics

at operating temperature range (T_J = –40°C to +125°C), V_{IN} = $V_{OUT(NOM)}$ + 0.3V or 1.6V, whichever is greater, V_{EN} = 1.0 V, I_{OUT} = 1mA, C_{IN} = 1µF, C_{OUT} = 0.75µF derated (unless otherwise noted); all typical values are at T_J = 25°C

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
ΔV_{OUT}	Output voltage tolerance	V_{IN} = ($V_{OUT(NOM)}$ + 0.3V) to 6.0V, I_{OUT} = 1mA to 300mA, V_{OUT} ≥ 1.85V		–1.5		1.5	%
		V_{IN} = ($V_{OUT(NOM)}$ + 0.3V) to 6.0V, I_{OUT} = 1mA to 300mA, V_{OUT} < 1.85V		-30		30	mV
ΔV_{OUT}	Line regulation	V_{IN} = ($V_{OUT(NOM)}$ + 0.3V) to 6.0V, I_{OUT} = 1mA			0.03		%/V
ΔV_{OUT}	Load regulation	I_{OUT} = 1mA to 300mA			11		mV
I_{GND}	Quiescent ground current	V_{EN} = V_{IN} = 6V, I_{OUT} = 0mA	T_J = –40°C to 125°C			18.5	µA
		V_{EN} = V_{IN} = 6V, I_{OUT} = 300mA			2000		
I_{SHDN}	Shutdown ground current	V_{EN} = 0V (disabled), V_{IN} = 6.0V, T_J = –40°C to 125°C				5	µA
$I_{GND(DO)}$	I_{GND} in dropout	V_{IN} ≤ $V_{OUT(NOM)}$, I_{OUT} = 0mA, V_{EN} = V_{IN}			11	18	µA
V_{DO}	Dropout voltage	I_{OUT} = 300mA, V_{OUT} = 95% x $V_{OUT(NOM)}$	0.8V ≤ V_{OUT} < 1.0V[1]			690	mV
			1.0V ≤ V_{OUT} < 1.2V[1]			490	
			1.2V ≤ V_{OUT} < 1.5V[1]			355	
			1.5V ≤ V_{OUT} < 2.5V			200	
			2.5V ≤ V_{OUT} < 3.3V			140	
			3.3V ≤ V_{OUT} ≤ 5.5V			130	
I_{CL}	Output current limit	V_{OUT} = 0.9 x $V_{OUT(NOM)}$, V_{IN} = $V_{OUT(NOM)}$ + 0.5 V	V_{OUT} < 1.5V	360	520	800	mA
		V_{OUT} = 0.9 x $V_{OUT(NOM)}$, V_{IN} = $V_{OUT(NOM)}$ + 0.3 V	V_{OUT} ≥ 1.5V	360	520	770	
I_{SC}	Short-circuit current limit	V_{OUT} = 0V			185		mA
PSRR	Power-supply rejection ratio	I_{OUT} = 20mA, V_{IN} = V_{OUT} + 1.0V	f = 100Hz		95		dB
			f = 1kHz		95		
			f = 10kHz		75		
			f = 100kHz		58		
			f = 1MHz		36		
		I_{OUT} = 300mA, V_{IN} = V_{OUT} + 1.0V	f = 100Hz		65		
			f = 1kHz		70		
			f = 10kHz		75		
			f = 100kHz		61		
			f = 1MHz		40		

Copyright © 2025 Texas Instruments Incorporated

5.5 Electrical Characteristics (continued)

at operating temperature range (T_J = –40°C to +125°C), V_{IN} = $V_{OUT(NOM)}$ + 0.3V or 1.6V, whichever is greater, V_{EN} = 1.0 V, I_{OUT} = 1mA, C_{IN} = 1µF, C_{OUT} = 0.75µF derated (unless otherwise noted); all typical values are at T_J = 25°C

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V_N	Output noise voltage	BW = 10Hz to 100kHz, V_{OUT} = 2.8V	I_{OUT} = 300mA		7		μV_{RMS}
			I_{OUT} = 1mA		10		
$R_{PULLDOWN}$	Output automatic discharge pulldown resistance	V_{EN} < $V_{EN(LOW)}$ (output disabled), V_{IN} = 3.1V, $V_{OUT(nom)}$=2.85V			285		Ω
T_{SD}	Thermal shutdown	T_J rising			165		°C
		T_J falling			140		
$V_{EN(LOW)}$	Low input threshold	V_{IN} = 1.6V to 6.0V, V_{EN} falling until the output is disabled				0.3	V
$V_{EN(HI)}$	High input threshold	V_{IN} = 1.6V to 6.0V V_{EN} rising until the output is enabled		0.9			V
V_{UVLO}	UVLO threshold	V_{IN} rising		1.11	1.35	1.59	V
		V_{IN} falling		1.05	1.3	1.55	
$V_{UVLO(HYST)}$	UVLO hysteresis				42		mV
I_{EN}	EN input leakage current	V_{EN} = 6.0V and V_{IN} = 6.0V			90	250	nA
$R_{EN(PULL-DOWN)}$	Smart enable pulldown resistor	V_{EN} = 0.25V			500		KΩ

(1) Design simulation data only.

5.6 Switching Characteristics

at operating temperature range (T_J = –40°C to +125°C), V_{IN} = $V_{OUT(NOM)}$ + 0.3 V or 1.6V, whichever is greater, V_{EN} = 1.0 V, I_{OUT} = 1 mA, C_{IN} = 1 µF, C_{OUT} = 1 µF, C_{OUT} ESL = 300pH, C_{OUT} ESR = 8mΩ, board ESL = 1.5nH, board ESR = 5 mΩ (unless otherwise noted); all typical values are at T_J = 25°C

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{STR}	Start-up time	From V_{EN} > $V_{EN(HI)}$ to V_{OUT} = 95% of $V_{OUT(NOM)}$,		750	1150	µs

Copyright © 2025 Texas Instruments Incorporated

5.7 Typical Characteristics

V_{IN} = $V_{OUT(NOM)}$ + 0.3V or 1.6V (whichever is greater), V_{OUT} = 2.85V, I_{OUT} = 1mA, C_{IN} = 1µF, C_{OUT} (derated) = 0.75µF, and T_A = 25°C (unless otherwise noted)

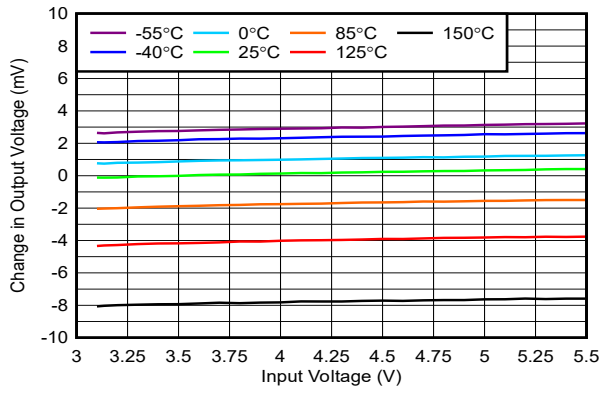

V_{EN} = 1V

Figure 5-1. Line Regulation

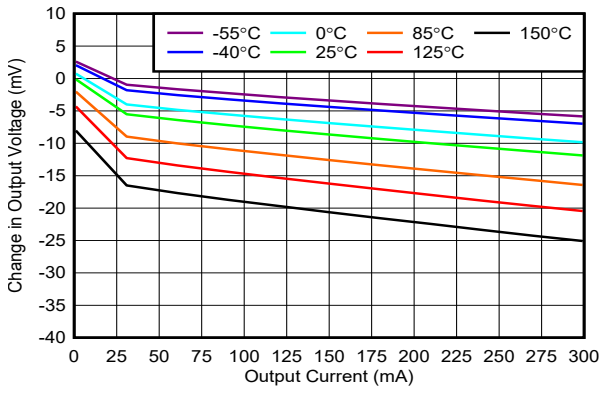

V_{EN} = 1V

Figure 5-2. Load Regulation

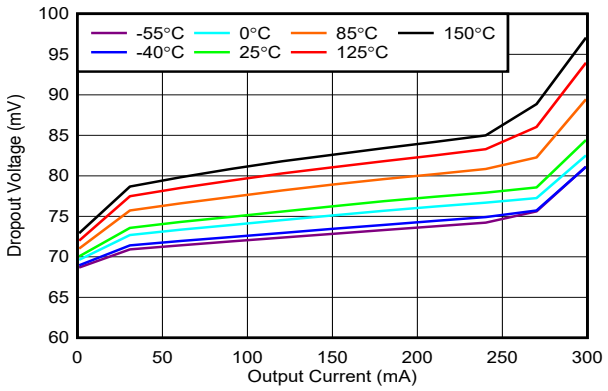

V_{EN} = 1V

Figure 5-3. Dropout Voltage vs I_{OUT}

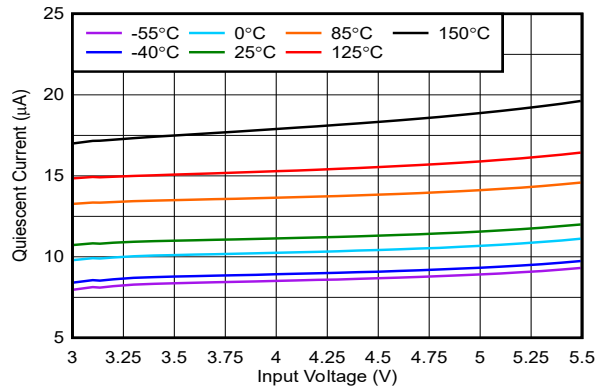

V_{EN} = 1V, I_{OUT} = 0mA

Figure 5-4. I_{GND} vs V_{IN}

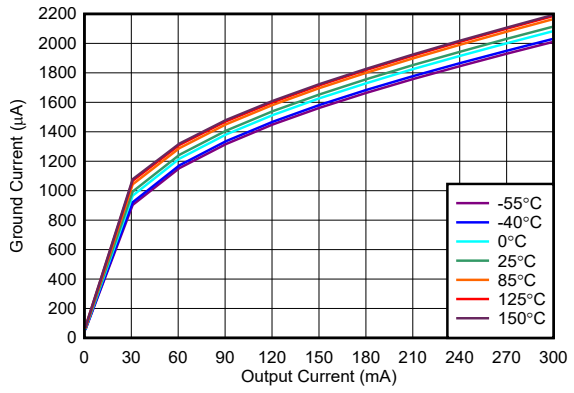

V_{EN} = 1V (0mA to 300mA)

Figure 5-5. I_{GND} vs I_{OUT}

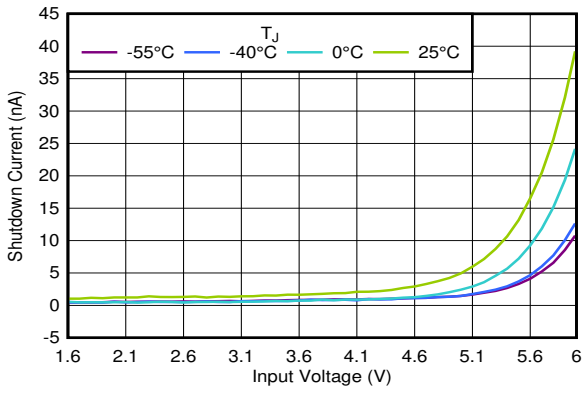

V_{EN} = 0V

Figure 5-6. Shutdown Current vs V_{IN}

Copyright © 2025 Texas Instruments Incorporated

5.7 Typical Characteristics (continued)

V_{IN} = $V_{OUT(NOM)}$ + 0.3V or 1.6V (whichever is greater), V_{OUT} = 2.85V, I_{OUT} = 1mA, C_{IN} = 1µF, C_{OUT} (derated) = 0.75µF, and T_A = 25°C (unless otherwise noted)

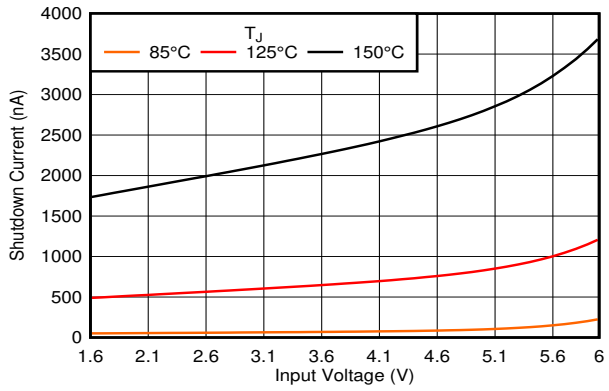

V_{EN} = 0V

Figure 5-7. Shutdown Current vs V_{IN}

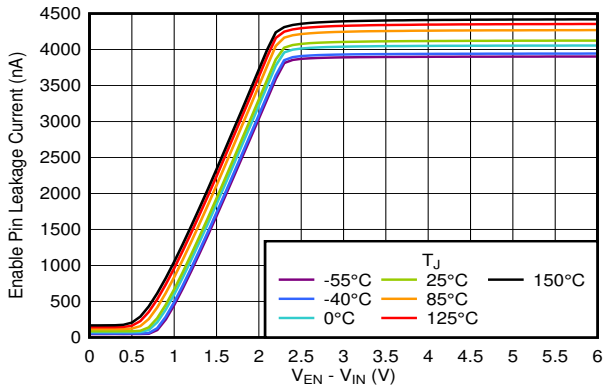

V_{EN} = 6V, I_{OUT} = 0mA

Figure 5-8. Enable Pin Leakage Current vs V_{EN} – V_{IN}

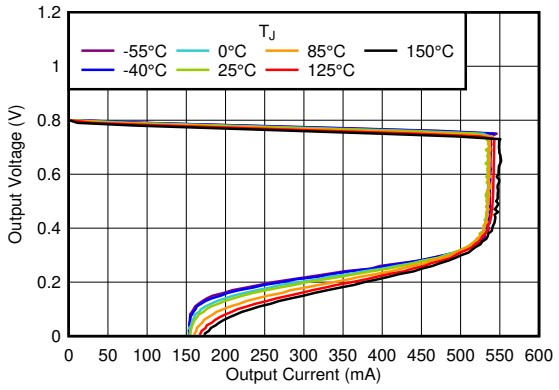

V_{EN} = 1V

Figure 5-9. Current Limit

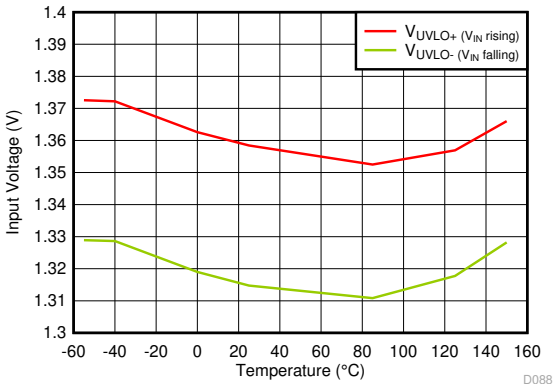

V_{EN} = 1V

Figure 5-10. UVLO Threshold vs Temperature

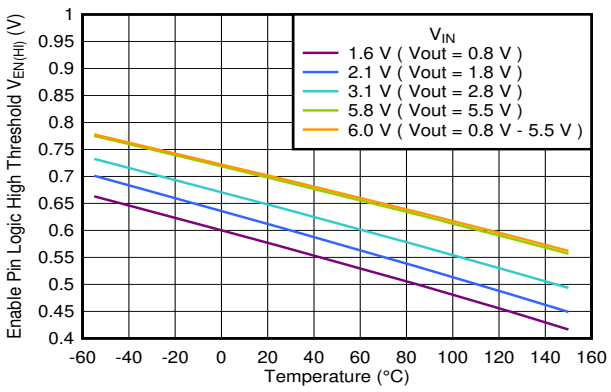

Figure 5-11. Enable Logic High Threshold vs Temperature

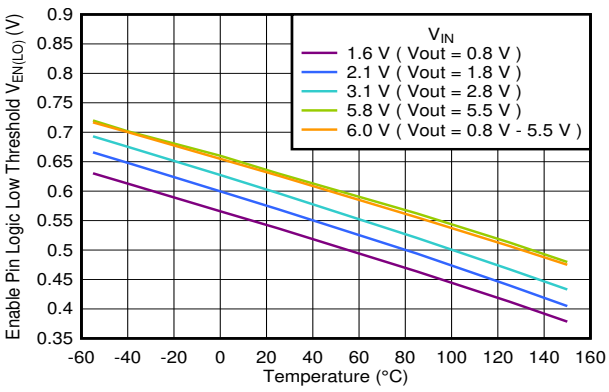

Figure 5-12. Enable Logic Low Threshold Low vs Temperature

Copyright © 2025 Texas Instruments Incorporated

5.7 Typical Characteristics (continued)

V_{IN} = $V_{OUT(NOM)}$ + 0.3V or 1.6V (whichever is greater), V_{OUT} = 2.85V, I_{OUT} = 1mA, C_{IN} = 1µF, C_{OUT} (derated) = 0.75µF, and T_A = 25°C (unless otherwise noted)

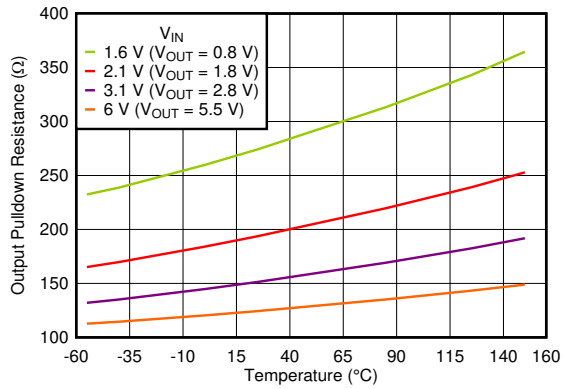

V_{EN} = 0.25V

Figure 5-13. Output Pulldown Resistor vs Temperature

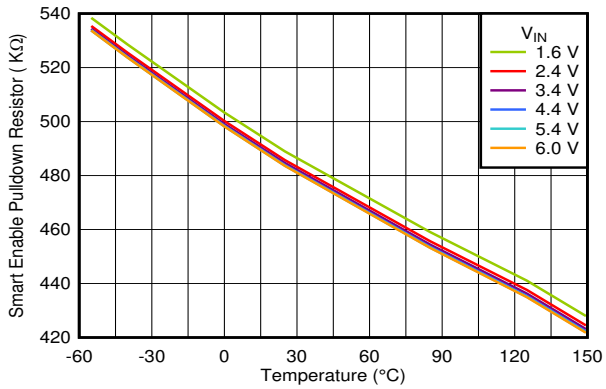

V_{EN} = 0.25V

Figure 5-14. Smart Enable Pulldown Resistor vs Temperature and V_{IN}

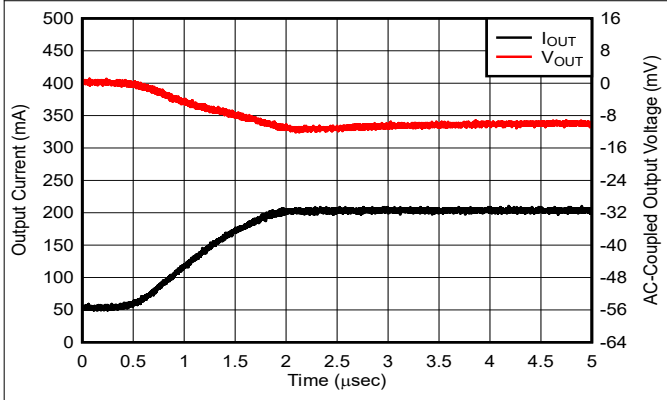

I_{OUT} = 50mA to 200mA, t_{RISING} = 1µs

Figure 5-15. Load Transient

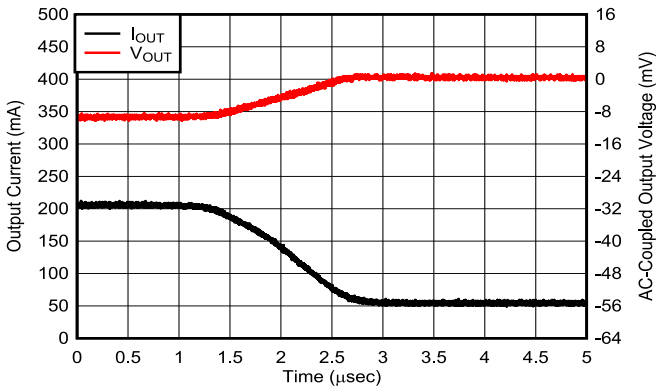

I_{OUT} = 200mA to 50mA, $t_{FALLING}$ = 1µs

Figure 5-16. Load Transient

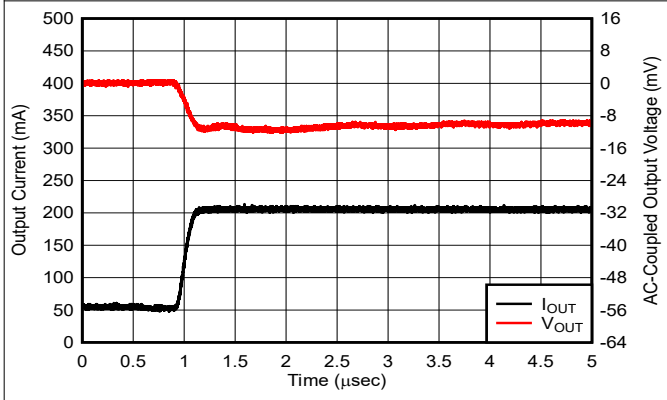

I_{OUT} = 50mA to 200mA, t_{RISING} = 150ns

Figure 5-17. Load Transient

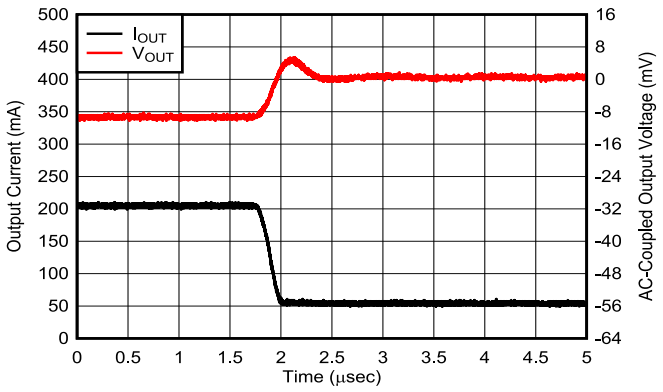

I_{OUT} = 200mA to 50mA, $t_{FALLING}$ = 150ns

Figure 5-18. Load Transient

5.7 Typical Characteristics (continued)

V_{IN} = $V_{OUT(NOM)}$ + 0.3V or 1.6V (whichever is greater), V_{OUT} = 2.85V, I_{OUT} = 1mA, C_{IN} = 1µF, C_{OUT} (derated) = 0.75µF, and T_A = 25°C (unless otherwise noted)

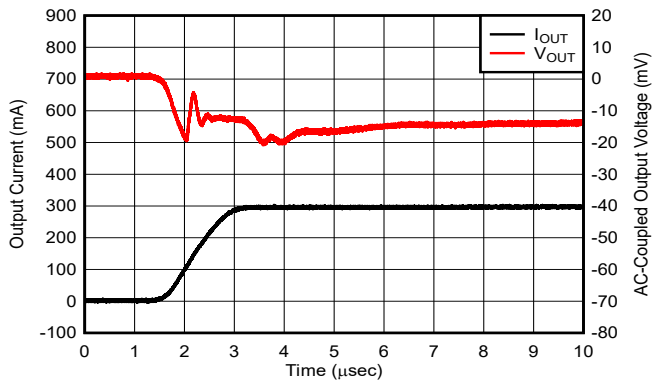

I_{OUT} = 1mA to 300mA, t_{RISING} = 1µs

Figure 5-19. Load Transient

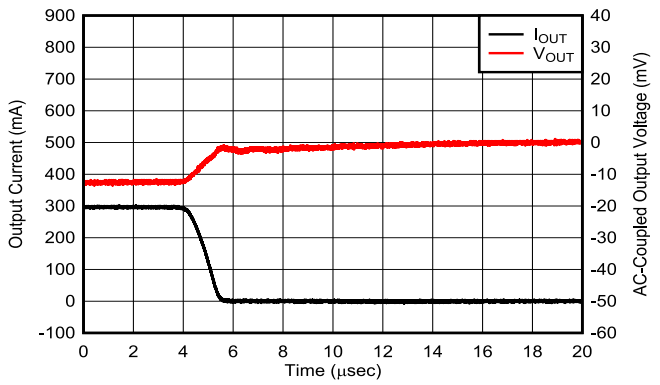

I_{OUT} = 300mA to 1mA, $t_{FALLING}$ = 1µs

Figure 5-20. Load Transient

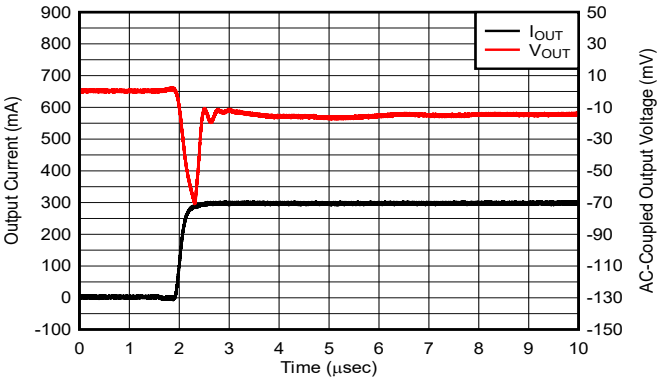

I_{OUT} = 1mA to 300mA, t_{RISING} = 200ns

Figure 5-21. Load Transient

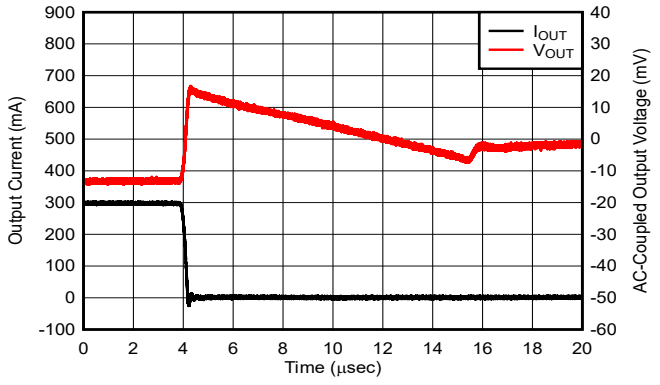

I_{OUT} = 300mA to 1mA, $t_{FALLING}$ = 200ns

Figure 5-22. Load Transient

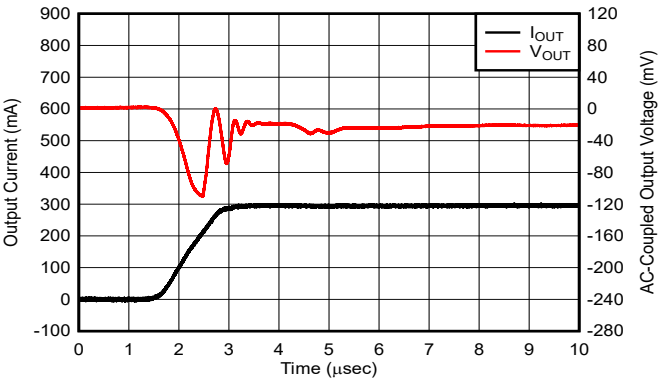

I_{OUT} = 0mA to 300mA, t_{RISING} = 1µs

Figure 5-23. Load Transient

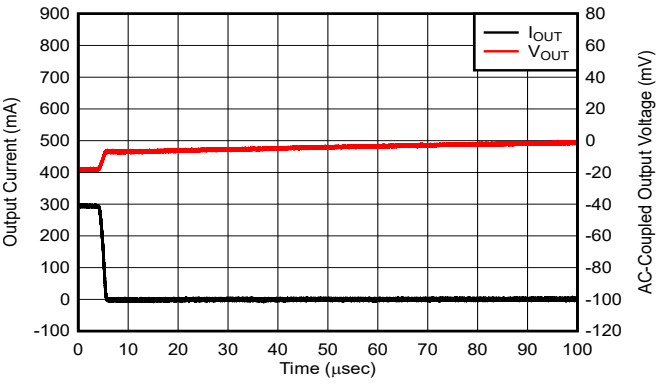

I_{OUT} = 300mA to 0mA, $t_{FALLING}$ = 1µs

Figure 5-24. Load Transient

Copyright © 2025 Texas Instruments Incorporated

5.7 Typical Characteristics (continued)

V_{IN} = $V_{OUT(NOM)}$ + 0.3V or 1.6V (whichever is greater), V_{OUT} = 2.85V, I_{OUT} = 1mA, C_{IN} = 1µF, C_{OUT} (derated) = 0.75µF, and T_A = 25°C (unless otherwise noted)

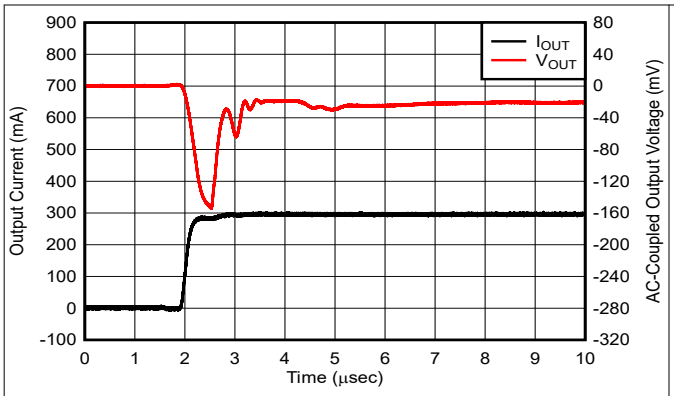

I_{OUT} = 0mA to 300mA, t_{RISING} = 200ns

Figure 5-25. Load Transient

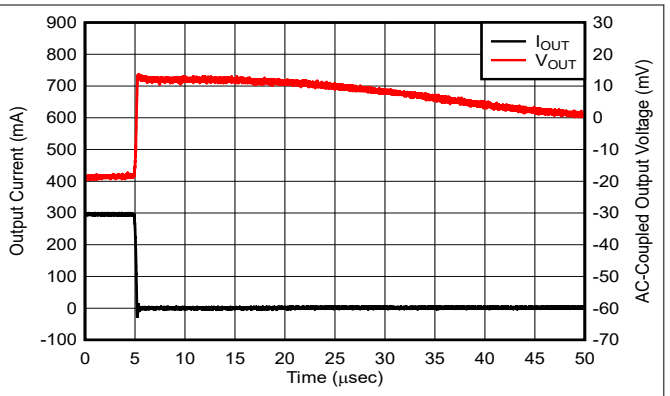

I_{OUT} = 300mA to 0mA, $t_{FALLING}$ = 200ns

Figure 5-26. Load Transient

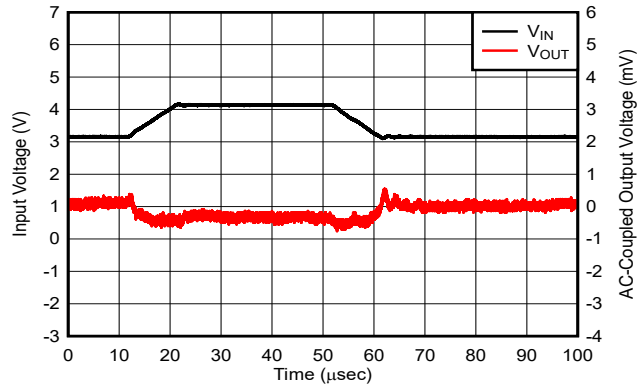

V_{IN} = 3.1V → 4.1V → 3.1V, V_{IN} t_{RISING} = 5µs, I_{OUT} = 150mA

Figure 5-27. Line Transient

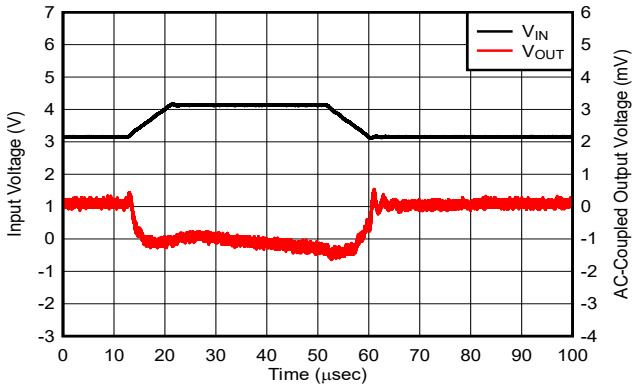

V_{IN} = 3.1V → 4.1V → 3.1V, V_{IN} t_{RISING} = 5µs, I_{OUT} = 300mA

Figure 5-28. Line Transient

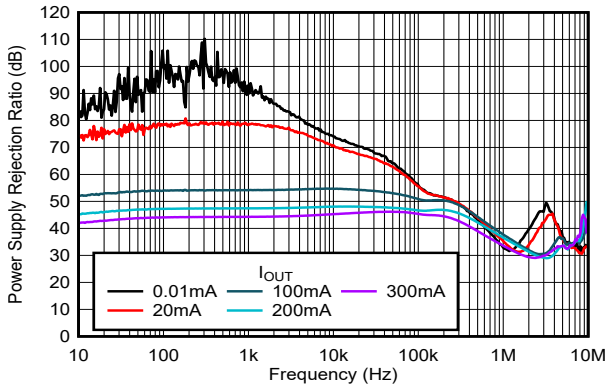

V_{IN} = 3.15V, V_{EN} = 1V, C_{IN} = 0.47µF

Figure 5-29. PSRR vs Frequency and I_{OUT}

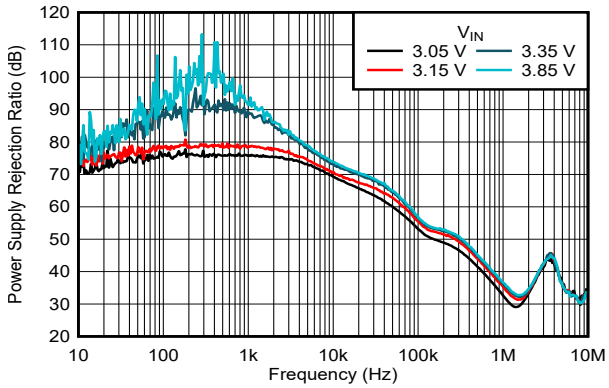

V_{EN} = 1V, I_{OUT} = 20mA, C_{IN} = 0.47µF

Figure 5-30. PSRR vs Frequency and V_{IN}

Copyright © 2025 Texas Instruments Incorporated

5.7 Typical Characteristics (continued)

V_{IN} = $V_{OUT(NOM)}$ + 0.3V or 1.6V (whichever is greater), V_{OUT} = 2.85V, I_{OUT} = 1mA, C_{IN} = 1µF, C_{OUT} (derated) = 0.75µF, and T_A = 25°C (unless otherwise noted)

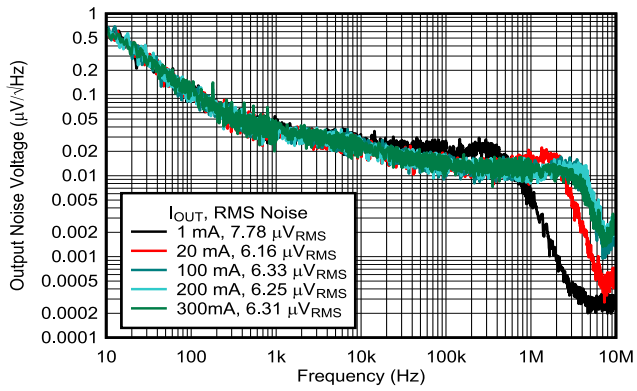

V_{RMS} BW = 10Hz to 100kHz

Figure 5-31. Noise vs Frequency and I_{OUT}

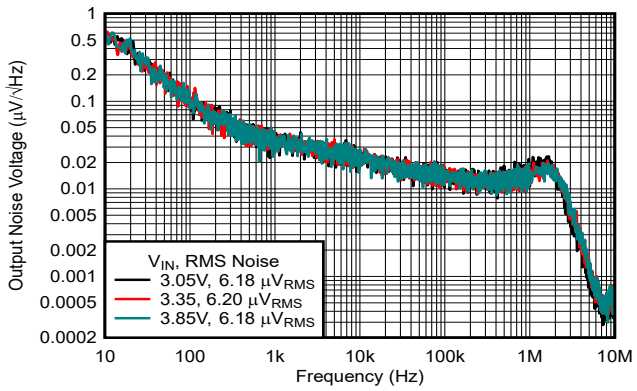

I_{OUT} = 20mA, V_{RMS} BW = 10Hz to 100kHz

Figure 5-32. Noise vs Frequency and V_{IN}

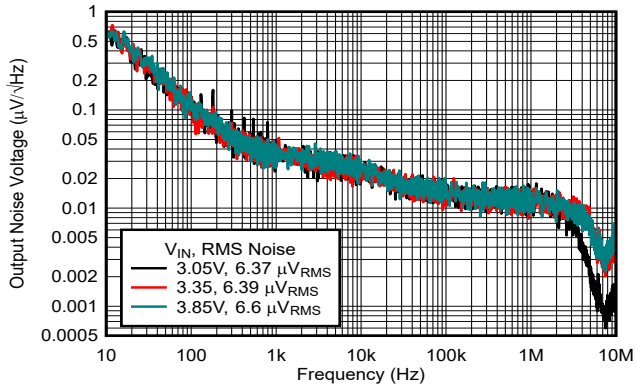

I_{OUT} = 300mA, V_{RMS} BW = 10Hz to 100kHz

Figure 5-33. Noise vs Frequency and V_{IN}

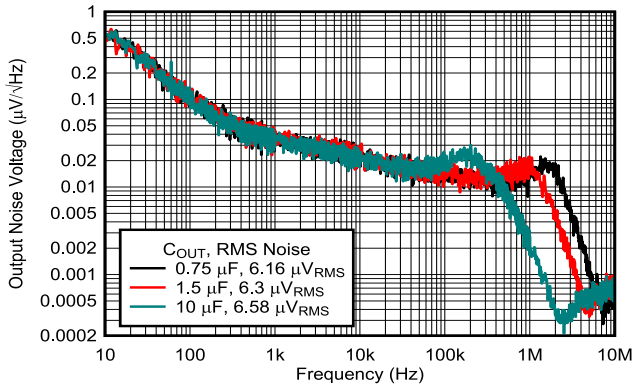

V_{IN} = 3.85V, I_{OUT} = 20mA, V_{RMS} BW = 10Hz to 100kHz

Figure 5-34. Noise vs Frequency and C_{OUT}

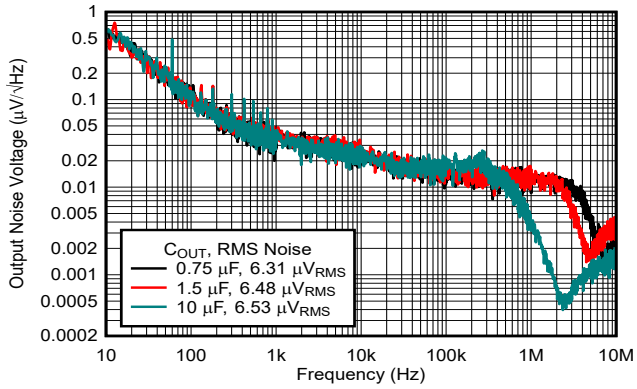

V_{IN} = 3.85V, I_{OUT} = 300mA, V_{RMS} BW = 10Hz to 100kHz

Figure 5-35. Noise vs Frequency and C_{OUT}

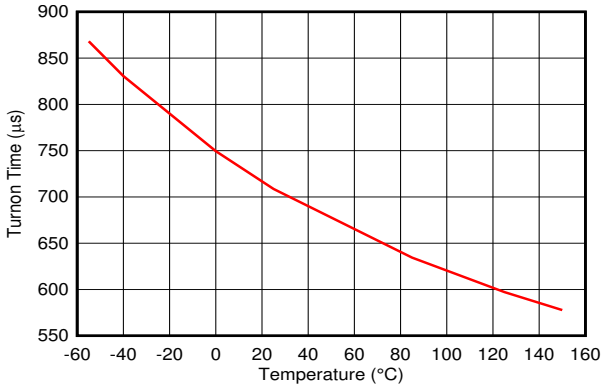

V_{EN} = $V_{EN(HI)}$ to V_{OUT} = 95% of $V_{OUT(NOM)}$, I_{OUT} = 0mA

Figure 5-36. Start-Up Turn-On Time

Copyright © 2025 Texas Instruments Incorporated

5.7 Typical Characteristics (continued)

V_{IN} = $V_{OUT(NOM)}$ + 0.3V or 1.6V (whichever is greater), V_{OUT} = 2.85V, I_{OUT} = 1mA, C_{IN} = 1µF, C_{OUT} (derated) = 0.75µF, and T_A = 25°C (unless otherwise noted)

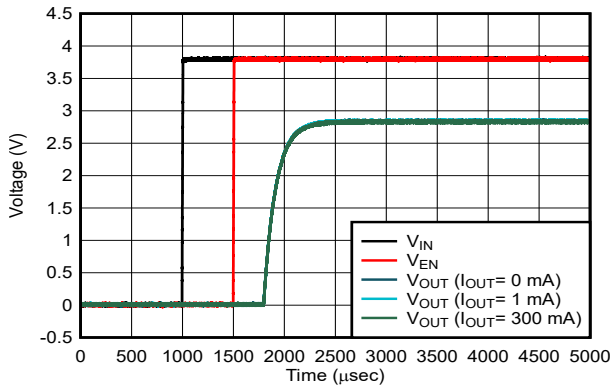

V_{IN} = 0V to 3.85V, V_{EN} = 0V to 3.85V, V_{EN} rises 500µs behind V_{IN}, V_{IN} and V_{EN} slew rate = 1V/µs

Figure 5-37. Start-Up

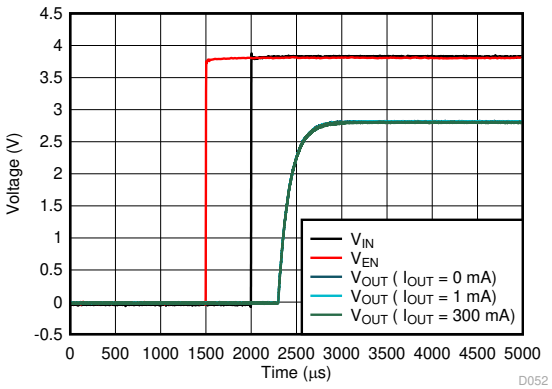

V_{IN} = 0V to 3.85V, V_{EN} = 0V to 3.85V, V_{EN} rises 500µs ahead of V_{IN}, V_{IN} and V_{EN} slew rate = 1V/µs

Figure 5-38. Start-Up

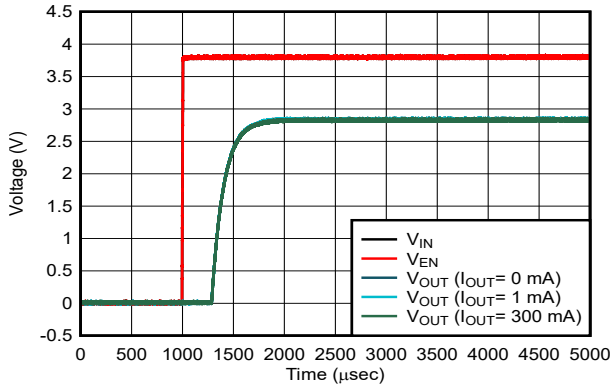

V_{IN} = V_{EN} = 0V to 3.85V, V_{IN} and slew rate = 1V/µs

Figure 5-39. Start-Up

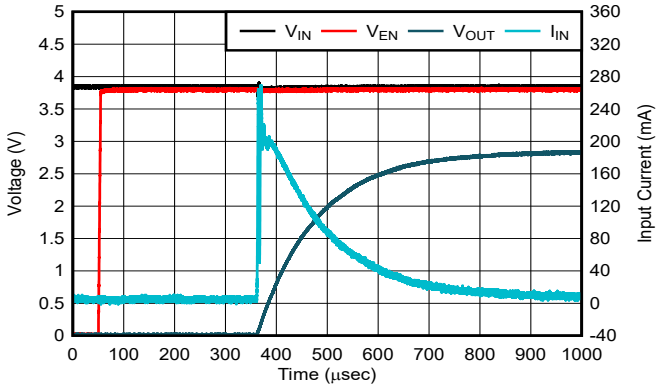

V_{IN} = 3.85V, V_{EN} = 0V to 3.85V, V_{EN} slew rate = 1V/µs, C_{OUT} = 10µF

Figure 5-40. Inrush Current

6 Detailed Description

6.1 Overview

The TPS7A20C provides low noise, high PSRR, low quiescent current, and low line and load transient response figures. This device is designed to meet the needs of sensitive RF and analog circuits. Using innovative design techniques, the TPS7A20C offers class-leading noise performance without the need for a separate noise filter capacitor.

The TPS7A20C is designed to operate with a single 1µF input capacitor. The device also provides excellent load settling performance when used with a single ceramic output capacitor in the 0.75µF to 1.5µF range.

6.2 Functional Block Diagram

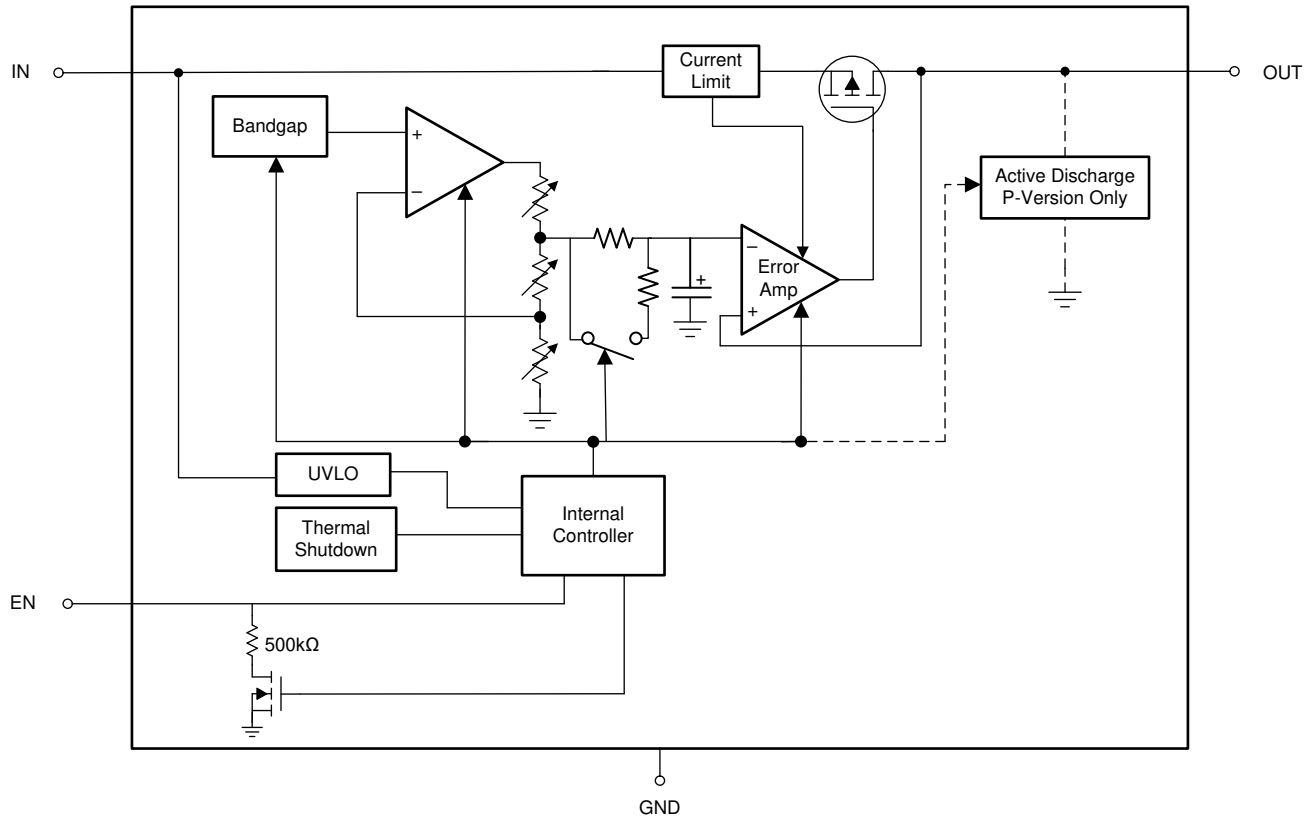

Copyright © 2025 Texas Instruments Incorporated

6.3 Feature Description

6.3.1 Fast Settling

This LDO is designed to settle quickly in response to load transients up to 200mA. Use output capacitance in the 0.5µF to 1.5µF range and ESL less than 2.5nH for fast load transient settling.

6.3.2 Low Output Noise

Any internal noise at the TPS7A20C reference voltage is reduced by a first-order, low-pass RC filter before being passed to the output buffer stage. The low-pass RC filter has a –3dB cut-off frequency of approximately 0.1Hz.

During start-up, the filter resistor is bypassed to reduce output rise time. The filter begins normal operation after the output voltage reaches the correct value.

6.3.3 Dropout Voltage

Dropout voltage (V_{DO}) is defined as $V_{IN} – V_{OUT}$ at the rated output current (I_{RATED}), where the pass transistor is fully on. V_{IN} is the input voltage, V_{OUT} is the output voltage, and I_{RATED} is the maximum I_{OUT} listed in the *Recommended Operating Conditions* table. At this operating point, the pass transistor is driven fully on. Dropout voltage indirectly specifies a minimum input voltage greater than the nominal programmed output voltage where the output voltage is expected to stay in regulation. If the input voltage falls to less than the nominal output regulation, then the output voltage falls as well.

For a CMOS regulator, the dropout voltage is determined by the drain-source, on-state resistance ($R_{DS(ON)}$) of the pass transistor. Therefore, if the linear regulator operates at less than the rated current, the dropout voltage for that current scales accordingly. The following equation calculates the $R_{DS(ON)}$ of the device.

$$R_{DS(ON)} = \frac{V_{DO}}{I_{RATED}} \quad (1)$$

6.3.4 Smart Enable

The enable (EN) input polarity is active high. The output voltage is enabled when the enable input voltage is greater than $V_{EN(HI)}$ and disabled when the enable input voltage is less than $V_{EN(LOW)}$. If independent control of the output voltage is not needed, connect EN to IN.

This device has a smart enable circuit to reduce quiescent current. When the enable pin voltage is driven above $V_{EN(HI)}$, the device is enabled and the smart enable internal pulldown resistor ($R_{EN(PULLDOWN)}$) is disconnected. See the *Electrical Characteristics* table. When the enable pin is floating, $R_{EN(PULLDOWN)}$ is connected and pulls the enable pin low to disable the device. The $R_{EN(PULLDOWN)}$ value is listed in the *Electrical Characteristics* table.

6.3.5 Current Limit

The device has an internal current limit circuit that protects the regulator during transient high-load current faults or shorting events. The current limit is a hybrid brick-wall-foldback scheme. The current limit transitions from a brick-wall scheme to a foldback scheme at the foldback voltage ($V_{FOLDBACK}$). In a high-load current fault with the output voltage above $V_{FOLDBACK}$, the brick-wall scheme limits the output current to the current limit (I_{CL}). When the voltage drops below $V_{FOLDBACK}$, a foldback current limit activates that scales back the current as the output voltage approaches GND. When the output is shorted, the device supplies a typical current called the short-circuit current limit (I_{SC}). I_{CL} and I_{SC} are listed in the *Electrical Characteristics* table.

The output voltage is not regulated when the device is in current limit. When a current limit event occurs, the device begins to heat up because of the increase in power dissipation. When the device is in brick-wall current limit, the pass transistor dissipates power [$(V_{IN} – V_{OUT}) \times I_{CL}$]. When the device output is shorted and the output is below $V_{FOLDBACK}$, the pass transistor dissipates power [$(V_{IN} – V_{OUT}) \times I_{SC}$]. If thermal shutdown is triggered, the device turns off. After the device cools down, the internal thermal shutdown circuit turns the device back on. If the output current fault condition continues, the device cycles between current limit and thermal shutdown. For more information on current limits, see the *Know Your Limits* application note.

Copyright © 2025 Texas Instruments Incorporated

Figure 6-1 shows a diagram of the foldback current limit.

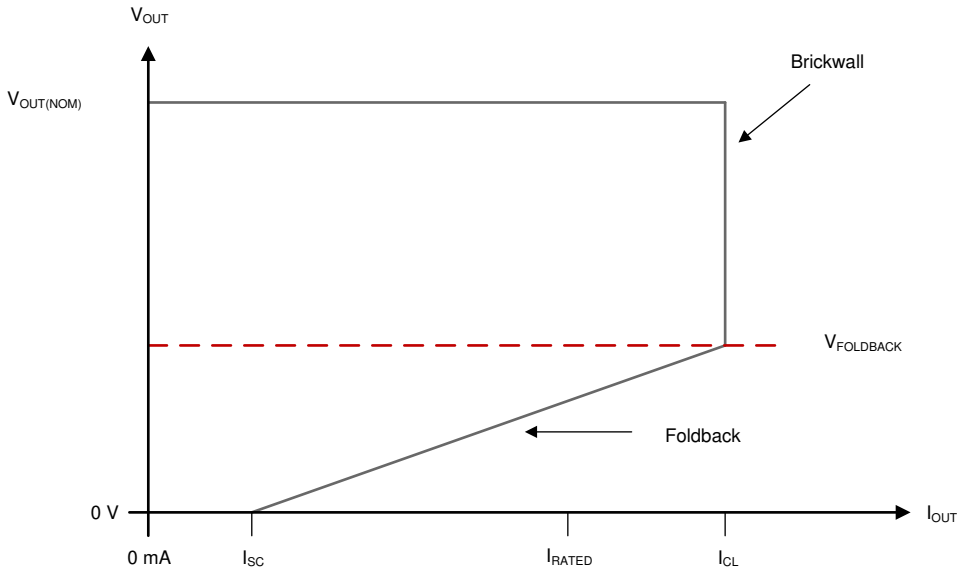

Figure 6-1. Foldback Current Limit

6.3.6 Undervoltage Lockout (UVLO)

The device has an independent undervoltage lockout (UVLO) circuit that monitors the input voltage. This circuit allows for a controlled and consistent turn on and off of the output voltage. To prevent the device from turning off if the input drops during turn on, the UVLO has hysteresis, as specified in the *Electrical Characteristics* table.

6.3.7 Thermal Shutdown

A thermal shutdown protection circuit disables the LDO when the junction temperature (T_J) of the pass transistor rises to $T_{SD(shutdown)}$ (typical). Thermal shutdown hysteresis makes sure that the device resets (turns on) when the temperature falls to $T_{SD(reset)}$ (typical).

The thermal time-constant of the semiconductor die is fairly short. Thus, the device cycles on and off when thermal shutdown is reached until power dissipation is reduced. Power dissipation during start-up is high from large $V_{IN} – V_{OUT}$ voltage drops across the device or from high inrush currents charging large output capacitors. Under some conditions, the thermal shutdown protection disables the device before start-up completes.

For reliable operation, limit the junction temperature to the maximum listed in the *Recommended Operating Conditions* table. Operation above this maximum temperature causes the device to exceed operational specifications. Although the internal device protection circuitry is designed to protect against thermal overload conditions, this circuitry is not intended to replace proper heat sinking. Continuously running the device into thermal shutdown or above the maximum recommended junction temperature reduces long-term reliability.

Copyright © 2025 Texas Instruments Incorporated

6.3.8 Active Discharge

An internal pulldown MOSFET connects a resistor from OUT to ground when the device is disabled to actively discharge the output capacitance. The active discharge circuit is activated by driving EN low or by the voltage on IN falling below the undervoltage lockout (UVLO) threshold.

Do not rely on the active discharge circuit for discharging a large amount of output capacitance after the input supply has collapsed. Reverse current potentially flows from the output to the input. This reverse current flow causes damage to the device. Limit reverse current to no more than 5% of the device rated current for a short period of time.

6.4 Device Functional Modes

6.4.1 Device Functional Mode Comparison

Table 6-1 shows the conditions that lead to the different modes of operation. See the *Electrical Characteristics* table for parameter values.

Table 6-1. Device Functional Mode Comparison

OPERATING MODE	PARAMETER			
	V_{IN}	V_{EN}	I_{OUT}	T_J
Normal operation	$V_{IN} > V_{OUT(nom)} + V_{DO}$ and $V_{IN} > V_{IN(min)}$	$V_{EN} > V_{EN(HI)}$	$I_{OUT} < I_{OUT(max)}$	$T_J < T_{SD(shutdown)}$
Dropout operation	$V_{IN(min)} < V_{IN} < V_{OUT(nom)} + V_{DO}$	$V_{EN} > V_{EN(HI)}$	$I_{OUT} < I_{OUT(max)}$	$T_J < T_{SD(shutdown)}$
Disabled (any true condition disables the device)	$V_{IN} < V_{UVLO}$	$V_{EN} < V_{EN(LOW)}$	Not applicable	$T_J > T_{SD(shutdown)}$

6.4.2 Normal Operation

The device regulates to the nominal output voltage when the following conditions are met:

- The input voltage is greater than the nominal output voltage plus the dropout voltage ($V_{OUT(nom)} + V_{DO}$)
- The output current is less than the current limit ($I_{OUT} < I_{CL}$)
- The device junction temperature is less than the thermal shutdown temperature ($T_J < T_{SD}$)
- The enable voltage has previously exceeded the enable rising threshold voltage and has not yet decreased to less than the enable falling threshold

6.4.3 Dropout Operation

If the input voltage is lower than the nominal output voltage plus the specified dropout voltage, the device operates in dropout mode. In this mode, the output voltage tracks the input voltage. In this mode, the transient performance of the device becomes significantly degraded. During this mode, the pass transistor is driven fully on. Line or load transients in dropout potentially result in large output voltage deviations.

When the device is in a steady dropout state, the pass transistor is driven fully on. This state is defined as when the device is in dropout, directly after being in a normal regulation state, but *not* during start-up. Dropout occurs when $V_{IN} < V_{OUT(NOM)} + V_{DO}$. When the regulator exits dropout, the input voltage returns to a value $\geq V_{OUT(NOM)} + V_{DO}$. During this time, the output voltage potentially overshoots for a short period of time. $V_{OUT(NOM)}$ is the nominal output voltage and V_{DO} is the dropout voltage. During dropout exit, the device pulls the pass transistor back from being driven fully on.

6.4.4 Disabled

Shut down the output of the LDO by driving EN to less than $V_{EN(LOW)}$ (see the *Electrical Characteristics* table). When disabled, the pass transistor is turned off and internal circuits are shut down. The output voltage is also actively discharged to ground by an internal discharge circuit between OUT and ground.

Copyright © 2025 Texas Instruments Incorporated

7 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

7.1 Application Information

7.1.1 Recommended Capacitor Types

The device is designed to be stable using low equivalent series resistance (ESR) ceramic capacitors at the input and output. Multilayer ceramic capacitors have become the industry standard for these types of applications and are recommended, but use good judgment. Ceramic capacitors that employ X7R-, X5R-, and C0G-rated dielectric materials provide relatively good capacitive stability across temperature. Using Y5V-rated capacitors is discouraged because of large variations in capacitance.

Regardless of the ceramic capacitor type selected, the effective capacitance varies with operating voltage and temperature. Generally, expect the effective capacitance to decrease by as much as 50%. The input and output capacitors listed in the *Recommended Operating Conditions* table account for an effective capacitance of approximately 50% of the nominal value.

7.1.2 Input and Output Capacitor Requirements

Although the LDO is stable without an input capacitor, good analog design practice is to connect a capacitor from IN to GND. Make sure this capacitor has a value at least equal to the nominal value specified in the *Recommended Operating Conditions* table. The input capacitor counteracts reactive input sources and improves transient response, input ripple, and PSRR. Use this capacitor if the source impedance is greater than 0.5Ω. When the source resistance and inductance are sufficiently high, especially in the presence of load transients, the overall system is susceptible to instability. Instability includes ringing, sustained oscillation, and other performance degradation if there is insufficient capacitance between IN and GND. Use a capacitor with a value greater than the minimum if large, fast-rise-time load or line transients are anticipated. Also use this capacitor if the device is located more than a few centimeters from the input power source.

An output capacitor of an appropriate value helps provide stability and improve dynamic performance. Use an output capacitor within the range specified in the *Recommended Operating Conditions* table. For fastest settling time, keep the derated output capacitance in the 0.75µF to 1.5µF range. Minimize any inductance (including capacitor ESL) between OUT and the output capacitance to less than 2.5µH avoid degrading settling performance.

7.1.3 Load Transient Response

The load-step transient response is the output voltage response by the LDO to a step in load current, whereby output voltage regulation is maintained. There are two key transitions during a load transient response: from a light to a heavy load and from a heavy to a light load. The regions shown in Figure 7-1 are broken down as follows. Regions A, E, and H are where the output voltage is in steady-state.

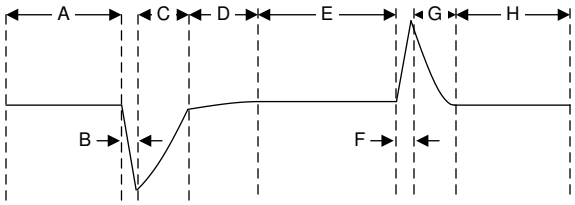

Figure 7-1. Load Transient Waveform

Copyright © 2025 Texas Instruments Incorporated

During transitions from a light load to a heavy load, the:

- Initial voltage dip is a result of the depletion of the output capacitor charge and parasitic impedance to the output capacitor (region B)
- Recovery from the dip results from the LDO increasing the sourcing current, and leads to output voltage regulation (region C)

During transitions from a heavy load to a light load, the:

- Initial voltage rise results from the LDO sourcing a large current, and leads to the output capacitor charge to increase (region F)
- Recovery from the rise results from the LDO decreasing the sourcing current in combination with the load discharging the output capacitor (region G)

A larger output capacitance reduces the peaks during a load transient but slows down the response time of the device. A larger DC load also reduces the peaks. The amplitude of the transition is lowered and a higher current discharge path is provided for the output capacitor.

This LDO is designed to provide best transient response performance when the load current is limited to approximately 200mA or less.

7.1.4 Undervoltage Lockout (UVLO) Operation

The UVLO circuit makes sure that the device stays disabled before the input supply reaches the minimum operational voltage range. This circuit also makes sure that the device shuts down when the input supply collapses. Figure 7-2 shows the UVLO circuit response to various input voltage events. The diagram is separated into the following parts:

- Region A: The device does not start until the input reaches the UVLO rising threshold.
- Region B: Normal operation, regulating device.
- Region C: Brownout event above the UVLO falling threshold (UVLO rising threshold – UVLO hysteresis). The output potentially falls out of regulation but the device remains enabled.
- Region D: Normal operation, regulating device.
- Region E: Brownout event below the UVLO falling threshold. The device is disabled in most cases and the output falls because of the load and active discharge circuit. The device is re-enabled when the UVLO rising threshold is reached by the input voltage and a normal start-up follows.
- Region F: Normal operation followed by the input falling to the UVLO falling threshold.
- Region G: The device is disabled when the input voltage falls below the UVLO falling threshold to 0V. The output falls because of the load and active discharge circuit.

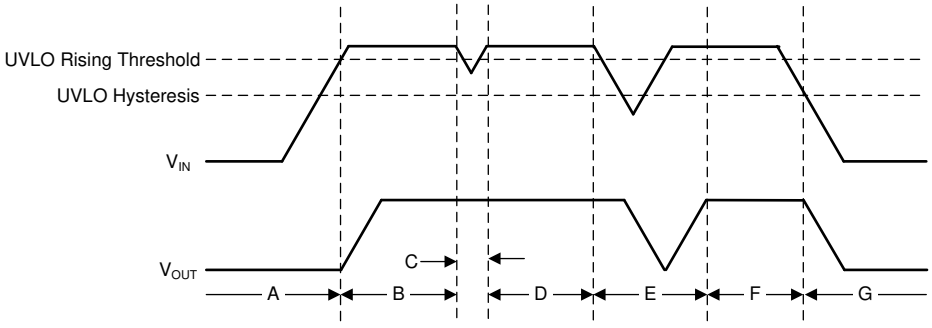

Figure 7-2. Typical UVLO Operation

7.1.5 Power Dissipation (P_D)

Circuit reliability demands that proper consideration be given to device power dissipation, location of the circuit on the PCB, and correct thermal plane sizing. Make sure the printed circuit board (PCB) area around the regulator is as free as possible of other heat-generating devices that cause added thermal stresses.

As a first-order approximation, power dissipation in the regulator depends on the input-to-output voltage difference and load conditions. Use Equation 2 to approximate P_D:

$$P_D = (V_{IN} – V_{OUT}) × I_{OUT} \quad (2)$$

Power dissipation is minimized, and thus greater efficiency achieved, by proper selection of the system voltage rails. Proper selection allows the minimum input-to-output voltage differential to be obtained. The low dropout of the TPS7A20C allows for maximum efficiency across a wide range of output voltages.

The maximum power dissipation determines the maximum allowable junction temperature (T_J) for the device. According to Equation 3, power dissipation and junction temperature are most often related by the $R_{θJA}$ of the combined PCB and device package and the T_A. $R_{θJA}$ is the junction-to-ambient thermal resistance and T_A is the ambient air temperature. Equation 4 rearranges Equation 3 for output current.

$$T_J = T_A + (R_{θJA} × P_D) \quad (3)$$

$$I_{OUT} = (T_J – T_A) / [R_{θJA} × (V_{IN} – V_{OUT})] \quad (4)$$

Unfortunately, this thermal resistance ($R_{θJA}$) is highly dependent on the heat-spreading capability built into the particular PCB design. Therefore, $R_{θJA}$ varies according to the total copper area, copper weight, and location of the planes. The $R_{θJA}$ recorded in the *Thermal Information* table is determined by the JEDEC standard, PCB, and copper-spreading area. $R_{θJA}$ is only used as a relative measure of package thermal performance. For a well-designed thermal layout, $R_{θJA}$ is actually the sum of $R_{θJC(bot)}$ plus the thermal resistance contribution by the PCB copper. $R_{θJC(bot)}$ is the package junction-to-case (bottom) thermal resistance.

7.1.5.1 Estimating Junction Temperature

The JEDEC standard now recommends the use of psi (Ψ) thermal metrics. These metrics estimate the junction temperatures of the LDO when in-circuit on a typical PCB board application. These metrics are not strictly speaking thermal resistances, but rather offer practical and relative means of estimating junction temperatures. These psi metrics are determined to be significantly independent of the copper-spreading area. The key thermal metrics ($Ψ_{JT}$ and $Ψ_{JB}$) are used in accordance with Equation 5 and are given in the *Thermal Information* table.

$$Ψ_{JT} : T_J = T_T + Ψ_{JT} × P_D \text{ and } Ψ_{JB} : T_J = T_B + Ψ_{JB} × P_D \quad (5)$$

where:

- P_D is the power dissipated as explained in Equation 2
- T_T is the temperature at the center-top of the device package
- T_B is the PCB surface temperature measured 1mm from the device package and centered on the package edge

Copyright © 2025 Texas Instruments Incorporated

7.1.5.2 Recommended Area for Continuous Operation

The operational area of an LDO is limited by the dropout voltage, output current, junction temperature, and input voltage. The recommended area for continuous operation for a linear regulator is given in Figure 7-3 and is separated into the following parts:

- Dropout voltage limits the minimum differential voltage between the input and the output ($V_{IN} – V_{OUT}$) at a given output current level. See the *Dropout Operation* section for more details.
- The rated output currents limits the maximum recommended output current level. Exceeding this rating causes the device to fall out of specification.
- The rated junction temperature limits the maximum junction temperature of the device. Exceeding this rating causes the device to fall out of specification and reduces long-term reliability.
  - The shape of the slope is given by Equation 4. The slope is nonlinear because the maximum-rated junction temperature of the LDO is controlled by the power dissipation across the LDO. Thus, when $V_{IN} – V_{OUT}$ increases the output current decreases.
- The rated input voltage range governs both the minimum and maximum of $V_{IN} – V_{OUT}$.

Figure 7-3 shows the recommended area of operation for this device on a JEDEC-standard high-K board with a $R_{\theta JA}$, as given in the *Thermal Information* table.

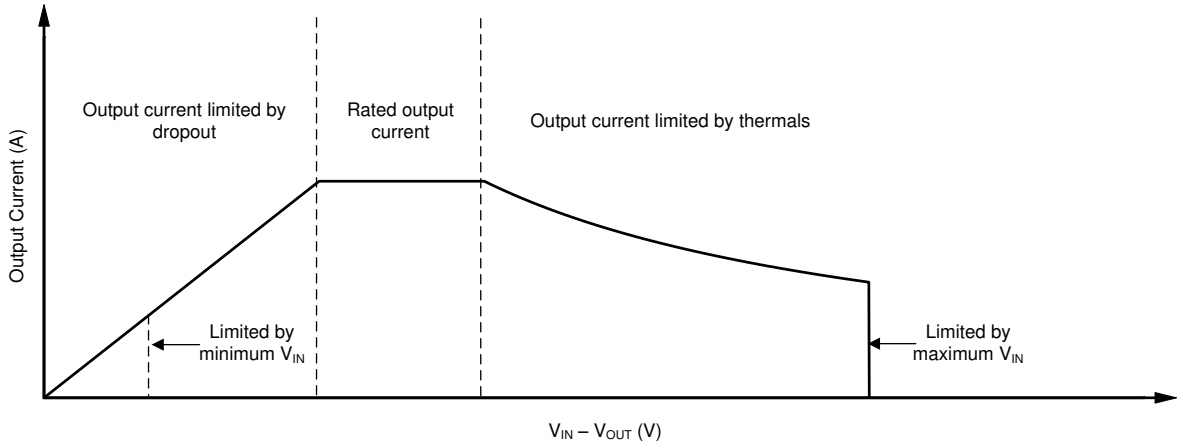

Figure 7-3. Region Description of Continuous Operation Regime

7.2 Typical Application

Figure 7-4 shows the typical application circuit for the TPS7A20C. If needed, increase input and output capacitances above the 1µF minimum for some applications.

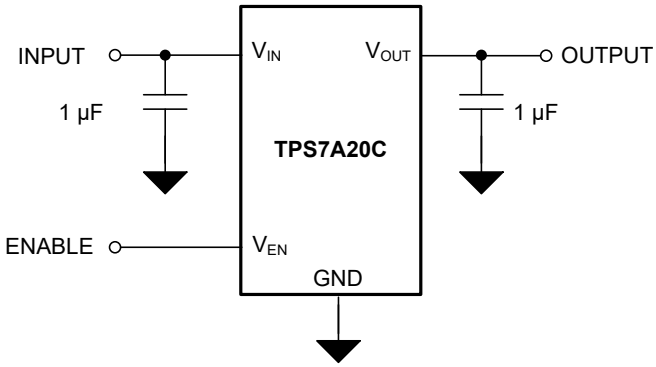

Figure 7-4. TPS7A20C Typical Application

7.2.1 Design Requirements

Table 7-1 summarizes the design requirements for Figure 7-4.

Table 7-1. Design Parameters

DESIGN PARAMETER	EXAMPLE VALUE
Input voltage range	3.1V to 3.6V
Output voltage	2.85V
Output current	200mA
Maximum ambient temperature	85°C

7.2.2 Detailed Design Procedure

For this design example, the 2.85V output version (TPS7A20C285) is selected. A nominal 3.3V input supply is assumed. Use a minimum 1.0µF input capacitor to minimize the effect of resistance and inductance between the 3.3V source and the LDO input. Also use a nominal 1.0µF output capacitor for stability and good load transient response. The dropout voltage (V_{DO}) is less than 140mV maximum at a 2.85V output voltage and 300mA output current. Thus, there are no dropout issues with a 3.0V minimum input voltage and a maximum 200mA output current.

7.2.3 Application Curve

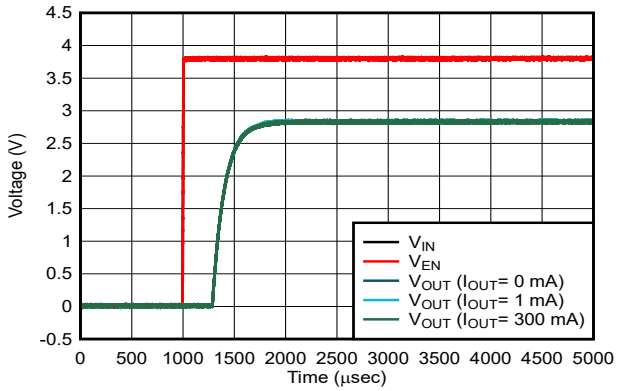

Figure 7-5. Start-Up

Copyright © 2025 Texas Instruments Incorporated

7.3 Power Supply Recommendations

This device is designed to operate from an input supply voltage range of 1.6V to 6.0V. Make sure the input supply is well regulated and free of spurious noise. Set the input supply to be at least $V_{OUT(nom)}$ + 0.3V or 1.6V, whichever is greater. This setting makes sure that the output voltage is well regulated and dynamic performance is optimum. Use a 1µF or greater input capacitor to reduce the impedance of the input supply, especially during transients.

7.4 Layout

7.4.1 Layout Guidelines

- Place input and output capacitors as close to the device as possible
- Use copper planes for device connections to optimize thermal performance
- Place thermal vias around the device to distribute the heat

7.4.2 Layout Example

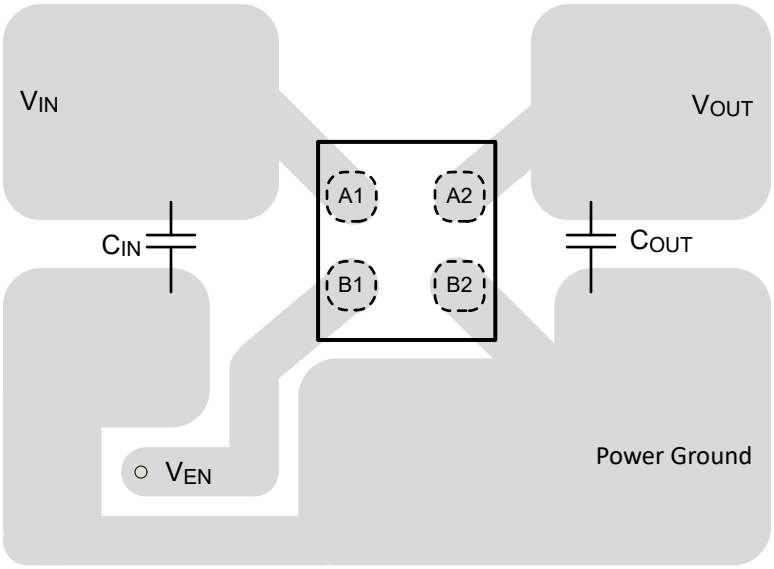

Figure 7-6. YCK Package (DSBGA) Typical Layout

8 Device and Documentation Support

8.1 Device Support

8.1.1 Device Nomenclature

Table 8-1. Device Nomenclature

PRODUCT(1) (2)	V_{OUT}
TPS7A20C**xx(x)Pyyyz**	**xx(x)** is the nominal output voltage. For output voltages with a resolution of 100mV, two digits are used in the ordering number. Otherwise, three digits are used (for example, 28 = 2.8V; 125 = 1.25V). **P** indicates an active output discharge feature. **yyy** is the package designator. **z** is the package quantity. R is for reel (12000 pieces for YCK).

(1) For the most current package and ordering information see the Package Option Addendum at the end of this document, or visit the device product folder on www.ti.com.
(2) Output voltages from 0.8V to 5.5V in 25mV increments are available. Contact the factory for details and availability.

8.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

8.3 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

8.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.
All trademarks are the property of their respective owners.

8.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

8.6 Glossary

TI Glossary — This glossary lists and explains terms, acronyms, and definitions.

9 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision * (August 2024) to Revision A (September 2025)	Page
• Changed minimum output capacitance from *0.47µF* to *0.75µF* throughout document	1
• Changed minimum output capacitance value	4
• Clarified description of ESR and added minimum ESR value	4

10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2025 Texas Instruments Incorporated

10.1 Mechanical Data

PACKAGE OUTLINE

YCK0004-C01 **DSBGA - 0.33mm MAX HEIGHT**

DIE SIZE BALL GRID ARRAY

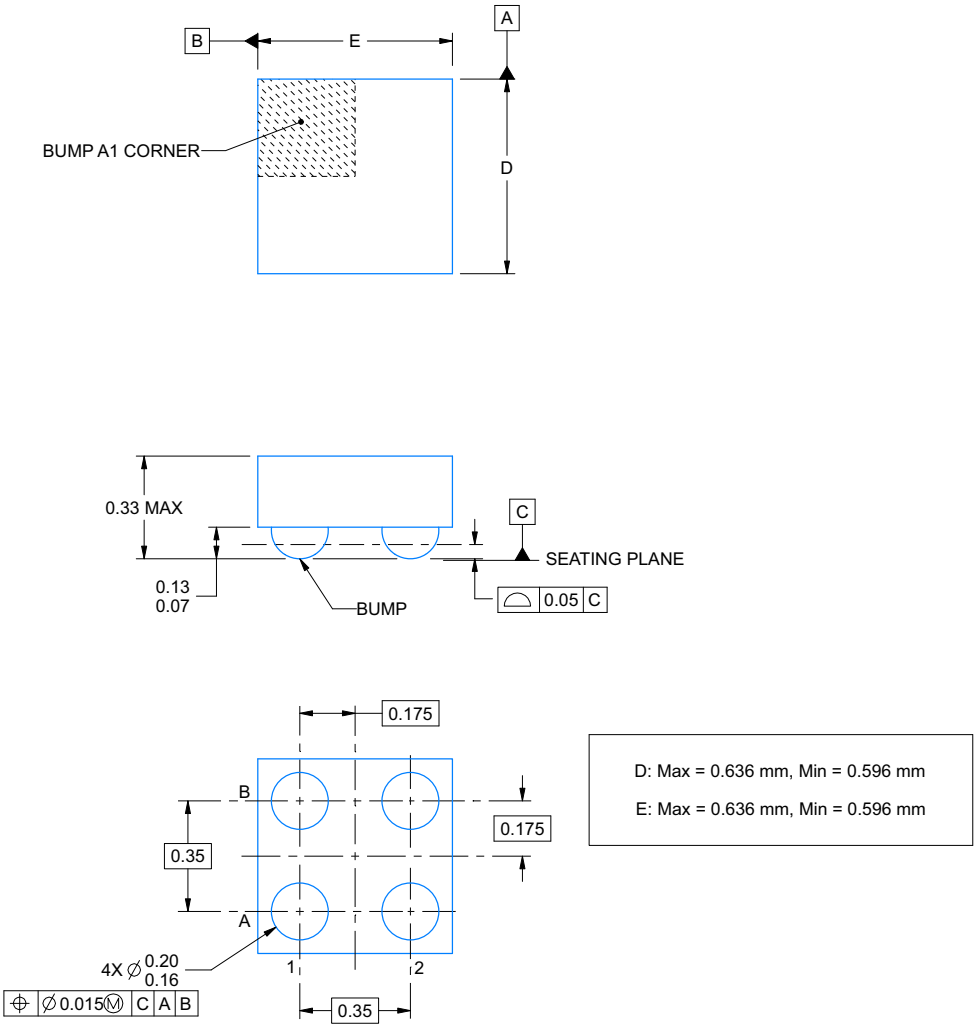

NOTES:

1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

Copyright © 2025 Texas Instruments Incorporated

EXAMPLE BOARD LAYOUT

YCK0004-C01

DSBGA - 0.33mm MAX HEIGHT

DIE SIZE BALL GRID ARRAY

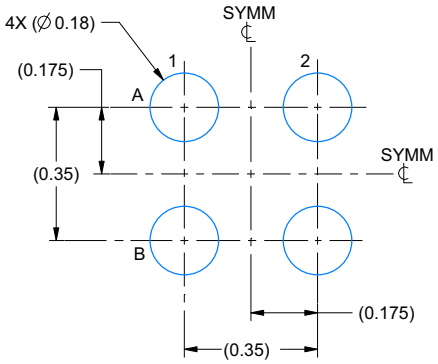

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:60X

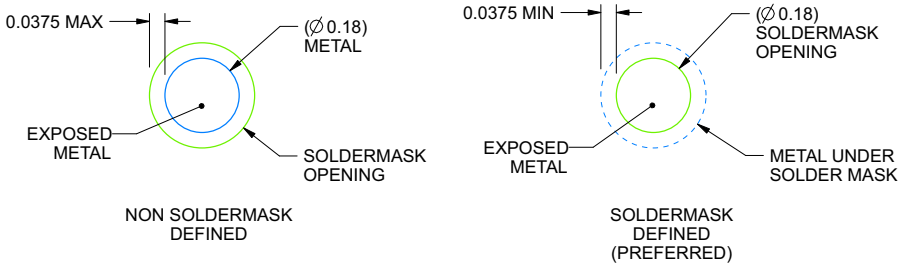

SOLDERMASK DETAILS
NOT TO SCALE

4228575/A 03/2022

NOTES: (continued)

3. Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. Refer to Texas Instruments Literature No. SNVA009 (www.ti.com/lit/snva009).

Copyright © 2025 Texas Instruments Incorporated

EXAMPLE STENCIL DESIGN

YCK0004-C01 **DSBGA - 0.33mm MAX HEIGHT**

DIE SIZE BALL GRID ARRAY

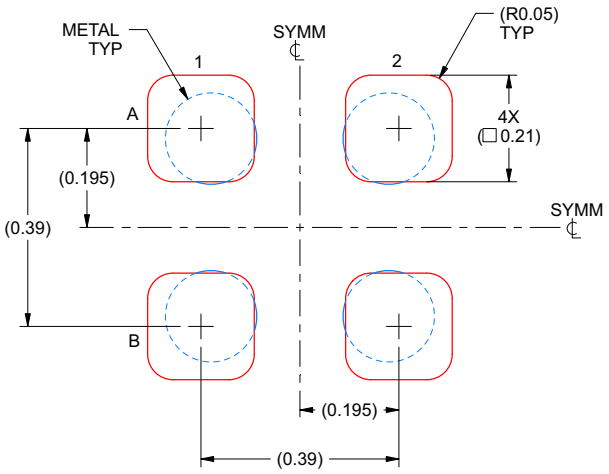

SOLDERPASTE EXAMPLE
BASED ON 0.075 mm THICK STENCIL
SCALE:80X

4228575/A 03/2022

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

Copyright © 2025 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPS7A20C15PYCKR	Active	Production	DSBGA (YCK) | 4	12000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	J
TPS7A20C18PYCKR	Active	Production	DSBGA (YCK) | 4	12000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	S
TPS7A20C20PYCKR	Active	Production	DSBGA (YCK) | 4	12000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	B
TPS7A20C20PYCKR.A	Active	Production	DSBGA (YCK) | 4	12000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	B
TPS7A20C2275PYCKR	Active	Production	DSBGA (YCK) | 4	12000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	W
TPS7A20C22PYCKR	Active	Production	DSBGA (YCK) | 4	12000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	E
TPS7A20C22PYCKR.A	Active	Production	DSBGA (YCK) | 4	12000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	E
TPS7A20C25PYCKR	Active	Production	DSBGA (YCK) | 4	12000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	F
TPS7A20C25PYCKR.A	Active	Production	DSBGA (YCK) | 4	12000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	F
TPS7A20C285PYCKR	Active	Production	DSBGA (YCK) | 4	12000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	C
TPS7A20C285PYCKR.A	Active	Production	DSBGA (YCK) | 4	12000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	C
TPS7A20C315PYCKR	Active	Production	DSBGA (YCK) | 4	12000 | LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-40 to 125	X

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

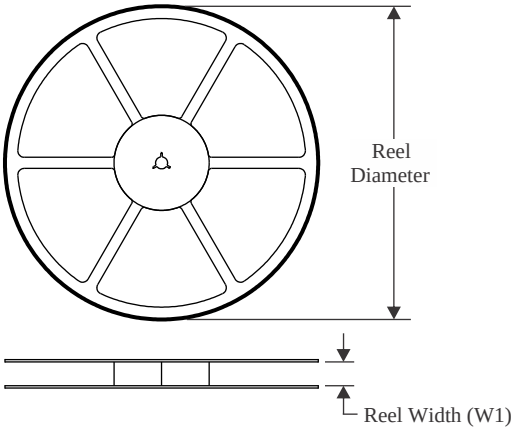

TAPE DIMENSIONS

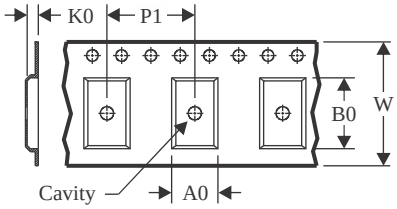

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

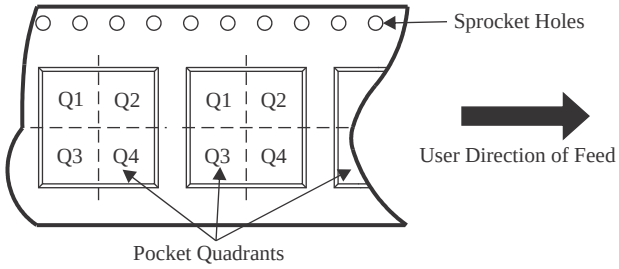

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS7A20C15PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1
TPS7A20C15PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1
TPS7A20C18PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1
TPS7A20C18PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1
TPS7A20C20PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1
TPS7A20C20PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1
TPS7A20C2275PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1
TPS7A20C2275PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1
TPS7A20C22PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1
TPS7A20C22PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1
TPS7A20C25PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1
TPS7A20C25PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1
TPS7A20C285PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1
TPS7A20C285PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1
TPS7A20C315PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1
TPS7A20C315PYCKR	DSBGA	YCK	4	12000	180.0	8.4	0.71	0.71	0.42	2.0	8.0	Q1

TAPE AND REEL BOX DIMENSIONS

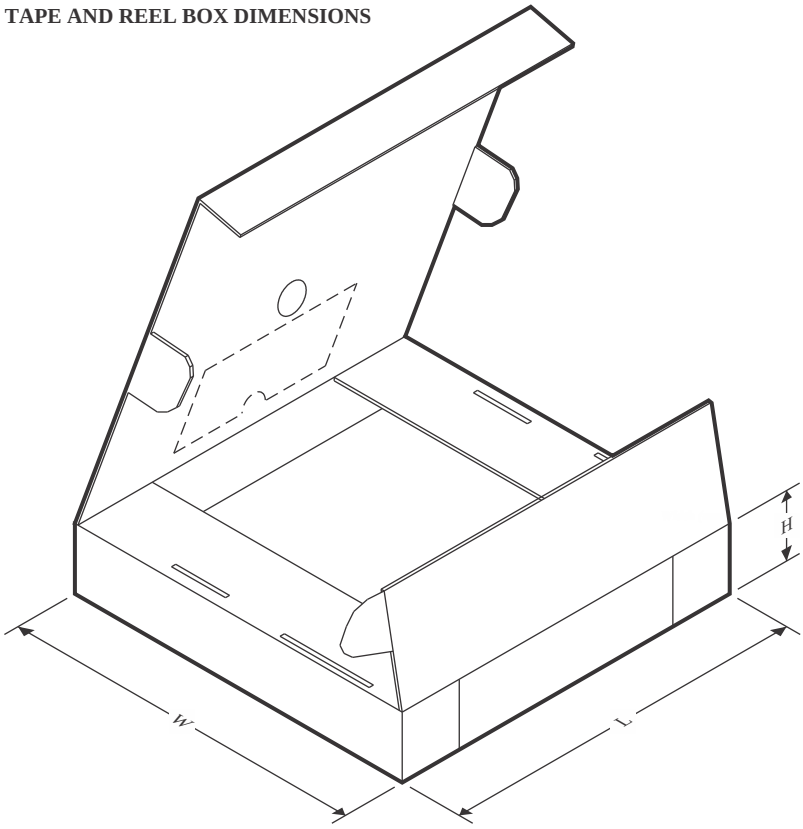

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS7A20C15PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0
TPS7A20C15PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0
TPS7A20C18PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0
TPS7A20C18PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0
TPS7A20C20PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0
TPS7A20C20PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0
TPS7A20C2275PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0
TPS7A20C2275PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0
TPS7A20C22PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0
TPS7A20C22PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0
TPS7A20C25PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0
TPS7A20C25PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0
TPS7A20C285PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0
TPS7A20C285PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0
TPS7A20C315PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0
TPS7A20C315PYCKR	DSBGA	YCK	4	12000	182.0	182.0	20.0

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.