Ordering number : EN8635A

2SK3745LS

N-Channel Power MOSFET
1500V, 2A, 13Ω, TO-220F-3FS

ON Semiconductor®
http://onsemi.com

Features

- Low ON-resistance, low input capacitance, ultrahigh-speed switching
- High reliability (Adoption of HVP process)
- Micaless package facilitating mounting
- Avalanche resistance guarantee

Specifications

Absolute Maximum Ratings at Ta=25°C


Parameter	Symbol	Conditions	Ratings	Unit
Drain-to-Source Voltage	V_{DSS}		1500	V
Gate-to-Source Voltage	V_{GSS}		±20	V
Drain Current (DC)	I_D*		2	A
Drain Current (Pulse)	I_{DP}		4	A
Allowable Power Dissipation	P_D		2.0	W
		Tc=25°C	35	W
Channel Temperature	Tch		150	°C
Storage Temperature	Tstg		−55 to +150	°C
Avalanche Energy (Single Pulse) *1	E_{AS}		41	mJ
Avalanche Current *2	I_{AV}		2	A

*Shows chip capability
*1 V_{DD}=50V, L=20mH, I_{AV}=2A (Fig.1)
*2 L≤20mH, single pulse

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

Package Dimensions


unit : mm (typ)
7528-001

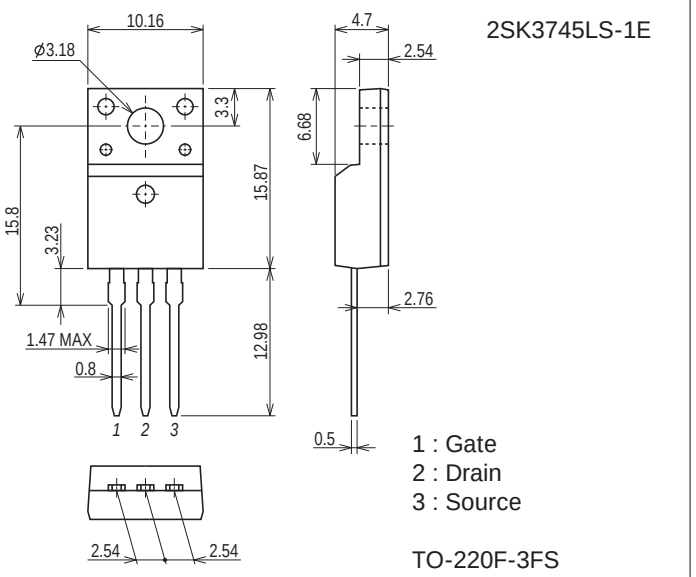


Product & Package Information

- Package : TO-220F-3FS
- JEITA, JEDEC : SC-67
- Minimum Packing Quantity : 50 pcs./magazine

Marking



Electrical Connection



Electrical Characteristics at Ta=25°C

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Drain-to-Source Breakdown Voltage	$V_{(BR)DSS}$	I_D=1mA, V_{GS}=0V	1500			V
Zero-Gate Voltage Drain Current	I_{DSS}	V_{DS}=1200V, V_{GS}=0V			100	μA
Gate-to-Source Leakage Current	I_{GSS}	V_{GS}=16V, V_{DS}=0V			±10	μA
Cutoff Voltage	V_{GS}(off)	V_{DS}=10V, I_D=1mA	2.5		3.5	V
Forward Transfer Admittance	| yfs |	V_{DS}=20V, I_D=1A	0.7	1.4		S
Static Drain-to-Source On-State Resistance	R_{DS}(on)	I_D=1A, V_{GS}=10V		10	13	Ω
Input Capacitance	Ciss	V_{DS}=30V, f=1MHz		380		pF
Output Capacitance	Coss			70		pF
Reverse Transfer Capacitance	Crss			40		pF
Turn-ON Delay Time	t_d(on)	See Fig.2		12		ns
Rise Time	t_r			37		ns
Turn-OFF Delay Time	t_d(off)			152		ns
Fall Time	t_f			59		ns
Total Gate Charge	Qg	V_{DS}=200V, V_{GS}=10V, I_D=2A		37.5		nC
Gate-to-Source Charge	Qgs			2.7		nC
Gate-to-Drain “Miller” Charge	Qgd			20		nC
Diode Forward Voltage	V_{SD}	I_S=2A, V_{GS}=0V		0.88	1.2	V

Fig.1 Avalanche Resistance Test Circuit



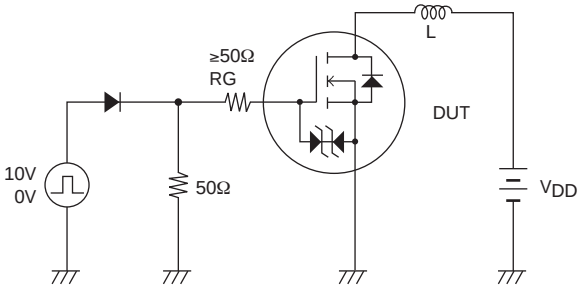



Fig.2 Switching Time Test Circuit

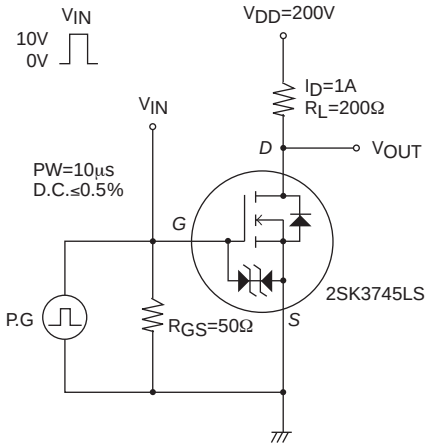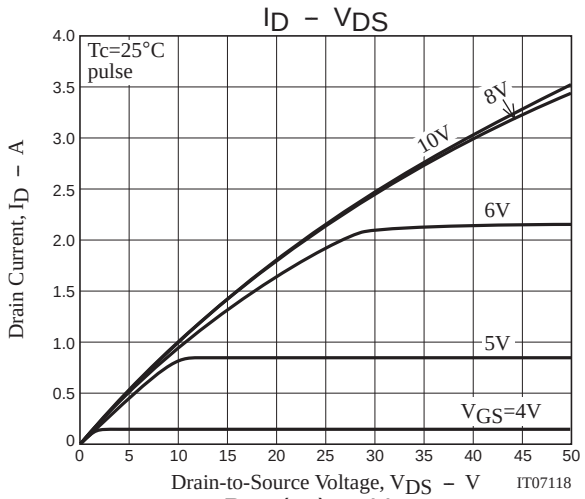



Ordering Information


Device	Package	Shipping	memo
2SK3745LS-1E	TO-220F-3FS	50pcs./magazine	Pb Free



ID – VDS
Tc=25°C
pulse
8V
10V
6V
5V
VGS=4V
Drain Current, ID – A
Drain-to-Source Voltage, VDS – V
IT07118

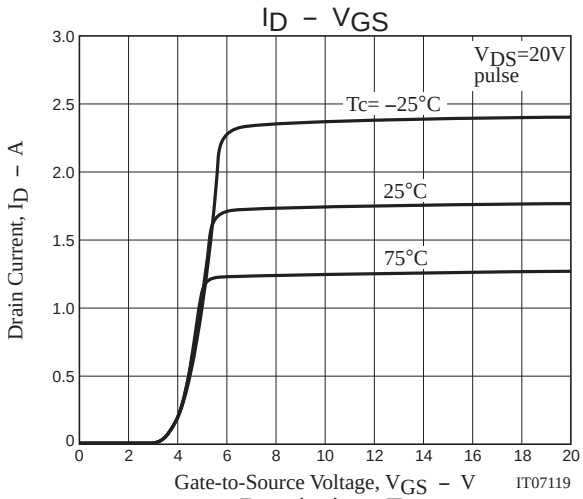

ID – VGS
VDS=20V
pulse
Tc= –25°C
25°C
75°C
Drain Current, ID – A
Gate-to-Source Voltage, VGS – V
IT07119

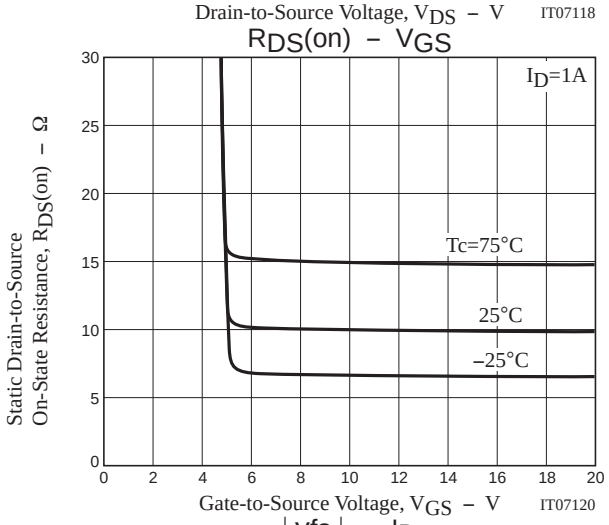

RDS(on) – VGS
ID=1A
Tc=75°C
25°C
–25°C
Static Drain-to-Source
On-State Resistance, RDS(on) – Ω
Gate-to-Source Voltage, VGS – V
IT07120

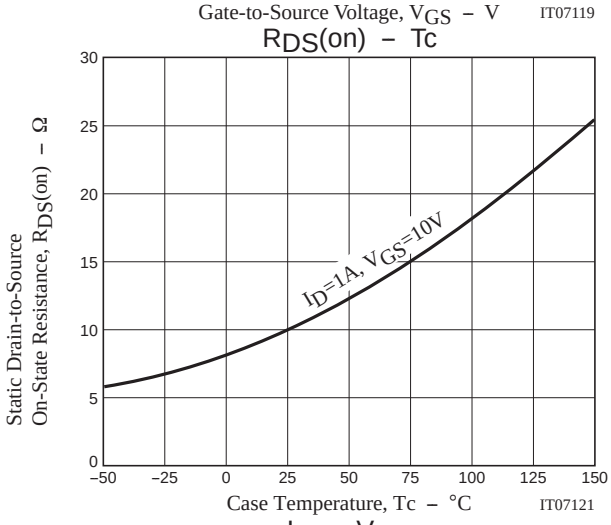

RDS(on) – Tc
ID=1A, VGS=10V
Static Drain-to-Source
On-State Resistance, RDS(on) – Ω
Case Temperature, Tc – °C
IT07121

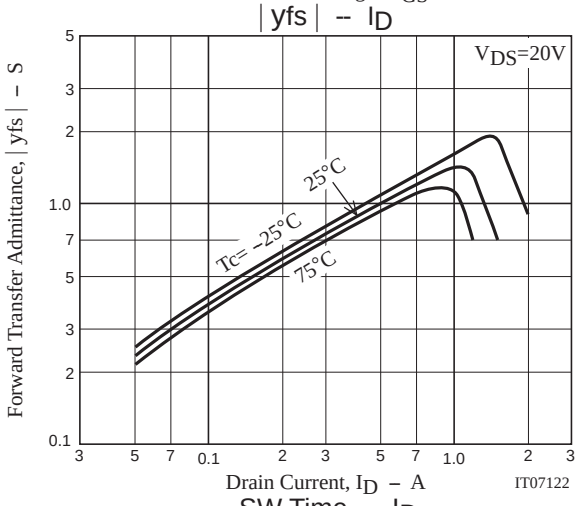

| yfs | – ID
VDS=20V
25°C
Tc= –25°C
75°C
Forward Transfer Admittance, | yfs | – S
Drain Current, ID – A
IT07122

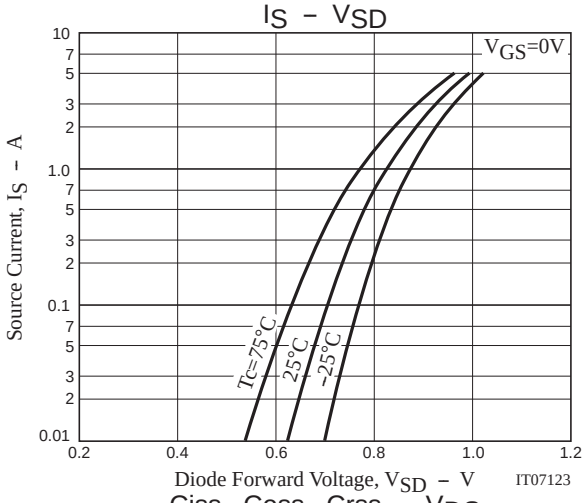

IS – VSD
VGS=0V
Tc=75°C
25°C
–25°C
Source Current, IS – A
Diode Forward Voltage, VSD – V
IT07123

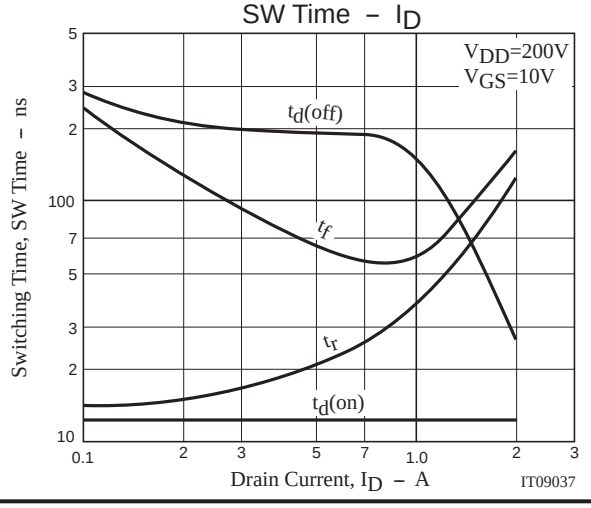

SW Time – ID
VDD=200V
VGS=10V
td(off)
tf
tr
td(on)
Switching Time, SW Time – ns
Drain Current, ID – A
IT09037

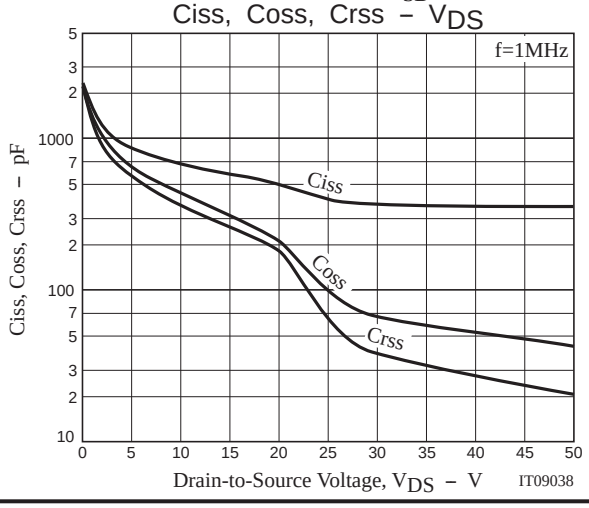
Ciss, Coss, Crss – VDS
f=1MHz
Ciss
Coss
Crss
Ciss, Coss, Crss – pF
Drain-to-Source Voltage, VDS – V
IT09038

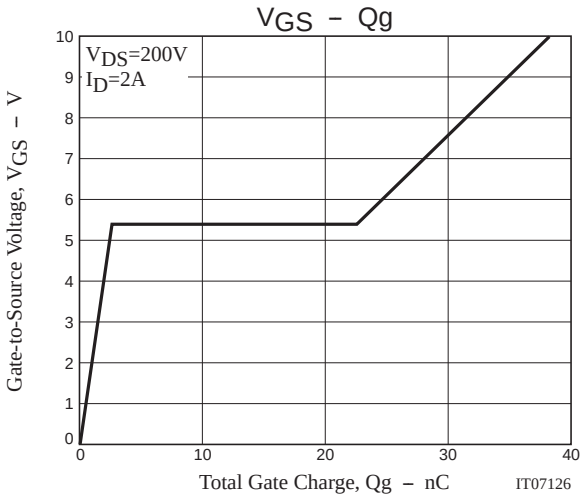
VGS – Qg
VDS=200V
ID=2A
Gate-to-Source Voltage, VGS – V
Total Gate Charge, Qg – nC
IT07126

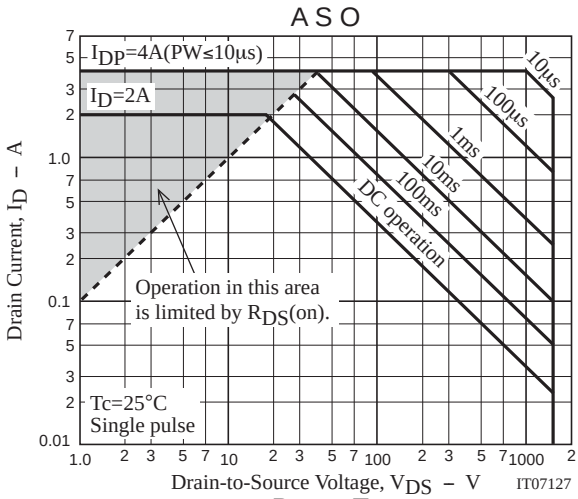
A S O
IDP=4A(PW≤10μs)
ID=2A
10μs
100μs
1ms
10ms
100ms
DC operation
Operation in this area
is limited by RDS(on).
Tc=25°C
Single pulse
Drain Current, ID – A
Drain-to-Source Voltage, VDS – V
IT07127

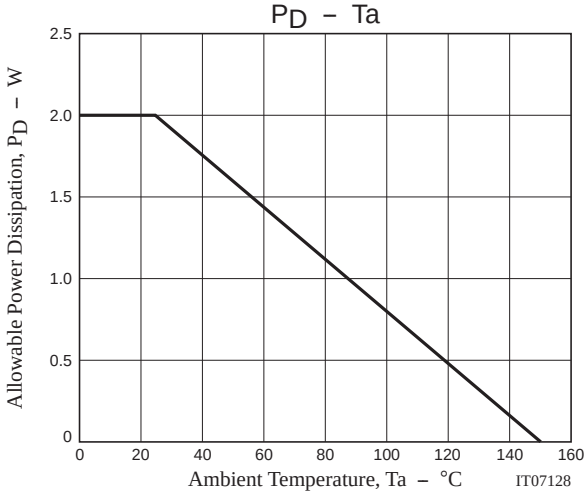
PD – Ta
Allowable Power Dissipation, PD – W
Ambient Temperature, Ta – °C
IT07128

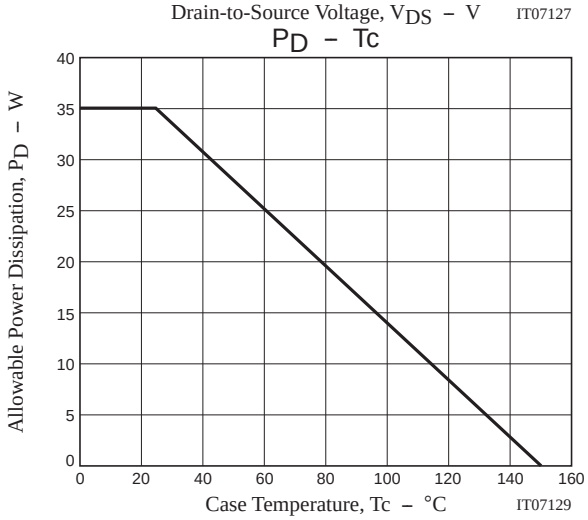
PD – Tc
Allowable Power Dissipation, PD – W
Case Temperature, Tc – °C
IT07129

Magazine Specification


2SK3745LS-1E

1. Packing Format

Package Name	Magazine Name	Maximum Number of devices contained (pcs)			Packing format	
		Magazine	Inner box	Outer box	Inner BOX	Outer BOX
TO-220F-3FS	TO-220F	50	1,000	4,000	SPD-0V0001 20 magazines contained Dimensions:mm (external) 568×150×55	SPT-081029 4 inner boxes contained Dimensions:mm (external) 590×225×178


2. Magazine dimensions

(unit:mm)

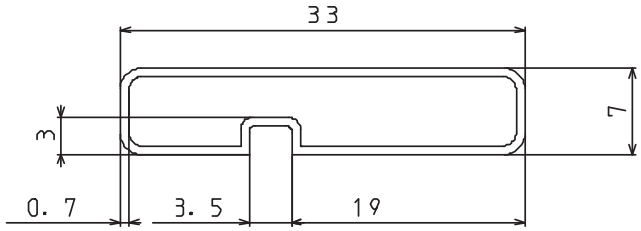


Tolerance=±0.3mm
Thickness=0.7±0.2mm
Length =532.5±2mm
Material =PVC (Antistatic treatment)

3. Storage method to magazine

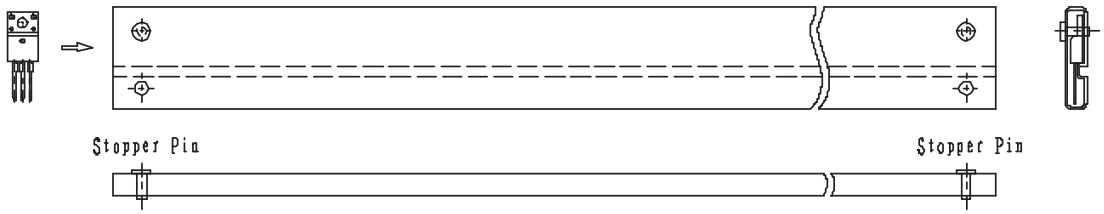


4. Inner box label (unit:mm)

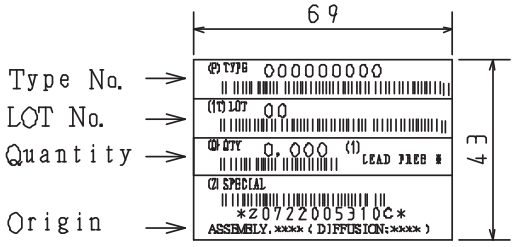

5. Outer box label (unit:mm)

It is a label at the time of factory shipments.
The form of a label may change in physical distribution process.

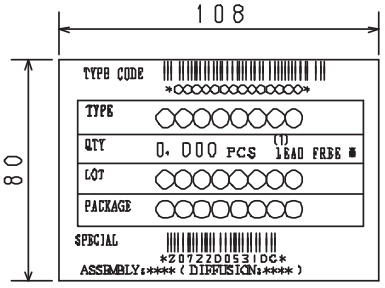


NOTE (1)
The LEAD FREE ※ description shows that the surface treatment of the terminal is lead free.

Label	JEITA Phase
LEAD FREE 3	JEITA Phase 3A

Outline Drawing

2SK3745LS-1E

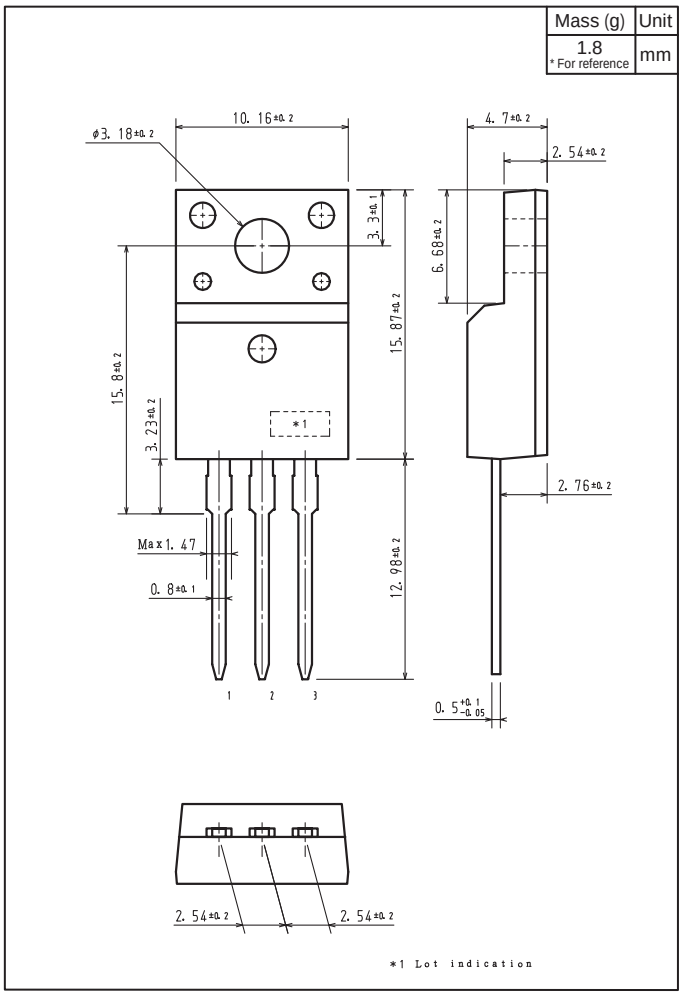

Note on usage : Since the 2SK3745LS is a MOSFET product, please avoid using this device in the vicinity of highly charged objects.

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.