查询HA17555供应商 捷多邦，专业PCB打样工厂，24小时加急出货

HA17555 Series

Precision Timer

HITACHI

ADE-204-064 (Z)
Rev. 0
Dec. 2000

Description

HA17555 Series are ICs designed for accurate time delays or oscillations. It provides both of trigger terminal and reset terminal in order to enable a wide scope of application including Mono Multi Vibrator and Astable Multi Vibrator, and the number of external components is fewer. Further, it's compatible with NE555 of singnetics.

Features

- Mono multi vibrator can be constructed with one resistor and one capacitor.
- Astable multi vibrator can be constructed with two resistors and one capacitor.
- Delay time can be established widely from several μ seconds to several hours.
- Pulse Duty can be controlled.
- The maximum value of both sink current and source current is 200mA.
- Direct connection of output to TTL is possible.
- Temperature/delay time ratio is 50 ppm/°C (typ).
- Output is normally in the on and off states.

Ordering Information

Application	Type No.	Package
Industrial use	HA17555PS	DP-8
	HA17555FP	FP-8D
Commercial use	HA17555	DP-8
	HA17555F	FP-8D

找PDF 维库一下 pdf.dzsc.com

Applications

- Delay Time Generator (Mono Multi Vibrator)
- Pulse Generator (Astable Multi Vibrator)
- Pulse Width Modulator
- Pulse Location Modulator
- Miss Pulse Detector

Pin Arrangement

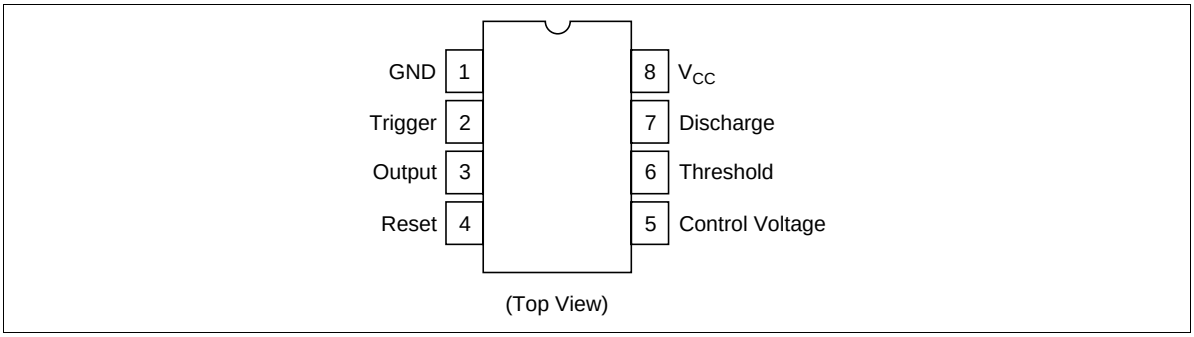

Pin Description

Pin No.	Function
1	Ground pin
2	Trigger pin
3	Output pin
4	Reset pin
5	Control voltage pin
6	Threshold pin
7	Discharge pin
8	V_{cc} pin

Circuit Schematic

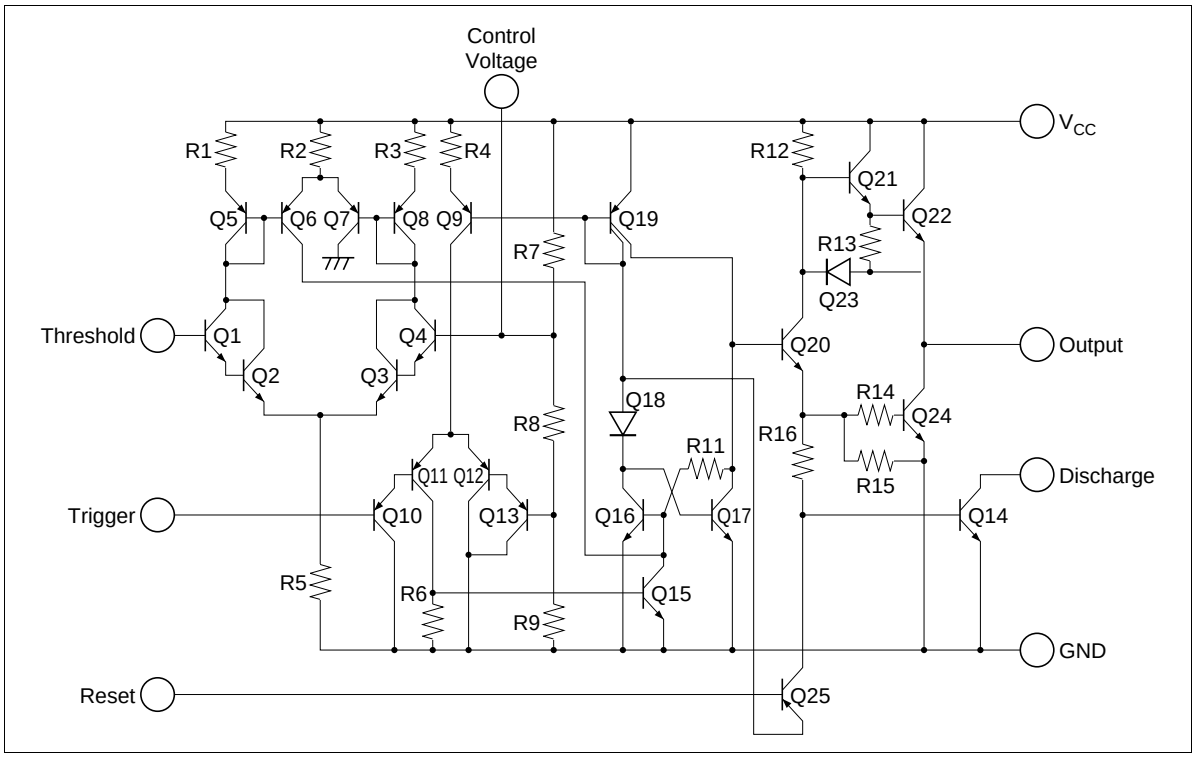

Block Diagram

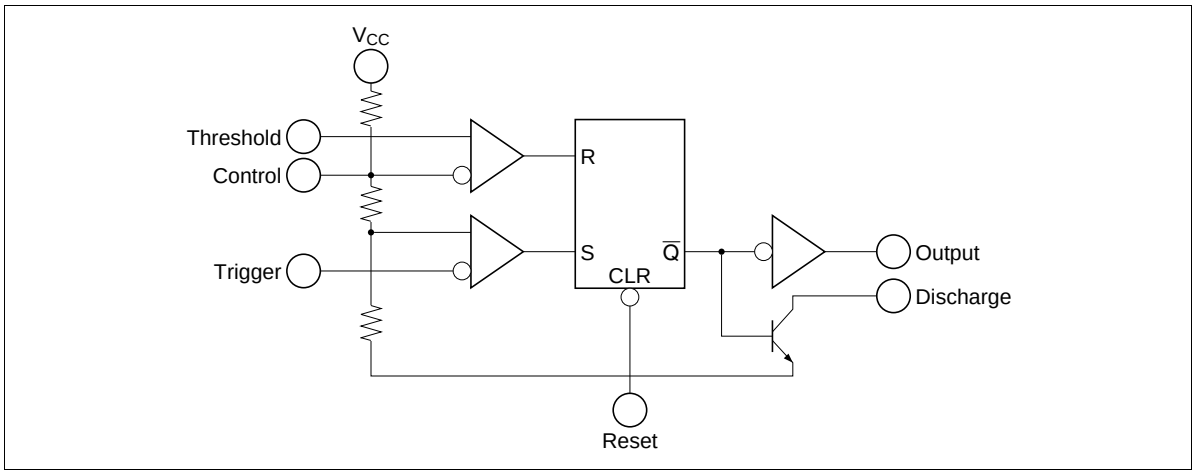

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	HA17555PS/FP	HA17555/F	Unit
Supply voltage	V_{CC}	18	18	V
Discharge current	I_T	200	200	mA
Output source current	Isource	200	200	mA
Output sink current	Isink	200	200	mA
Power dissipation*[1]	P_T	600/385	600/385	mW
Operating temperature	Topr	–20 to +75	–20 to +70	°C
Storage temperature	Tstg	–55 to +125	–55 to +125	°C

Note: 1. For the HA17555/PS,

This value applies up to Ta = 50°C; at temperatures above this, 8.3mW/°C derating should be applied.

For the HA17555F/FP,

This value applies up to Ta = 25°C; at temperatures above this, 3.85mW/°C derating should be applied.

See notes on SOP Package Usage in Reliability section.

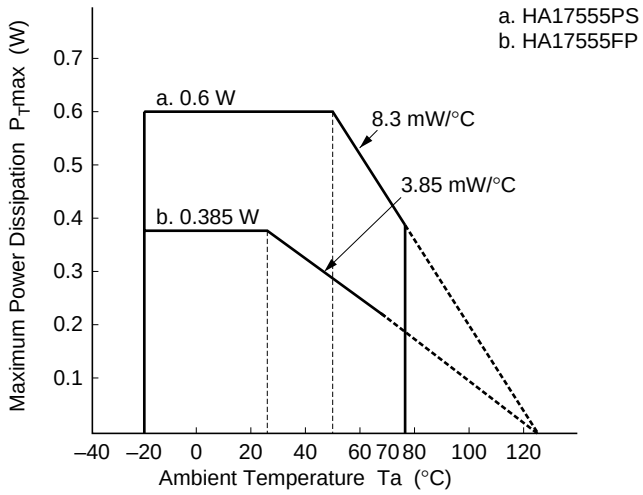
a. HA17555PS
b. HA17555FP
Maximum Power Dissipation $P_T$max (W)
0.7
0.6
0.5
0.4
0.3
0.2
0.1
a. 0.6 W
b. 0.385 W
8.3 mW/°C
3.85 mW/°C
–40 –20 0 20 40 60 70 80 100 120
Ambient Temperature Ta (°C)

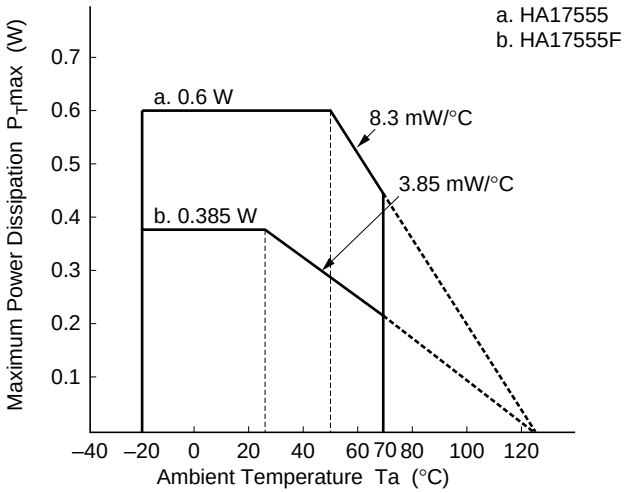
a. HA17555
b. HA17555F
Maximum Power Dissipation $P_T$max (W)
0.7
0.6
0.5
0.4
0.3
0.2
0.1
a. 0.6 W
b. 0.385 W
8.3 mW/°C
3.85 mW/°C
–40 –20 0 20 40 60 70 80 100 120
Ambient Temperature Ta (°C)

Electrical Characteristics (V_{CC} = 5 to 15 V, Ta = 25°C)

Item	Symbol	Min	Typ	Max	Unit	Test conditions
Supply voltage*[1]	V_{CC}	4.5	—	16.0	V	
Supply current	I_{CC}	—	3.0	6.0	mA	V_{CC} = 5 V, R_L = ∞
	I_{CC}	—	10	15	mA	V_{CC} = 15 V, R_L = ∞
Timing error*[2] (Inherent error)	Et	—	1.0	—	%	
Timing error*[2] (Ta dependency)	Et	—	50	—	ppm/°C	Ta = –20 to + 75°C
Timing error*[2] (Voltage dependency)	Et	—	0.01	—	%/V	V_{CC} = 5 to 15 V
Threshold voltage	Vth	—	2/3	—	$V \times V_{CC}$	
Trigger voltage	V_T	—	5.0	—	V	V_{CC} = 15 V
	V_T	—	1.67	—	V	V_{CC} = 5 V
Trigger current	I_T	—	0.5	—	µA	
Reset voltage	V_R	0.2	0.5	1.0	V	
Reset current	I_R	—	0.1	—	mA	
Threshold current	Ith*[3]	—	0.1	0.25	µA	
Control voltage	V_{CL}	9	10	11	V	V_{CC} = 15 V
	V_{CL}	2.6	3.33	4.0	V	V_{CC} = 5 V
Output voltage	V_{OL}	—	0.1	0.25	V	V_{CC} = 15 V, Isink = 10 mA
		—	0.4	0.75	V	V_{CC} = 15 V, Isink = 50 mA
		—	2.0	2.5	V	V_{CC} = 15 V, Isink = 100 mA
		—	2.5	—	V	V_{CC} = 15 V, Isink = 200 mA
		—	0.25	0.35	V	V_{CC} = 5 V, Isink = 5 mA
Output voltage	V_{OH}	—	12.5	—	V	V_{CC} = 15 V, Isource = 200 mA
		12.75	13.3	—	V	V_{CC} = 15 V, Isource = 100 mA
		2.75	3.3	—	V	V_{CC} = 5 V, Isource = 100 mA
Output rise time	t_r	—	100	—	ns	No loading
Output fall time	t_f	—	100	—	ns	No loading
Oscillation pulse width*[4]	tw	10.0	—	—	ns	

Notes: 1. When output is low (When it is high, I_{CC} is lower by 1 mA typically.)
2. R_A, R_B = 1 k to 100 kΩ, C = 0.1 µF, V_{CC} = 5 V or 15 V.
3. (R_A + R_B) at V_{CC} = 15 V is determined by the value of Ith. It is 20 MΩ Max.
4. Output pulse width at mono multi circuit. Output high level pulse width at astable circuit.

Characteristic Curves

Quiescent Current vs. Supply Voltage

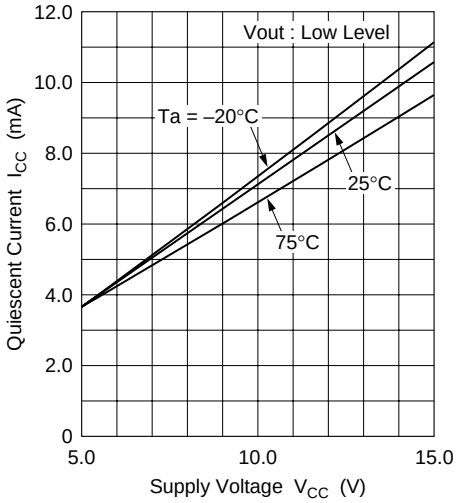

Supply Voltage (V_{CC}) Output Voltage (V_{OH}) vs. Source Current

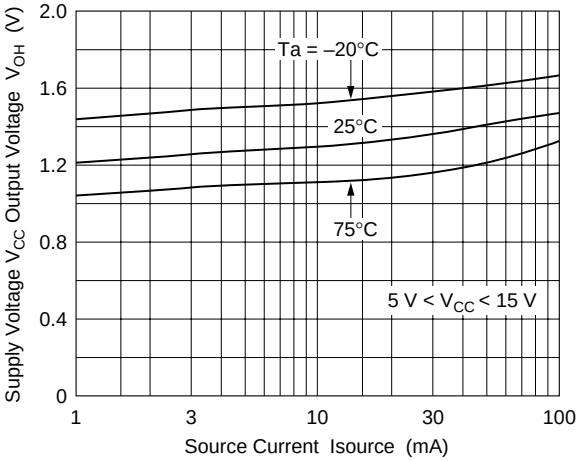

Output Voltage (V_{OL}) vs. Sink Current (1)

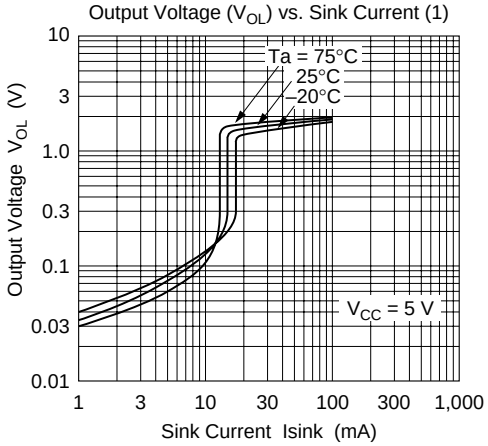

Output Voltage (V_{OL}) vs. Sink Current (2)

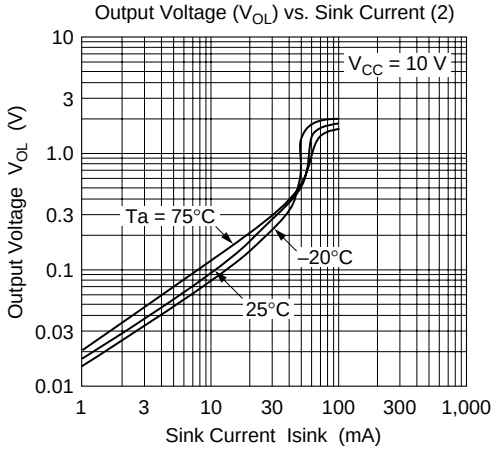

Output Voltage (V_{OL}) vs. Sink Current (3)

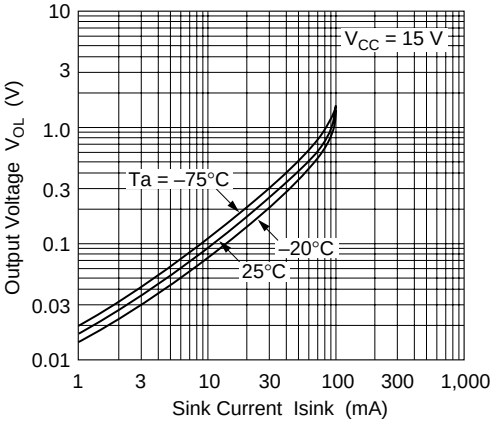

Relative Delay Time vs. Supply Voltage

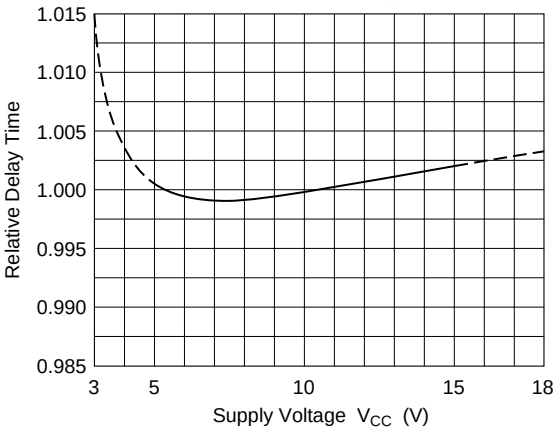

Relative Delay Time
vs. Ambient Temperature

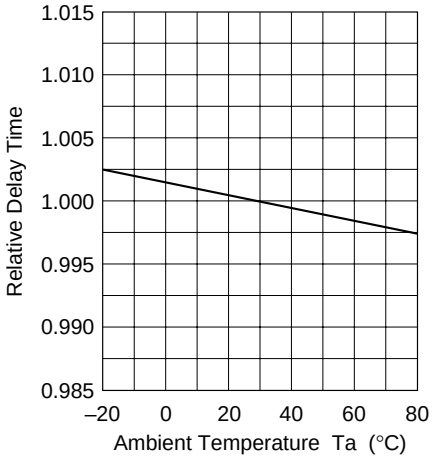

Minimum Trigger Pulse Width
vs. Low Level Trigger Voltage

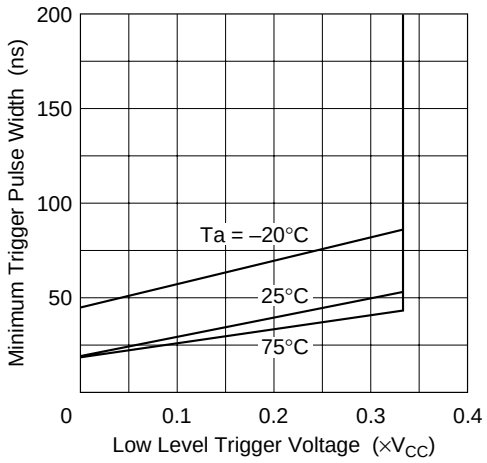

Propagation Delay Time
vs. Low Level Trigger Voltage

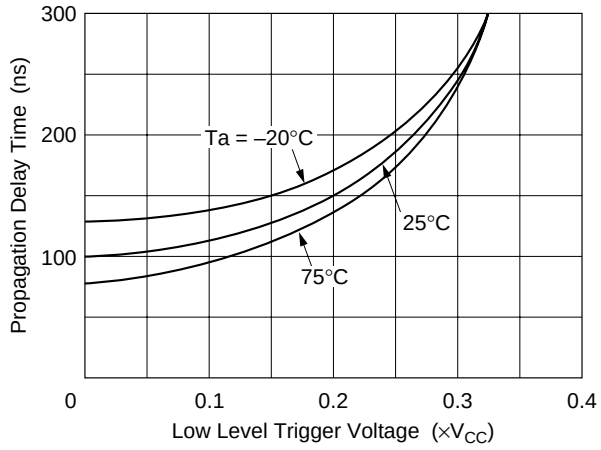

Package Dimensions

Unit: mm

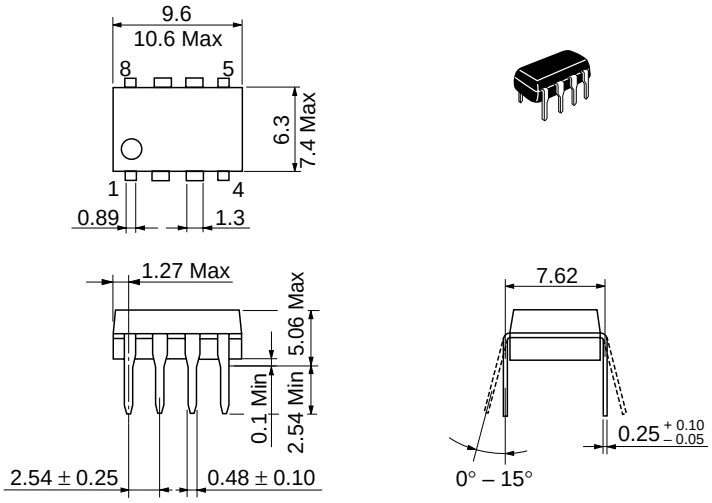

Hitachi Code	DP-8
JEDEC	Conforms
EIAJ	Conforms
Mass (reference value)	0.54 g

Unit: mm

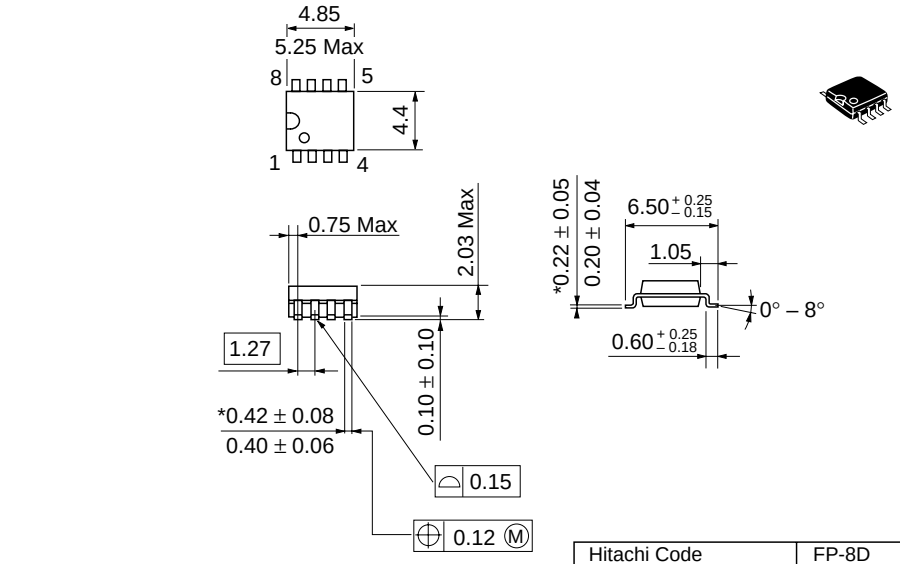

Hitachi Code	FP-8D
JEDEC	—
EIAJ	Conforms
Mass (reference value)	0.10 g

*Dimension including the plating thickness
Base material dimension

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.
Semiconductor & Integrated Circuits.
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL NorthAmerica : http://semiconductor.hitachi.com/
Europe : http://www.hitachi-eu.com/hel/ecg
Asia : http://sicapac.hitachi-asia.com
Japan : http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor (America) Inc.
179 East Tasman Drive,
San Jose,CA 95134
Tel: <1> (408) 433-1990
Fax: <1>(408) 433-0223

Hitachi Europe GmbH
Electronic Components Group
Dornacher Straβe 3
D-85622 Feldkirchen, Munich
Germany
Tel: <49> (89) 9 9180-0
Fax: <49> (89) 9 29 30 00

Hitachi Europe Ltd.
Electronic Components Group.
Whitebrook Park
Lower Cookham Road
Maidenhead
Berkshire SL6 8YA, United Kingdom
Tel: <44> (1628) 585000
Fax: <44> (1628) 585160

Hitachi Asia Ltd.
Hitachi Tower
16 Collyer Quay #20-00,
Singapore 049318
Tel : <65>-538-6533/538-8577
Fax : <65>-538-6933/538-3877
URL : http://www.hitachi.com.sg

Hitachi Asia Ltd.
(Taipei Branch Office)
4/F, No. 167, Tun Hwa North Road,
Hung-Kuo Building,
Taipei (105), Taiwan
Tel : <886>-(2)-2718-3666
Fax : <886>-(2)-2718-8180
Telex : 23222 HAS-TP
URL : http://www.hitachi.com.tw

Hitachi Asia (Hong Kong) Ltd.
Group III (Electronic Components)
7/F., North Tower,
World Finance Centre,
Harbour City, Canton Road
Tsim Sha Tsui, Kowloon,
Hong Kong
Tel : <852>-(2)-735-9218
Fax : <852>-(2)-730-0281
URL : http://www.hitachi.com.hk

Copyright © Hitachi, Ltd., 2000. All rights reserved. Printed in Japan.
Colophon 2.0

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.