BCP030C

HIGH EFFICIENCY HETEROJUNCTION POWER FET CHIP (.25µm x 300µm)


The BeRex BCP030C is a GaAs Power pHEMT with a nominal 0.25-micron by 300-micron gate making this product ideally suited for applications where high-gain and medium power in the DC to 26.5 GHz frequency range are required. The product may be used in either wideband (6-18 GHz) or narrow-band applications. The BCP030C is produced using state of the art metallization with SI_3N_4 passivation and is screened to assure reliability.

PRODUCT FEATURES

- 24.5 dBm Typical Output Power
- 13.5 dB Typical Gain @ 12 GHz
- 0.25 X 300 Micron Recessed Gate

APPLICATIONS

- Commercial
- Military / Hi-Rel.
- Test & Measurement

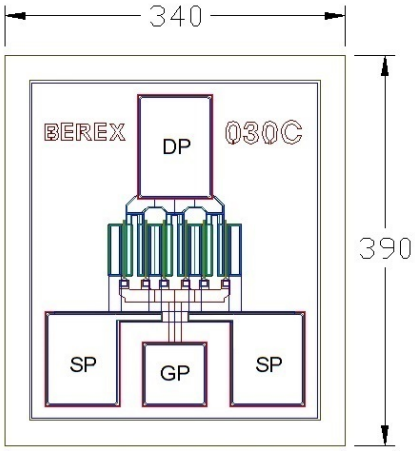

Chip dimensions : 340 X 390 microns
Gate pad(GP) : 60 X 60 microns
Drain pad(DP) : 70 X 100 microns
Source pad(SP) : 70 X 95 microns
Chip thickness : 75 microns

ELECTRICAL CHARACTERISTIC (TUNED FOR POWER) T_a = 25° C

PARAMETER/TEST CONDITIONS		TEST FREQ.	MIN.	TYPICAL	MAX.	UNIT
P_{1dB}	Output Power @ P_{1dB} (V_{ds} = 8V, I_d = 45mA)	12 GHZ 18 GHz	23.0 23.0	24.5 24.5		dBm
G_{1dB}	Gain @ P_{1dB} (V_{ds} = 8V, I_d = 45mA)	12 GHZ 18 GHz	12.0 9.0	13.5 10.5		dB
PAE	PAE @ P_{1dB} (V_{ds} = 8V, I_d = 45mA)	12 GHZ 18 GHz		60 55		%
NF	Noise figure (Vds = 2V, I_d = 15 mA)	12 GHz		1.1		dB
I_{dss}	Saturated Drain Current (V_{gs} = 0V, V_{ds} = 2.0V)		60	90	120	mA
G_m	Transconductance (V_{ds} = 2V, I_d = 45mA)			115		mS
V_p	Pinch-off Voltage (I_{ds} = 0.3mA, V_{ds} = 2V)		-2.5	-1.2		V
BV_{gd}	Drain Breakdown Voltage (I_g = -0.3mA, source open)			-15	-12	V
BV_{gs}	Source Breakdown Voltage (I_g = -0.3mA, drain open)			-13		V
R_{th}	Thermal Resistance (Au-Sn Eutectic Attach)			115		°C/W


Specifications are subject to change without notice. ©BeRex 2017

MAXIMUM RATING (T_a = 25° C)

PARAMETERS		ABSOLUTE	CONTINUOUS
V_{ds}	Drain-Source Voltage	12 V	8 V
V_{gs}	Gate-Source Voltage	-6 V	-3 V
I_d	Drain Current	I_{dss}	I_{dss}
I_{gsf}	Forward Gate Current	18 mA	3 mA
P_{in}	Input Power	22 dBm	@ 3 dB compression
T_{ch}	Channel Temperature	175°C	150°C
T_{stg}	Storage Temperature	-60°C – 150°C	-60°C – 150°C
P_t	Total Power Dissipation	1.3 W	1.1 W


Exceeding any of the above Maximum Ratings will result in reduced MTTF and may cause permanent damage to the device.

P_{IN}_P_{OUT}/Gain, PAE (12 GHz)

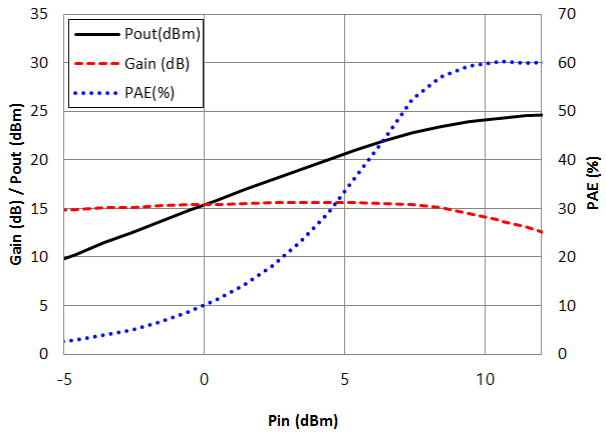

Frequency = 12 GHz
V_{ds} = 8 V, I_{ds} = 45mA (Tuned for Power)

P_{IN}_P_{OUT}/Gain, PAE (18 GHz)

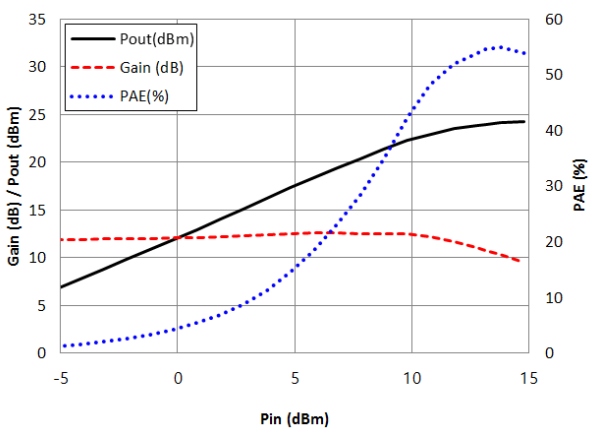

Frequency = 18 GHz
V_{ds} = 8 V, I_{ds} = 45mA (Tuned for Power)

Specifications are subject to change without notice. ©BeRex 2017


S-PARAMETERS (V_{ds} = 8V, I_{ds} = 45mA)

FREQ. [GHZ]	S11 [MAG]	S11 [ANG.]	S21 [MAG]	S21 [ANG.]	S12 [MAG]	S12 [ANG.]	S22 [MAG]	S22 [ANG.]
1.0	0.98	-23.86	7.38	162.50	0.014	74.60	0.81	-6.76
2.0	0.94	-46.46	7.02	146.70	0.030	66.16	0.79	-13.54
3.0	0.89	-69.03	6.57	131.52	0.038	55.17	0.75	-19.74
4.0	0.84	-91.85	6.05	117.38	0.046	47.41	0.71	-23.65
5.0	0.79	-113.68	5.52	103.92	0.054	38.46	0.67	-27.78
6.0	0.76	-134.40	4.98	91.19	0.056	30.31	0.63	-31.80
7.0	0.75	-153.92	4.49	79.98	0.057	24.78	0.60	-34.64
8.0	0.74	-170.69	4.01	69.58	0.056	19.61	0.57	-37.56
9.0	0.75	174.28	3.58	59.64	0.056	14.51	0.55	-41.45
10.0	0.76	161.67	3.21	50.90	0.051	10.25	0.53	-44.56
11.0	0.77	150.68	2.88	42.68	0.050	9.53	0.52	-48.73
12.0	0.79	140.76	2.61	34.50	0.049	8.41	0.51	-53.13
13.0	0.81	131.79	2.38	27.20	0.049	6.81	0.49	-57.19
14.0	0.83	124.13	2.16	20.07	0.049	3.22	0.47	-61.62
15.0	0.85	116.58	1.97	12.99	0.046	4.27	0.46	-66.25
16.0	0.86	110.76	1.79	6.68	0.047	5.07	0.44	-71.83
17.0	0.88	106.16	1.66	0.71	0.049	3.61	0.43	-79.17
18.0	0.89	100.57	1.52	-6.23	0.051	1.39	0.42	-86.51
19.0	0.90	96.91	1.39	-12.56	0.051	2.67	0.42	-95.77
20.0	0.91	93.43	1.26	-18.91	0.051	-1.59	0.41	-107.58
21.0	0.90	91.80	1.15	-24.47	0.054	-0.89	0.42	-118.49
22.0	0.90	90.93	1.05	-29.70	0.054	-1.15	0.44	-129.50
23.0	0.89	90.40	0.95	-35.59	0.058	-2.37	0.46	-140.82
24.0	0.90	90.80	0.87	-39.96	0.056	0.12	0.48	-151.10
25.0	0.90	91.15	0.80	-44.03	0.052	-1.19	0.51	-159.63
26.0	0.92	90.01	0.72	-48.59	0.059	1.93	0.55	-168.32

Note: S-parameters include bond wires. Reference planes are at edge of substrates shown on “Wire Bonding Information” figure below.

Specifications are subject to change without notice. ©BeRex 2017

WIRE BONDING INFORMATION

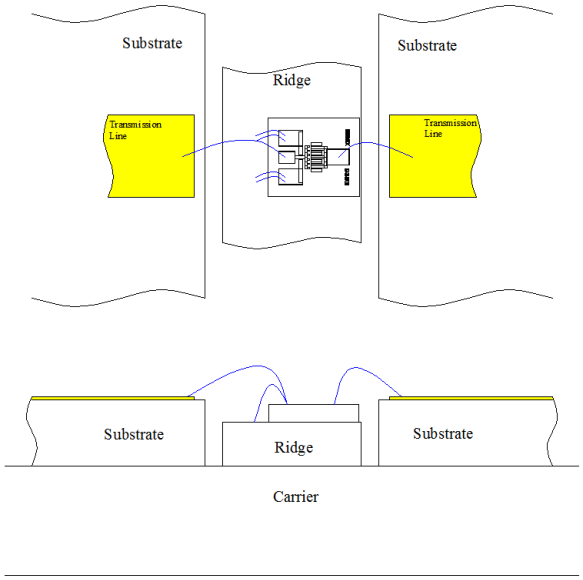

Using 1 mil. diameter, Au bonding wires.

1. Gate to input transmission line
   - Length and Height : 600 µm x 250 µm
   - Number of wire(s): 1
2. Drain to output transmission line
   - Length and Height : 400 µm x 250 µm
   - Number of wire(s) : 1
3. Source to ground plate
   - Length and Height : 250 µm x 300 µm
   - Number of wire(s) : 4



Proper ESD procedures should be followed when handling this device.

Specifications are subject to change without notice. ©BeRex 2017

DIE ATTACH RECOMMENDATIONS:

BeRex recommends the "Eutectic" die attach using Au-Sn (80%-20%) pre-forms. The die attach station must have accurate temperature control, and the operation should be performed with parts no hotter than 300°C for less than 60 seconds. An inert forming gas (90% N_2-10% H_2) or clean, dry N_2 should be used.

Use of conductive epoxy (gold or silver filled) may also be acceptable for die-attaching low power devices.

HANDLING PRECAUTIONS:

GaAs FETs are very sensitive to and may be damaged by Electrostatic Discharge (ESD). Therefore, proper ESD precautions must be taken whenever you are handling these devices. It is critically important that all work surfaces, and assembly equipment, as well as the operator be properly grounded when handling these devices to prevent ESD damage.

STORAGE & SHIPPING:

The BeRex standard chip device shipping package consists of an antistatic "Gel-Pak", holding the chips, placed inside a sealed antistatic and moisture barrier bag. This packaging is designed to provide a reasonable measure of protection from both mechanical and ESD damage.

Chip devices should be stored in a clean, dry Nitrogen gas environment at room temperature until they are required for assembly. Only open the shipping package or perform die assembly in a work area with a class 10,000 or better clean room environment to prevent contamination of the exposed devices.

DISCLAIMER

BEREX RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. BEREX DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN.

LIFE SUPPORT POLICY

BEREX PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES WITHOUT THE EXPRESS WRITTEN APPROVAL OF BEREX.

1. Life support devices or systems are devices or systems which (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.