LOW DROPOUT VOLTAGE REGULATOR

■ GENERAL DESCRIPTION

The NJM2819A is a low dropout voltage regulator with ON/OFF control.

Advanced Bipolar technology achieves low noise, high ripple rejection and low quiescent current.

It delivers up to 7V/2A output power with the maximum input voltage of 10V.

The NJM2819A is suitable for audio/video and digital applications.

■ PACKAGE OUTLINE



NJM2819ADL3

■ FEATURES

- High Ripple Rejection 65dB typ. (f=1kHz,3V Version)
- Output Noise Voltage Vno=42μVrms typ. (Vo=3V Version)
- Output capacitor with 4.7μF ceramic capacitor (Vo≥2.1V)
- Output Current Io(max.)=2.0A
- High Precision Output Vo ±1.0%
- Low Dropout Voltage 0.1V typ. (Io=1.0A, 3.0V Version)
- ON/OFF Control
- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Package Outline TO-252-5

■ PIN CONFIGURATION



1. V_{IN}
2. CONTROL
3. Vo
4. N.C.
5. GND

NJM2819ADL3

■ EQUIVALENT CIRCUIT

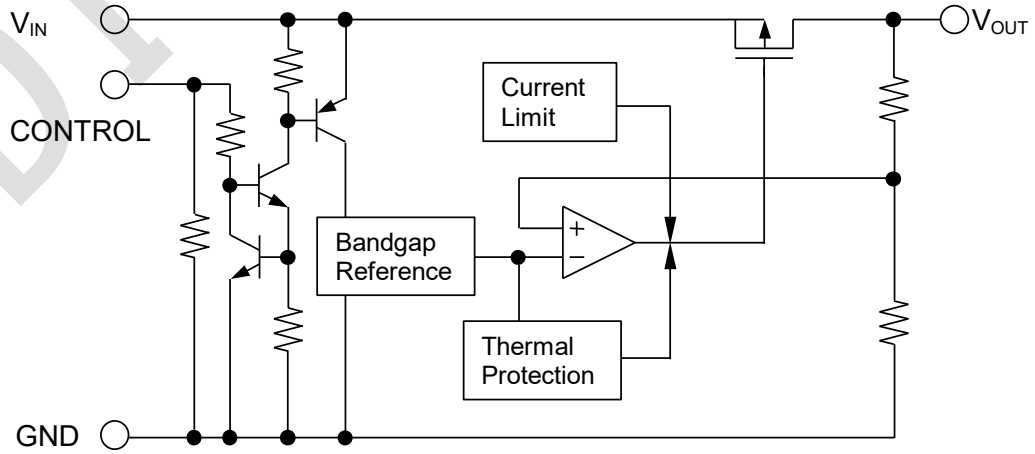

DISCONTINUED

■ OUTPUT VOLTAGE RANK LIST

Device Name	V_{OUT}
NJM2819ADL3-18	1.8V
NJM2819ADL3-21	2.1V
NJM2819ADL3-03	3.0V
NJM2819ADL3-33	3.3V
NJM2819ADL3-05	5.0V
NJM2819ADL3-515	5.15V
NJM2819ADL3-52	5.2V
NJM2819ADL3-07	7.0V

Output voltage options available : 1.8 ~ 7.0V

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	V_O > 6.0V : +10 5.0V < V_O ≤ 6.0V : +9 V_O ≤ 5.0V : +8	V
Control Voltage	V_{CONT}	V_O > 6.0V : +10 5.0V < V_O ≤ 6.0V : +9 V_O ≤ 5.0V : +8	V
Power Dissipation	P_D	1190(*1) 3125(*2)	mW
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +150	°C

(*1) : Mounted on glass epoxy board. (76.2x114.3x1.6mm:based on EIA/JEDEC standard size, 2Layers, Cu area 100mm^2)

(*2) : Mounted on glass epoxy board. (76.2x114.3x1.6mm:based on EIA/JEDEC standard, 4Layers)

(For 4Layers: Applying 74.2x74.2mm inner Cu area and thermal via holes to a board based on JEDEC standard JESD51-5)

■ OPERATING VOLTAGE

$V_{IN}=V_O + \Delta V_{I-O}$ ~ 9V (In case of V_O > 6.0V version)

$V_{IN}=V_O + \Delta V_{I-O}$ ~ 8V (In case of 5.0V < V_O ≤ 6.0V version)

$V_{IN}=V_O + \Delta V_{I-O}$ ~ 7V (In case of 2.1V ≤ V_O ≤ 5.0V version)

V_{IN}=2.3V ~ 7V (In case of V_O < 2.1V version)

DISCONTINUED

■ ELECTRICAL CHARACTERISTICS (V_{IN}=Vo+1V, C_{IN}=4.7µF, Co=4.7µF(Co=10µF : 1.8V≤Vo<2.1V), Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Output Voltage	Vo	Io=100mA		-1.0%	-	+1.0%	V
Quiescent Current	I_Q	Io=0mA, exclude I_{CONT}		-	500	800	µA
Quiescent Current at Control OFF	$I_{Q\,(OFF)}$	V_{CONT}=0V		-	-	1	µA
Output Current	Io	Vo - 0.3V		2	3	-	A
Line Regulation	$\Delta Vo/\Delta V_{IN}$	V_O>5.0V : V_{IN}=Vo+1V ~ 9V, 5.0V < V_O ≤ 6.0V : V_{IN}=Vo+1V ~ 8V, V_O≤5.0V : V_{IN}=Vo+1V ~ 7V, Io=100mA		-	-	0.1	%/V
Load Regulation	$\Delta Vo/\Delta Io$	Io=0 ~ 2.0A		-	0.05	0.4	%/A
Dropout Voltage(*3)	ΔV_{I-O}	Io=1.0A	2.1V ≤ Vo < 2.5V	-	0.14	0.25	V
			2.5V ≤ Vo < 2.8V	-	0.11	0.20	
			2.8V ≤ Vo < 3.4V	-	0.10	0.18	
			3.4V ≤ Vo ≤ 7.0V	-	0.09	0.16	
Ripple Rejection	RR	ein=200mVrms,f=1kHz, Io=100mA, Vo=3V Version		-	65	-	dB
Average Temperature Coefficient of Output Voltage	$\Delta Vo/\Delta Ta$	Ta=0 ~ 85°C, Io=100mA		-	±50	-	ppm/°C
Output Noise Voltage	V_{NO}	f=10Hz ~ 80kHz, Io=100mA, Vo=3V Version		-	42	-	µVrms
Control Current	I_{CONT}	V_{CONT}=1.6V		-	3	12	µA
Control Voltage for ON-state	$V_{CONT(ON)}$			1.6	-	-	V
Control Voltage for OFF-state	$V_{CONT(OFF)}$			-	-	0.6	V
Minimum Input Voltage	$V_{IN\,(MIN.)}$	Vo<2.1V	Io≤1.5A, Vo×0.96	2.3	-	-	V
			1.5A<Io≤2.0A, Vo×0.96	2.4	-	-	V

(*3): The output voltage excludes under 2.1V.

The above specification is a common specification for all output voltages.

Therefore, it may be different from the individual specification for a specific output voltage.

DISCONTINUED

■ POWER DISSIPATION vs. AMBIENT TEMPERATURE

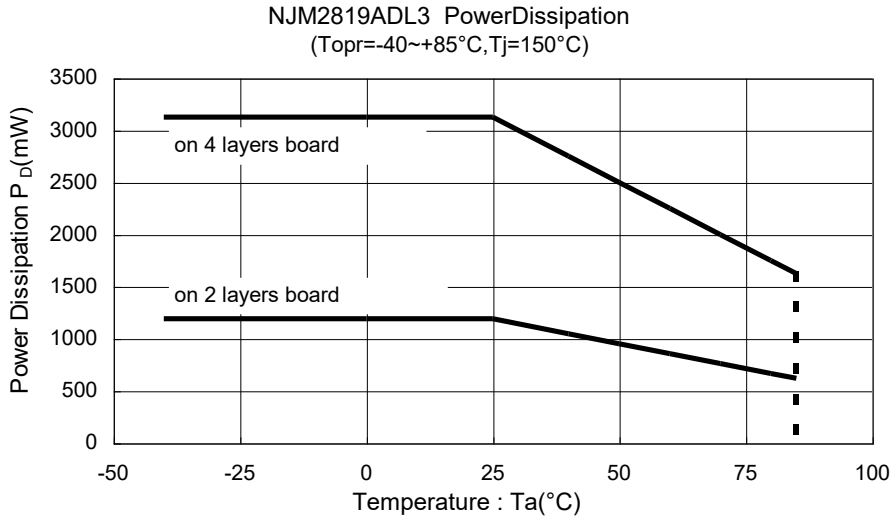

■ TEST CIRCUIT

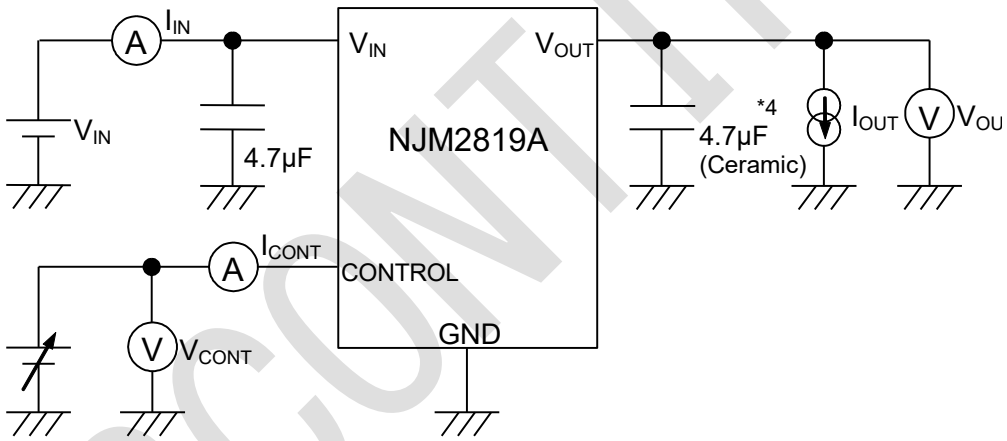

*4 : 1.8 ≤Vo<2.6V version : Co=10µF (Ceramic)

DISCONTINUED

■ TYPICAL APPLICATION

① In the case where ON/OFF Control is not required:

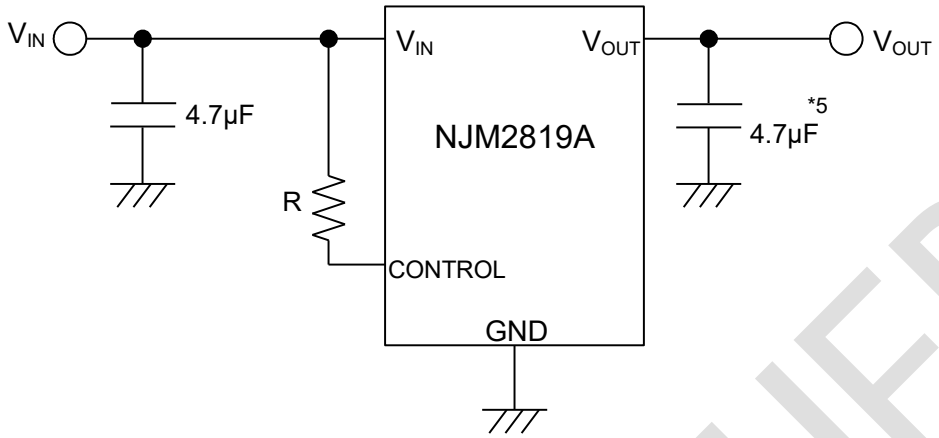

*5 : 1.8 ≤Vo<2.6V version : Co=10μF

Connect control terminal to V_{IN} terminal

② In use of ON/OFF CONTROL:

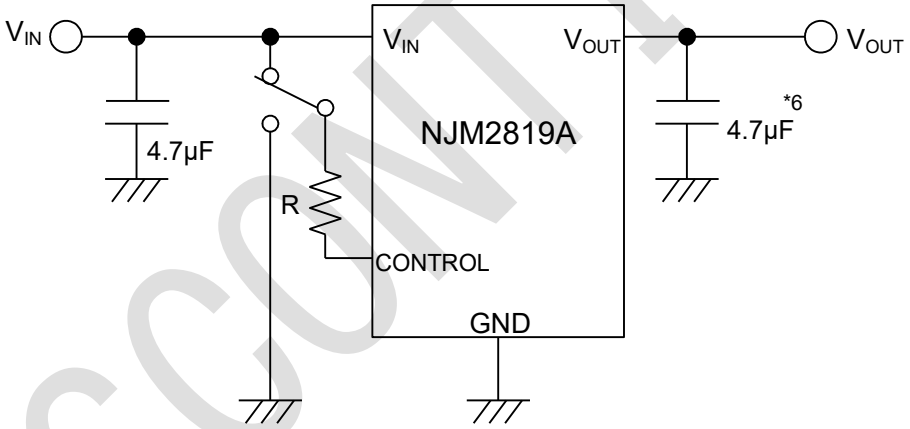

*6 : 1.8 ≤Vo<2.6V version : Co=10μF

State of control terminal:

- "H"→ output is enabled.
- "L" or "open" → output is disabled.

∗In the case of using a resistance "R" between V_{IN} and control.

If this resistor is inserted, it can reduce the control current when the control voltage is high.

The applied voltage to control pin should set to consider voltage drop through the resistor "R" and the minimum control voltage for ON-state.

The $V_{CONT\,(ON)}$ and I_{CONT} have temperature dependence as shown in the "Control Current vs. Temperature" and " Control Voltage vs. Temperature" characteristics. Therefore, the resistance "R" should be selected to consider the temperature characteristics.

DISCONTINUED

∗Input Capacitor C_{IN}

Input Capacitor C_{IN} is required to prevent oscillation and reduce power supply ripple for applications with high power supply impedance or a long power supply line.
Use the C_{IN} value of 4.7µF greater to avoid the problem.
C_{IN} should connect between GND and V_{IN} as short as possible.

∗Output Capacitance C_O

The output capacitor C_O is required for a phase compensation of the internal error amplifier, and the capacitance and the equivalent series resistance (ESR) influence stable operation of the regulator.
If use a smaller output capacitor than the recommended capacitance (refer to conditions of ELECTRIC CHARACTERISTIC), it may cause excess output noise or oscillation of the regulator due to lack of the phase compensation. Therefore, the recommended capacitance or larger output capacitor, connected between V_{OUT} and GND as short path as possible, is recommended for stable operation. The recommended capacitance may be different by output voltage, therefore confirm the recommended capacitance of the required output voltage.
Furthermore, a larger output capacitor reduces output noise and ripple output, and also improves Output Transient Response when a load changes rapidly.
Selecting the output capacitor, should consider varied characteristics of a capacitor: frequency characteristics, temperature characteristics, DC bias characteristics and so on. Therefore, the capacitor that has a sufficient margin of the rated voltage against the output voltage and superior temperature characteristics, is recommended for C_O.

∗ When distance from an IC to load is long, an IC may cause malfunction by wiring capacity and an L ingredient
Please use it after having evaluated it enough.

DISCONTINUED

■ TYPICAL CHARACTERISTICS

NJM2819A_3.0V
Output Voltage vs.Input Voltage

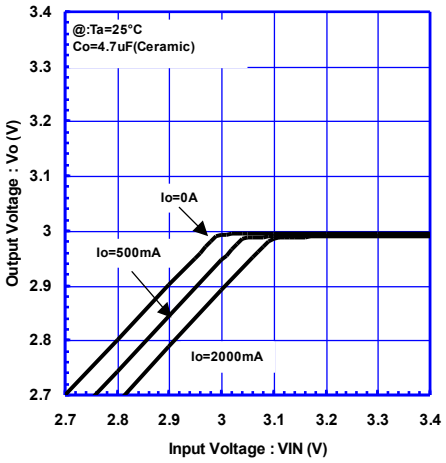

NJM2819A_3.0V
Output Volatage vs.Output Current

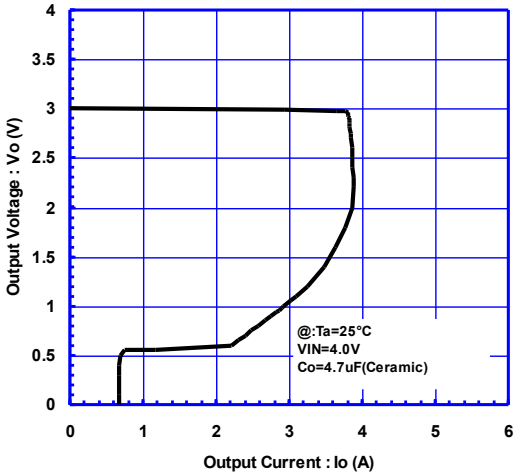

NJM2819A_3.0V
Ground Pin Current vs.Output Current

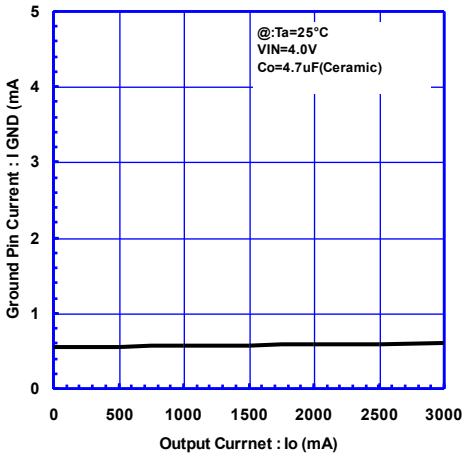

NJM2819A_3.0V
Dropout Voltage vs.Output Current

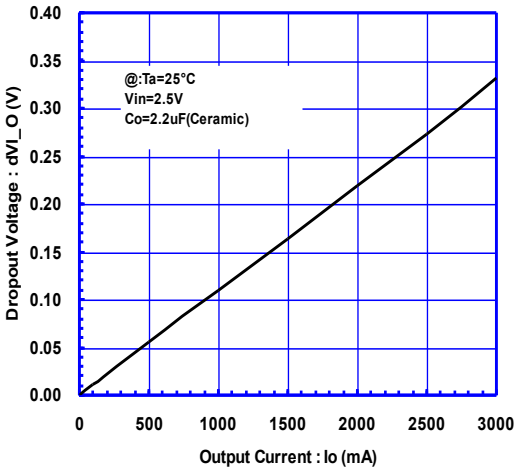

NJM2819A_3.0V
Control Current vs.Control Voltage

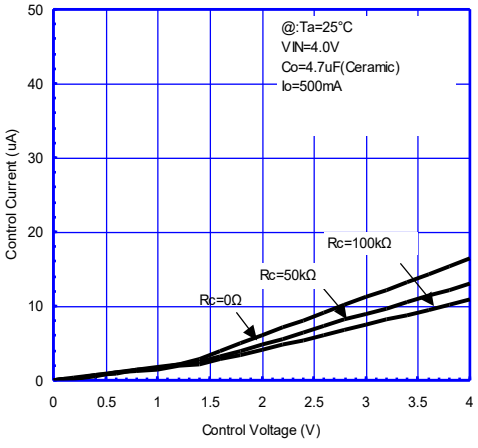

NJM2819A_3.0V
Output Voltage vs. Control Voltage

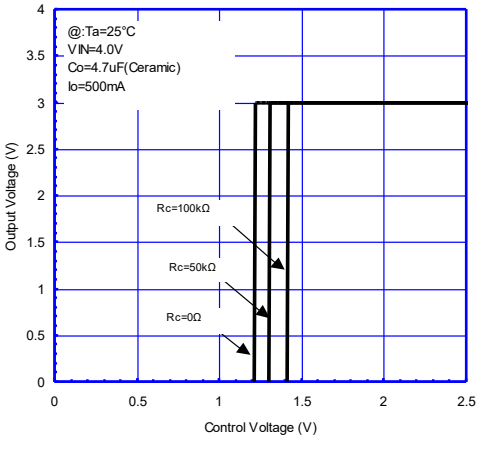

NJM2819A_3.0V
Load Regulation vs.Output Current

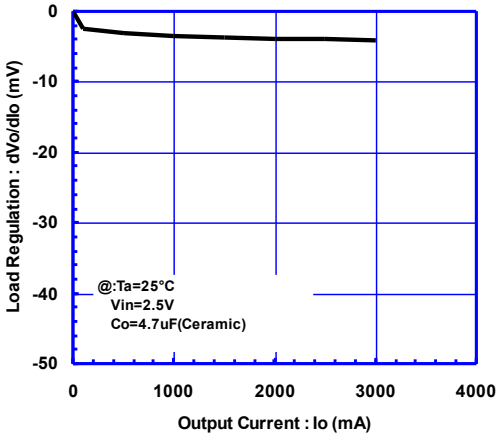

NJM2819A_3.0V
Peak Output Current vs.Input Voltage

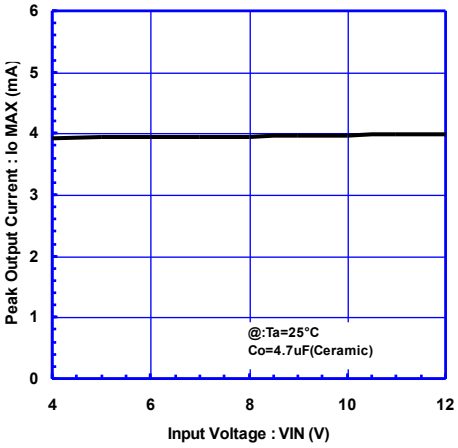

NJM2819A_3.0V
Quiescent Current vs.Input Voltage

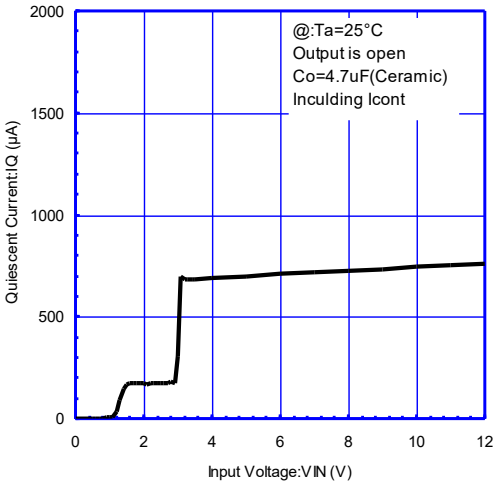

NJM2819A_3.0V
Output Noize Voltage vs.Output Current

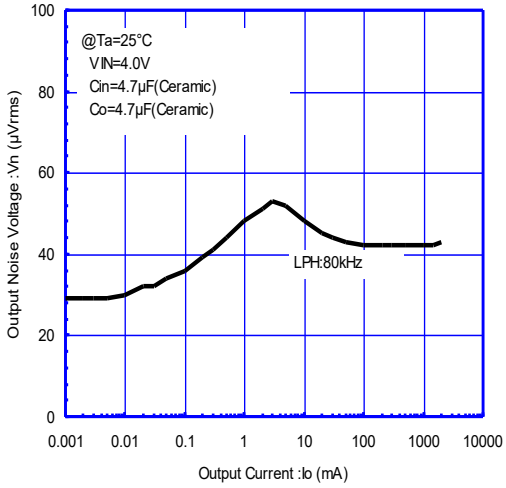

NJM2819A_3.0V
Ripple Rejection Ratio vs.Frequency

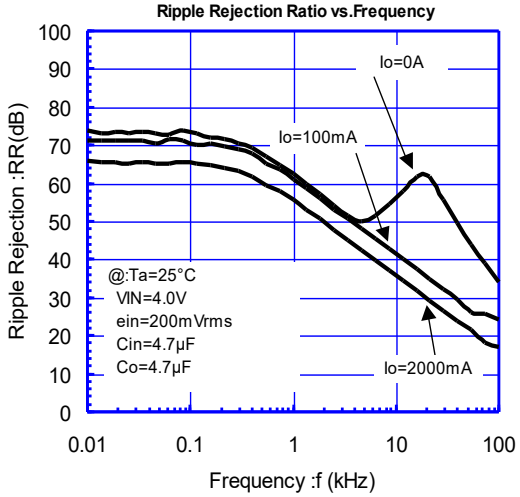

NJM2819A_3.0V
Ripple Rejection vs.Output Current

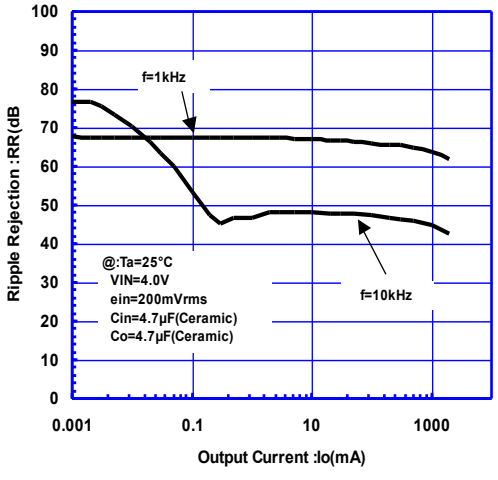

NJM2819A_3.0V
Equivalent Serise Resistance vs. Output Current

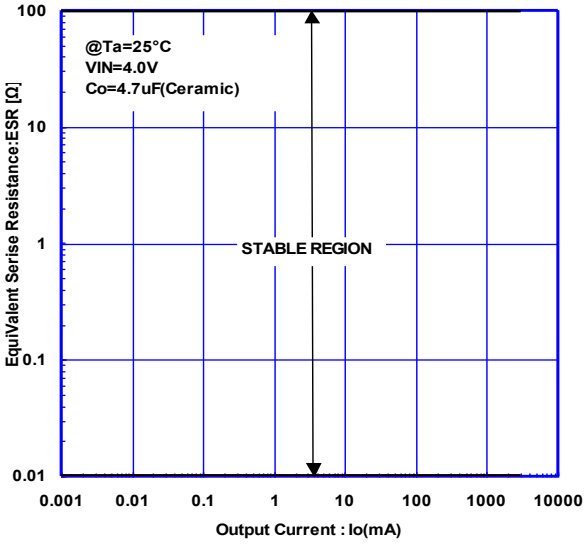

NJM2819A_3.0V
Dropout Voltage vs.Temperature

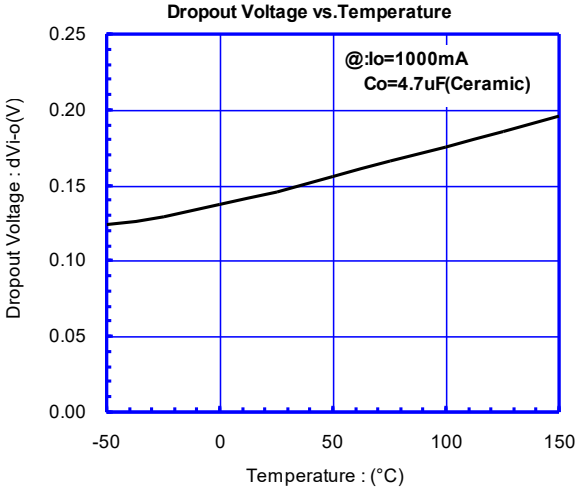

NJM2819A_3.0V
Output Voltage vs.Temperature

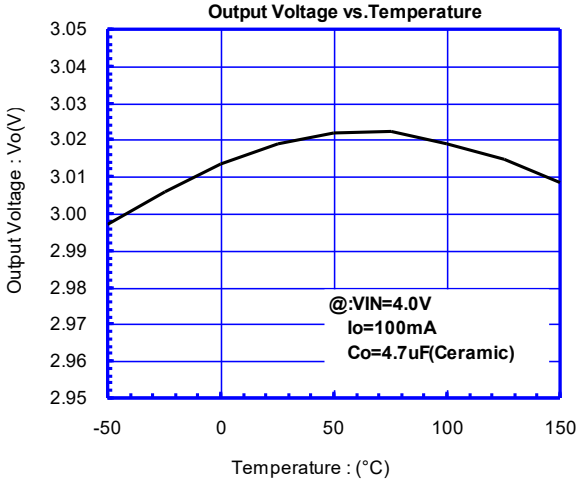

NJM2819A_3.0V
Control Voltage vs.Temperature

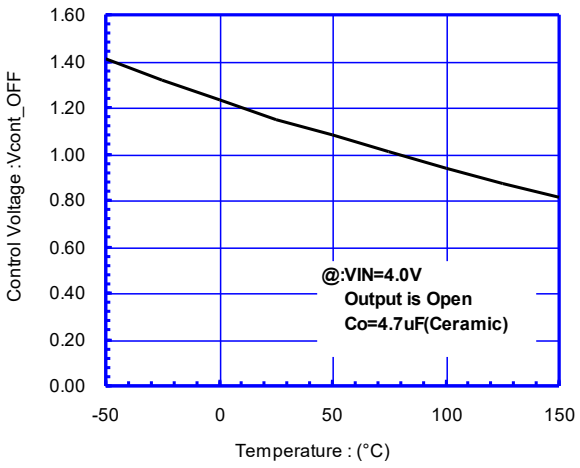

NJM2819A_3.0V
Control Current vs.Temperature

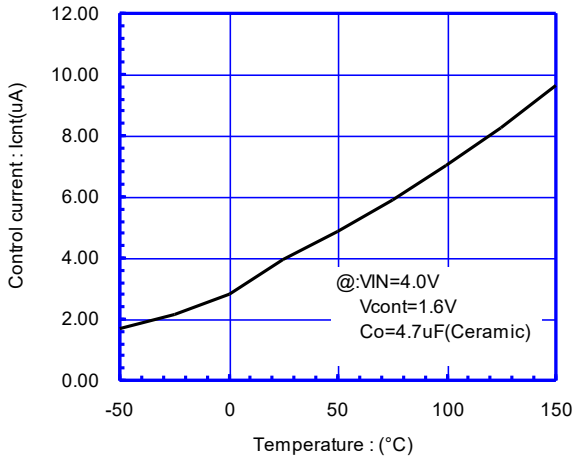

NJM2819A_3.0V
Quiescent Current vs.Temperature

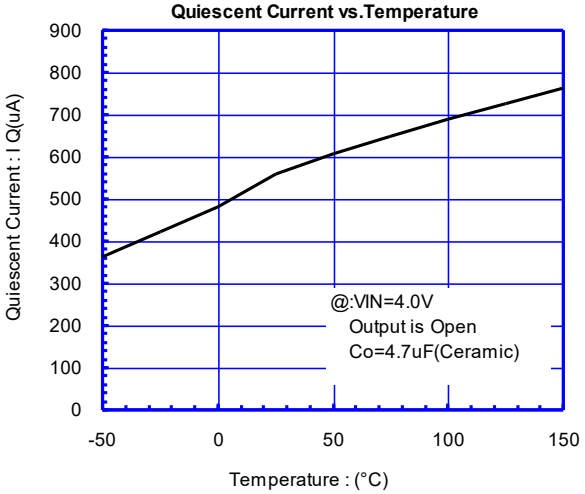

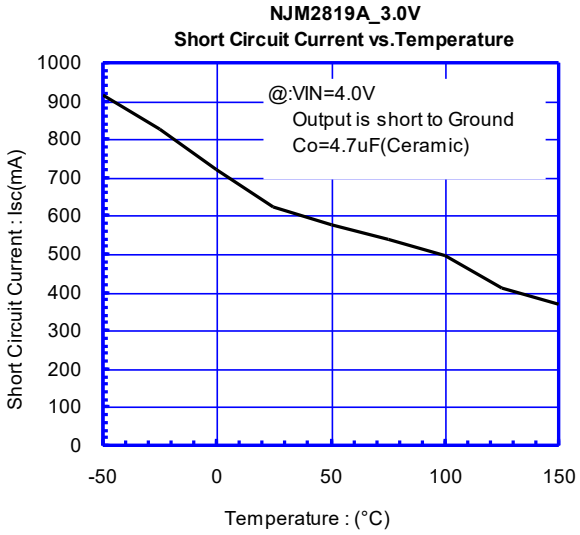
NJM2819A_3.0V
Short Circuit Current vs.Temperature
@:VIN=4.0V
Output is short to Ground
Co=4.7uF(Ceramic)
Short Circuit Current : Isc(mA)
1000
900
800
700
600
500
400
300
200
100
0
-50
0
50
100
150
Temperature : (°C)

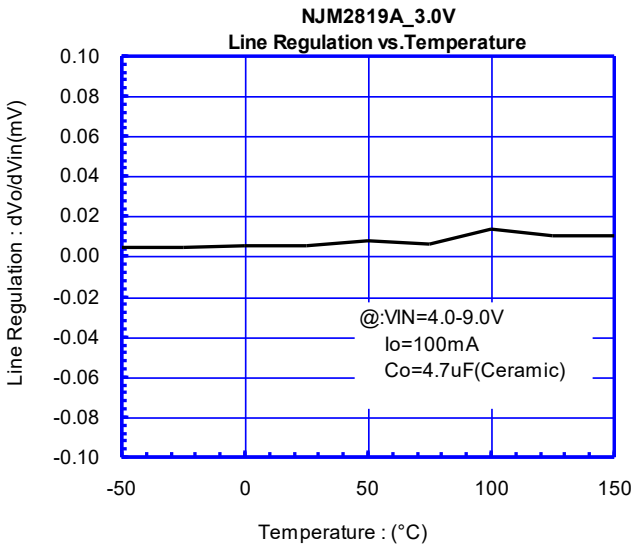
NJM2819A_3.0V
Line Regulation vs.Temperature
@:VIN=4.0-9.0V
Io=100mA
Co=4.7uF(Ceramic)
Line Regulation : dVo/dVin(mV)
0.10
0.08
0.06
0.04
0.02
0.00
-0.02
-0.04
-0.06
-0.08
-0.10
-50
0
50
100
150
Temperature : (°C)

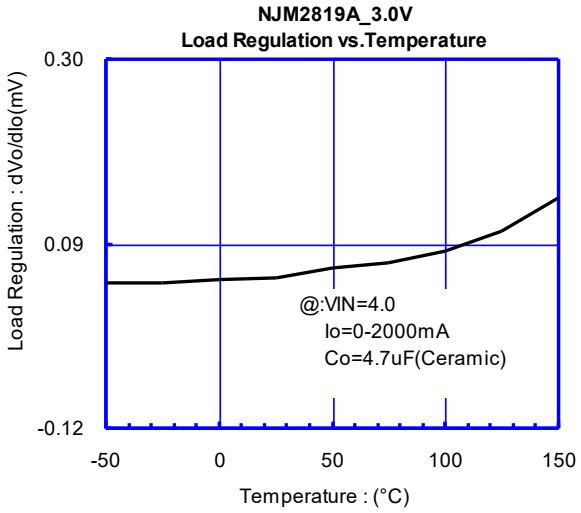
NJM2819A_3.0V
Load Regulation vs.Temperature
@:VIN=4.0
Io=0-2000mA
Co=4.7uF(Ceramic)
Load Regulation : dVo/dIo(mV)
0.30
0.09
-0.12
-50
0
50
100
150
Temperature : (°C)

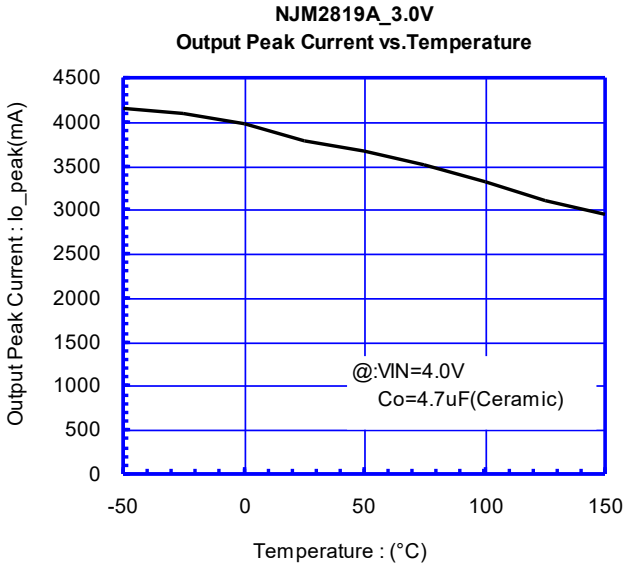
NJM2819A_3.0V
Output Peak Current vs.Temperature
@:VIN=4.0V
Co=4.7uF(Ceramic)
Output Peak Current : Io_peak(mA)
4500
4000
3500
3000
2500
2000
1500
1000
500
0
-50
0
50
100
150
Temperature : (°C)

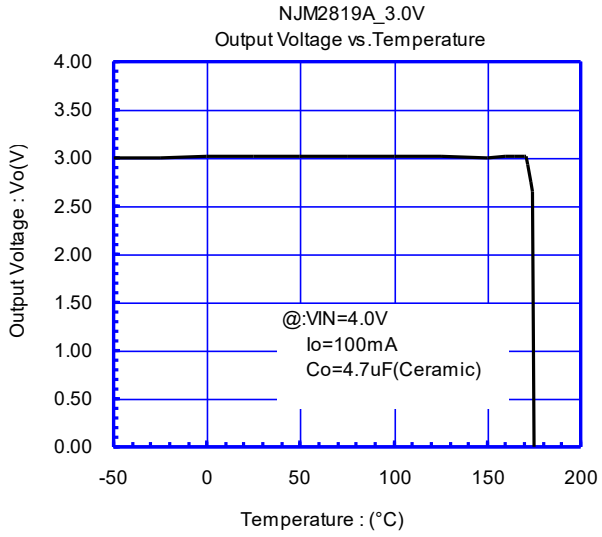
NJM2819A_3.0V
Output Voltage vs.Temperature
@:VIN=4.0V
Io=100mA
Co=4.7uF(Ceramic)
Output Voltage : Vo(V)
4.00
3.50
3.00
2.50
2.00
1.50
1.00
0.50
0.00
-50
0
50
100
150
200
Temperature : (°C)

NJM2819A_3.0V
ON/OFF Transient Response without Load

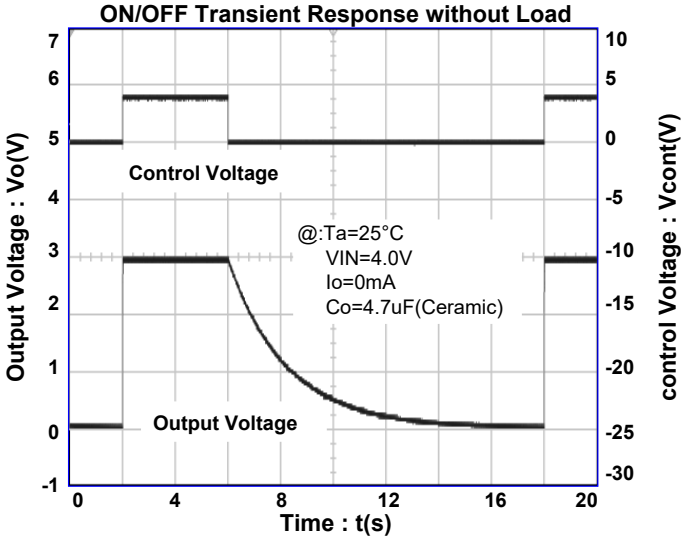

NJM2819A_3.0V
ON/OFF Transient Response

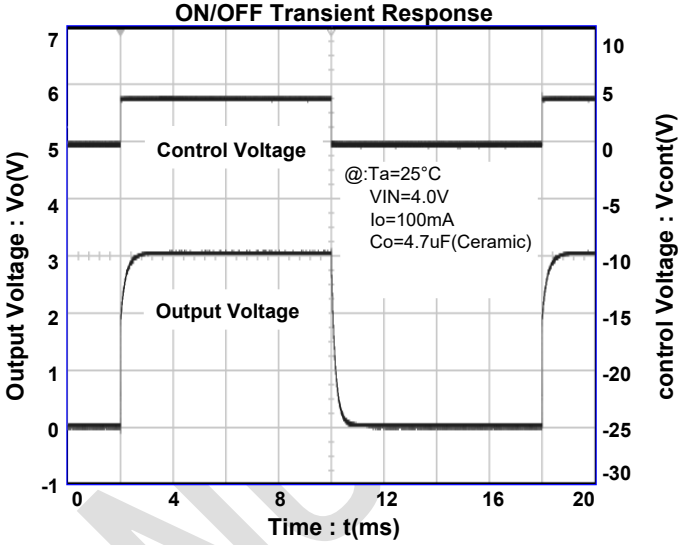

NJM2819A_3.0V
Load Transient Response

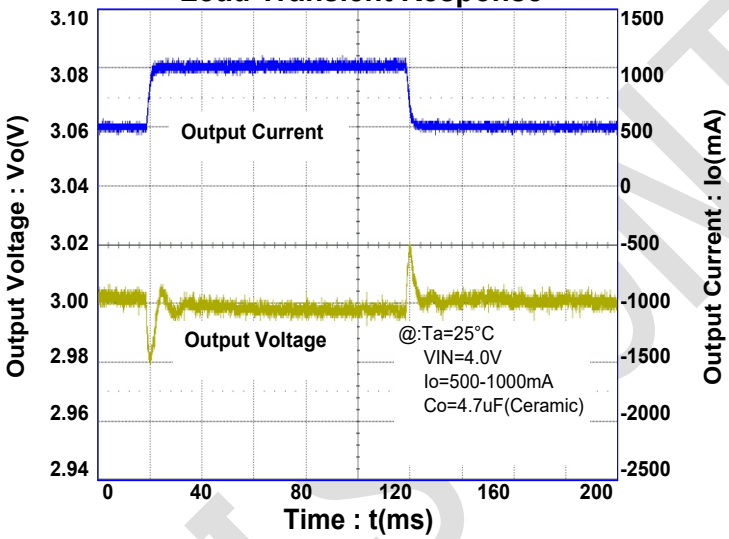

NJM2819A_3.0V
Input Transient Response

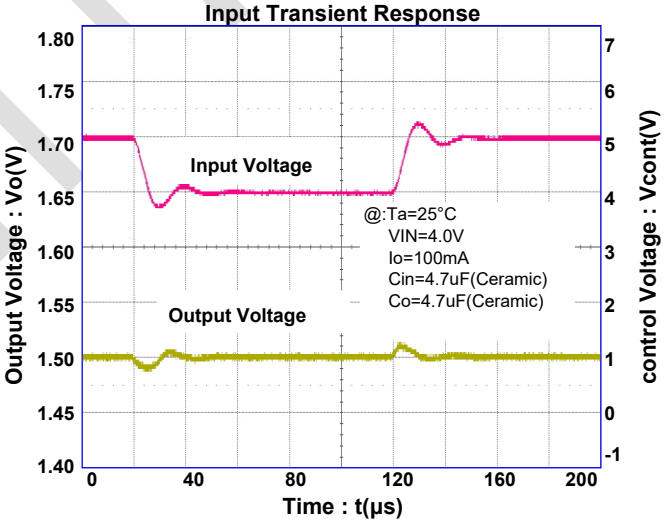

[CAUTION]
The specifications on this datasheet are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this datasheet are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.