Ultra Low Noise Low Dropout Voltage Regulator

■ GENERAL DESCRIPTION

The NJM2863/64 is a low dropout voltage regulator designed for VCO Applications.

Advanced Bipolar technology achieves ultra low noise, high ripple rejection and low quiescent current.

■ PACKAGE OUTLINE



NJM2863F/64F

■ FEATURES

- ● High Ripple Rejection 75dB typ. (f=1kHz,Vo=3V Version)
- ● Output capacitor with 1.0µF ceramic capacitor
- ● Output Noise Voltage Vno=19µVrms typ. (Cp=0.01µF, Co=1.0µF(Ceramic))
  Vno=12µVrms typ. (Cp=0.1µF, Co=10µF(Tantalum))
- ● Output Current Io(max.)=100mA
- ● High Precision Output Vo±1.0%
- ● Low Dropout Voltage 0.10V typ. (Io=60mA)
- ● ON/OFF Control (Active High)
- ● Internal Short Circuit Current Limit
- ● Internal Thermal Overload Protection
- ● Bipolar Technology
- ● Package Outline SOT-23-5

■ PIN CONFIGURATION



1.CONTROL
2.GND
3.NOISE BYPASS
4.V_{OUT}
5.V_{IN}

NJM2863F



1.V_{IN}
2.GND
3.CONTROL
4.NOISE BYPASS
5.V_{OUT}

NJM2864F

■ EQUIVALENT CIRCUIT

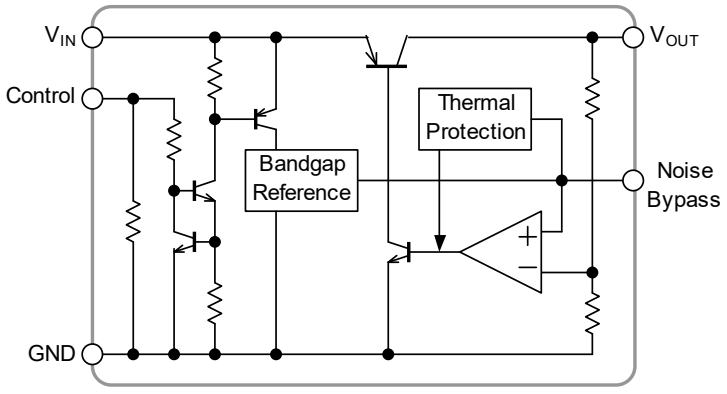

■ OUTPUT VOLTAGE RANK LIST

Device Name	V_{OUT}	Device Name	V_{OUT}
NJM286×F21	2.1V	NJM286×F29	2.9V
NJM286×F25	2.5V	NJM286×F03	3.0V
NJM286×F27	2.7V	NJM286×F33	3.3V
NJM286×F28	2.8V	NJM286×F05	5.0V
NJM286×F285	2.85V		

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS		UNIT
Input Voltage	V_{IN}	+14		V
Control Voltage	V_{CONT}	+14(*1)		V
Power Dissipation	P_D	SOT-23-5	350(*2)	mW
			200(*3)	
Operating Temperature	Topr	–40 ~ +85		°C
Storage Temperature	Tstg	–40 ~ +125		°C

(*1): When input voltage is less than +14V, the absolute maximum control voltage is equal to the input voltage.

(*2): Mounted on glass epoxy board based on EIA/JEDEC. (114.3x76.2x1.6mm: 2Layers)

(*3): Device itself.

■ ELECTRICAL CHARACTERISTICS (V_{IN}=Vo+1V, C_{IN}=0.1µF, Co=1.0µF, Cp=0.01µF, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	Vo	Io=30mA	-1.0%	–	+1.0%	V
Quiescent Current	I_Q	Io=0mA, except Icont	–	120	180	µA
Quiescent Current at Control OFF	$I_{Q(OFF)}$	V_{CONT}=0V	–	–	100	nA
Output Current	Io	Vo-0.3V	100	130	–	mA
Line Regulation	$\Delta Vo/\Delta V_{IN}$	V_{IN}=Vo+1V ~ Vo+6V, Io=30mA	–	–	0.10	%/V
Load Regulation	$\Delta Vo/\Delta Io$	Io=0 ~ 100mA	–	–	0.03	%/mA
Dropout Voltage	ΔV_{I-O}	Io=60mA	–	0.10	0.18	V
Ripple Rejection	RR	ein=200mVrms,f=1kHz, Io=10mA, Vo=3V Version	–	75	–	dB
Average Temperature Coefficient of Output Voltage	$\Delta Vo/\Delta Ta$	Ta=0~85°C, Io=10mA	–	±50	–	ppm/°C
Output Noise Voltage1	V_{NO1}	f=10Hz~80kHz, Io=10mA, Cp=0.01µF, Co=1.0µF (Ceramic), Vo=3V Version	–	19	–	µVrms
Output Noise Voltage2	V_{NO2}	f=10Hz~80kHz, Io=10mA, Cp=0.1µF, Co=10µF (Tantalum), Vo=3V Version		12		µVrms
Control Voltage for ON-state	$V_{CONT(ON)}$		1.6	–	–	V
Control Voltage for OFF-state	$V_{CONT(OFF)}$		–	–	0.6	V

The above specification is a common specification for all output voltages.
Therefore, it may be different from the individual specification for a specific output voltage.

■ TEST CIRCUIT

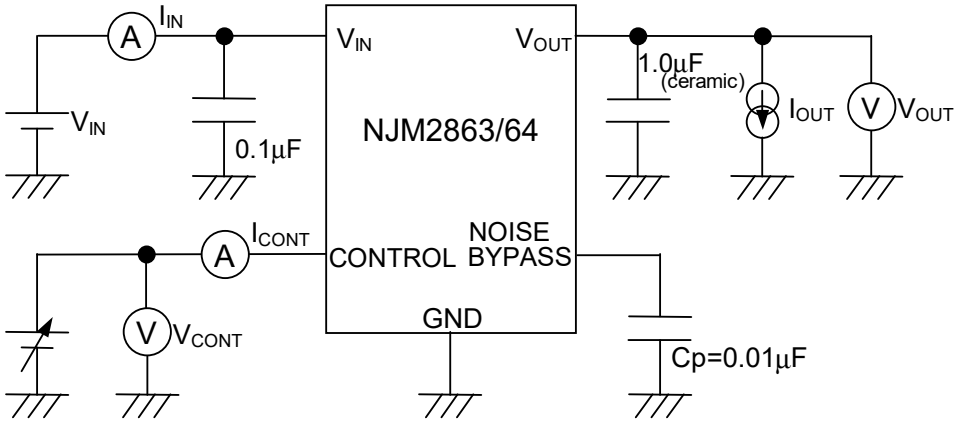

■ TYPICAL APPLICATION

① In the case where ON/OFF Control is not required:

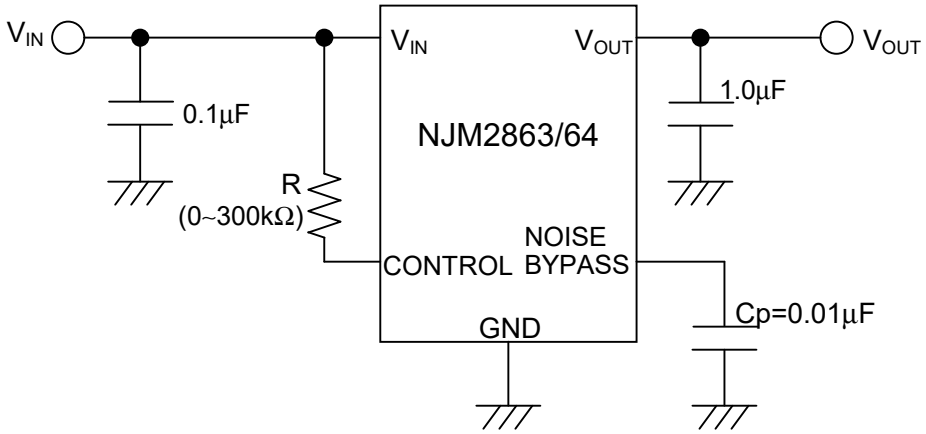

Connect control terminal to V_{IN} terminal

② In use of ON/OFF CONTROL:

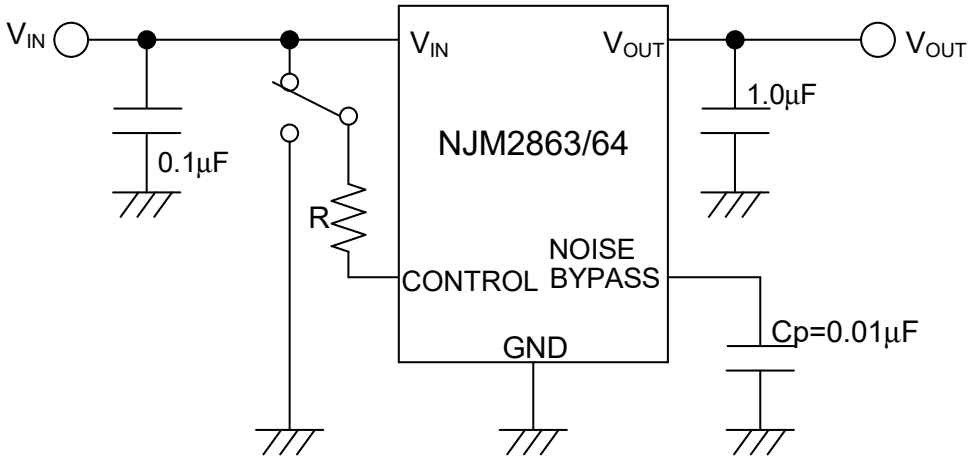

State of control terminal:

- "H"→ output is enabled.
- "L" or "open" → output is disabled.

∗Noise bypass Capacitance Cp

Noise bypass capacitance Cp reduces noise generated by band-gap reference circuit. Noise level and ripple rejection will be improved when larger Cp is used. Use of smaller Cp value may cause oscillation.
Use the Cp value of 0.01µF greater to avoid the problem.

∗In the case of using a resistance "R" between V_{IN} and control.

The current flow into the control terminal while the IC is ON state (I_{CONT}) can be reduced when a pull up resistance "R" is inserted between V_{IN} and the control terminal.
The minimum control voltage for ON state ($V_{CONT\,(ON)}$) is increased due to the voltage drop caused by I_{CONT} and the resistance "R". The I_{CONT} is temperature dependence as shown in the "Control Current vs. Temperature" characteristics. Therefore, the resistance "R" should be carefully selected to ensure the control voltage exceeds the $V_{CONT\,(ON)}$ over the required temperature range.

■ POWER DISSIPATION vs. AMBIENT TEMPERATURE

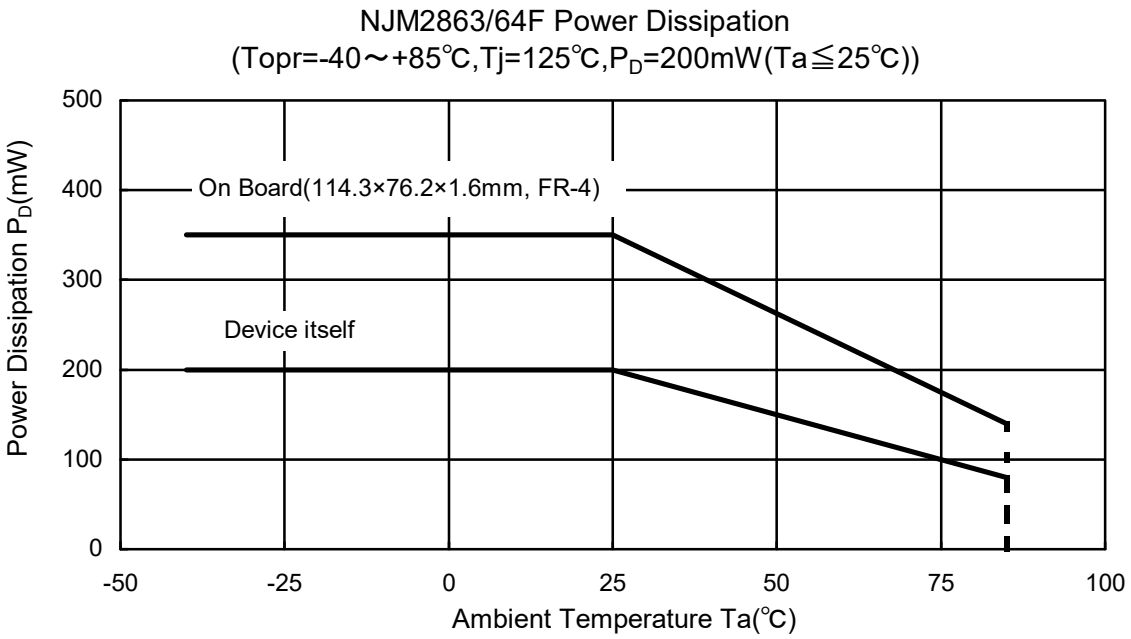

■ ELECTRICAL CHARACTERISTICS

NJM2863/64_3.0V
Output Voltage v.s. Input Voltage

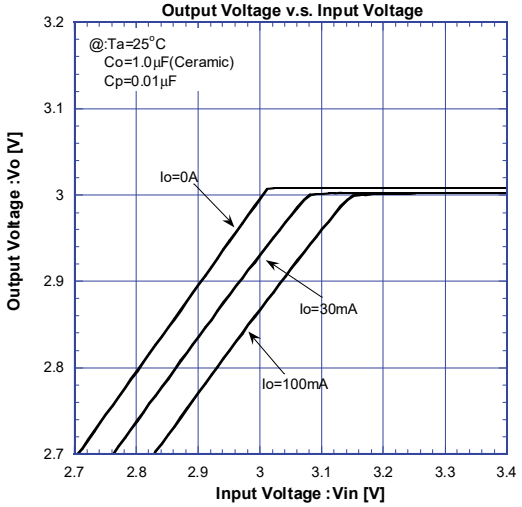

NJM2863/64_3.0V
Output Voltage vs. Output Current

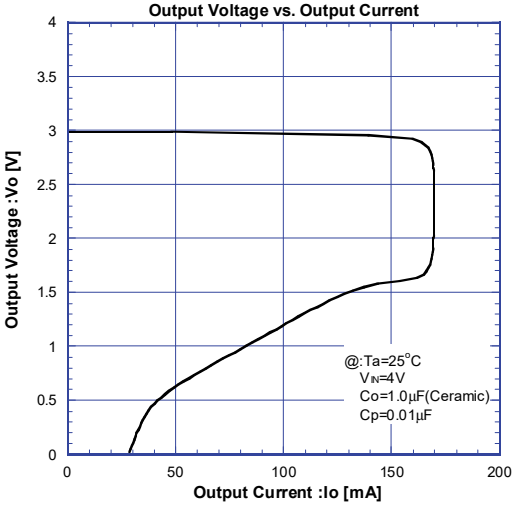

NJM2863/64_3.0V
Ground Pin Current vs. Output Voltage

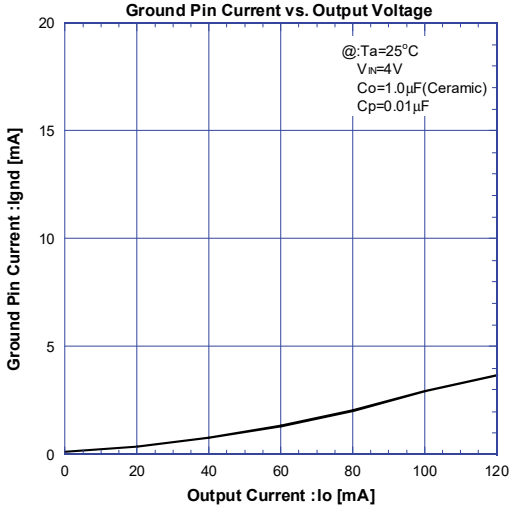

NJM2863/64_3.0V
Dropout Voltage vs. Output Current

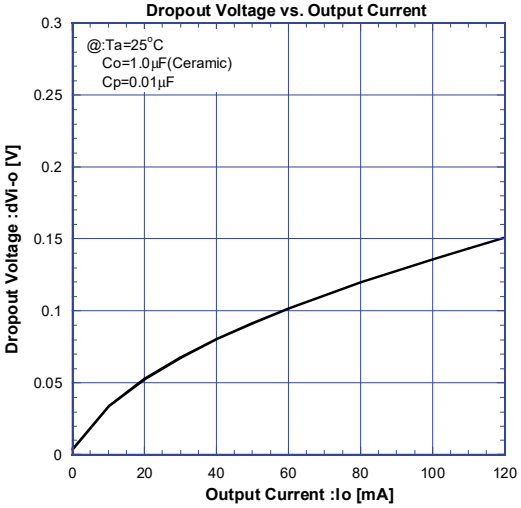

NJM2863/64_3.0V
Control Current v.s. Control Voltage

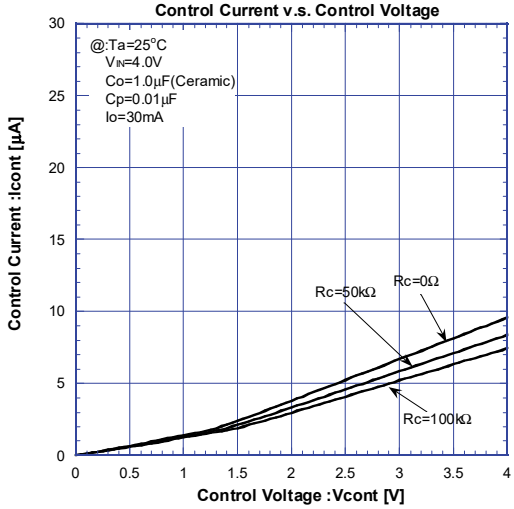

NJM2863/64_3.0V
Output Voltage v.s. Control Voltage

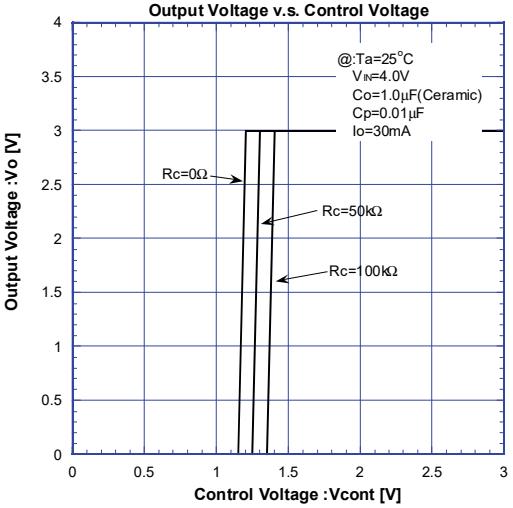

■ ELECTRICAL CHARACTERISTICS

NJM2863_3.0V
Load Regulation vs. Output Current

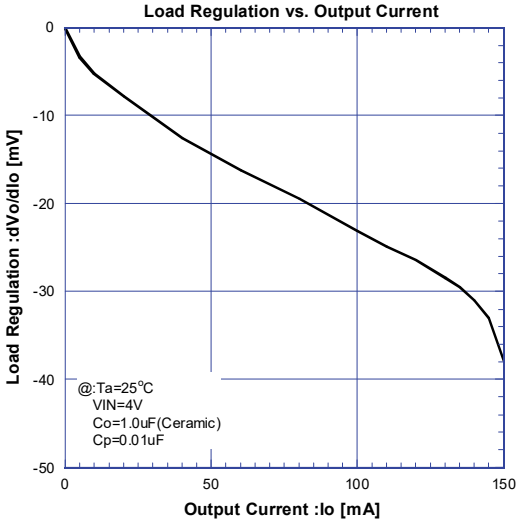

NJM2863_3.0V
Peak Output Current vs. Input Voltage

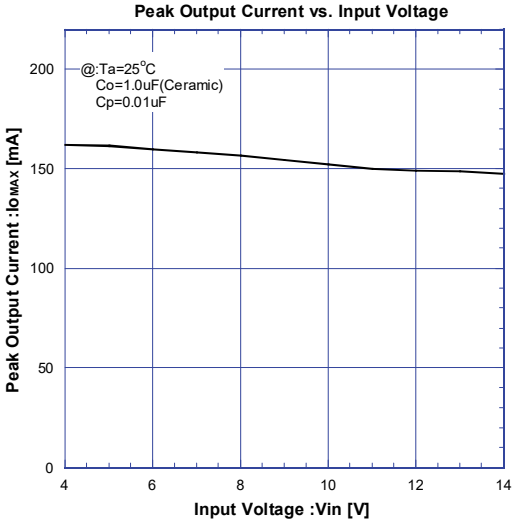

NJM2863_3.0V
Quiescent Current v.s. Input Voltage

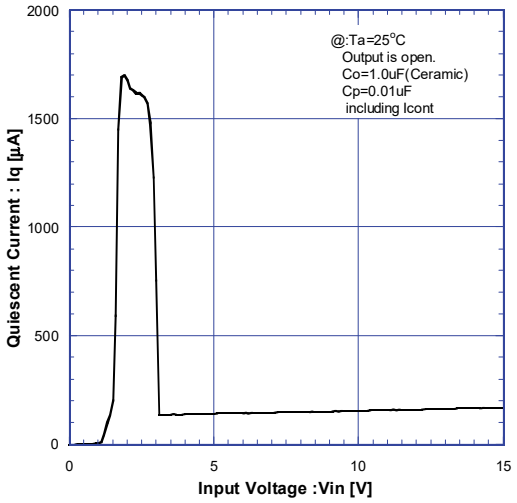

NJM2863/64_3.0V
Output Noise Voltage vs. Noise Bypass Capacitor

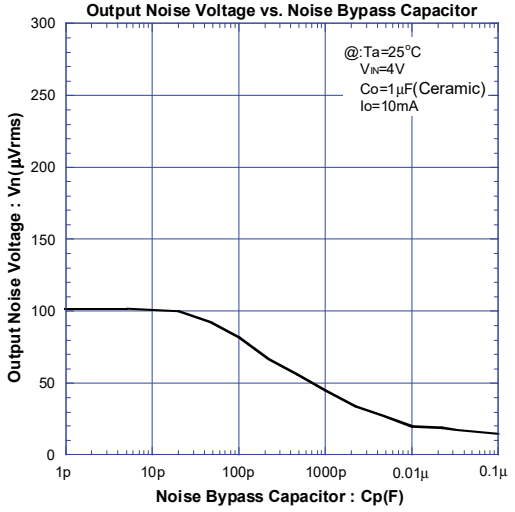

NJM2863/64_3.0V
Output Noise Voltage vs. Output Current

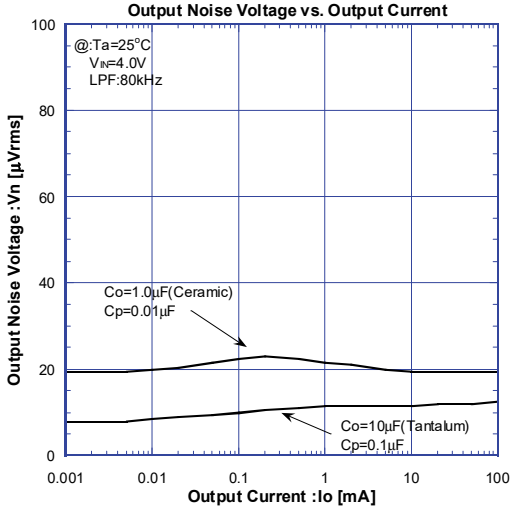

NJM2863/64_3.0V
Ripple Rejection Ratio v.s. Frequency

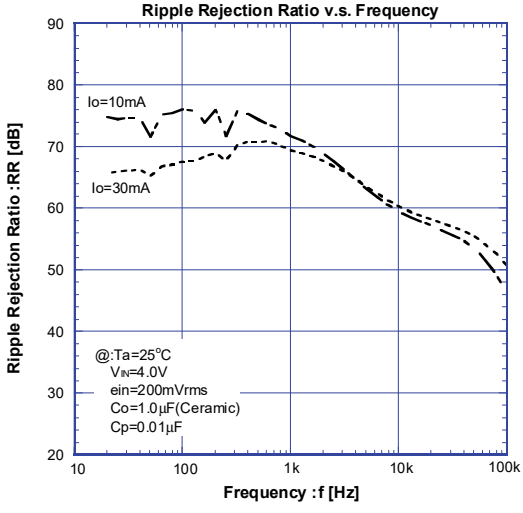

■ ELECTRICAL CHARACTERISTICS

NJM2863/64_3.0V
Ripple Rejection vs. Output Current

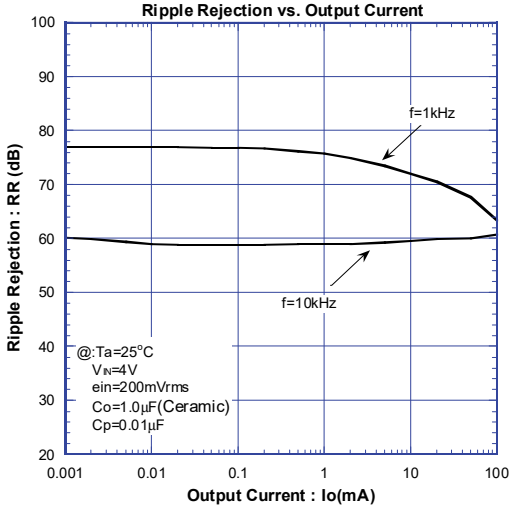

NJM2863/64_3.0V
Equivalent Series Resistance vs. Output Current

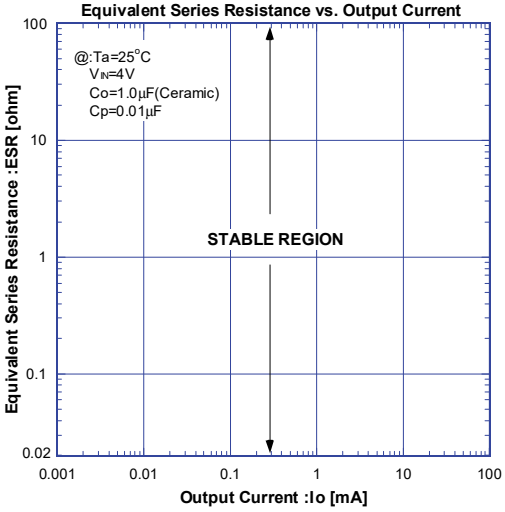

NJM2863/64_3.0V
Dropout Voltage v.s. Temperature

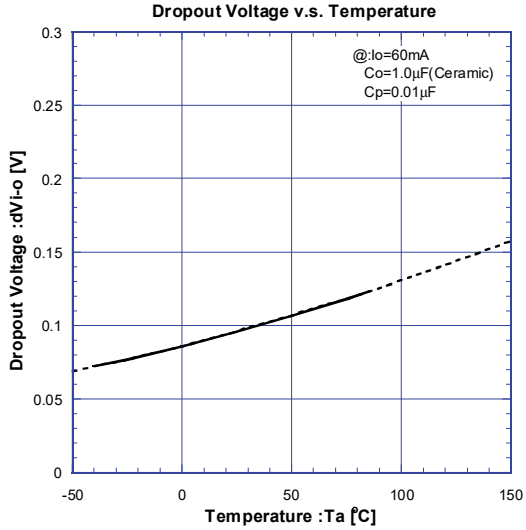

NJM2863_3.0V
Output Voltage v.s. Temperature

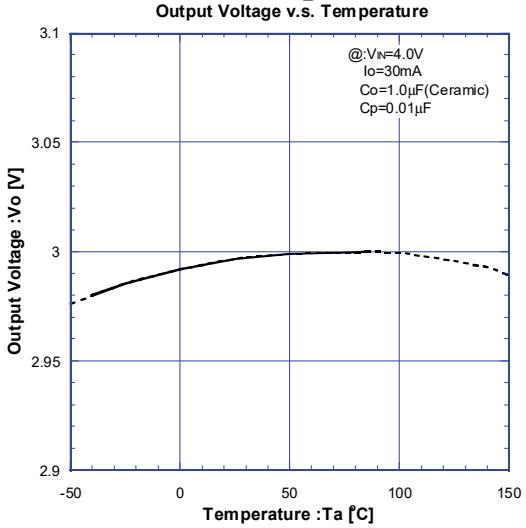

NJM2863/64_3.0V
Control Voltage v.s. Temperature

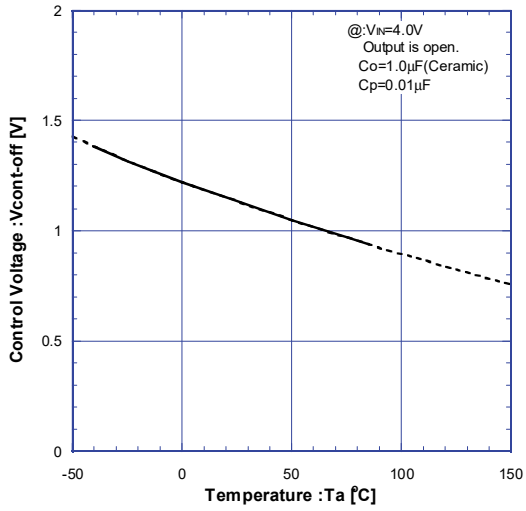

NJM2863/64_3.0V
Control Current v.s. Temperature

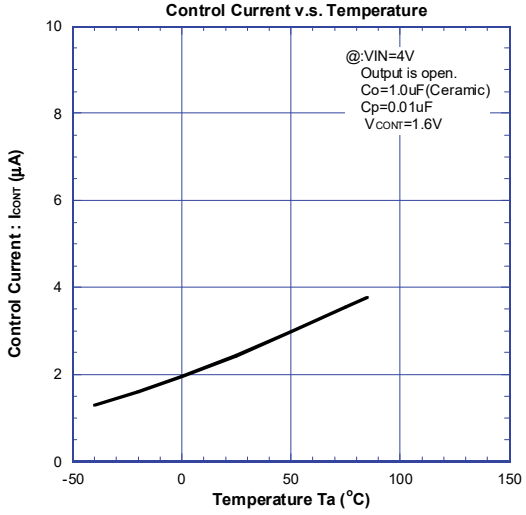

■ ELECTRICAL CHARACTERISTICS

NJM2863_3.0V
Quiescent Current v.s. Temperature

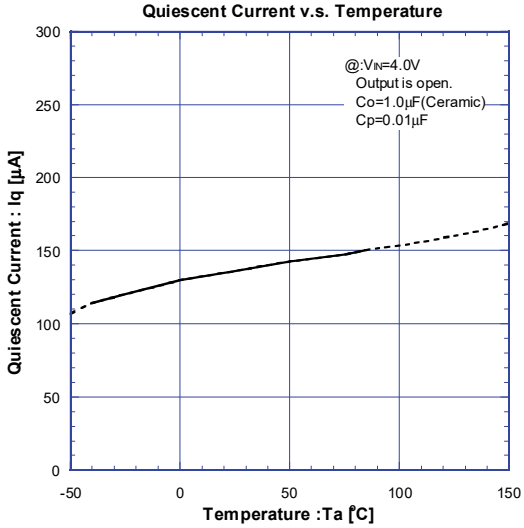

NJM2863_3.0V
Short Circuit Current v.s. Temperature

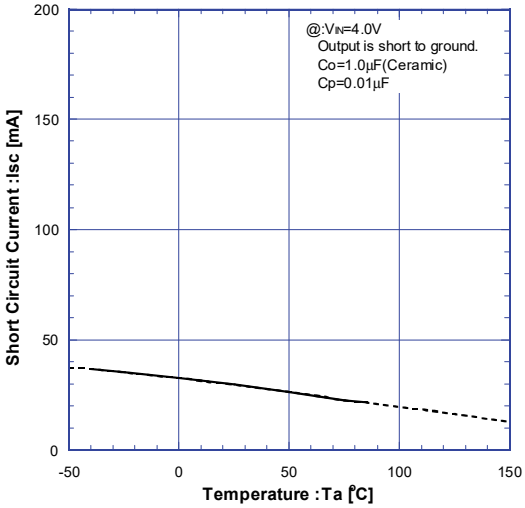

NJM2863_3.0V
Line Regulation v.s. Temperature

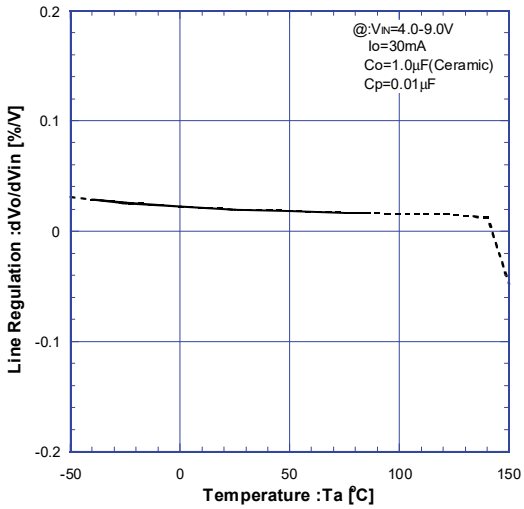

NJM2863_3.0V
Load Regulation v.s. Temperature

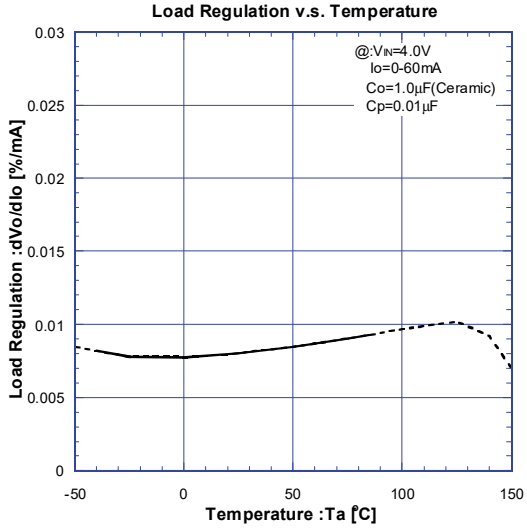

NJM2863_3.0V
Output Voltage v.s. Temperature

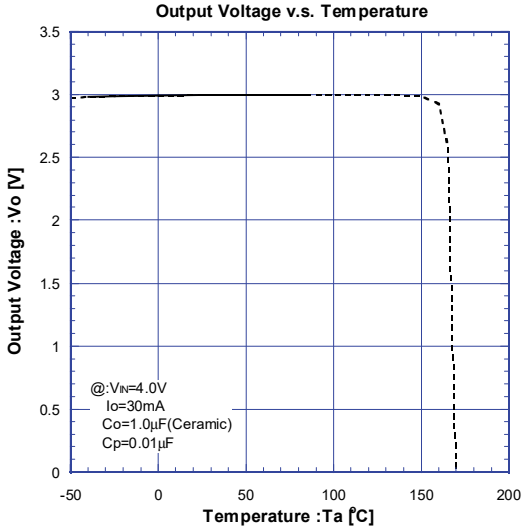

■ ELECTRICAL CHARACTERISTICS

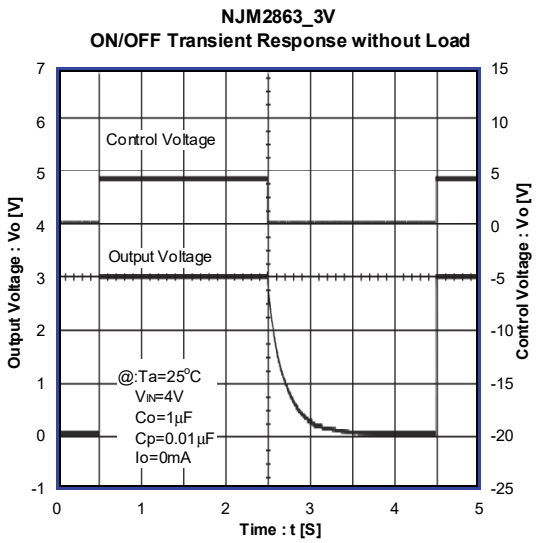

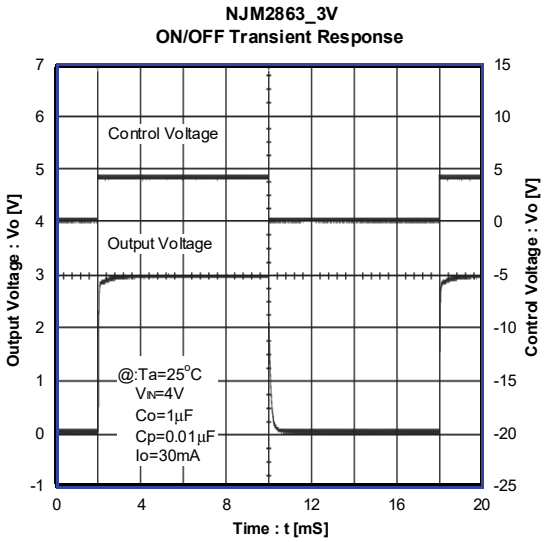

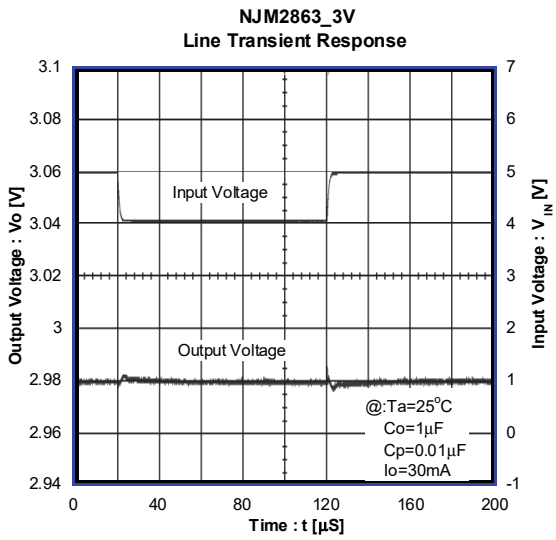

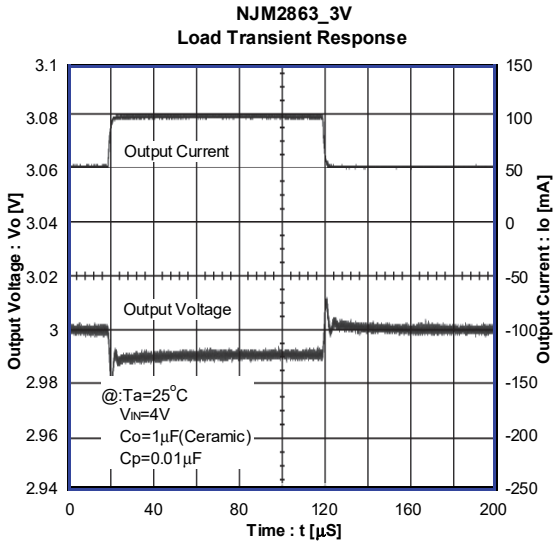

[CAUTION]
The specifications on this datasheet are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this datasheet are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.