ULTRA LOW NOISE, LOW CURRENT

E-PHEMT Transistor

TAV1-551+

50Ω 0.045 to 6 GHz

THE BIG DEAL

- Low Noise Figure, 0.5 dB typ. at 0.9 GHz
- Gain, 20.9 dB typ. at 0.9 GHz
- High Output IP3, +24 dBm at 2 GHz, 4V
- Output Power at 1dB compression, +20dBm, 4V
- Wide bandwidth
- External biasing and matching required



Generic photo used for illustration purposes only

CASE STYLE: TE2769

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

APPLICATIONS

- Cellular
- ISM
- GSM
- WCDMA
- WiMax
- WLAN
- UNII and HIPERLAN

PRODUCT OVERVIEW

TAV1-551+ is a low noise, high gain device manufactured using E-PHEMPT* technology enabling it to work with a single positive supply voltage. It has outstanding Noise figure, particularly below 2.5 GHz, and when combining this noise figure with gain in a single device it makes it an ideal amplifier for multiple applications.

KEY FEATURES

Feature	Advantages
Wideband, 0.045 to 6 GHz	Use in multiple applications: UHF, VHF, communication infrastructure
High Gain, Low noise figure	High Gain limits the effect of noise figure due to previous stages
Small size, 1.18 x 1.42 x 0.85 mm, MCLP package	Small foot print saves space in dense layouts while providing low inductance, repeatable transitions, and excellent thermal contact to the PCB.

* Enhancement mode Pseudomorphic High Electron Mobility Transistor.

REV. A
ECO-011337
TAV1-551+
MCL NY
220111

ELECTRICAL SPECIFICATIONS AT T_{AMB}=25°C, FREQUENCY 0.045 TO 6 GHZ


Symbol	Parameter	Condition		Min.	Typ.	Max.	Units
DC Specifications							
V_{GS}	Operational Gate Voltage	V_{DS}=3V, I_{DS}=15 mA		0.22	0.34	0.46	V
V_{TH}	Threshold Voltage	V_{DS}=3V, I_{DS}= 4 mA		0.18	0.26	0.38	V
I_{DSS}	Saturated Drain Current	V_{DS}=3V, V_{GS}=0 V		—	1.0	5.0	uA
G_M	Transconductance	V_{DS} =3V, Gm =$\Delta I_{DS}/\Delta V_{GS}$ ΔV_{GS} = V_{GS2}-V_{GS1} V_{GS1}= V_{GS1} at I_{DS}=15 mA V_{GS2}= V_{GS1} +0.05V		215	251	285	mS
I_{GSS}	Gate leakage Current	V_{GD}=V_{GS}=-3V		—	—	95	µA
RF Specifications[1], Z0=50 Ohms (Figure 1)							
NF[1]	Noise Figure	V_{DS}=3V, I_{DS}=15 mA	f=0.9 GHz	—	0.5	0.9	dB
			f=2.0 GHz		0.6		
			f=3.9 GHz		0.8		
			f=5.8 GHz		1.4		
		V_{DS}=4V, I_{DS}=15 mA	f=2.0 GHz		0.6		
Gain	Gain	V_{DS}=3V, I_{DS}=15 mA	f=0.9 GHz	14.4	21.6	18.4	dB
			f=2.0 GHz		16.7		
			f=3.9 GHz		11.9		
			f=5.8 GHz		8.6		
		V_{DS}=4V, I_{DS}=15 mA	f=2.0 GHz		16.7		
OIP3	Output IP3	V_{DS}=3V, I_{DS}=15 mA	f=0.9 GHz	20	23.9	—	dBm
			f=2.0 GHz		24.5		
			f=3.9 GHz		24.4		
			f=5.8 GHz		26.0		
		V_{DS}=4V, I_{DS}=15 mA	f=2.0 GHz		24.5		
P1dB[2]	Power output at 1 dB Compression	V_{DS}=3V, I_{DS}=15 mA	f=0.9 GHz	16	16.0	—	dBm
			f=2.0 GHz		17.4		
			f=3.9 GHz		18.4		
			f=5.8 GHz		18.8		
		V_{DS}=4V, I_{DS}=15 mA	f=2.0 GHz		19.8		


MAXIMUM RATINGS[3]

Symbol	Parameter	Max.	Units
V_{DS} (4)	Drain-Source Voltage	5	V
V_{GS} (4)	Gate-Source Voltage	-5 to 0.7	V
V_{GD} (4)	Gate-Drain Voltage	-5 to 0.7	V
I_{DS} (4)	Drain Current	100	mA
I_{CS}	Gate Current	2	mA
P_{DISS}	Total Dissipated Power	360	mW
P_{IN} (5)	RF Input Power	17	dBm
T_{CH}	Channel Temperature	150	°C
T_{OP}	Operating Temperature	-40 to 85	°C
T_{STD}	Storage Temperature	-65 to 150	°C
Θ_{JC}	Thermal Resistance	160	°C/W

1. Includes test board loss (tested on Mini-Circuits TB-TAV1-551+ test board.
2. Drain current bias is allowed to increase during compression measurement.
3. Operation of this device above any one of these parameters may cause permanent damage
4. Assumes DC quiescent conditions
5. I_{GS} is limited to 2 mA during test.

SIMPLIFIED SCHEMATIC AND PIN DESCRIPTION



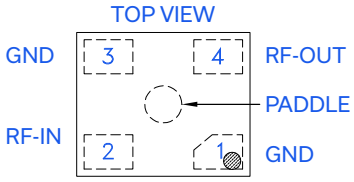

Function	Pin Number	Description
RF-IN	2	Gate used for RF input
RF-OUT	4	Drain used for RF output
GND	1,3 and Paddle	Source terminal and Paddle, normally connected to ground.

A. Note: Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, and application, compatibility with other components and environmental conditions and stresses
B. The Broadcom ATF-331M4 part number is used for identification and comparison purposes only.

CHARACTERIZATION TEST CIRCUIT


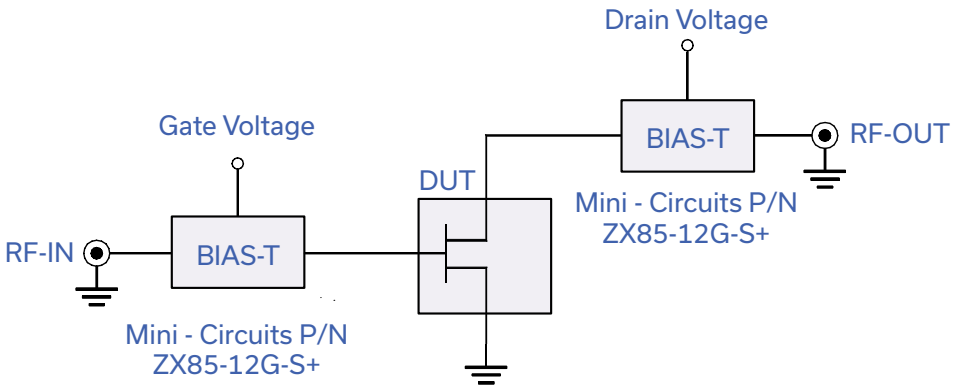


Fig 1. Block Diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Test Board TB-TAV1-551+)

Gain, Output power at 1dB compression (P1 dB), Noise Figure and output IP3 (OIP3) are measured using Keysight/Agilent Network Analyzer PNA-X.

Conditions:
1. Drain voltage (with reference to source, VDS)= 3 or 4V as shown.
2. Gate Voltage (with reference to source, VGS) is set to obtain desired Drain-Source current (IDS) as shown in specification table.
3. Gain: Pin= -25dBm
4. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, 0 dBm/tone at output.
5. No external matching components used.

PRODUCT MARKING

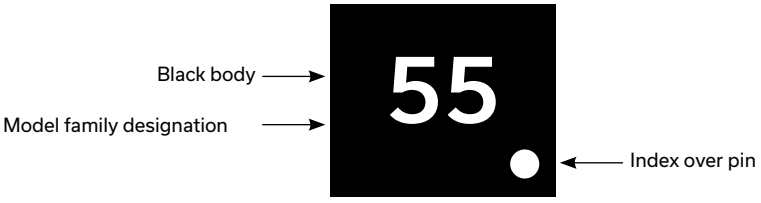

Marking may contain other features or characters for internal lot control

ULTRA LOW NOISE, LOW CURRENT

E-PHEMT Transistor TAV1-551+

ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASH BOARD. TO ACCESS CLICK HERE

Performance Data	Data Table Swept Graphs S-Parameter (S2P Files) Data Set (.zip file)
Case Style	TE2769 Plastic package, exposed paddle, lead finish: Matte-Tin plated
Tape & Reel **Standard quantities available on reel**	F90 7" reels with 20, 50, 100, 200, 500,1K,2K or 3K devices
Suggested Layout for PCB Design	98-PL-665
Evaluation Board	TB-TAV1-551+
Environmental Ratings	ENV08T2


ESD RATING

Human Body Model (HBM): Class 1A (250V to <500V) in accordance with ANSI/ESD STM 5.1 - 2001

MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDEC J-STD-020D

MSL TEST FLOW CHART

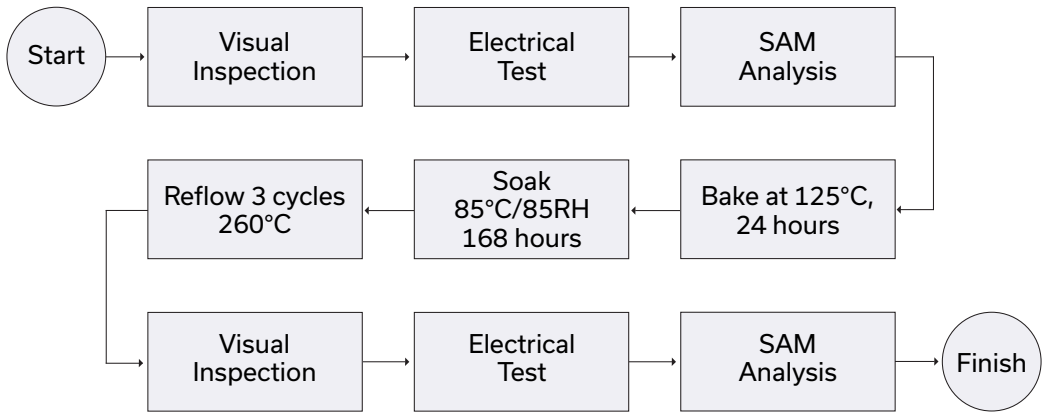

NOTES

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.