TOSHIBA Insulated Gate Bipolar Transistor Silicon N Channel IGBT


GT30J121

High Power Switching Applications

Fast Switching Applications

- Fourth-generation IGBT
- Enhancement mode type
- Fast switching (FS): Operating frequency up to 50 kHz (reference)
  High speed: t_f = 0.05 μs (typ.)
  Low switching loss: E_{on} = 1.00 mJ (typ.)
  : E_{off} = 0.80 mJ (typ.)
- Low saturation voltage: $V_{CE\ (sat)}$ = 2.0 V (typ.)

Unit: mm

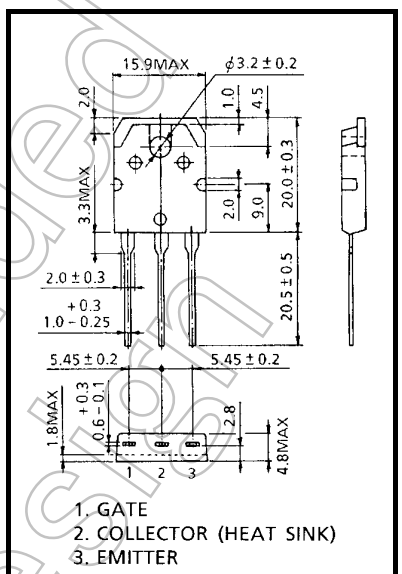

JEDEC	—
JEITA	—
TOSHIBA	2-16C1C

Weight: 4.6 g (typ.)

Absolute Maximum Ratings (Ta = 25°C)


Characteristics		Symbol	Rating	Unit
Collector-emitter voltage		V_{CES}	600	V
Gate-emitter voltage		V_{GES}	±20	V
Collector current	DC	I_C	30	A
	1 ms	I_{CP}	60	
Collector power dissipation (Tc = 25°C)		P_C	170	W
Junction temperature		T_j	150	°C
Storage temperature range		T_{stg}	−55 to 150	°C

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.
Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook (“Handling Precautions”/Derating Concept and Methods) and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Thermal Characteristics

Characteristics	Symbol	Max	Unit
Thermal resistance	$R_{th\ (j\text{-}c)}$	0.735	°C/W

Marking

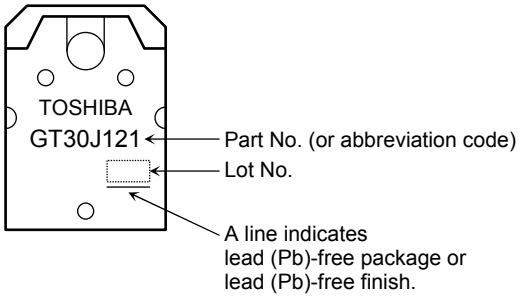


Not Recommended for New Design


Electrical Characteristics (Ta = 25°C)

Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit
Gate leakage current		I_{GES}	V_{GE} = ±20 V, V_{CE} = 0	—	—	±500	nA
Collector cut-off current		I_{CES}	V_{CE} = 600 V, V_{GE} = 0	—	—	1.0	mA
Gate-emitter cut-off voltage		$V_{GE\ (OFF)}$	I_C = 3 mA, V_{CE} = 5 V	3.5	—	6.5	V
Collector-emitter saturation voltage		$V_{CE\ (sat)}$	I_C = 30 A, V_{GE} = 15 V	—	2.0	2.45	V
Input capacitance		C_{ies}	V_{CE} = 10 V, V_{GE} = 0, f = 1 MHz	—	4650	—	pF
Switching time	Turn-on delay time	$t_{d\ (on)}$	Inductive Load V_{CC} = 300 V, I_C = 30 A V_{GG} = +15 V, R_G = 24 Ω (Note 1) (Note 2)	—	0.09	—	μs
	Rise time	t_r		—	0.07	—	
	Turn-on time	t_{on}		—	0.24	—	
	Turn-off delay time	$t_{d\ (off)}$		—	0.30	—	
	Fall time	t_f		—	0.05	—	
	Turn-off time	t_{off}		—	0.43	—	
Switching loss	Turn-on switching loss	E_{on}		—	1.00	—	mJ
	Turn-off switching loss	E_{off}		—	0.80	—	

Note 1: Switching time measurement circuit and input/output waveforms

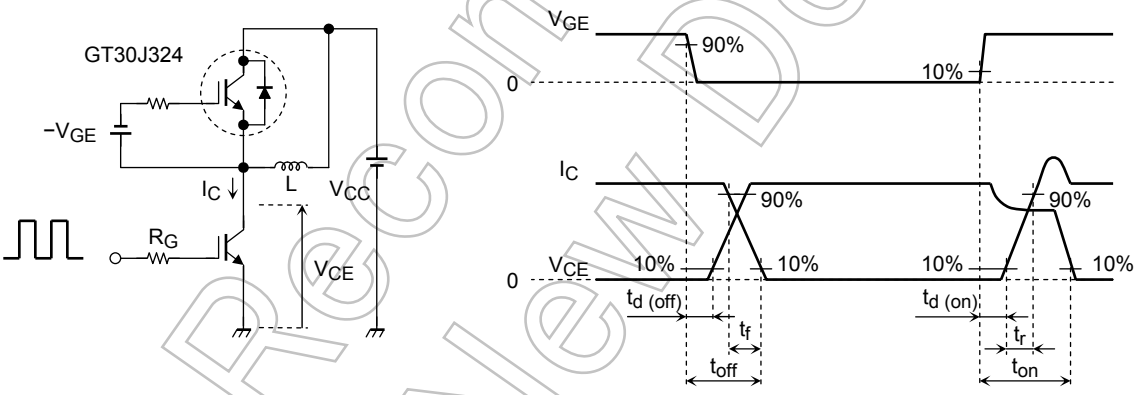


Note 2: Switching loss measurement waveforms

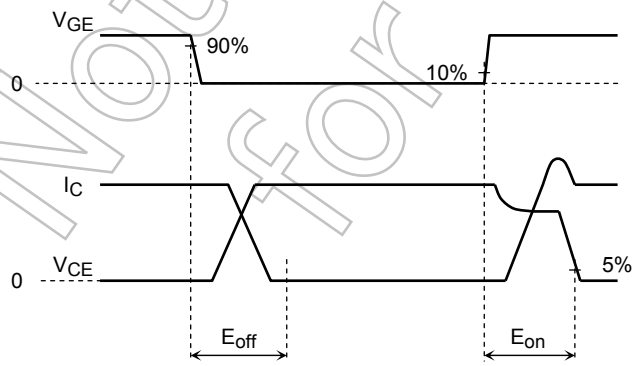


Not Recommended for New Design


$I_C - V_{CE}$

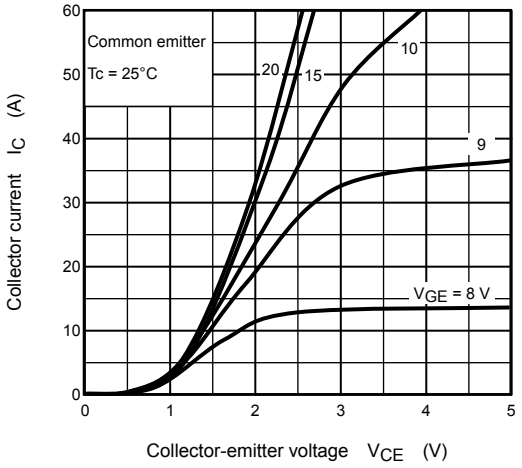


$V_{CE} - V_{GE}$

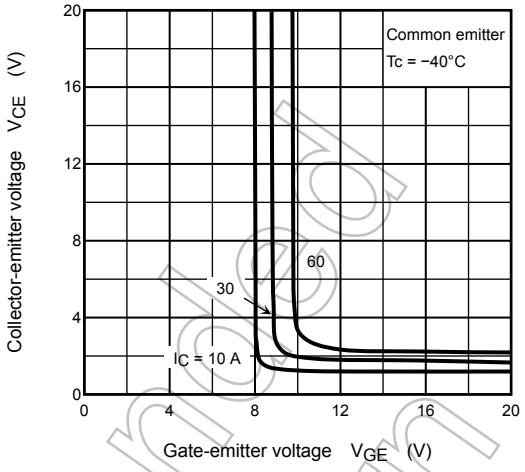


$V_{CE} - V_{GE}$

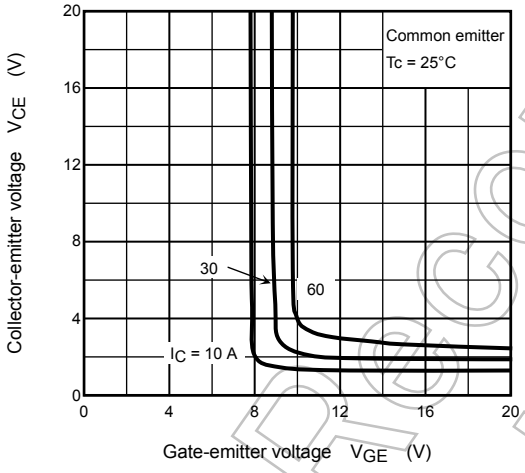


$V_{CE} - V_{GE}$

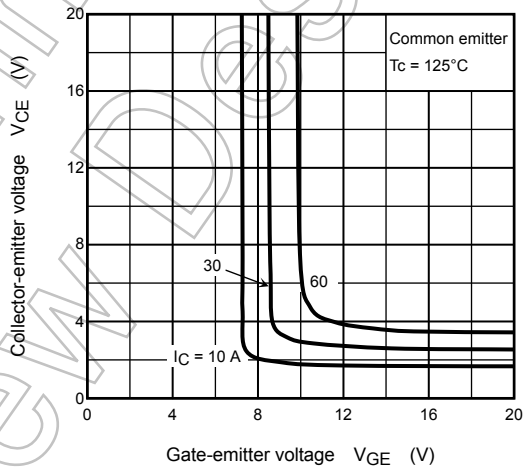

$I_C - V_{GE}$

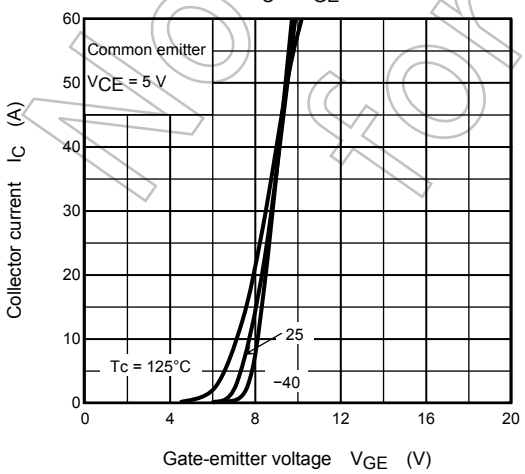


$V_{CE\ (sat)} - Tc$

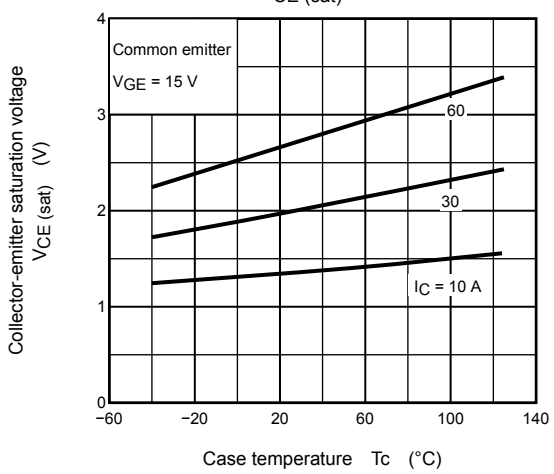


Not Recommended for New Design


Switching time t_{on}, t_r, $t_{d\ (on)}$ – R_G

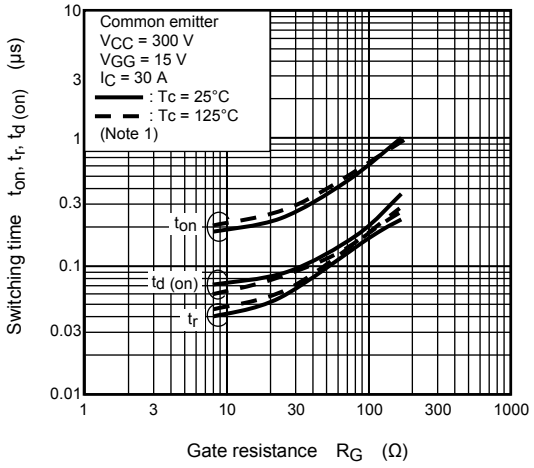


Switching time t_{on}, t_r, $t_{d\ (on)}$ – I_C

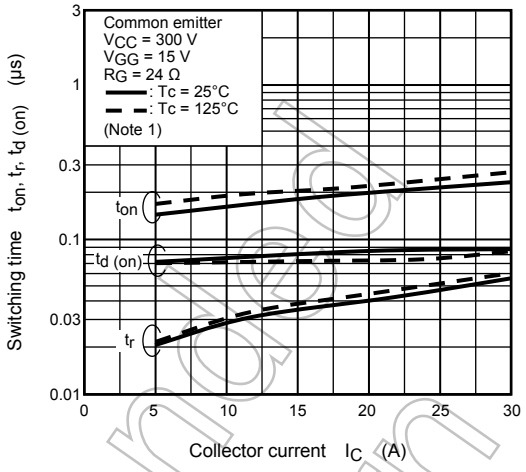


Switching time t_{off}, t_f, $t_{d\ (off)}$ – R_G

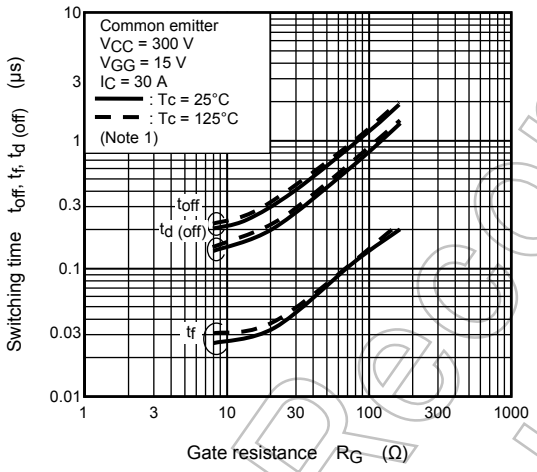


Switching time t_{off}, t_f, $t_{d\ (off)}$ – I_C

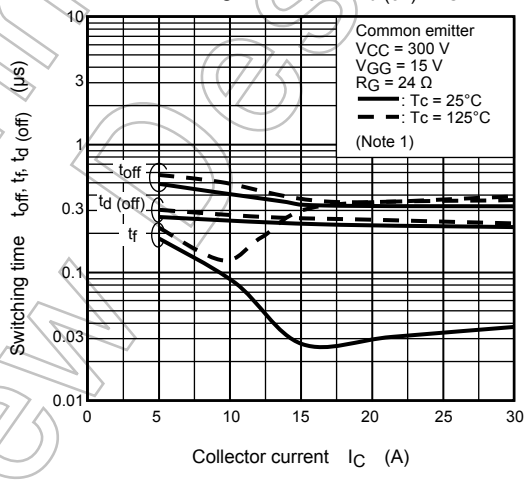

Switching loss E_{on}, E_{off} – R_G

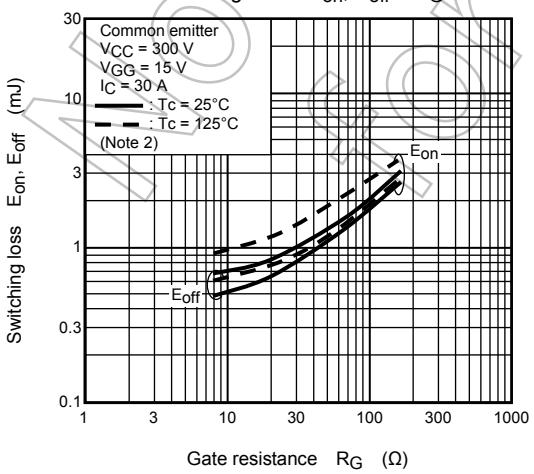


Switching loss E_{on}, E_{off} – I_C

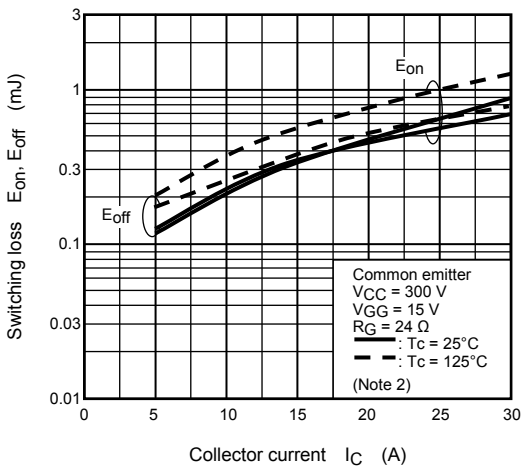


Not Recommended for New Design


C – V_{CE}

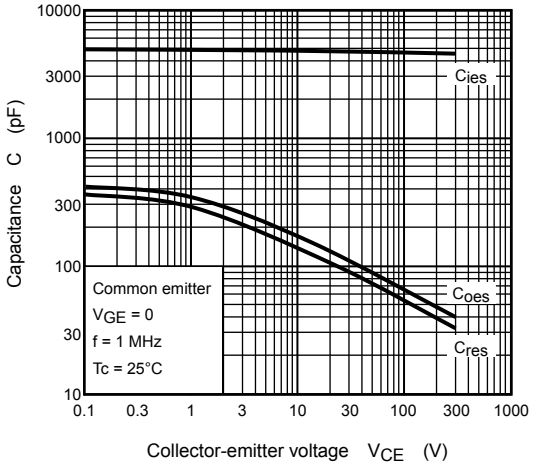


V_{CE}, V_{GE} – Q_G

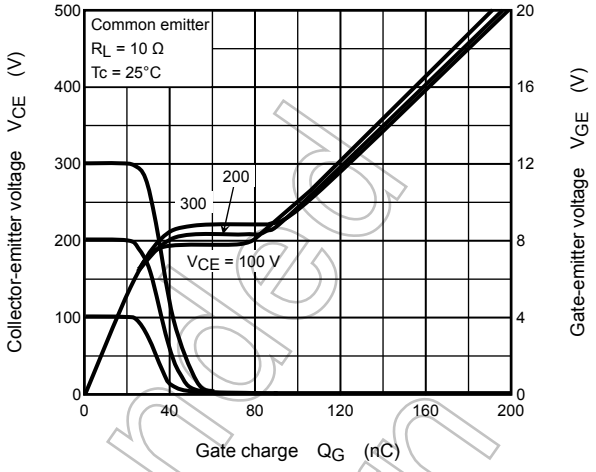


Safe Operating Area

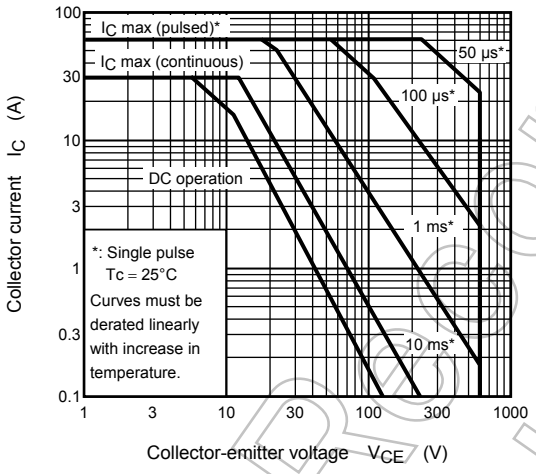

Reverse Bias SOA

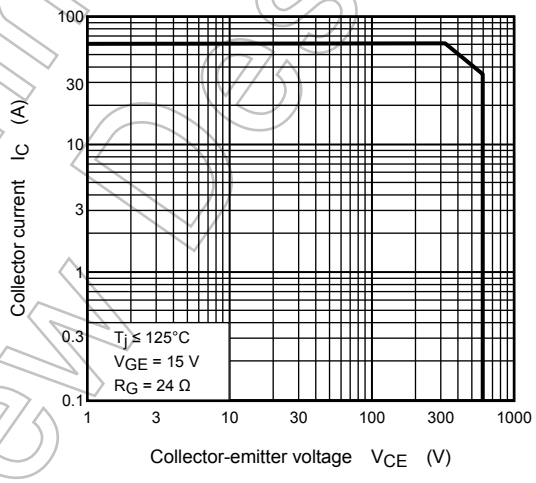

r_{th} (t) – t_w

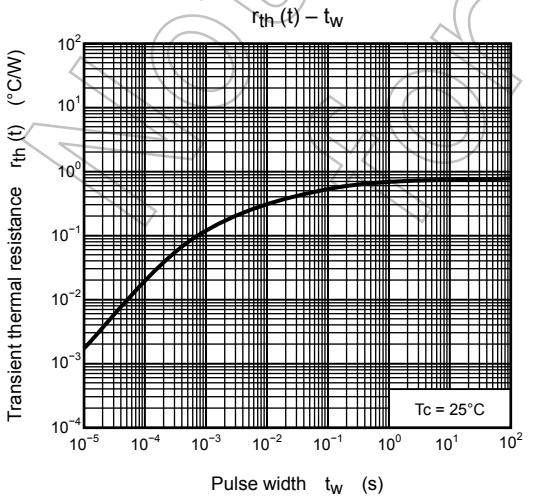

Not Recommended for New Design

Not Recommended for New Design

RESTRICTIONS ON PRODUCT USE

20070701-EN

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
  In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the “Handling Guide for Semiconductor Devices,” or “TOSHIBA Semiconductor Reliability Handbook” etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.).These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury (“Unintended Usage”). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in his document shall be made at the customer’s own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of TOSHIBA or the third parties.
- Please contact your sales representative for product-by-product details in this document regarding RoHS compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.