
CoolGaN™ G5

TOLL




CoolGaN™ Transistor 650 V G5 (IGT65R035D2)

Infineon's CoolGaN™ is a highly efficient gallium nitride (GaN) transistor designed for power conversion at 650 V. It enables higher power density, supports reduced system BOM cost, and facilitates miniaturized form factors. Produced using 200 mm (8 inch) wafer technology and fully automated production lines, it features narrow production tolerances and the highest product quality. This makes it suitable for a wide range of applications, from consumer electronics to industrial applications.

Features

- Enhancement mode transistor
- Ultra-fast switching
- No reverse-recovery charge
- Capable of reverse conduction
- Low gate and output charge
- Superior commutation ruggedness
- 2 kV HBM ESD standards

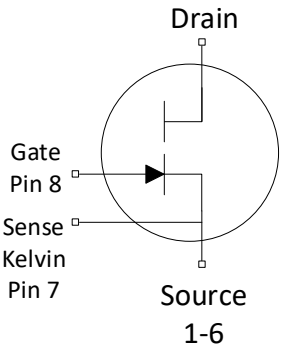

Benefits

- Normally OFF transistor technology ensures safe operation
- Enables rapid and precise power delivery control
- Improves system efficiency and reliability
- Ensures robust performance under challenging conditions

These features collectively make CoolGaN™ a game-changer in the realm of power conversion, offering a compelling combination of efficiency, compactness, and reliability.

Potential applications


Industrial, telecom, datacenter SMPS based on half-bridge hard and soft switching topologies such as totem pole PFC and high frequency LLC, as well as charger and adapter.

Product validation

Qualified according to relevant JEDEC tests.

Table 1 Key performance parameters

Parameter	Value	Unit
$V_{DS,max}$	650	V
$V_{DS,trans-max}$	900	V
$R_{DS(on),max}$	42	mΩ
$Q_{g,typ}$	7.7	nC
$I_{D,pulse}$	97	A
Q_{oss} @ 400 V	57	nC
Q_{rr}	0	nC



Part number	Package	Marking	Related links
IGT65R035D2	PG-HSOF-8	65R035D2	see Appendix A

Table of contents

Description 1
Maximum ratings 3
Thermal characteristics 5
Electrical characteristics 6
Electrical characteristics diagrams 8
Test circuits 13
Package outlines 14
Appendix A 17
Revision history 18
Trademarks 19
Disclaimer 19

1 Maximum ratings

at T_j = 25°C, unless otherwise specified. Stresses beyond max ratings may cause permanent damage to the device. For optimum lifetime and reliability, Infineon recommends operating conditions that do not continuously exceed 80% of the maximum ratings stated (unless otherwise explicitly stated). For further information, contact your local Infineon sales office.

Table 2 Maximum ratings

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Drain source voltage, continuous	$V_{DS,max}$	-	-	650	V	V_{GS} = 0 V; derating recommendation according JEDEC JEP198
Leakage current at drain source transient voltage	$I_{DS,trans}$	-	-	20	mA	V_{GS} = 0 V; $V_{DS,trans}$ = 900 V
Drain source voltage transient	$V_{DS,trans}$	-	-	900	V	<1% duty cycle; <1 µs; 1 million pulses
Drain source voltage, pulsed	$V_{DS,pulsed}$	-	-	750	V	T_j = 25°C; V_{GS} ≤ 0 V; cumulated stress time ≤ 10 h
						T_j = 125°C; V_{GS} ≤ 0 V; cumulated stress time ≤ 1 h
Switching surge voltage, pulsed	$V_{DS,surge}$	-	-	750	V	DC bus voltage = 700 V; turn off $V_{DS,pulse}$ = 750 V; turn on $I_{D,pulse}$ =44 A; f ≤ 100 kHz; T_j = 105°C; t ≤100 s (10 million pulses)
Continuous current, drain source [1]	I_D	-	-	49	A	T_C=25°C; T_j = $T_{j,max}$
Pulsed current, drain source [2]	$I_{D,pulse}$	-97	-	97	A	T_j=25°C; I_G=42 mA; See Diagram 3, 5
		-58		58		T_j=125°C; I_G=42 mA; See Diagram 4, 6
Gate current, continuous [3]	$I_{G,avg}$	-	19	32	mA	T_j=-55°C to T_j=150°C; See Table 9
Gate current, pulsed [3]	$I_{G,pulsed}$	-3.2	-	3.2	A	T_j=-55°C to T_j=150°C; t_{pulse}= 50 ns; f = 100 kHz; See Table 9
Gate source voltage, continuous [3]	V_{GS}	-10	-	-	V	T_j=-55°C to T_j=150°C; See Diagram 12
Gate source voltage, pulsed [3]	$V_{GS,pulse}$	-25	-	-	V	T_j=-55°C to T_j=150°C; t_{pulse}= 50 ns; f = 100 kHz; open drain
Power dissipation	P_{tot}	-	-	167	W	T_C=25°C
Operating junction temperature	T_j	-55	-	150	°C	-
Storage temperature	T_{stg}	-55	-	150	°C	Max shelf life depends on storage conditions
Drain-source voltage slew-rate	dv/dt	-	-	200	V/ns	-

1) Limited by $T_{j,max}$. Maximum duty cycle D = 0.75

2) Defined by design. Not subject to production test.

3) Consider the influence of the gate current (I_G) on the drain current (I_D). For further details, refer to the gate drive whitepaper and the reliability whitepaper, or contact your local Infineon sales office.

2 Thermal characteristics

Table 3 Thermal characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Thermal resistance, junction - case	R_{thJC}	-	-	0.76	°C/W	-
Thermal resistance, junction - ambient	R_{thJA}	-	-	86	°C/W	Device on PCB, minimum footprint
Thermal resistance, junction - ambient for SMD version	R_{thJA}	-	-	62	°C/W	Device on 40 mm*40 mm*1.5 mm epoxy PCB FR4 with 6 cm^2 (one layer, 70 µm thickness) copper area for tab (source) connection and cooling. PCB is vertical without air stream cooling.
Reflow soldering temperature	T_{sold}	-	-	260	°C	MSL1

3 Electrical characteristics

at T_j=25°C, unless specified otherwise

Table 4 Static characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Gate threshold voltage	$V_{GS(th)}$	0.9	1.2	1.6	V	I_{DS}=4.2 mA; V_{DS}=10 V; T_j=25°C
		-	1	-		I_{DS}=4.2 mA; V_{DS}=10 V; T_j=150°C
Gate-Source reverse clamping voltage	$V_{GS,\ clamp}$	-	-	-8	V	I_{GS}=-1 mA
Drain-Source leakage current	I_{DSS}	-	1.6	160	µA	V_{DS}=650 V; V_{GS}=0 V; T_j=25°C
			32	-		V_{DS}=650 V; V_{GS}=0 V; T_j=150°C
Drain-Source on-state resistance	$R_{DS(on)}$	-	0.035	0.042	Ω	I_G=42 mA; I_D=13 A; T_j=25°C
			0.075	-		I_G=42 mA; I_D=13 A; T_j=150°C
Gate resistance [4]	$R_{G,int}$	-	1.4	-	Ω	LCR impedance measurement; f=f_{res}, open drain

[4] Defined by design. Not subject to production test.

Table 5 Dynamic characteristics

Defined by design. Not subject to production test.

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Input capacitance	C_{iss}	-	540	-	pF	V_{GS}=0 V; V_{DS}=400 V; f=1 MHz
Output capacitance	C_{oss}		91			
Reverse transfer capacitance	C_{rss}		1.3			
Effective output capacitance, time related [5]	$C_{o(tr)}$	-	142	-	pF	V_{GS}=0 V; V_{DS}=0 to 400 V; I_D=const
Effective output capacitance, energy related [6]	$C_{o(er)}$	-	105	-	pF	V_{DS}=0 to 400 V
Output charge	Q_{oss}		57	-	nC	
Coss stored energy	E_{oss}		8.4	.	µJ	
Turn-on delay time	$t_{d(on)}$	-	11	-	ns	I_D= 13 A; R_{ON}=3.3 Ω; R_{OFF}=3.3 Ω; R_{SS}=220 Ω; C_C=5.3 nF; V_{DRV}=12 V; see Table 8
Turn-off delay time	$t_{d(off)}$		15			
Rise time	t_r		10			
Fall time	t_f		11			

[5] $C_{o(tr)}$ is a fixed capacitance that gives the same charging time as C_{oss} while V_{DS} is rising from 0 to 400 V

[6] $C_{o(er)}$ is a fixed capacitance that gives the same stored energy as C_{oss} while V_{DS} is rising from 0 to 400 V

Table 6 Gate charge characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Gate charge [7]	Q_G	-	7.7	-	nC	V_{GS}=0 to 3 V; V_{DS}=400 V; I_D=13 A

[7] Defined by design. Not subject to production test.


Table 7 Reverse conduction characteristics

Parameter	Symbol	Values			Unit	Note / Test condition
		Min.	Typ.	Max.		
Source-Drain reverse voltage	V_{SD}	-	2.0	2.4	V	V_{GS}=0 V; I_{SD}=13 A
Pulsed current, reverse	$I_{SD,pulse}$	-	-	97	A	I_G=42 mA
Reverse recovery charge [8]	Q_{rr}	-	0	-	nC	I_{SD}=13 A; V_{DS}=400 V

[8] Defined by design. Not subject to production test. Excluding Qoss.


4 Electrical characteristics diagrams

Diagram 1: Power dissipation

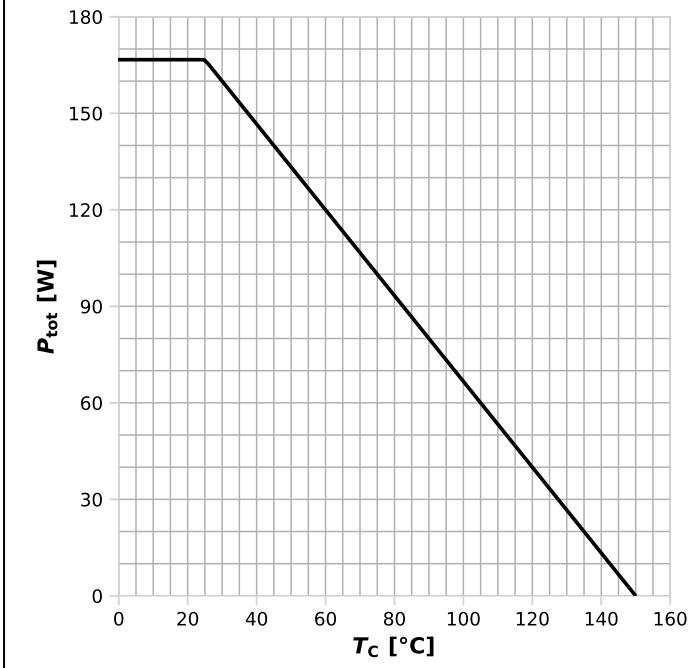


P_{tot}=f(T_C)

Diagram 2: Max. transient thermal impedance

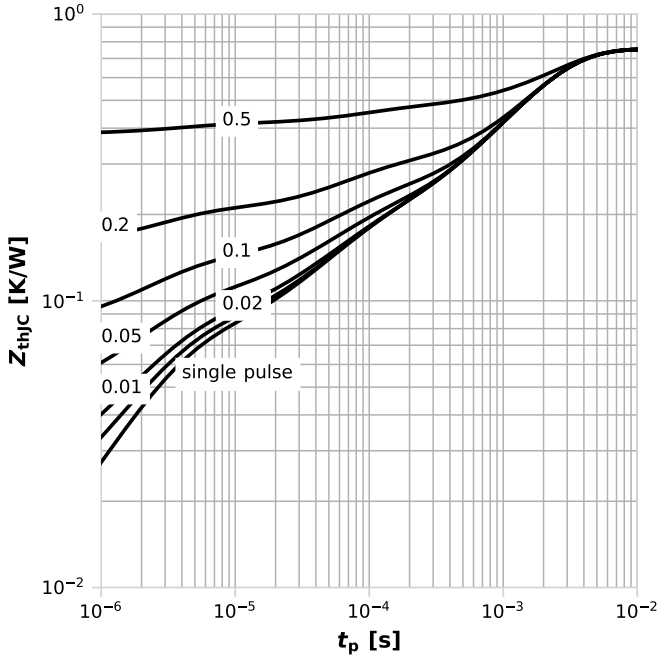


Z_{thJC} =f(t_P); parameter: D=t_p/T

Diagram 3: Safe operating area

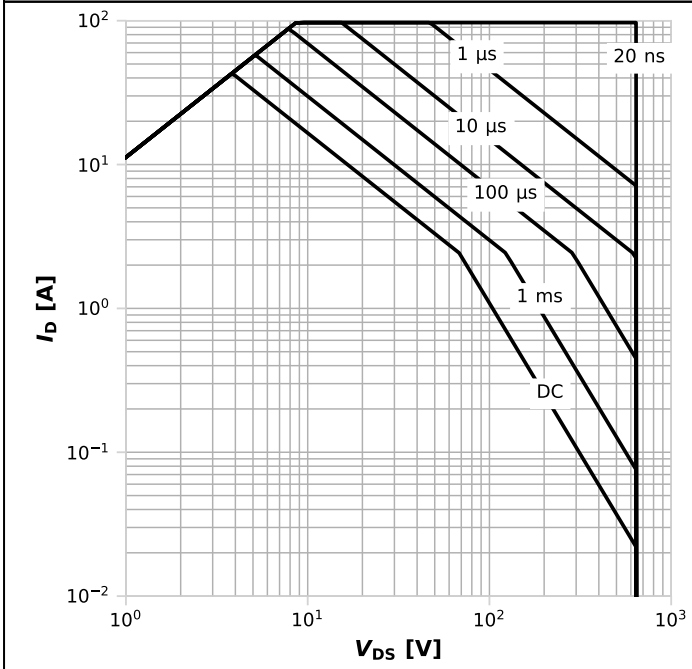


I_D=f(V_{DS}); T_C=25°C; D=0; parameter: t_p

Diagram 4: Safe operating area

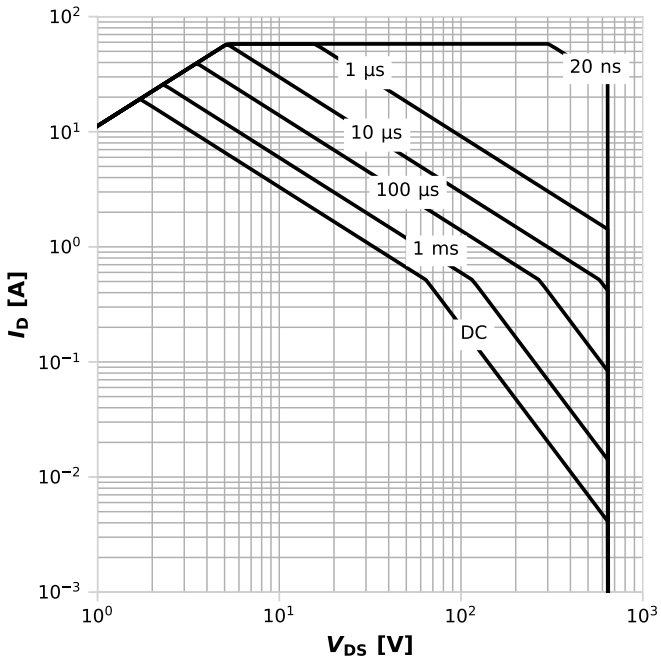


I_D=f(V_{DS}); T_C=125°C; D=0; parameter: t_p

Diagram 5: Repetitive safe operating area

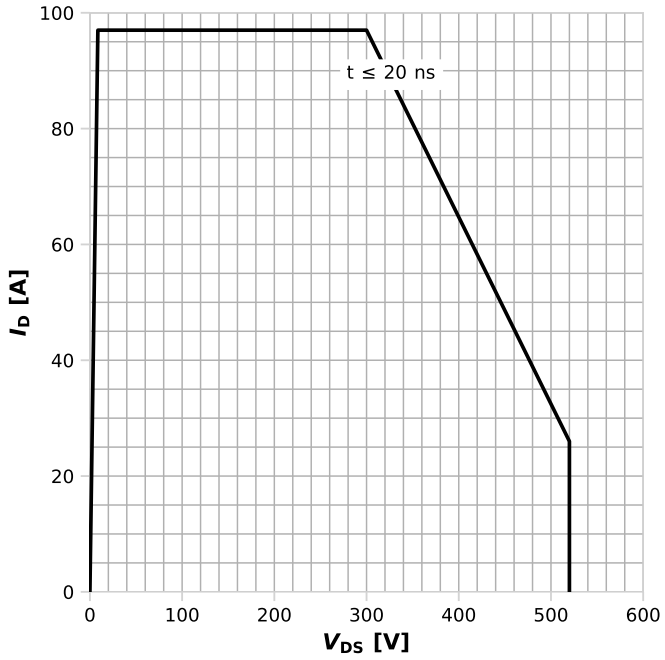


I_D=f(V_{DS}); T_C=25°C; T_j≤150°C; parameter: t_p

Diagram 6: Repetitive safe operating area

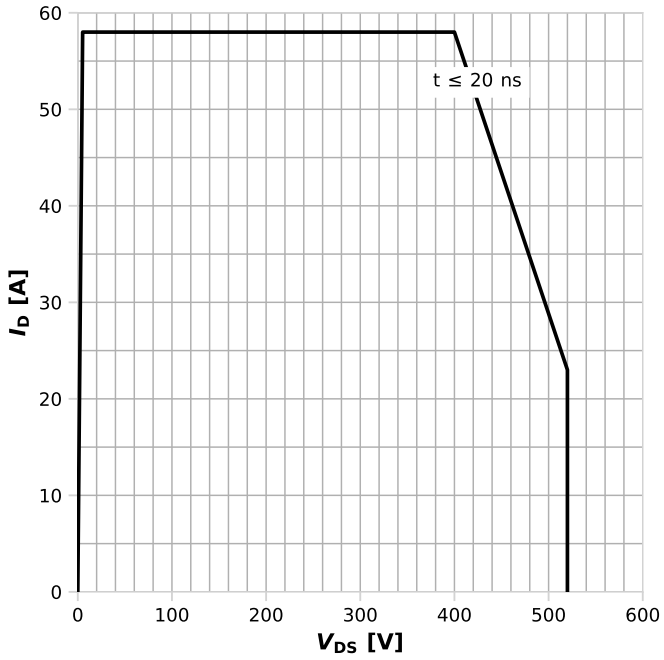


I_D=f(V_{DS}); T_C=125°C; T_j≤150°C; parameter: t_p

Diagram 7: Typ. static* output characteristics

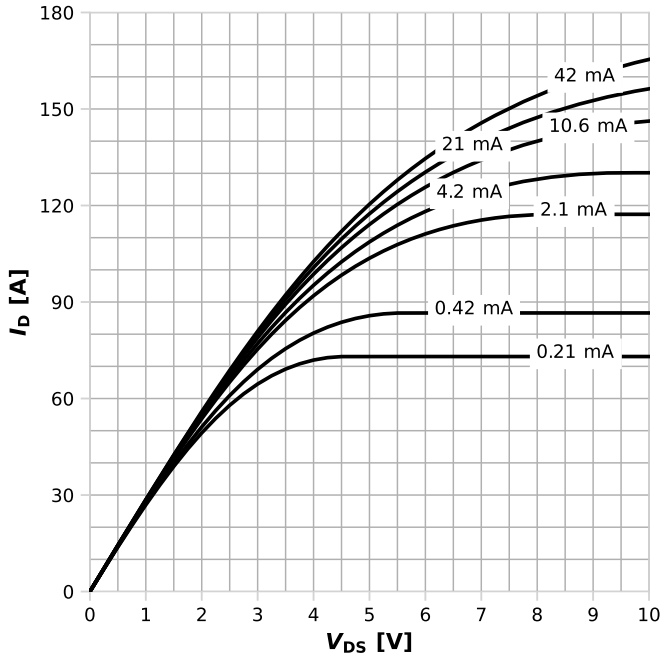

I_D=f(V_{DS}); T_j=25°C; parameter: I_{GS};
* Refer to gate drive application note (see table 10)

Diagram 8: Typ. static* output characteristics

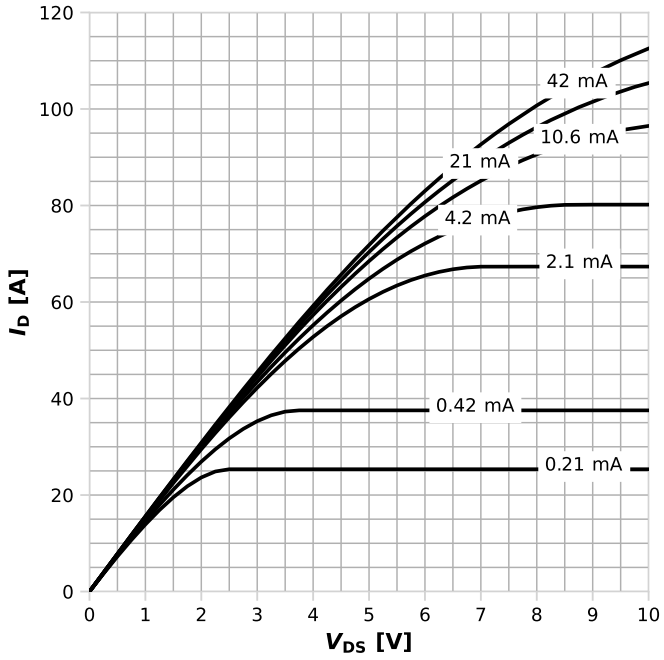

I_D=f(V_{DS}); T_j=125°C; parameter: I_{GS};
* Refer to gate drive application note (see table 10)


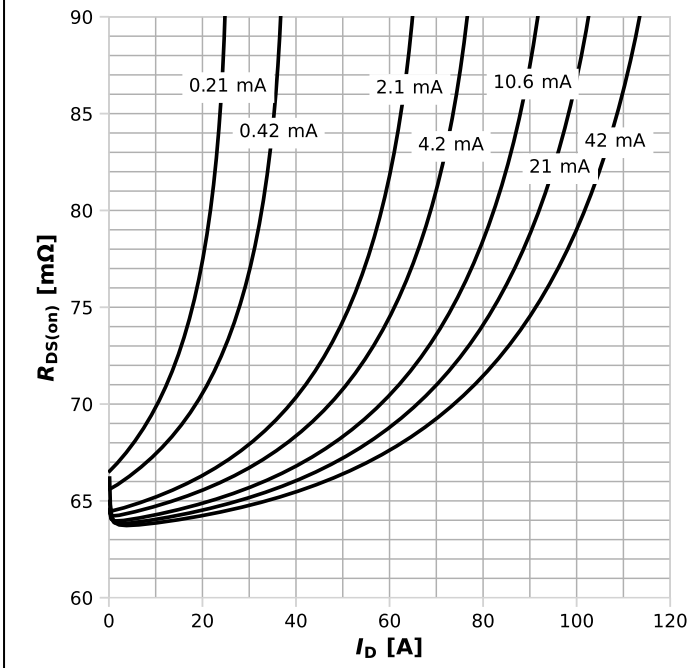
Diagram 9: Typ. Drain-source on-state resistance	Diagram 10: Drain-source on-state resistance
	
$R_{DS(on)}$=f(I_D); T_j=125°C; parameter: I_{GS}	$R_{DS(on)}$=f(T_j); I_D=13 A





Diagram 11: Typ. gate characteristics forward	Diagram 12: Typ. gate characteristics reverse
	
I_{GS}=f(V_{GS}); open drain; parameter: T_j	I_{SG}=f(V_{SG}); parameter: T_j

Diagram 13: Typ. transfer characteristics

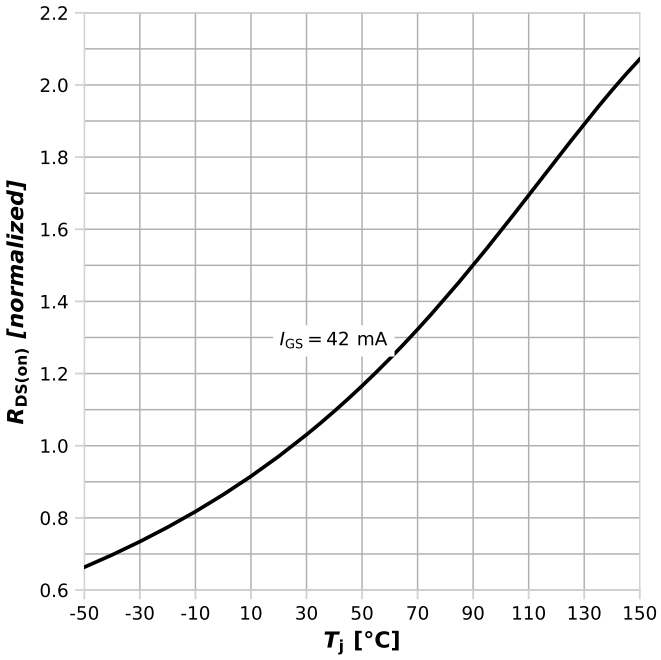


I_D=f(I_{GS}); V_{DS}=8V; parameter: T_j

Diagram 14: Typ. transfer gate current characteristic

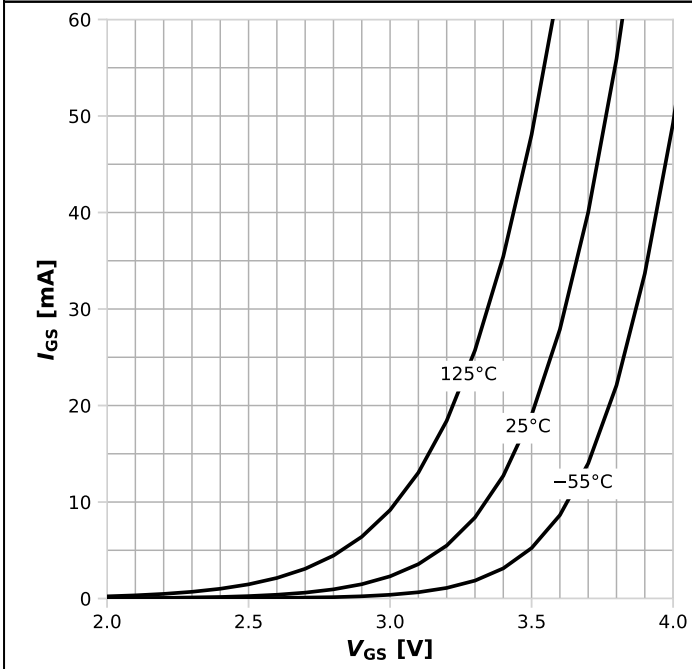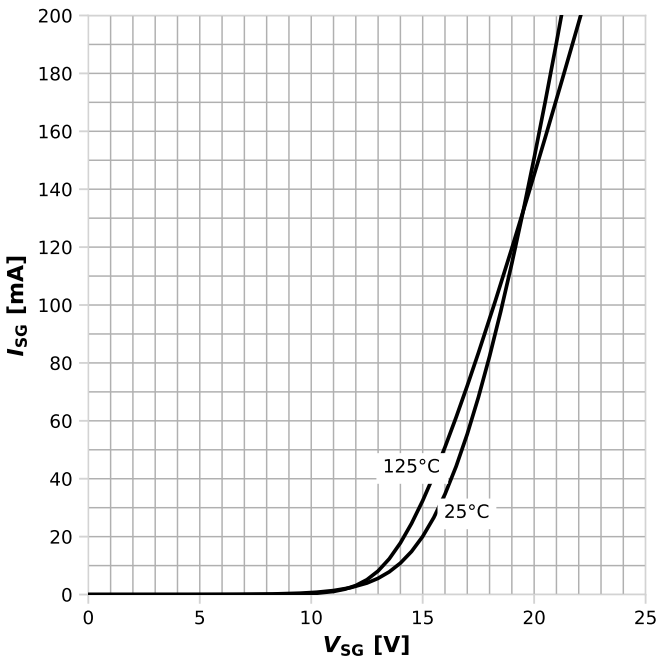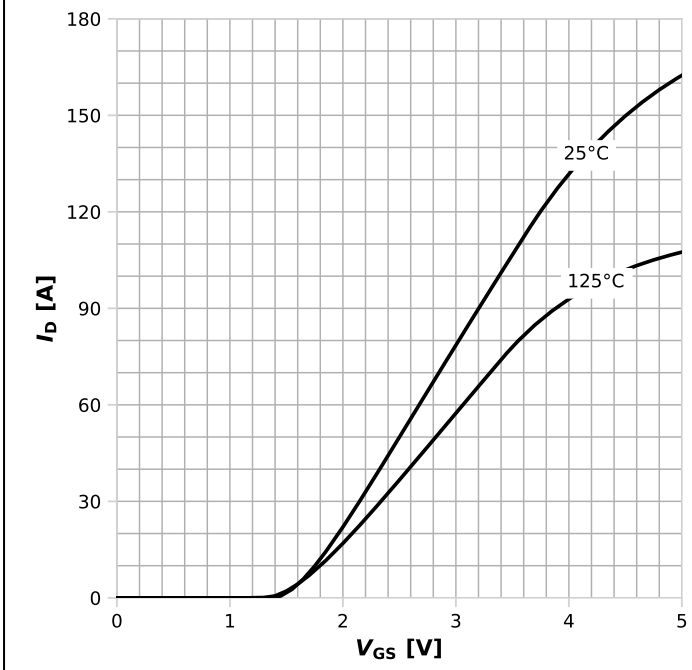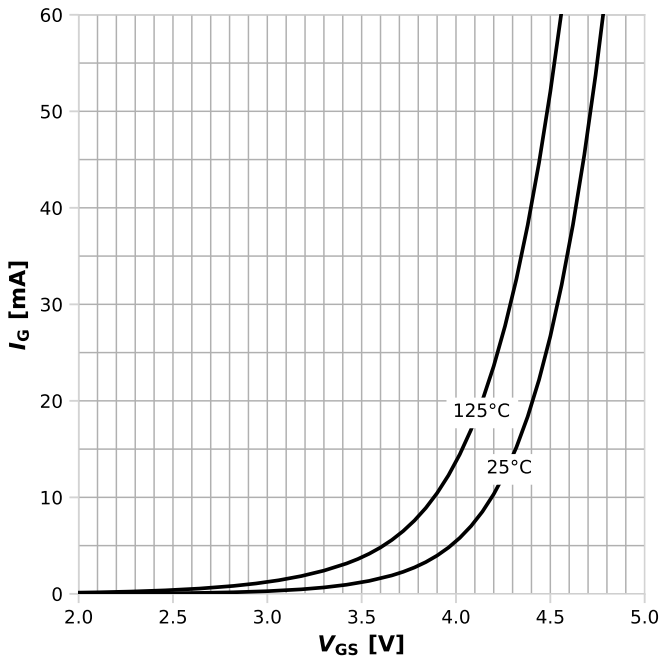


I_G=f(V_{GS}); V_{DS}=8V; parameter: T_j

Diagram 15: Typ. channel reverse characteristics

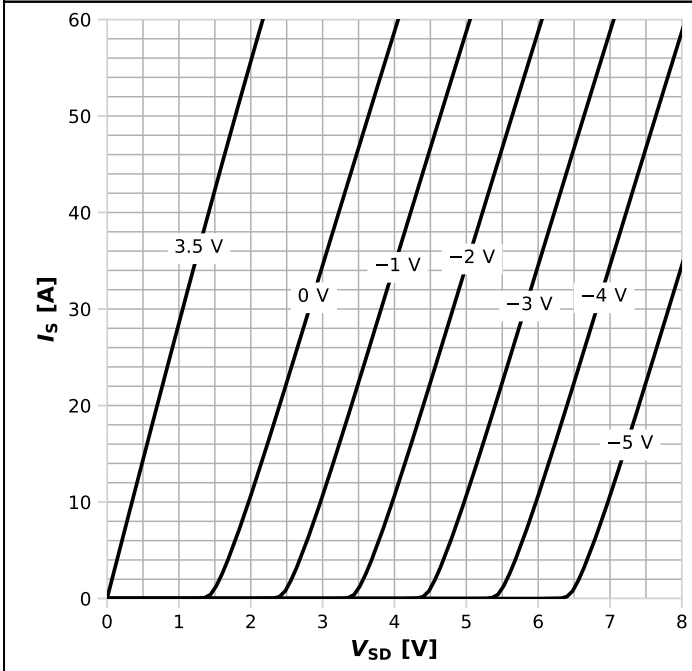

I_S=f(V_{SD}); T_j=25°C; parameter: V_{GS}

Diagram 16: Typ. channel reverse characteristics

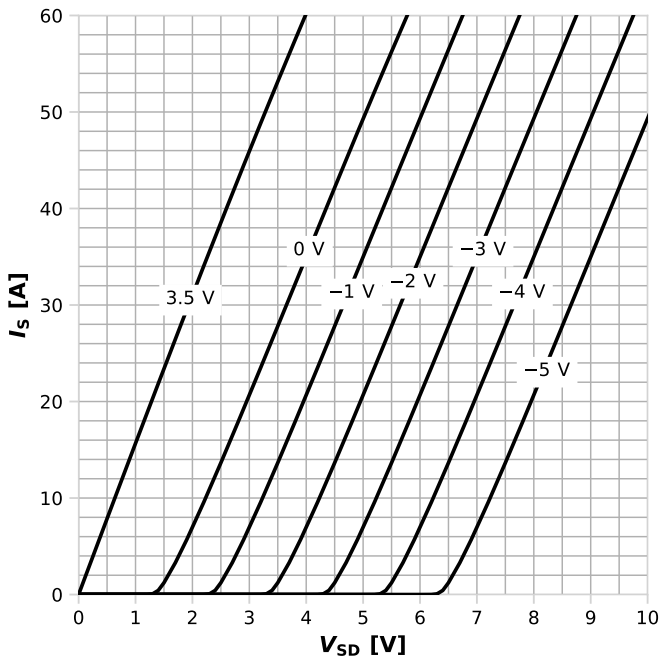

I_S=f(V_{SD}); T_j=125°C; parameter: V_{GS}

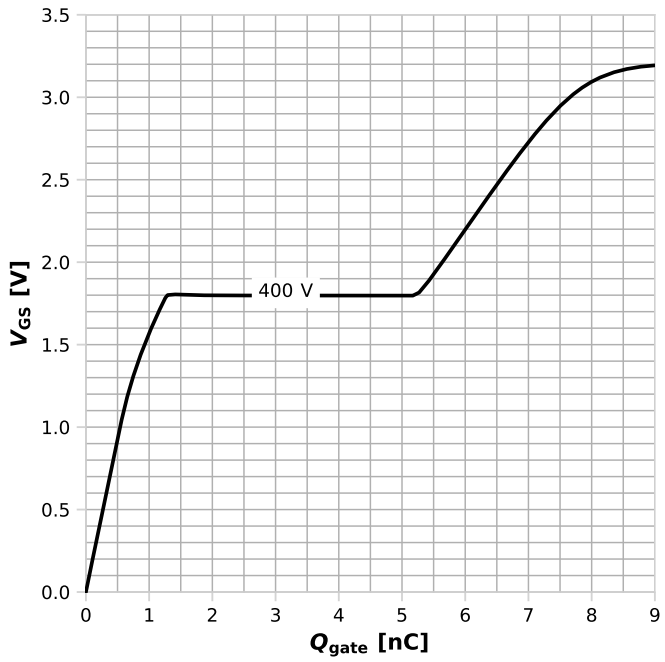
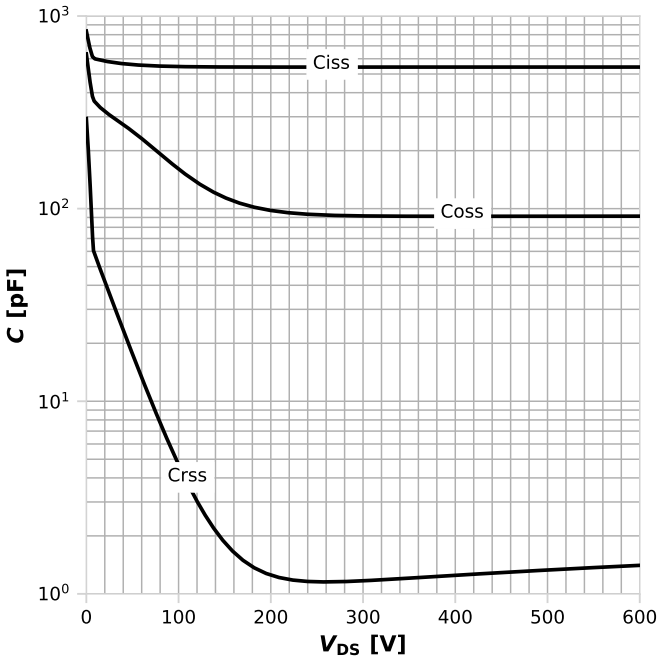
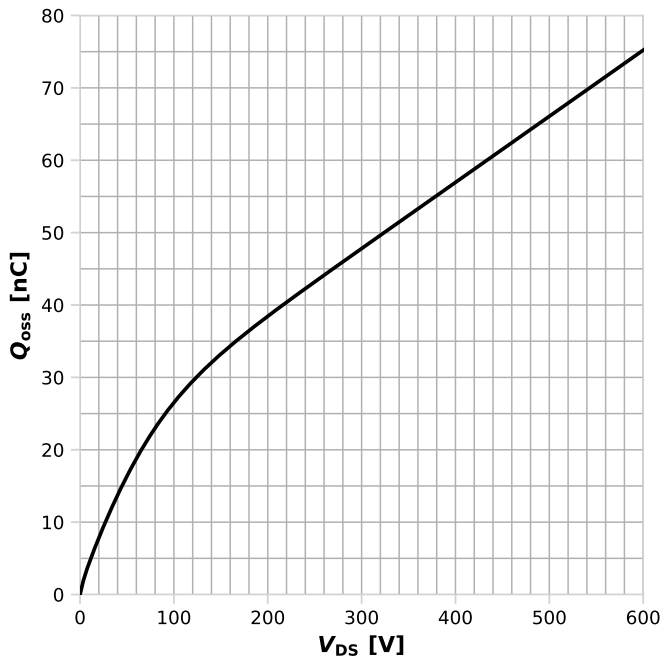
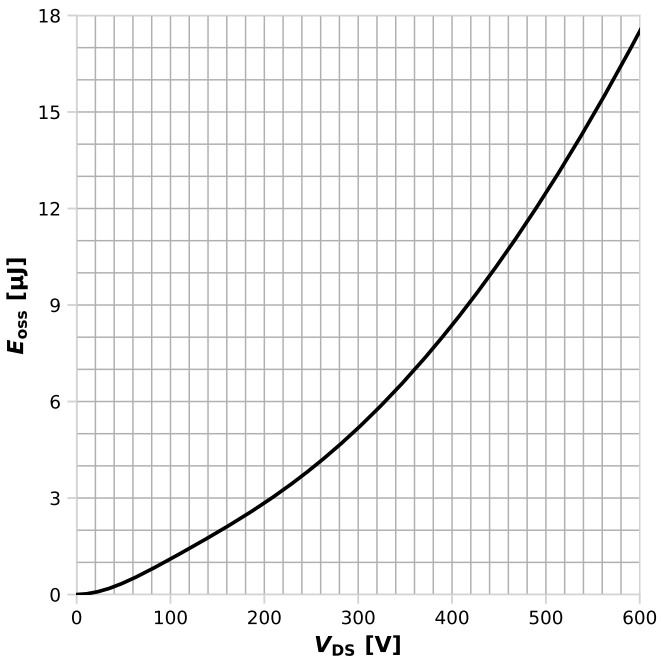
Diagram 17 Typ. gate charge	Diagram 18: Typ. capacitances
	
V_{GS}=f(Q_{gate}); I_D=13 A pulsed; I_G=4.5 mA; parameter: V_{DD}	C=f(V_{DS}); V_{GS}=0 V

Diagram 19: Typ. output charge	Diagram 20: Typ. Coss stored energy
	
Q_{oss}=f(V_{DS})	E_{oss}=f(V_{DS})

5 Test circuits

Table 8 Reverse channel characteristics test




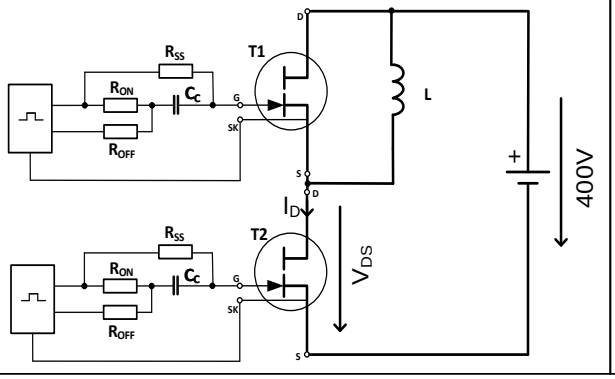
Switching times with inductive load	Switching times waveform
	

Table 9 Gate current switching waveform

Gate current switching waveform


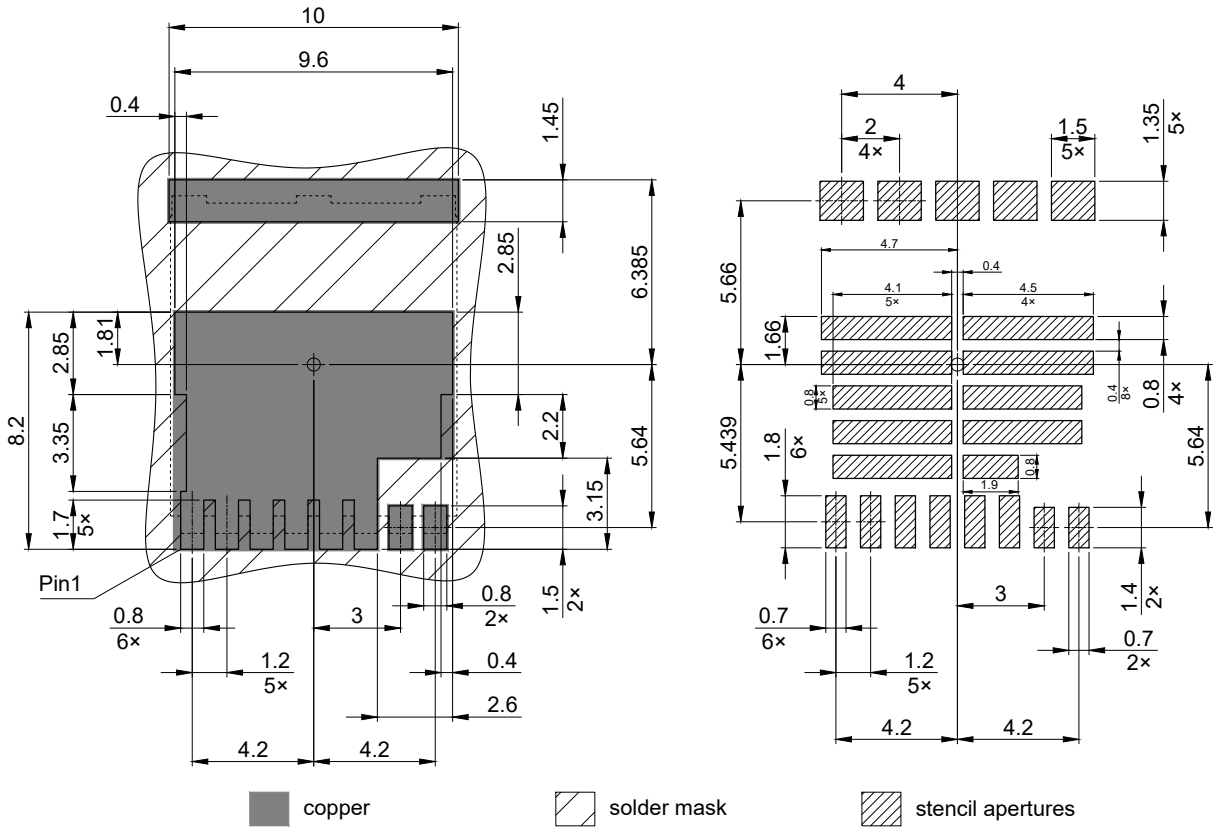
6 Package outlines

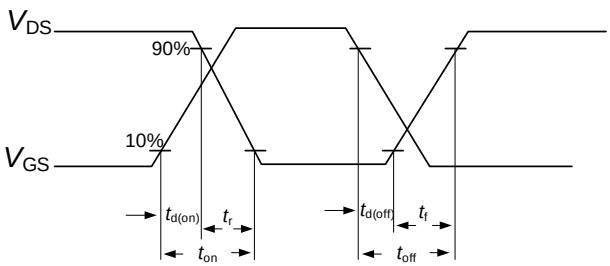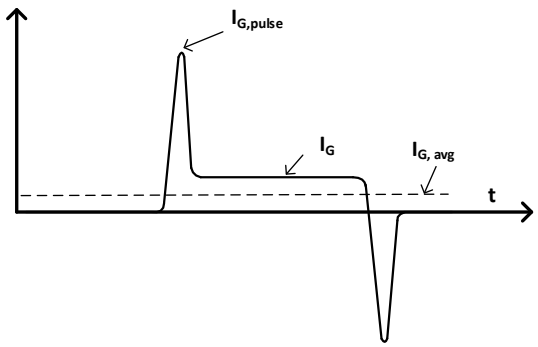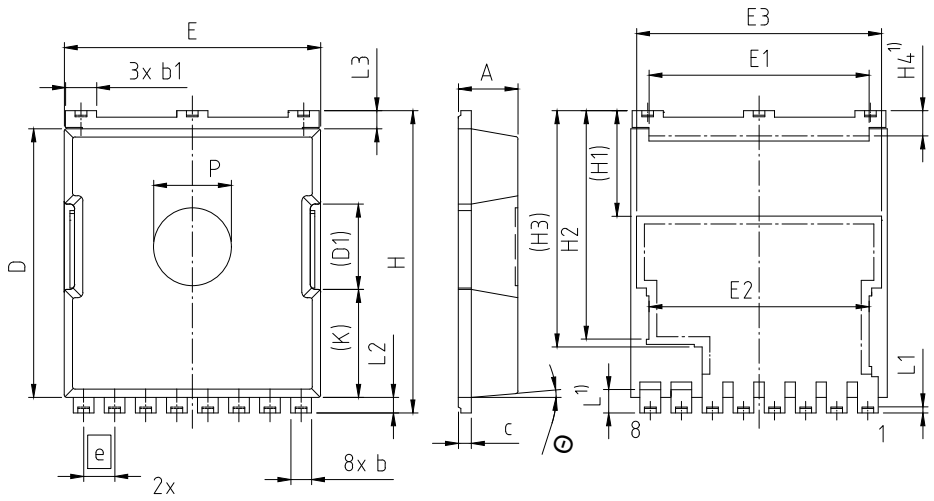

PACKAGE - GROUP NUMBER:	PG-HSOF-8-U04	
DIMENSIONS	MILLIMETERS	
	MIN.	MAX.
A	2.20	2.40
b	0.70	0.90
b1	1.10	1.30
c	0.40	0.60
D	10.275	10.575
D1	(3.20)	(3.40)
E	9.70	10.10
E1	8.40	8.60
E2	8.40	8.60
E3	9.36	9.56
e	1.20	
H	11.475	11.875
H1	(3.98)	(4.18)
H2	8.73	8.93
H3	(9.03)	(9.23)
H4	0.88	1.08
N	8	
K	(4.07)	(4.27)
L	0.80	1.00
L1	0.13	0.33
L2	0.50	0.70
L3	0.60	0.80
P	2.90	3.10
Θ	3.5°	6.5°

NOTES:
1) LEAD LENGTH UP TO ANTI FLASH PROFILE, MOLD FLASHES EXCLUDED

Figure 1 Outline PG-HSOF-8, dimensions in mm



Based on stencil thickness 0.130 mm
All dimensions are in units mm

Figure 2 Footprint drawing PG-HSOF-8, dimensions in mm

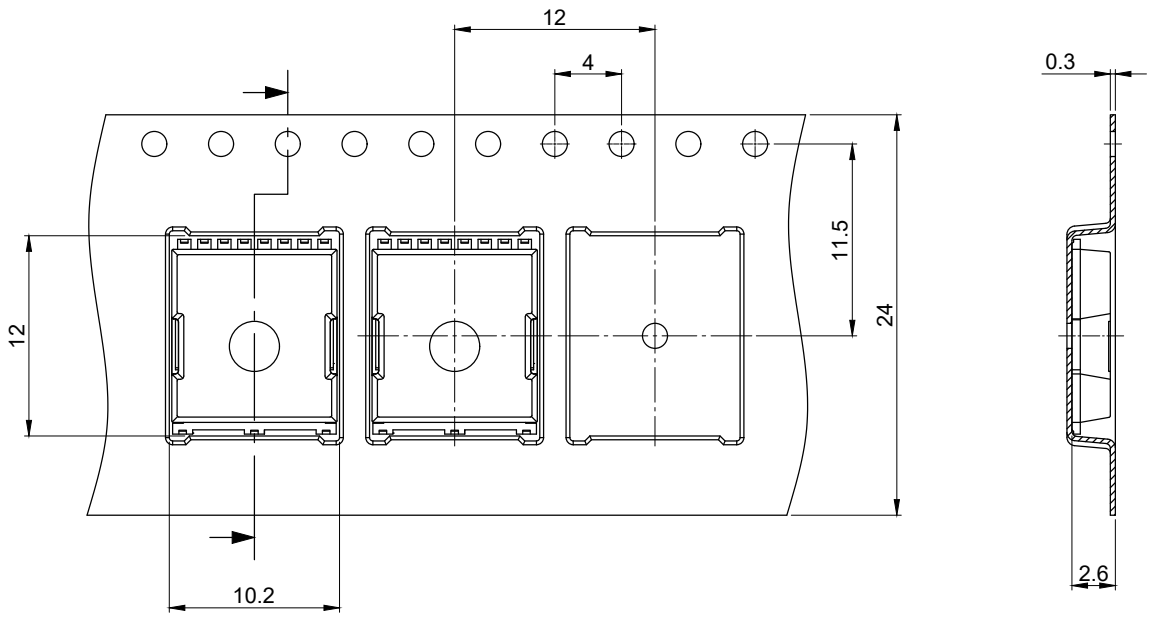


Figure 3 Packaging variant PG-HSOF-8, dimensions in mm

7 Appendix A

Table 10 Related links

- **CoolGaN™ Transistor 650 V G5: IGT65R035D2**
- **CoolGaN™ Transistor 650 V G5 family**
- **Package information**
- **Where & why GaN: applications and value propositions**
- **How to GaN: design tips and tricks**

Revision history

IGT65R035D2

Revision 2026-03-05, Rev. 1.1

Previous revisions

Revision	Date	Subjects (major changes since last revision)
1.0	2024-11-28	Release of final
1.1	2026-03-05	Update of format and footnotes. Typical gate current added.

Trademarks
All referenced product or service names and trademarks are the property of their respective owners.

Published by Infineon Technologies AG, Am Campeon 1-15, 85579 Neubiberg, Germany
Copyright (c) 2026 Infineon Technologies AG and its affiliates. All Rights Reserved.

Important notice
Products which may also include samples and may be comprised of hardware or software or both ("Product(s)") are sold or provided and delivered by Infineon Technologies AG and its affiliates ("Infineon") subject to the terms and conditions of the frame supply contract or other written agreement(s) executed by a customer and Infineon or, in the absence of the foregoing, the applicable Sales Conditions of Infineon. General terms and conditions of a customer or deviations from applicable Sales Conditions of Infineon shall only be binding for Infineon if and to the extent Infineon has given its express written consent.

For the avoidance of doubt, Infineon disclaims all warranties of non-infringement of third-party rights and implied warranties such as warranties of fitness for a specific use/purpose or merchantability.

Infineon shall not be responsible for any information with respect to samples, the application or customer's specific use of any Product or for any examples or typical values given in this document.

The data contained in this document is exclusively intended for technically qualified and skilled customer representatives. It is the responsibility of the customer to evaluate the suitability of the Product for the intended application and the customer's specific use and to verify all relevant technical data contained in this document in the intended application and the customer's specific use. The customer is responsible for properly designing, programming, and testing the functionality and safety of the intended application, as well as complying with any legal requirements related to its use.

Unless otherwise explicitly approved by Infineon, Products may not be used in any application where a failure of the Products or any consequences of the use thereof can reasonably be expected to result in personal injury. However, the foregoing shall not prevent the customer from using any Product in such fields of use that Infineon has explicitly designed and sold it for, provided that the overall responsibility for the application lies with the customer.

Infineon expressly reserves the right to use its content for commercial text and data mining (TDM) according to applicable laws, e.g. Section 44b of the German Copyright Act (UrhG).

If the Product includes security features: Because no computing device can be absolutely secure, and despite security measures implemented in the Product, Infineon does not guarantee that the Product will be free from intrusion, data theft or loss, or other breaches ("Security Breaches"), and Infineon shall have no liability arising out of any Security Breaches.

If this document includes or references software:
The software is owned by Infineon under the intellectual property laws and treaties of the United States, Germany, and other countries worldwide. All rights reserved. Therefore, you may use the software only as provided in the software license agreement accompanying the software. If no software license agreement applies, Infineon hereby grants you a personal, non-exclusive, non-transferable license (without the right to sublicense) under its intellectual property rights in the software (a) for software provided in source code form, to modify and reproduce the software solely for use with Infineon hardware products, only internally within your organization, and (b) to distribute the software in binary code form externally to end users, solely for use on Infineon hardware products. Any other use, reproduction, modification, translation, or compilation of the software is prohibited.

For further information on the Product, technology, delivery terms and conditions, and prices, please contact your nearest Infineon office or visit https://www.infineon.com.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.