MIC2210

Dual µCap LDO with Open-Drain Driver

General Description

The MIC2210 is a dual µCap, low dropout regulator with an open-drain driver and power-on reset circuit. The first regulator is capable of sourcing 150mA, while the second regulator can source up to 300mA and includes a power-on reset function. The open-drain output is capable of sinking 150mA for LED backlighting applications.

Ideal for battery operated applications, the MIC2210 offers 1% accuracy, extremely low dropout voltage (80mV @ 100mA), and extremely low ground current, only 48µA total. Equipped with a TTL logic compatible enable pin*, the MIC2210 can be put into a zero-off-mode current state, drawing no current when disabled.

The MIC2210 is a µCap design, operating with very small ceramic output capacitors for stability, reducing required board space and component cost.

The MIC2210 is available in fixed output voltages in the 10-pin 3mm × 3mm MLF® leadless package.

Data sheets and support documentation can be found on Micrel's web site at www.micrel.com.

*For each output.


Features

- Input voltage range: 2.25V to 5.5V
- Stable with ceramic output capacitor
- 2 LDO outputs
  - Output 1 - 150mA output current
  - Output 2 - 300mA output current
- 1 Open-drain driver
- Low dropout voltage of 80mV @ 100mA
- Ultra-low quiescent current of 48µA
- High output accuracy:
  - +1.0% initial accuracy
  - +2.0% over temperature
- Thermal shutdown protection
- Current limit protection
- Tiny 10-pin 3mm × 3mm MLF® package

Applications

- Cellular/PCS phones
- Wireless modems
- PDAs

Typical Application

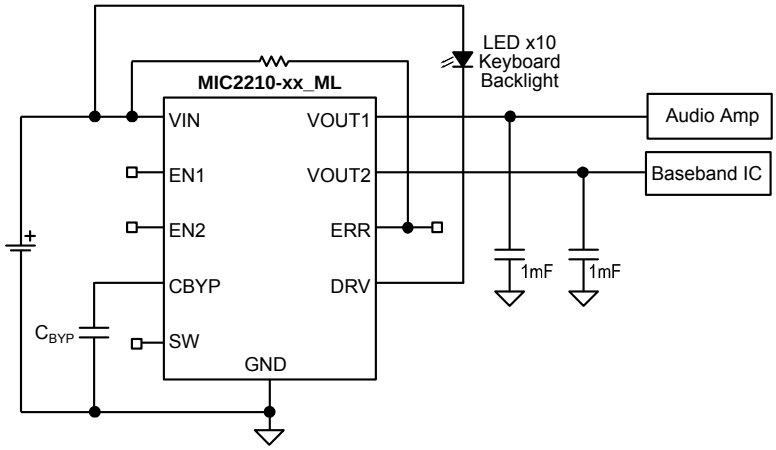

MIC2210 Typical Cell Phone Application

MLF and *Micro*LeadFram are registered trademarks of Amkor Technology, Inc.

Ordering Information


Part Number			Voltage* (Vo1/Vo2)	Junction Temp. Range	Package
Full	Manufacturing	Pb-Free			
MIC2210-1.5/2.8BML	MIC2210-FMBML	MIC2210-FMYML	1.5V/2.8V	–40° to +125°C	10-Pin 3x3 MLF®
MIC2210-1.8/3.3BML	MIC2210-GSBML	MIC2210-GSYML	1.8V/3.3V	–40° to +125°C	10-Pin 3x3 MLF®
MIC2210-2.8/1.6BML	MIC2210-MWBML	MIC2210-MWYML	2.8V/1.6V	–40° to +125°C	10-Pin 3x3 MLF®
MIC2210-2.8/3.0BML	MIC2210-MPBML	MIC2210-MPYML	2.8V/3.0V	–40° to +125°C	10-Pin 3x3 MLF®
MIC2210-3.0/3.3BML	MIC2210-PSBML	MIC2210-PSYML	3.0V/3.3V	–40° to +125°C	10-Pin 3x3 MLF®
MIC2210-3.3/3.3BML	MIC2210-SSBML	MIC2210-SSYML	3.3V/3.3V	–40° to +125°C	10-Pin 3x3 MLF®

* For other output voltage options, contact Micrel for details.

Voltage	Code
Adj.	A
1.5	F
1.6	W
1.8	G
1.85	D
1.9	Y
2.0	H
2.1	E
2.5	J
2.6	K
2.7	L
2.8	M
2.85	N
2.9	O
3.0	P
3.1	Q
3.2	R
3.3	S
3.4	T
3.5	U
3.6	V

Table 1. Voltage Codes

Pin Configuration

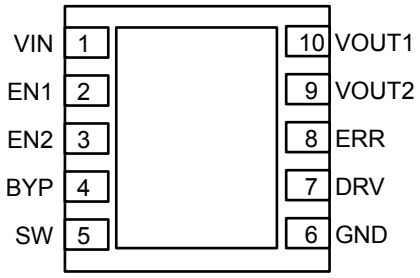

10-Pin 3mm x 3mm MLF® (ML)
(Top View)

Pin Description

Pin Number	Pin Name	Pin Function
1	VIN	Supply Input: (VIN1 and VIN2 are internally tied together.)
2	EN1	Enable Input to Regulator 1: Enables regulator 1 output. Active high input. High = on, low = off. Do not leave floating.
3	EN2	Enable Input to Regulator 2: Enables regulator 2 output. Active high input. High = on, low = off. Do not leave floating.
4	CBYP	Reference Bypass: Connect external 0.01µF to GND to reduce output noise. May be left open.
5	SW	Active high signal drives open-drain N-channel MOSFET.
6	GND	Ground: Connect externally to Exposed Pad.
7	DRV	Open-Drain Output: Capable of sinking 150mA.
8	ERR	Error Flag Output: Open-drain output. Active low indicates an output undervoltage condition on regulator 2.
9	VOUT2	Output of Regulator 2: 300mA output current.
10	VOUT1	Output of Regulator 1: 150mA output current.
EP	GND	Ground: Internally connected to the Exposed Pad. Connect externally to pin 6.

Absolute Maximum Ratings[1]

Supply Voltage (V_{IN}) ..... 0V to 7V
Enable Voltage (V_{EN}) ..... 0V to 7V
Power Dissipation (P_D) ..... Internally Limited[3]
Lead Temperature (soldering, 5 sec.) ..... 260°C
Junction Temperature (T_J) ..... –40°C to +125°C
Storage Temperature (T_s) ..... –65°C to +150°C

Operating Ratings[2]

Supply Voltage (V_{IN}) ..... 2.25V to 5.5V
Enable Voltage (V_{EN}) ..... 0V to V_{IN}
Junction Temperature (T_J) ..... –40°C to +125°C
Package Thermal Resistance
MLF-10 (θ_{JA}) 1" square 2oz. copper ..... 60°C/W

Electrical Characteristics[4]

$V_{IN} = V_{OUT} + 1V$ for higher output of the regulator pair; C_{OUT} = 1µF, I_{OUT} = 100µA; T_J = 25°C, **bold** values indicate –40°C≤ T_J ≤ +125°C, unless noted.


Parameter	Condition	Min	Typ	Max	Units
Output Voltage Accuracy	Variation from nominal V_{OUT}	–1 **–2**		+1 **+2**	% %
Output Voltage Temp. Coefficient			40		ppm/C
Line Regulation; **Note 5**	$V_{IN} = V_{OUT}$ +1V to 5.5V	–0.3 **–0.6**	0.02	+0.3 **+0.6**	%/V %/V
Load Regulation	I_{OUT} = 100µA to 150mA (Regulator 1 and 2)		0.2	1	%
	I_{OUT} = 100µA to 300mA (Regulator 2)			1.5	%
Dropout Voltage; **Note 6**	I_{OUT} = 150mA (Regulator 1 and 2)		120	190 **250**	mV mV
	I_{OUT} = 300mA (Regulator 2)		240	340 **420**	mV mV
Ground Pin Current	$I_{OUT1} = I_{OUT2}$ = 0µA		48	65 **80**	µA µA
	I_{OUT1} = 150mA & I_{OUT2} = 300mA		60		µA
Ground Pin Current in Shutdown	$V_{EN} \le 0.4V$			**2**	µA
Ripple Rejection	f = 1kHz; C_{OUT} = 1.0µF ceramic; C_{BYP} = 10nF		60		dB
	f = 20kHz; C_{OUT} = 1.0µF ceramic; C_{BYP} = 10nF		40		dB
Current Limit	V_{OUT} = 0V (Regulator 1)	150	280	460	mA
	V_{OUT} = 0V (Regulator 2)	300	450	700	mA
Output Voltage Noise	C_{OUT} =1µF, C_{BYP} =0.01µF, 10Hz to 100kHz		30		µVrms
Enable Output					
Enable Input Voltage	Logic Low (Regulator Shutdown)			**0.6**	V
	Logic High (Regulator Enabled)	**1.8**			V
Enable Input Current	V_{IL} < 0.6V (Regulator Shutdown)	–1	0.01	+1	µA
	V_{IH} > 1.8V (Regulator Enabled)	–1	0.01	+1	µA
ERROR Flag Output (LDO2)					
VERR	Low Threshold, % of nominal V_{OUT2} (Flag ON)	90			%
	High Threshold, % of nominal V_{OUT2} (Flag OFF)			96	%
VOL	Flag Output Logic Low Voltage; I_L = 100µA		0.02	0.1	mV
IERR	Flag Leakage Current, Flag OFF	–1	0.01	+1	µA


Parameter	Condition	Min	Typ	Max	Units
DRV Output					
Voltage Low	I_{DRV} = 150mA		0.2	0.5 **0.6**	V
Leakage Current	I_{DRV} = 0mA, V_{DRV} = 5.5V, SW = 0V	–1	0.01	+1	µA
SW Input Voltage	Logic Low (DRV Shutdown)			**0.6**	V
	Logic High (DRV Enabled)	**1.8**			V
SW Input Current	V_{IL} < 0.6V (DRV Shutdown)	–1	0.01	+1	µA
	V_{IH} > 1.8V (DRV Enabled)	–1	0.01	+1	µA


Notes:


1. Exceeding the absolute maximum rating may damage the device.
2. The device is not guaranteed to function outside its operating rating.
3. The maximum allowable power dissipation of any T_A (ambient temperature) is ($P_{D(max)} = T_{J(max)} – T_A) / \theta_{JA}$. Exceeding the maximum allowable power dissipation will result in excessive die temperature, and the regulator will go into thermal shutdown.
4. Specification for packaged product only.
5. Minimum input for line regulation test is set to V_{OUT} + 1V relative to the highest output voltage.
6. Dropout voltage is defined as the input-to-output differential at which the output voltage drops 2% below its nominal value measured at 1Vdifferential. For outputs below 2.25V, dropout voltage is the input-to-output voltage differential with the minimum input voltage 2.25V. Minimum input operating voltage is 2.25V.


Typical Characteristics







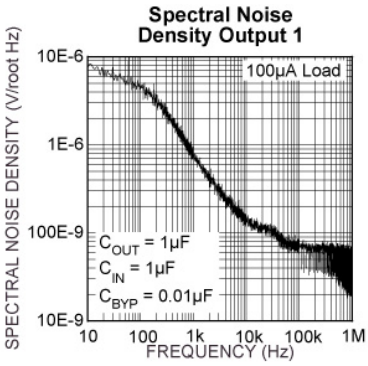


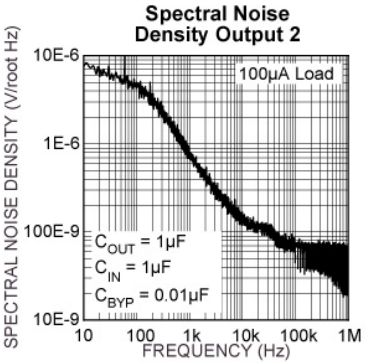


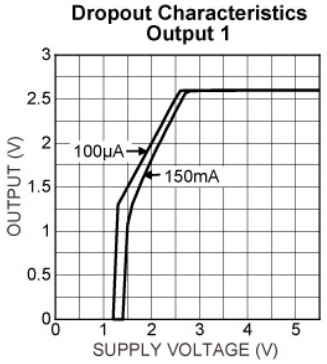


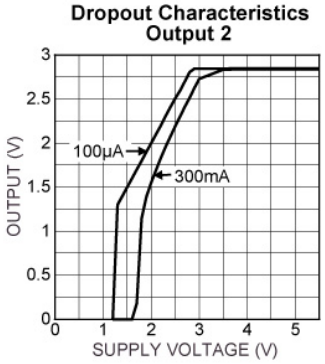


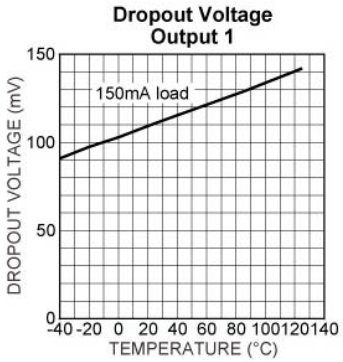


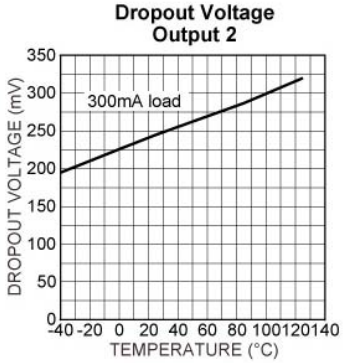

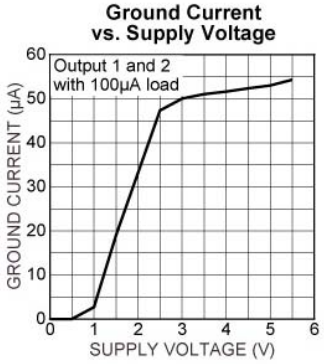

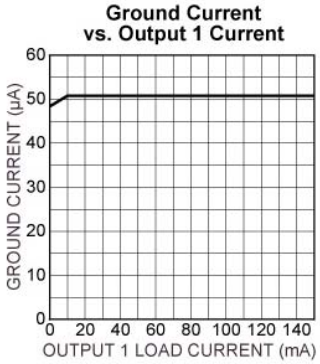


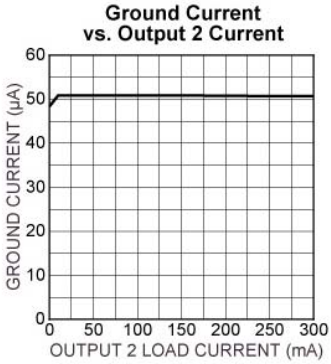

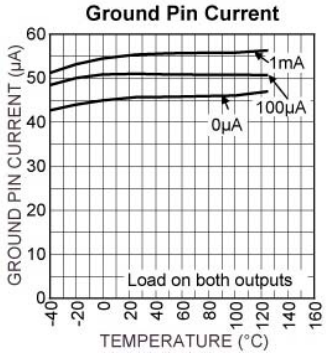


Typical Characteristics (cont.)


Ground Current vs. Output Current




Ground Current vs. Output Current




Ground Current vs. Output Current




Ground Current vs. Output Current




Output Voltage vs. Load Current

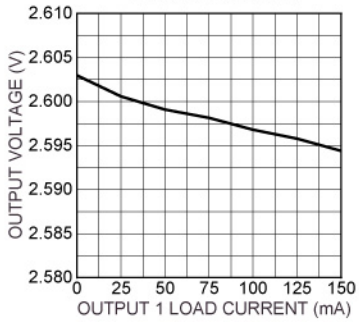


Output Voltage vs. Load Current

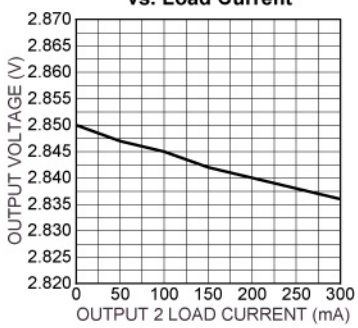


Output Voltage 1 vs. Temperature

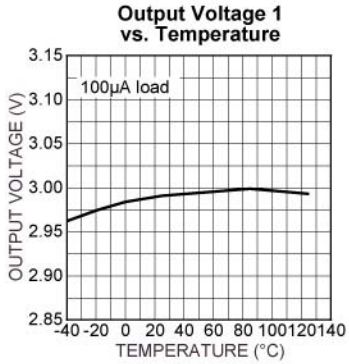


Output Voltage 2 vs. Temperature

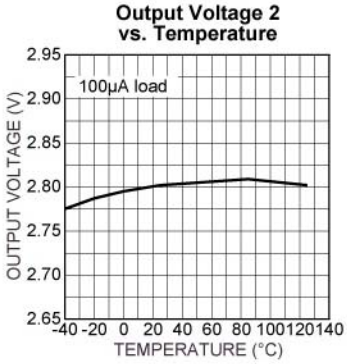

Switch Threshold vs. Supply Voltage

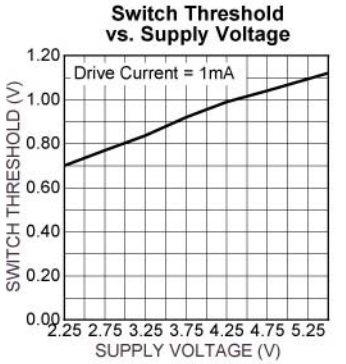


Enable Voltage Threshold vs. Supply Voltage

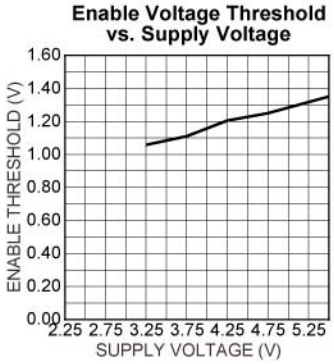


Functional Characteristics


Enable Characteristics

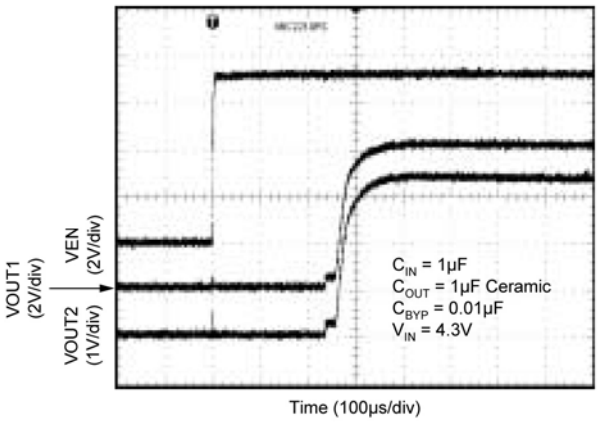


Load Transient Response (LDO 1)

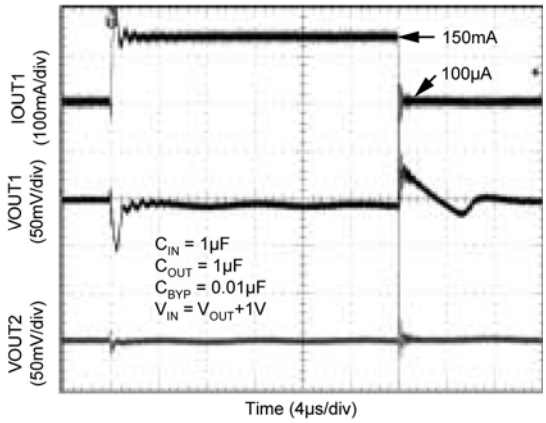

Load Transient Response (LDO 2)

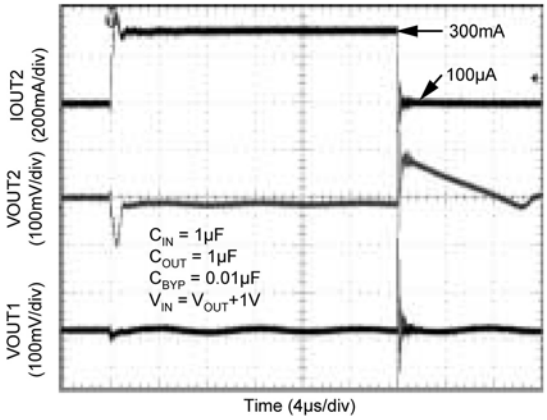

Functional Diagram

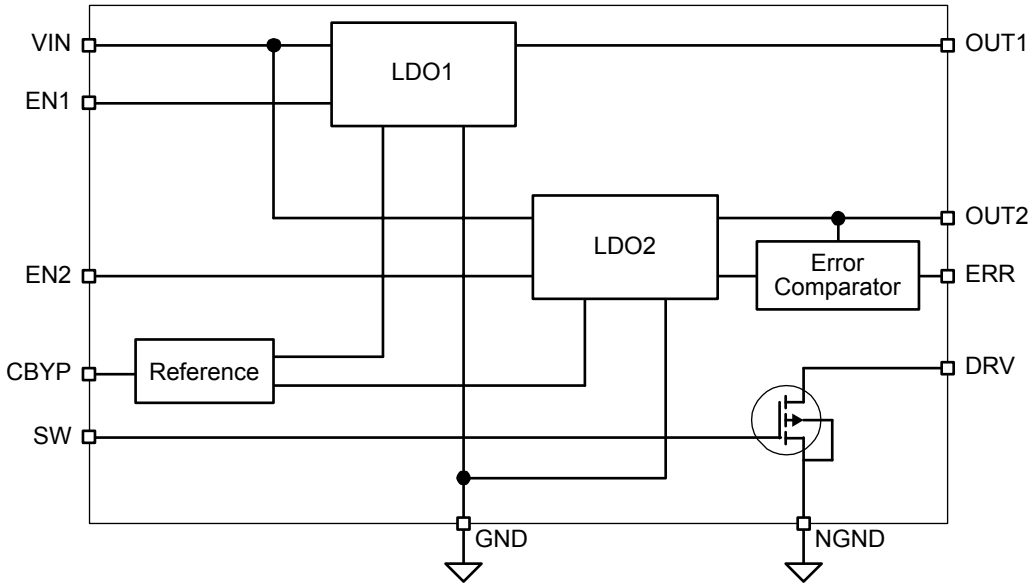

MIC2210 Fixed Voltage Block Diagram

Functional Description

The MIC2210 is a high performance, low quiescent current power management IC consisting of two µCap low dropout regulators, an open-drain driver. The first regulator is capable of sourcing 150mA at output voltages from 1.25V to 5V. The second regulator is capable of sourcing 300mA of current at output voltages from 1.25V to 5V. An open-drain driver completes the power management chipset, offering the capability of driving LEDs for keypad backlighting in applications such as cell phones.

Enable 1 and 2

The enable inputs allow for logic control of both output voltages with individual enable inputs. The enable input is active high, requiring 1.8V for guaranteed operation. The enable input is CMOS logic and cannot by left floating.

Open-Drain Driver (DRV)

The drive (DRV) pin is an open-drain output capable of sinking 150mA of current. This output is controlled by a logic level input, the switch (SW) pin. The switch pin is an active high input and cannot be left floating.

Input Capacitor

Good bypassing is recommended from input to ground to help improve AC performance. A 1µF capacitor or greater located close to the IC is recommended.

Bypass Capacitor


The internal reference voltage of the MIC2210 can be by-passed with a capacitor to ground to reduce output noise and increase power supply rejection (PSRR). A quick-start feature allows for quick turn-on of the output voltage regardless of the size of the capacitor. The recommended nominal bypass capacitor is 0.01µF, but it can be increased without limit.

Output Capacitor


Each regulator output requires a 1µF ceramic output capacitor for stability. The output capacitor value can be increased to improve transient response, but performance has been optimized for a 1µF ceramic type output capacitor.

X7R/X5R dielectric-type ceramic capacitors are recommended because of their temperature performance. X7R-type capacitors change capacitance by 15% over their operating temperature range and are the most stable type of ceramic capacitors. Z5U and Y5V dielectric capacitors change value by as much as 50% and 60% respectively over their operating temperature ranges. To use a ceramic chip capacitor with Y5V dielectric, the value must be much higher than a X7R ceramic capacitor to ensure the same minimum capacitance over the equivalent operating temperature range.


Package Information

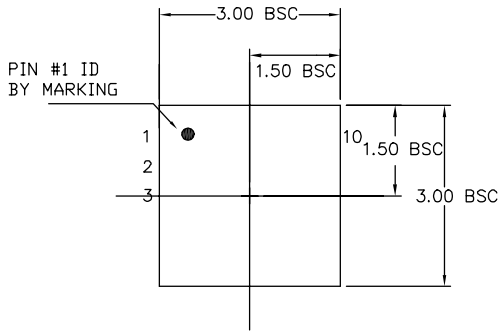

TOP VIEW

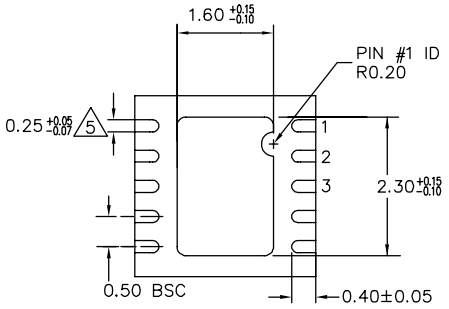

BOTTOM VIEW

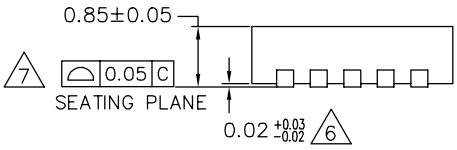

SIDE VIEW

NOTE:
1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. MAX. PACKAGE WARPAGE IS 0.05 mm.
3. MAXIMUM ALLOWABE BURRS IS 0.076 mm IN ALL DIRECTIONS.
4. PIN #1 ID ON TOP WILL BE LASER/INK MARKED.
5. DIMENSION APPLIES TO METALIZED TERMINAL AND IS MEASURED BETWEEN 0.20 AND 0.25 mm FROM TERMINAL TIP.
6. APPLIED ONLY FOR TERMINALS.
7. APPLIED FOR EXPOSED PAD AND TERMINALS.

10-Pin 3mm x 3mm MLF® (ML)

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA
TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB http://www.micrel.com

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2002 Micrel, Incorporated.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.