MIC5203

µCap 80mA Low-Dropout Regulator

General Description

The MIC5203 is a µCap 80mA linear voltage regulator with very low dropout voltage (typically 20mV at light loads and 300mV at 80mA) and very low ground current (225µA at 20mA output), offering better than 3% initial accuracy with a logic-compatible enable input.

TheµCap regulator design is optimized to work with low-value, low-cost ceramic capacitors. The outputs typically require only 0.47µF of output capacitance for stability.

Designed especially for hand-held, battery-powered devices, the MIC5203 can be controlled by a CMOS or TTL compatible logic signal. When disabled, power consumption drops nearly to zero. If on-off control is not required, the enable pin may be tied to the input for 3-terminal operation. The ground current of the MIC5203 increases only slightly in dropout, further prolonging battery life. Key MIC5203 features include current limiting, overtemperature shutdown, and protection against reversed battery.

The MIC5203 is available in 2.8V, 3.0V, 3.3V, 3.6V, 3.8V, 4.0V, 4.5V, 4.75V, and 5.0V fixed voltages. Other voltages are available.

Data sheets and support documentation can be found on Micrel's web site at www.micrel.com.

Features

- Tiny 4- and 5-lead surface-mount packages
- Wide selection of output voltages
- Guaranteed 80mA output
- Low quiescent current
- Low dropout voltage
- Low temperature coefficient
- Current and thermal limiting
- Reversed input polarity protection
- Zero off-mode current
- Logic-controlled shutdown
- Stability with low-ESR ceramic capacitors

Applications

- Cellular telephones
- Laptop, notebook, and palmtop computers
- Battery-powered equipment
- Barcode scanners
- SMPS post-regulator/DC-to-DC modules
- High-efficiency linear power supplies

Typical Application

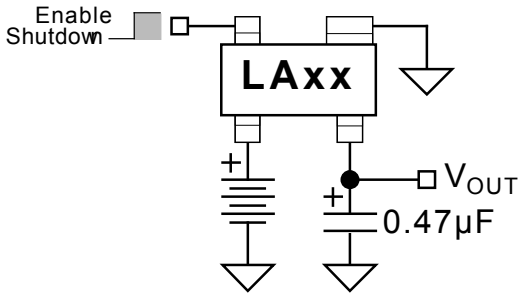

SOT-143 Version

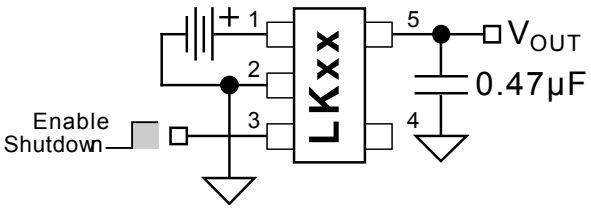

SOT-23-5 Version

Ordering Information[1]

Part Number				Voltage	Temperature Range	Package
Standard	Marking	Pb-Free	Marking			
MIC5203-2.6BM4	LA26	MIC5203-2.6YM4	LA26	2.6V	–40° to +125°C	SOT-143
MIC5203-2.8BM4	LA28	MIC5203-2.8YM4	LA28	2.8V	–40° to +125°C	SOT-143
MIC5203-3.0BM4	LA30	MIC5203-3.0YM4	LA30	3.0V	–40° to +125°C	SOT-143
MIC5203-3.3BM4	LA33	MIC5203-3.3YM4	LA33	3.3V	–40° to +125°C	SOT-143
MIC5203-3.6BM4	LA36	MIC5203-3.6YM4	LA36	3.6V	–40° to +125°C	SOT-143
MIC5203-3.8BM4	LA38	MIC5203-3.8YM4	LA38	3.8V	–40° to +125°C	SOT-143
MIC5203-4.0BM4	LA40	MIC5203-4.0YM4	LA40	4.0V	–40° to +125°C	SOT-143
MIC5203-4.5BM4	LA45	MIC5203-4.5YM4	LA45	4.5V	–40° to +125°C	SOT-143
MIC5203-4.7BM4	LA47	MIC5203-4.7YM4	LA47	4.7V	–40° to +125°C	SOT-143
MIC5203-5.0BM4	LA50	MIC5203-5.0YM4	LA50	5.0V	–40° to +125°C	SOT-143
MIC5203-2.6BM5	LK26	MIC5203-2.6YM5	LK26	2.6V	–40° to +125°C	SOT-23-5
MIC5203-2.8BM5	LK28	MIC5203-2.8YM5	LK28	2.8V	–40° to +125°C	SOT-23-5
MIC5203-3.0BM5	LK30	MIC5203-3.0YM5	LK30	3.0V	–40° to +125°C	SOT-23-5
MIC5203-3.3BM5	LK33	MIC5203-3.3YM5	LK33	3.3V	–40° to +125°C	SOT-23-5
MIC5203-3.6BM5	LK36	MIC5203-3.6YM5	LK36	3.6V	–40° to +125°C	SOT-23-5
MIC5203-3.8BM5	LK38	MIC5203-3.8YM5	LK38	3.8V	–40° to +125°C	SOT-23-5
MIC5203-4.0BM5	LK40	MIC5203-4.0YM5	LK40	4.0V	–40° to +125°C	SOT-23-5
MIC5203-4.5BM5	LK45	MIC5203-4.5YM5	LK45	4.5V	–40° to +125°C	SOT-23-5
MIC5203-4.7BM5	LK47	MIC5203-4.7YM5	LK47	4.7V	–40° to +125°C	SOT-23-5
MIC5203-5.0BM5	LK50	MIC5203-5.0YM5	LK50	5.0V	–40° to +125°C	SOT-23-5

Note:

1. Other Voltage available. Contact Micrel for details.

Pin Configuration

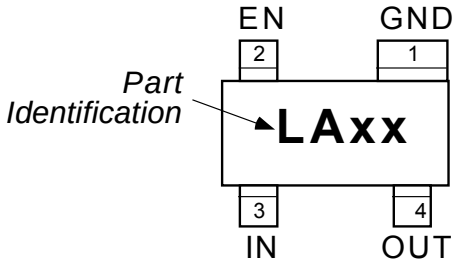

SOT-143 (M4)



SOT-23-5 (M5)

Pin Description

Pin Number SOT-143	Pin Number SOT-23-5	Pin Name	Pin Name
1	2	GND	Ground.
2	3	EN	Enable (Input): TTL/CMOS compatible control input. Logic high = enabled; logic low or open = shutdown.
3	1	IN	Supply input.
	4	NC	Not internally connected.
4	5	OUT	Regulator output.

Absolute Maximum Ratings[1]

Supply Voltage (V_{IN}) ..... –20V to +20V
Enable Input Voltage (V_{EN}) ..... –20V to +20V
Power Dissipation (P_D) ..... Internally Limited
Storage Temperature (Ts) ..... –60°C to +150°C
Lead Temperature (soldering, #sec.) ..... 260°C

Operating Ratings[2]

Input Voltage (V_{IN}) ..... 2.5V to 16V
Enable Input Voltage (V_{EN}) ..... 0V to V_{IN}
Junction Temperature Range ..... –40°C to +125°C
Thermal Resistance (θ_{JA}) ..... Note 3

Electrical Characteristics

$V_{IN} = V_{OUT} + 1V$; $I_L = 1mA$; $C_L = 0.47\mu F$; $V_{EN} \geq 2.0V$; $T_J = 25°C$, **bold** values indicate $–40°C \leq T_J \leq +125°C$, unless noted.

Symbol	Parameter	Condition	Min	Typ	Max	Units
V_O	Output voltage accuracy		–3		3	%
			–4		**4**	
$\Delta V_O/\Delta T$	Output voltage temperature coefficient	Note 4		**50**	**200**	pm/°C
$\Delta V_O/V_O$	Line regulation	$V_{IN} = V_{OUT} + 1V$ to 16V		0.008	0.3	%
					0.5	
$\Delta V_O/V_O$	Load regulation	$I_L = 0.1mA$ to 80mA[5]		0.08	0.3	%
					0.5	
$\Delta V_O – V_O$	Dropout voltage[6]	$I_L = 100\ \mu A$		20		mV
		$I_L = 20mA$		200	**350**	
		$I_L = 50mA$		250		
		$I_L = 80mA$		300	**600**	
I_Q	Quiescent current	$V_{EN} \leq 0.4V$ (shutdown)		0.01	10	µA
I_{GND}	Ground pin current[7]	$I_L = 100\ \mu A$, $V_{EN} \geq 2.0V$ (active)		180		µA
		$I_L = 20mA$, $V_{EN} \geq 2.0V$ (active)		225	**750**	
		$I_L = 50mA$, $V_{EN} \geq 2.0V$ (active)		850		
		$I_L = 80mA$, $V_{EN} \geq 2.0V$ (active)		1800	**3000**	
I_{GNDDO}	Ground pin current at dropout	$V_{IN} = V_{OUT(nominal)} – 0.5V$[7]		200	**300**	µA
I_{LIMIT}	Current limit	$V_{OUT} = 0V$		180	**250**	mA
$\Delta V_O/\Delta P_D$	Thermal regulation	Note 8		0.05		%/W

Electrical Characteristics (continued)

$V_{IN} = V_{OUT} + 1V$; $I_L = 1mA$; $C_L = 0.47\mu F$; $V_{EN} \geq 2.0V$; $T_J = 25°C$, **bold** values indicate $-40°C \leq T_J \leq +125°C$, unless noted.

Symbol	Parameter	Condition	Min	Typ	Max	Units
Enable Input						
V_{IL}	Enable input voltage level	Logic low (off)			**0.6**	V
V_{IH}		Logic high (on)	2.0			
I_{IL}	Enable input current	$V_{IL} \leq 0.6V$		0.01	1	µA
I_{IH}		$V_{IH} \geq 2.0V$		15	**50**	

Notes:

1. Exceeding the absolute maximum rating may damage the device.
2. The device is not guaranteed to function outside its operating rating.
3. The maximum allowable power dissipation at any T_A (ambient temperature) is $P_{D(MAX)} = (T_{J(MAX)} - T_A) \div \theta_{JA}$. Exceeding the maximum allowable power dissipation will result in excessive die temperature, and the regulator will go into thermal shutdown. The θ_{JA} is 250°C/W for the SOT-143 and 220°C/W for the SOT-23-5 mounted on a printed circuit board.
4. Output voltage temperature coefficient is defined as the worst-case voltage change divided by the total temperature range.
5. Regulation is measured at constant junction temperature using low duty cycle pulse testing. Parts are tested for load regulation in the load range from 0.1mA to 150mA. Changes in output voltage due to heating effects are covered by the thermal regulation specification.
6. Dropout voltage is defined as the input-to-output differential at which the output voltage drops 2% below its nominal value measured at 1V differential.
7. Ground pin current is the regulator quiescent current plus pass transistor base current. The total current drawn from the supply is the sum of the load current plus the ground pin current.
8. Thermal regulation is defined as the change in output voltage at a time “t” after a change in power dissipation is applied, excluding load or line regulation effects. Specifications are for a 150mA load pulse at $V_{IN} = 16V$ for t = 10ms.

Typical Characteristics

Dropout Voltage vs. Output Current



Dropout Voltage vs. Temperature



Dropout Characteristics



Ground Current vs. Output Current



Ground Current vs. Supply Voltage



Ground Current vs. Temperature



Output Voltage vs. Output Current



Short Circuit Current vs. Input Voltage



Thermal Regulation (3.3V Version)



Output Voltage vs. Temperature



Short Circuit Current vs. Temperature



Minimum Supply Voltage vs. Temperature



Typical Characteristics (continued)









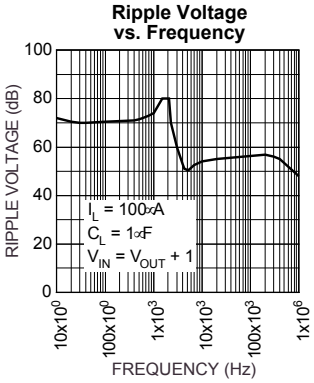

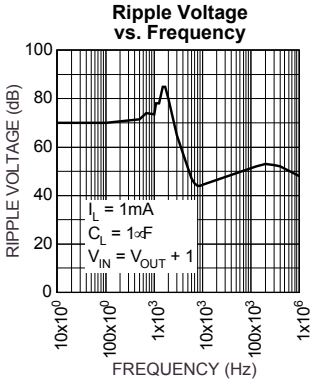

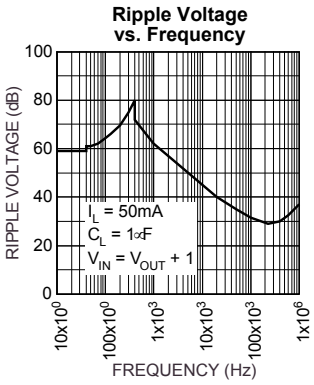

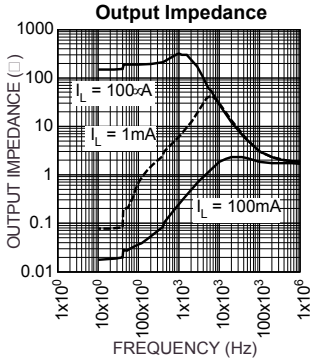









Applications Information

Input Capacitor

A 0.1µF capacitor should be placed from IN to GND if there is more than 10 inches of wire between the input and the AC filter capacitor or when a battery is used as the input.

Output Capacitor

Typical PNP based regulators require an output capacitor to prevent oscillation. The MIC5203 is ultrastable, requiring only 0.47µF of output capacitance for stability. The regulator is stable with all types of capacitors, including the tiny, low-ESR ceramic chip capacitors. The output capacitor value can be increased without limit to improve transient response.

The capacitor should have a resonant frequency above

500kHz. Ceramic capacitors work, but some dielectrics have poor temperature coefficients, which will affect the value of the output capacitor over temperature. Tantalum capacitors are much more stable over temperature, but typically are larger and more expensive. Aluminum electrolytic capacitors will also work, but they have electrolytes that freeze at about –30°C. Tantalum or ceramic capacitors are recommended for operation below –25°C.

No-Load Stability

The MIC5203 will remain stable and in regulation with no load (other than the internal voltage divider) unlike many other voltage regulators. This is especially important in CMOS RAM keep-alive applications.

Enable Input

The MIC5203 features nearly zero off-mode current. When EN (enable input) is held below 0.6V, all internal circuitry is powered off. Pulling EN high (over 2.0V) re-enables the device and allows operation. EN draws a small amount of current, typically 15µA. While the logic threshold is TTL/CMOS compatible, EN may be pulled as high as 20V, independent of V_{IN}.

Package Information

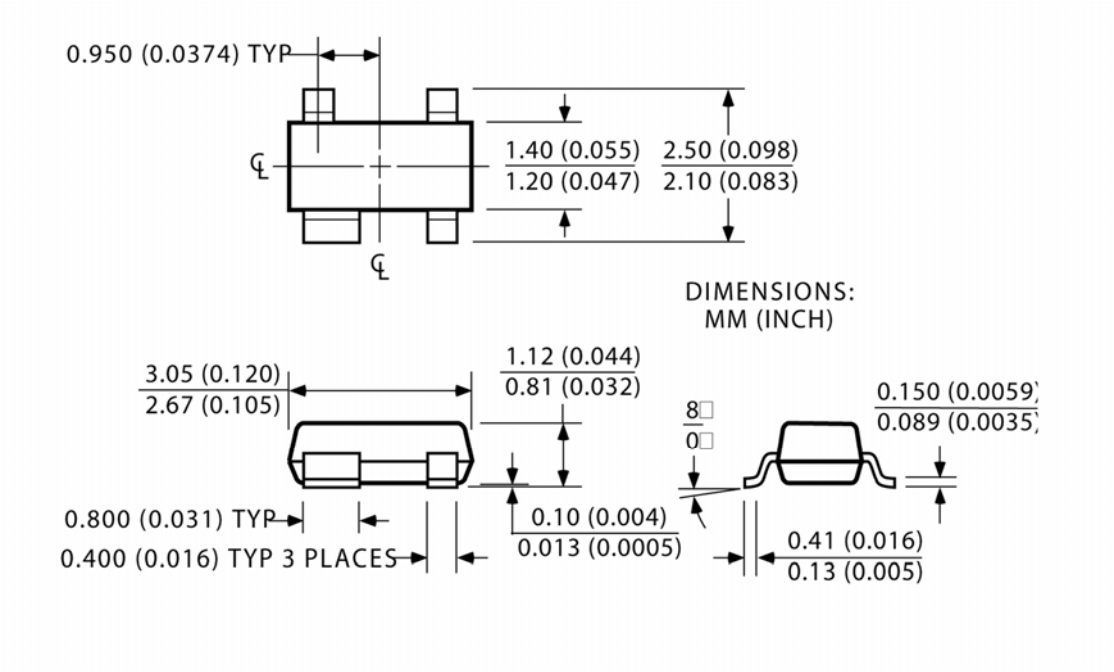

SOT-143 (M4)

Package Information (continued)

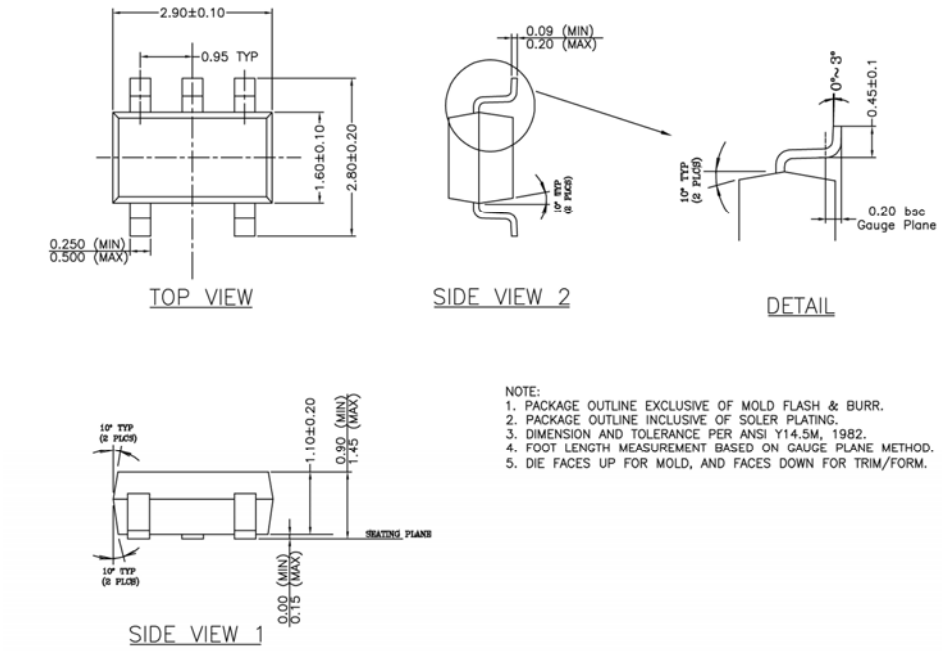

SOT-23-5 (M5)

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA
TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB http://www.micrel.com

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 1998 Micrel, Incorporated.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.