MIC5330

Dual 300mA µCap LDO in 2mm x 2mm MLF®

General Description

The MIC5330 is a tiny Dual Ultra Low Dropout (ULDO™) linear regulator ideally suited for portable electronics due to its high power supply ripple rejection (PSRR) and ultra low output noise. The MIC5330 integrates two high performance 300mA ULDOs into a tiny 2mm x 2mm leadless MLF® package, which provides exceptional thermal package characteristics.

The MIC5330 is a µCap design which enables operation with very small ceramic output capacitors for stability, thereby reducing required board space and component cost. The combination of extremely low drop out voltage, high power supply rejection and exceptional thermal package characteristics makes it ideal for powering RF/noise sensitive circuitry, cellular phone camera modules, imaging sensors for digital still cameras, PDAs, MP3 players and WebCam applications.

The MIC5330 ULDO™ is available in fixed output voltages in the tiny 8-pin 2mm x 2mm leadless MLF® package which occupies less than half the board area of a single SOT-6 package. Additional voltage options are available. For more information, contact Micrel marketing department.

Data sheets and support documentation are found on the Micrel web site:www.micrel.com.


Features

- 2.3V to 5.5V input voltage range
- Ultra low dropout voltage ULDO™ 75mV @ 300mA
- High PSRR - >70dB @ 1KHz
- Ultra-low output noise: 30µV_{RMS}
- ±2% initial output accuracy
- Tiny 8-pin 2mm x 2mm MLF® leadless package
- Excellent Load/Line transient response
- Fast start up time: 30µs
- 300mA output current per LDO
- Thermal shutdown protection
- Low quiescent current: 75µA per output
- Current limit protection

Applications

- Mobile phones
- PDAs
- GPS receivers
- Portable electronics
- Portable media players
- Digital still and video cameras


Typical Application

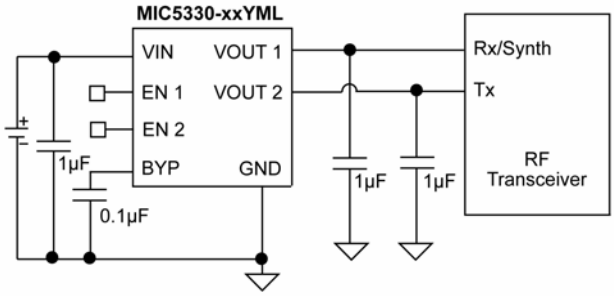

RF Power Supply Circuit

ULDO is a trademark of Micrel, Inc.
MLF and *Micro*LeadFrame are registered trademarks of Amkor Technology, Inc.

Block Diagram

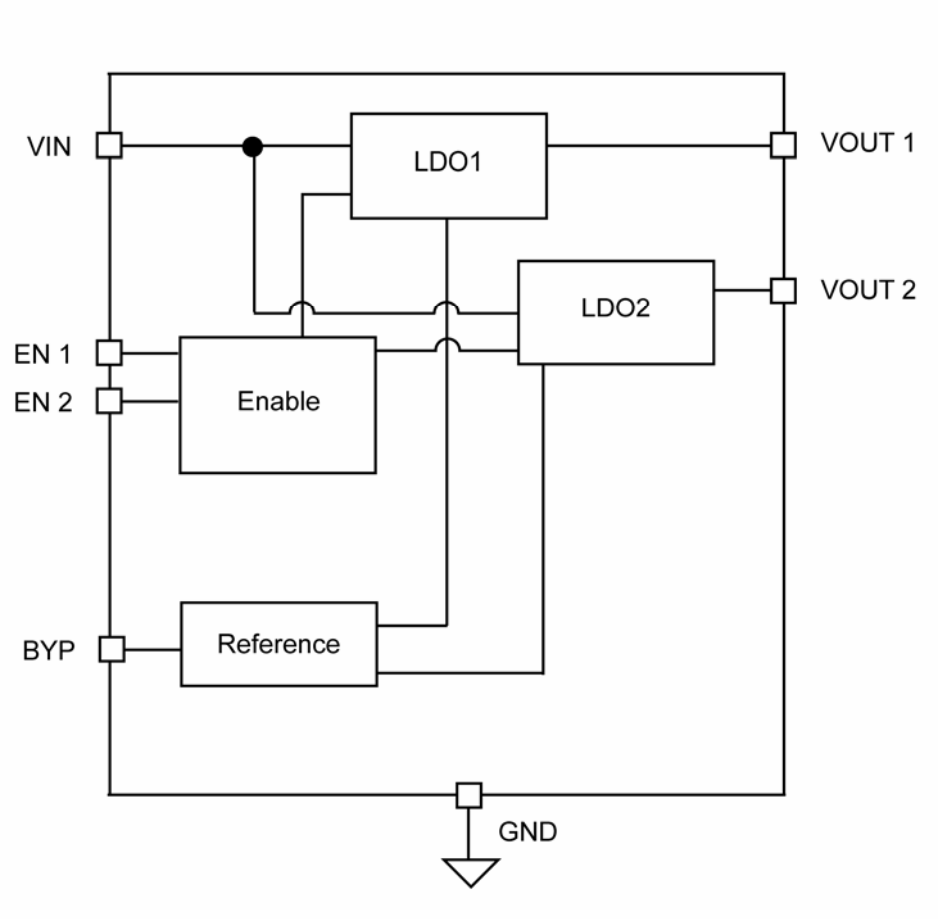

MIC5330 Fixed Block Diagram


Ordering Information

Functional Part number	Ordering Part Number	Marking[1]	V_{OUT1}/V_{OUT2}[2]	Junction Temperature Range	Package[3]
MIC5330-1.8/1.5YML	MIC5330-GFYML	EGF	1.8V/1.5V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-1.8/1.8YML	MIC5330-GGYML	EGG	1.8V/1.8V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-1.8/1.6YML	MIC5330-GWYML	EGW	1.8V/1.6V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-2.5/1.8YML	MIC5330-JGYML	EJG	2.5V/1.8V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-2.5/2.5YML	MIC5330-JJYML	EJJ	2.5V/2.5V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-2.6/1.85YML	MIC5330-KDYML	EKD	2.6V/1.85	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-2.6/1.8YML	MIC5330-KGYML	EKG	2.6V/1.8V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-2.7/2.7YML	MIC5330-LLYML	ELL	2.7V/2.7V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-2.8/1.5YML	MIC5330-MFYML	EMF	2.8V/1.5V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-2.8/1.8YML	MIC5330-MGYML	EMG	2.8V/1.8V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-2.8/2.6YML	MIC5330-MKYML	EMK	2.8V/2.6V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-2.8/2.8YML	MIC5330-MMYML	EMM	2.8V/2.8V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-2.85/1.85YML	MIC5330-NDYML	END	2.85V/1.85V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-2.85/2.6YML	MIC5330-NKYML	ENK	2.85V/2.6V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-2.85/2.85YML	MIC5330-NNYML	ENN	2.85V/2.85V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-2.9/1.5YML	MIC5330-OFYML	EOF	2.9V/1.5V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-2.9/1.8YML	MIC5330-OGYML	EOG	2.9V/1.8V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-2.9/2.9YML	MIC5330-OOYML	EOO	2.9V/2.9V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.0/1.8YML	MIC5330-PGYML	EPG	3.0V/1.8V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.0/2.5YML	MIC5330-PJYML	EPJ	3.0V/2.5V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.0/2.6YML	MIC5330-PKYML	EPK	3.0V/2.6V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.0/2.8YML	MIC5330-PMYML	EPM	3.0V/2.8V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.0/2.85YML	MIC5330-PNYML	EPN	3.0V/2.85V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.0/3.0YML	MIC5330-PPYML	EPP	3.0V/3.0V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.3/1.5YML	MIC5330-SFYML	ESF	3.3V/1.5V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.3/1.8YML	MIC5330-SGYML	ESG	3.3V/1.8V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.3/2.5YML	MIC5330-SJYML	ESJ	3.3V/2.5V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.3/2.6YML	MIC5330-SKYML	ESK	3.3V/2.6V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.3/2.8YML	MIC5330-SMYML	ESM	3.3V/2.8V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.3/2.85YML	MIC5330-SNYML	ESN	3.3V/2.85V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.3/2.9YML	MIC5330-SOYML	ESO	3.3V/2.9V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.3/3.0YML	MIC5330-SPYML	ESP	3.3V/3.0V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.3/3.2YML	MIC5330-SRYML	ESR	3.3V/3.2V	–40°C to +125°C	8-Pin 2x2 MLF®
MIC5330-3.3/3.3YML	MIC5330-SSYML	ESS	3.3V/3.3V	–40°C to +125°C	8-Pin 2x2 MLF®

Notes:

1. Over bar (¯) symbol may not be to scale.
2. Other voltage options available. Contact Micrel for more details.
3. MLF® is a GREEN RoHS compliant package. Lead finish is NiPdAu. Mold compound is Halogen Free.

Pin Configuration

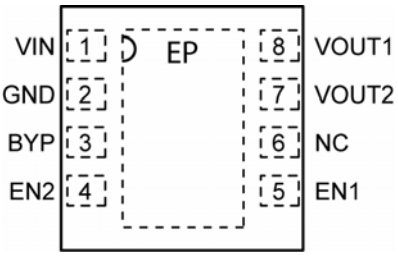

8-Pin 2mm x 2mm MLF (ML)
Top View

Pin Description

Pin Number MLF-8	Pin Name	Pin Function
1	VIN	Supply Input.
2	GND	Ground
3	BYP	Reference Bypass: Connect external 0.1µF to GND to reduce output noise. May be left open when bypass capacitor is not required.
4	EN2	Enable Input (regulator 2). Active High Input. Logic High = On; Logic Low = Off; Do not leave floating.
5	EN1	Enable Input (regulator 1). Active High Input. Logic High = On; Logic Low = Off; Do not leave floating.
6	NC	Not internally connected
7	VOUT2	Regulator Output – LDO2
8	VOUT1	Regulator Output – LDO1
–	EP	Exposed Pad. Connect EP to GND.

Absolute Maximum Ratings[1]

Supply Voltage (V_{IN}) ..... 0V to +6V
Enable Input Voltage (V_{EN}) ..... 0V to +6V
Power Dissipation ..... Internally Limited[3]
Lead Temperature (soldering, 3sec ..... 260°C
Storage Temperature (T_S) ..... -65°C to +150°C
ESD Rating[4] 2kV

Operating Ratings[2]

Supply voltage (V_{IN}) ..... +2.3V to +5.5V
Enable Input Voltage (V_{EN}) ..... 0V to V_{IN}
Junction Temperature ..... -40°C to +125°C
Junction Thermal Resistance
MLF-8 (θ_{JA}) ..... 90°C/W

Electrical Characteristics[5]

V_{IN} = EN1 = EN2 = V_{OUT} + 1.0V; higher of the two regulator outputs, $I_{OUTLDO1}$ = $I_{OUTLDO2}$ = 100µA; C_{OUT1} = C_{OUT2} = 1µF; C_{BYP} = 0.1µF; T_J = 25°C, **bold** values indicate –40°C ≤ T_J ≤ +125°C, unless noted.


Parameter	Conditions	Min	Typ	Max	Units
Output Voltage Accuracy	Variation from nominal V_{OUT}	-2.0		+2.0	%
	Variation from nominal V_{OUT}; –40°C to +125°C	**-3.0**		**+3.0**	%
Line Regulation	V_{IN} = V_{OUT} + 1V to 5.5V; I_{OUT} = 100µA		0.02	0.3 **0.6**	%/V %/V
Load Regulation	I_{OUT} = 100µA to 300mA		0.5		%
Dropout Voltage (**Note 6**)	I_{OUT} = 100µA		0.1		mV
	I_{OUT} = 100mA		25	**75**	mV
	I_{OUT} = 150mA		35	**100**	mV
	I_{OUT} = 300mA		75	**200**	mV
Ground Current	EN1 = High; EN2 = Low; I_{OUT} = 100µA to 300mA		85	**120**	µA
	EN1 = Low; EN2 = High; I_{OUT} = 100µA to 300mA		85	**120**	µA
	EN1 = EN2 = High; I_{OUT1} = 300mA, I_{OUT2} = 300mA		150	**200**	µA
Ground Current in Shutdown	EN1 = EN2 = 0V		0.01	2	µA
Ripple Rejection	f = 1kHz; C_{OUT} = 1.0µF; C_{BYP} = 0.1µF		70		dB
	f = 20kHz; C_{OUT} = 1.0µF; C_{BYP} = 0.1µF		65		dB
Current Limit	V_{OUT} = 0V	**350**	550	**950**	mA
Output Voltage Noise	C_{OUT} = 1.0µF; C_{BYP} = 0.1µF; 10Hz to 100kHz		30		μV_{RMS}
Enable Inputs (EN1 / EN2)					
Enable Input Voltage	Logic Low			**0.2**	V
	Logic High	**1.1**			V
Enable Input Current	V_{IL} ≤ 0.2V		0.01		µA
	V_{IH} ≥ 1.0V		0.01		µA
Turn on Time (See Timing Diagram)					
Turn on Time (LDO1 and 2)	C_{OUT} = 1.0µF; C_{BYP} = 0.01µF		30	**100**	µs

Notes:


1. Exceeding the absolute maximum rating may damage the device.
2. The device is not guaranteed to function outside its operating rating.
3. The maximum allowable power dissipation of any T_A (ambient temperature) is $P_{D(max)} = (T_{J(max)} – T_A) / \theta_{JA}$. Exceeding the maximum allowable power dissipation will result in excessive die temperature, and the regulator will go into thermal shutdown.
4. Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k in series with 100pF.
5. Specification for packaged product only.
6. Dropout voltage is defined as the input to output differential at which the output voltage drops 2% below its nominal V_{OUT}. For outputs below 2.3V, the dropout voltage is the input to output differential with the minimum input voltage 2.3V.

Typical Characteristics


Power Supply Rejection Ratio

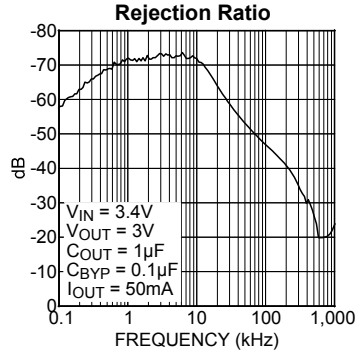


Power Supply Rejection Ratio

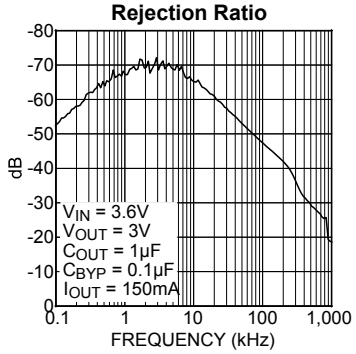


Power Supply Rejection Ratio

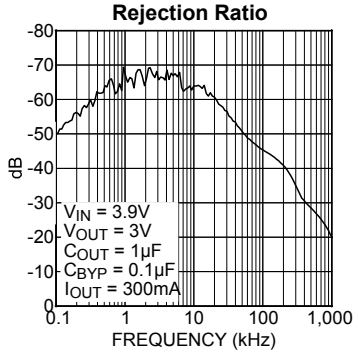


Dropout Voltage vs. Output Current

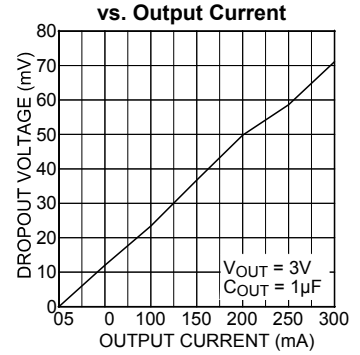


Ground Current vs. Temperature

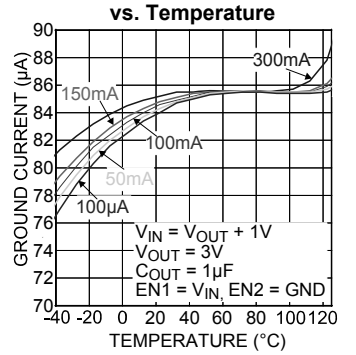


Output Voltage vs. Temperature

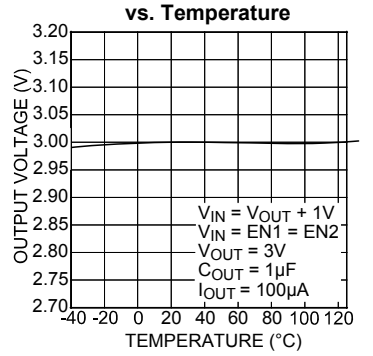


Output Voltage vs. Output Current

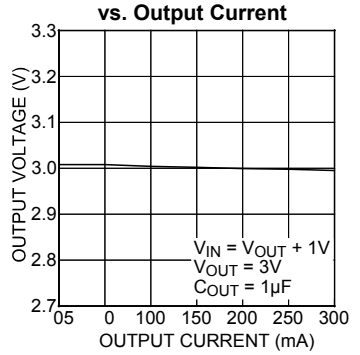


Output Voltage vs. Input Voltage

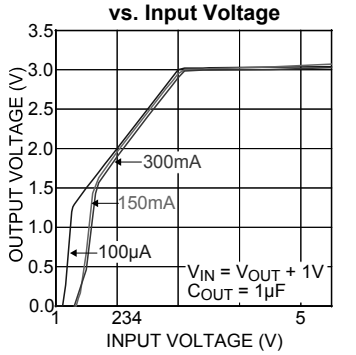


Dropout Voltage vs. Temperature

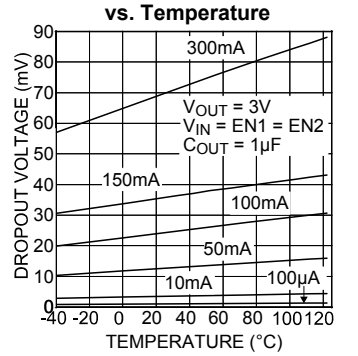


Ground Current vs. Output Current

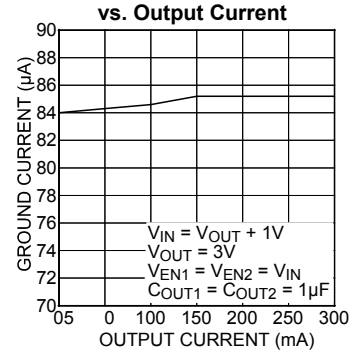


Current Limit vs. Input Voltage

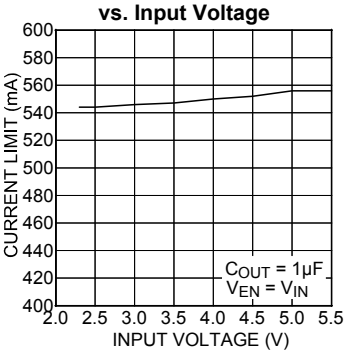



Output Noise Spectral Density

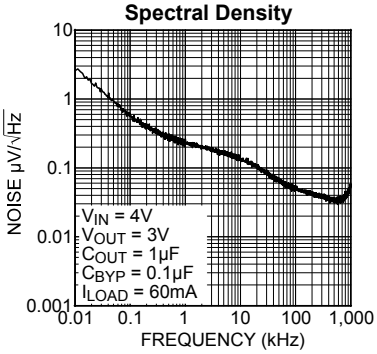

Functional Characteristics

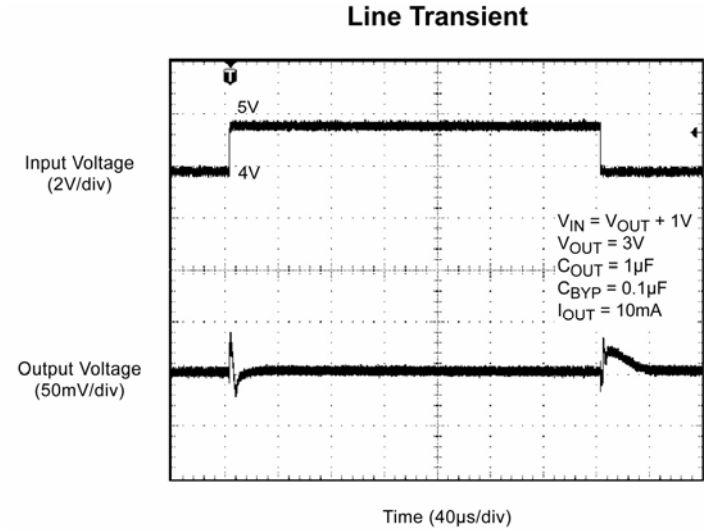

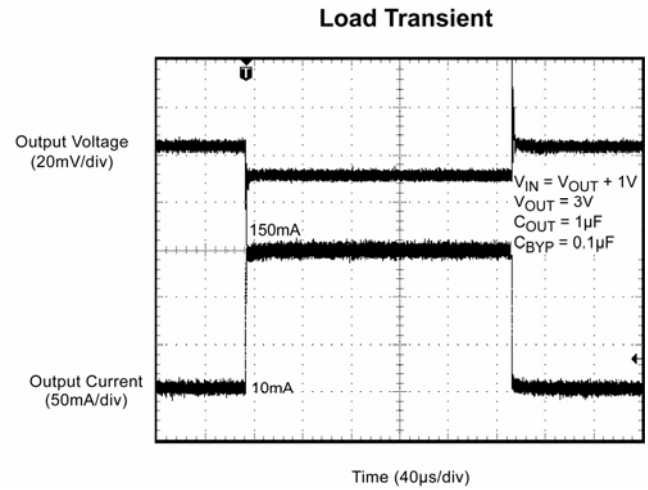

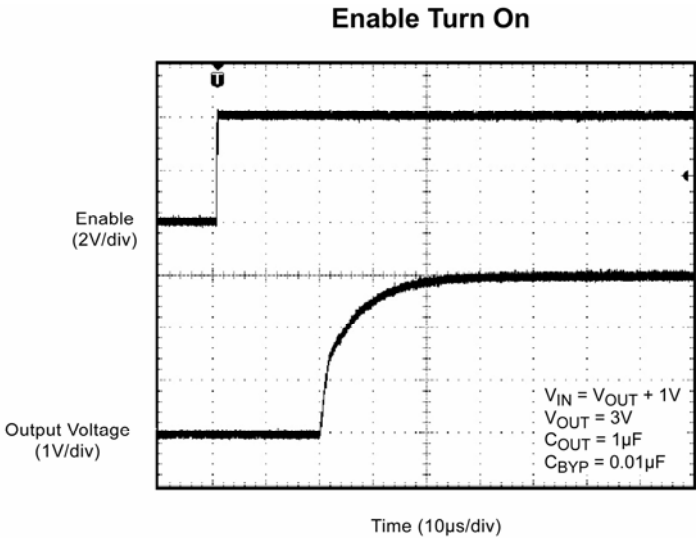

Applications Information

Enable/Shutdown

The MIC5330 comes with dual active high enable pins that allow each regulator to be enabled independently. Forcing the enable pin low disables the regulator and sends it into a "zero" off mode current state. In this state, current consumed by the regulator goes nearly to zero. Forcing the enable pin high enables the output voltage. The active high enable pin uses CMOS technology and the enable pin cannot be left floating; a floating enable pin may cause an indeterminate state on the output.

Input Capacitor

The MIC5330 is a high performance, high bandwidth device. Therefore, it requires a well bypassed input supply for optimal performance. A 1µF capacitor is required from the input to ground to provide stability. Low ESR ceramic capacitors provide optimal performance at a minimum of space. Additional high frequency capacitors, such as small valued NPO dielectric type capacitors, help filter out high frequency noise and are good practice in any RF based circuit.

Output Capacitor

The MIC5330 requires an output capacitor of 1µF or greater to maintain stability. The design is optimized for use with low ESR ceramic chip capacitors. High ESR capacitors may cause high frequency oscillation. The output capacitor can be increased, but performance has been optimized for a 1µF ceramic output capacitor and does not improve significantly with larger capacitance.

X7R/X5R dielectric type ceramic capacitors are recommended because of their temperature performance. X7R type capacitors change capacitance by 15% over their operating temperature range and are the most stable type of ceramic capacitors. Z5U and Y5V dielectric capacitors change value by as much as 50% and 60%, respectively, over their operating temperature ranges. To use a ceramic chip capacitor with Y5V dielectric, the value must be much higher than an X7R ceramic capacitor to ensure the same minimum capacitance over the equivalent operating temperature range.

Bypass Capacitor

A capacitor can be placed from the noise bypass pin to ground to reduce output voltage noise. The capacitor bypasses the internal reference. A 0.1µF capacitor is recommended for applications that require low noise outputs. The bypass capacitor can be increased, further reducing noise and improving PSRR. Turn on time increases slightly with respect to bypass capacitance. A unique, quick start circuit allows the MIC5330 to drive a large capacitor on the bypass pin without significantly slowing turn on time.

No-Load Stability

Unlike many other voltage regulators, the MIC5330 will remain stable and in regulation with no load. This is especially important in CMOS RAM keep alive applications.

Thermal Considerations

The MIC5330 is designed to provide 300mA of continuous current for both outputs in a very small package. Maximum ambient operating temperature can be calculated based on the output current and the voltage drop across the part. Given that the input voltage is 3.3V, the output voltage is 2.8V for V_{OUT1}, 2.5V for V_{OUT2} and the output current = 300mA. The actual power dissipation of the regulator circuit can be determined using the equation:

$$P_D = (V_{IN} – V_{OUT1})\ I_{OUT1} + (V_{IN} – V_{OUT2})\ I_{OUT2} + V_{IN}\ I_{GND}$$

Because this device is CMOS and the ground current is typically <100µA over the load range, the power dissipation contributed by the ground current is < 1% and can be ignored for this calculation.

$$P_D = (3.3V – 2.8V) \times 300mA + (3.3V - 1.5) \times 300mA$$
$$P_D = 0.69W$$

To determine the maximum ambient operating temperature of the package, use the junction-to-ambient thermal resistance of the device and the following basic equation:

$$P_{D(MAX)} = \left(\frac{T_{J(MAX)} - T_A}{\theta_{JA}} \right)$$

$T_{J(max)}$ = 125°C, the maximum junction temperature of the die θ_{JA} thermal resistance = 90°C/W.

The table below shows junction-to-ambient thermal resistance for the MIC5330 in the MLF package.

Package	θ_{JA} Recommended Minimum Footprint
8-Pin 2x2 MLF®	90°C/W

Thermal Resistance

Substituting P_D for $P_{D(max)}$ and solving for the ambient operating temperature will give the maximum operating conditions for the regulator circuit. The junction-to-ambient thermal resistance for the minimum footprint is 90°C/W.

The maximum power dissipation must not be exceeded for proper operation.

For example, when operating the MIC5330-MFYML at an input voltage of 3.3V and 300mA loads at each output with a minimum footprint layout, the maximum ambient operating temperature T_A can be determined as follows:


$$0.99W = (125°C - T_A)/(90°C/W)$$

$$T_A = 62.9°C$$

Therefore, a 2.8V/1.5V application with 300mA at each output current can accept an ambient operating temperature of 62.9°C in a 2mm x 2mm MLF® package. For a full discussion of heat sinking and thermal effects on voltage regulators, refer to the "Regulator Thermals" section of *Micrel's Designing with Low-Dropout Voltage Regulators* handbook. This information can be found on Micrel's website at:

http://www.micrel.com/_PDF/other/LDOBk_ds.pdf

Package Information

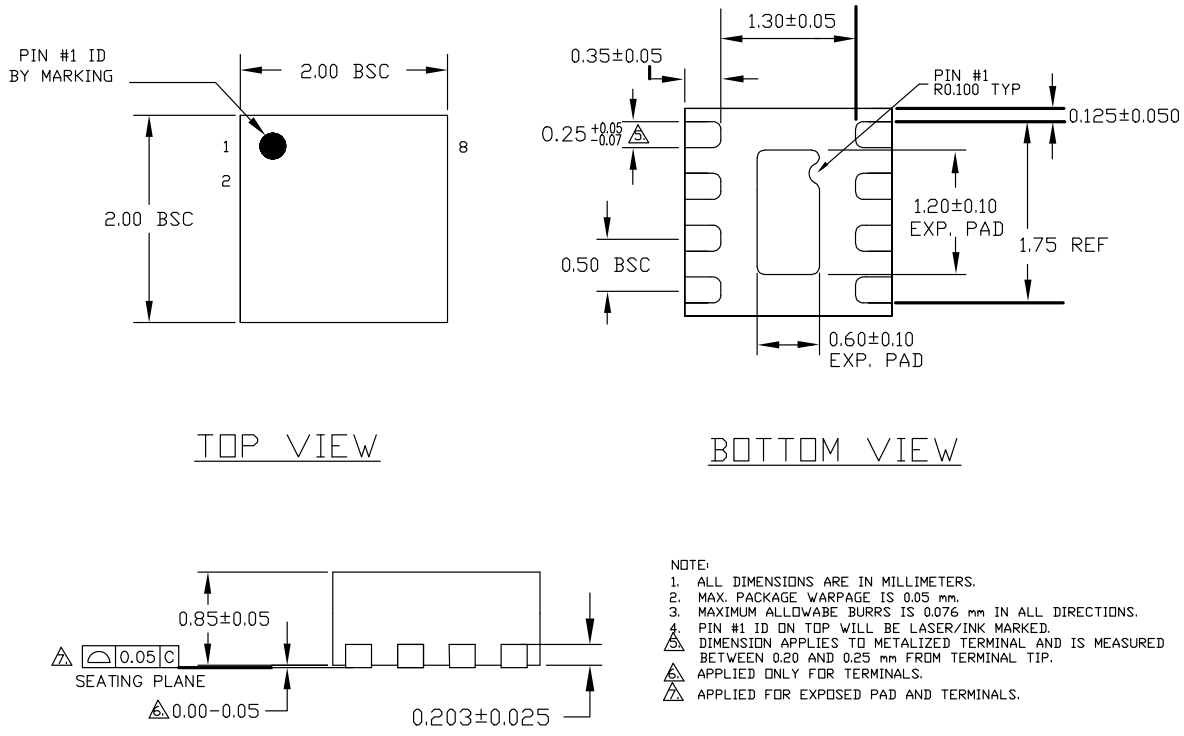

8-Pin 2mm x 2mm MLF (ML)

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA
TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB http://www.micrel.com

Micrel makes no representations or warranties with respect to the accuracy or completeness of the information furnished in this data sheet. This information is not intended as a warranty and Micrel does not assume responsibility for its use. Micrel reserves the right to change circuitry, specifications and descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Micrel's terms and conditions of sale for such products, Micrel assumes no liability whatsoever, and Micrel disclaims any express or implied warranty relating to the sale and/or use of Micrel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2006 Micrel, Incorporated.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.