# Voltage Regulator - CMOS, Low Iq, Low-Dropout

## 150 mA

# NCP551, NCV551

The NCP551 series of fixed output low dropout linear regulators are designed for handheld communication equipment and portable battery powered applications which require low quiescent. The NCP551 series features an ultra-low quiescent current of 4.0 μA. Each device contains a voltage reference unit, an error amplifier, a PMOS power transistor, resistors for setting output voltage, current limit, and temperature limit protection circuits.

The NCP551 has been designed to be used with low cost ceramic capacitors and requires a minimum output capacitor of 0.1 μF. The device is housed in the TSOP-5 surface mount package. Standard voltage versions are 1.4, 1.5, 1.8, 2.5, 2.7, 2.8, 2.9, 3.0, 3.1, 3.2, 3.3, 3.6, 3.8 and 5.0 V. Other voltages are available in 100 mV steps.

### Features

- Low Quiescent Current of 4.0 μA Typical
- Maximum Operating Voltage of 12 V
- Low Output Voltage Option
- High Accuracy Output Voltage of 2.0%
- Industrial Temperature Range of −40 °C to 85 °C (NCV551, $T_A$ = −40 °C to +125 °C)
- NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb-Free and are RoHS Compliant

### Typical Applications

- Battery Powered Instruments
- Hand-Held Instruments
- Camcorders and Cameras



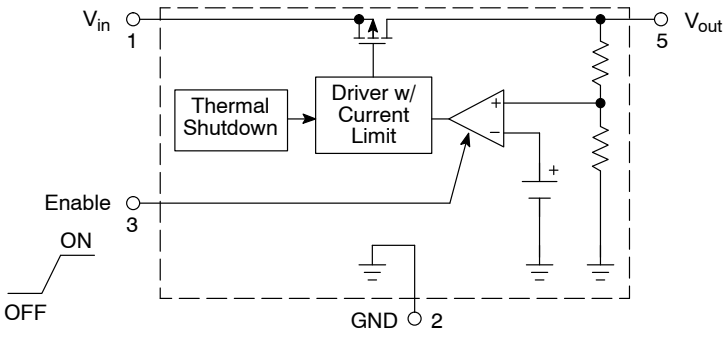



**Figure 1. Representative Block Diagram**




**TSOP-5**
**(SOT23-5, SC59-5)**
**SN SUFFIX**
**CASE 483**

### PIN CONNECTIONS AND MARKING DIAGRAM




(Top View)

xxx = Specific Device Code
A = Assembly Location
Y = Year
W = Work Week
▪ = Pb-Free Package
(Note: Microdot may be in either location)

### ORDERING INFORMATION

See detailed ordering and shipping information on page 11 of this data sheet.

NOTE: Some of the devices on this data sheet have been **DISCONTINUED**. Please refer to the table on page 11.

© Semiconductor Components Industries, LLC, 2016

## PIN FUNCTION DESCRIPTION

| Pin No. | Pin Name | Description |
|---|---|---|
| 1 | $V_{in}$ | Positive power supply input voltage. |
| 2 | GND | Power supply ground. |
| 3 | Enable | This input is used to place the device into low-power standby. When this input is pulled low, the device is disabled. If this function is not used, Enable should be connected to $V_{in}$. |
| 4 | N/C | No Internal Connection. |
| 5 | $V_{out}$ | Regulated output voltage. |

## MAXIMUM RATINGS

| Rating | | Symbol | Value | Unit |
|---|---|---|---|---|
| Input Voltage | | $V_{in}$ | 0 to 12 | V |
| Enable Voltage | | $V_{EN}$ | −0.3 to $V_{in}$ +0.3 | V |
| Output Voltage | | $V_{out}$ | −0.3 to $V_{in}$ +0.3 | V |
| Power Dissipation | | $P_D$ | Internally Limited | W |
| Operating Junction Temperature | | $T_J$ | +150 | °C |
| Operating Ambient Temperature | NCP551<br>NCV551 | $T_A$ | −40 to +85<br>−40 to +125 | °C |
| Storage Temperature | | $T_{stg}$ | −55 to +150 | °C |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. This device series contains ESD protection and exceeds the following tests:
   Human Body Model 2000 V per MIL-STD-883, Method 3015
   Machine Model Method 200 V
   Charge Device Model (CDM) tested C3B per EIA/JESD22-C101.
2. Latchup capability (85 °C) ±100 mA DC with trigger voltage.

## THERMAL CHARACTERISTICS

| Rating | Symbol | Test Conditions | Typical Value | Unit |
|---|---|---|---|---|
| Junction-to-Ambient | $R_{\theta JA}$ | 1 oz Copper Thickness, 100 $mm^2$ | 250 | °C/W |
| PSIJ-Lead 2 | $\Psi_{J-L2}$ | 1 oz Copper Thickness, 100 $mm^2$ | 68 | °C/W |

NOTE: Single component mounted on an 80 x 80 x 1.5 mm FR4 PCB with stated copper head spreading area. Using the following boundary conditions as stated in EIA/JESD 51−1, 2, 3, 7, 12.



Share Feedback
Your Opinion Matters

## ELECTRICAL CHARACTERISTICS

($V_{in}$ = $V_{out(nom.)}$ + 1.0 V, $V_{EN}$ = $V_{in}$, $C_{in}$ = 1.0 μF, $C_{out}$ = 1.0 μF, $T_A$ = 25 °C, unless otherwise noted.)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|---|---|---|---|---|---|
| Output Voltage ($T_A$ = 25 °C, $I_{out}$ = 10 mA)<br>1.4 V<br>1.5 V<br>1.8 V<br>2.5 V<br>2.7 V<br>2.8 V<br>2.9 V<br>3.0 V<br>3.1 V<br>3.2 V<br>3.3 V<br>3.6 V<br>3.8 V<br>5.0 V | $V_{out}$ | <br>1.358<br>1.455<br>1.746<br>2.425<br>2.646<br>2.744<br>2.842<br>2.940<br>3.038<br>3.136<br>3.234<br>3.528<br>3.724<br>4.90 | <br>1.4<br>1.5<br>1.8<br>2.5<br>2.7<br>2.8<br>2.9<br>3.0<br>3.1<br>3.2<br>3.3<br>3.6<br>3.8<br>5.0 | <br>1.442<br>1.545<br>1.854<br>2.575<br>2.754<br>2.856<br>2.958<br>3.060<br>3.162<br>3.264<br>3.366<br>3.672<br>3.876<br>5.10 | V |
| Output Voltage ($T_A$ = $T_{low}$ to $T_{high}$, $I_{out}$ = 10 mA)<br>1.4 V<br>1.5 V<br>1.8 V<br>2.5 V<br>2.7 V<br>2.8 V<br>2.9 V<br>3.0 V<br>3.1 V<br>3.2 V<br>3.3 V<br>3.6 V<br>3.8 V<br>5.0 V | $V_{out}$ | <br>1.344<br>1.440<br>1.728<br>2.400<br>2.619<br>2.716<br>2.813<br>2.910<br>3.007<br>3.104<br>3.201<br>3.492<br>3.686<br>4.850 | <br>1.4<br>1.5<br>1.8<br>2.5<br>2.7<br>2.8<br>2.9<br>3.0<br>3.1<br>3.2<br>3.3<br>3.6<br>3.8<br>5.0 | <br>1.456<br>1.560<br>1.872<br>2.600<br>2.781<br>2.884<br>2.987<br>3.090<br>3.193<br>3.296<br>3.399<br>3.708<br>3.914<br>5.150 | V |
| Line Regulation ($V_{in}$ = $V_{out}$ + 1.0 V to 12 V, $I_{out}$ = 10 mA) | $Reg_{line}$ | – | 10 | 30 | mV |
| Load Regulation ($I_{out}$ = 10 mA to 150 mA, $V_{in}$ = $V_{out}$ + 2.0 V) | $Reg_{load}$ | – | 40 | 65 | mV |
| Output Current ($V_{out}$ = ($V_{out}$ at $I_{out}$ = 100 mA) −3%)<br>1.4 V−2.0 V ($V_{in}$ = 4.0 V)<br>2.1 V−3.0 V ($V_{in}$ = 5.0 V)<br>3.1 V−4.0 V ($V_{in}$ = 6.0 V)<br>4.1 V−5.0 V ($V_{in}$ = 8.0 V) | $I_{o(nom.)}$ | <br>150<br>150<br>150<br>150 | <br>–<br>–<br>–<br>– | <br>–<br>–<br>–<br>– | mA |
| Dropout Voltage ($I_{out}$ = 10 mA, Measured at $V_{out}$ −3.0%)<br>1.4 V<br>1.5 V, 1.8 V, 2.5 V<br>2.7 V, 2.8 V, 2.9 V, 3.0 V, 3.1 V, 3.2 V, 3.3 V, 3.6 V, 3.8 V, 5.0 V | $V_{in}$−$V_{out}$ | <br>–<br>–<br>– | <br>170<br>130<br>40 | <br>250<br>220<br>150 | mV |
| Quiescent Current<br>(Enable Input = 0 V)<br>(Enable Input = $V_{in}$, $I_{out}$ = 1.0 mA to $I_{o(nom.)}$)<br>1.4 V−2.0 V options, $V_{in}$ = 4.0 V<br>2.1 V−3.0 V options, $V_{in}$ = 5.0 V<br>3.1 V−4.0 V options, $V_{in}$ = 6.0 V<br>4.1 V−5.0 V options, $V_{in}$ = 8.0 V | $I_Q$ | <br>–<br>– | <br>0.1<br>4.0 | <br>1.0<br>8.0 | μA |
| Output Voltage Temperature Coefficient | $T_c$ | – | ±100 | – | ppm/°C |
| Enable Input Threshold Voltage<br>(Voltage Increasing, Output Turns On, Logic High)<br>(Voltage Decreasing, Output Turns Off, Logic Low) | $V_{th(en)}$ | <br>1.3<br>– | <br>–<br>– | <br>–<br>0.3 | V |



Share Feedback
Your Opinion Matters

**ELECTRICAL CHARACTERISTICS** (continued)
($V_{in}$ = $V_{out(nom.)}$ + 1.0 V, $V_{EN}$ = $V_{in}$, $C_{in}$ = 1.0 μF, $C_{out}$ = 1.0 μF, $T_A$ = 25 °C, unless otherwise noted.)

| | | | | | |
|---|---|---|---|---|---|
| Output Short Circuit Current ($V_{out}$ = 0 V)<br>1.4 V–2.0 V ($V_{in}$ = 4.0 V)<br>2.1 V–3.0 V ($V_{in}$ = 5.0 V)<br>3.1 V–4.0 V ($V_{in}$ = 6.0 V)<br>4.1 V–5.0 V ($V_{in}$ = 8.0 V) | $I_{out(max)}$ | <br>160<br>160<br>160<br>160 | <br>350<br>350<br>350<br>350 | <br>600<br>600<br>600<br>600 | mA |

3. Maximum package power dissipation limits must be observed.

$$PD = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

4. Low duty cycle pulse techniques are used during testing to maintain the junction temperature as close to ambient as possible.
5. NCP551 $T_{low}$ = −40 °C $T_{high}$ = +85 °C
   NCV551 $T_{low}$ = −40 °C $T_{high}$ = +125 °C.


Share Feedback
Your Opinion Matters

## DEFINITIONS

### Load Regulation

The change in output voltage for a change in output current at a constant temperature.

### Dropout Voltage

The input/output differential at which the regulator output no longer maintains regulation against further reductions in input voltage. Measured when the output drops 3% below its nominal. The junction temperature, load current, and minimum input supply requirements affect the dropout level.

### Maximum Power Dissipation

The maximum total dissipation for which the regulator will operate within its specifications.

### Quiescent Current

The quiescent current is the current which flows through the ground when the LDO operates without a load on its output: internal IC operation, bias, etc. When the LDO becomes loaded, this term is called the Ground current. It is actually the difference between the input current (measured through the LDO input pin) and the output current.

### Line Regulation

The change in output voltage for a change in input voltage. The measurement is made under conditions of low dissipation or by using pulse technique such that the average chip temperature is not significantly affected.

### Line Transient Response

Typical over and undershoot response when input voltage is excited with a given slope.

### Thermal Protection

Internal thermal shutdown circuitry is provided to protect the integrated circuit in the event that the maximum junction temperature is exceeded. When activated at typically 160 °C, the regulator turns off. This feature is provided to prevent failures from accidental overheating.

### Maximum Package Power Dissipation

The maximum power package dissipation is the power dissipation level at which the junction temperature reaches its maximum operating value, i.e. 125 °C. Depending on the ambient power dissipation and thus the maximum available output current.



Share Feedback
Your Opinion Matters

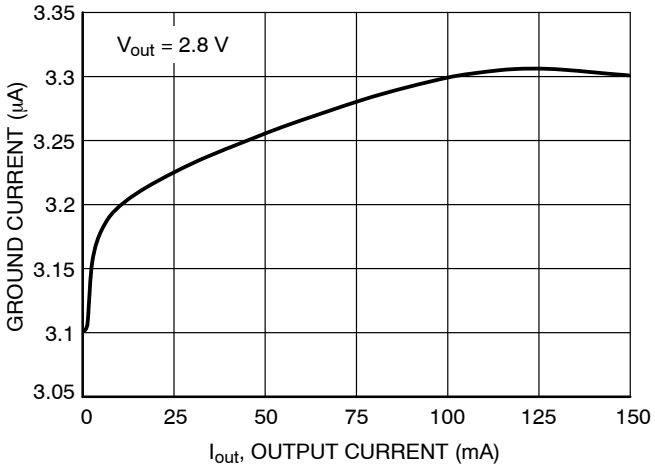



**Figure 2. Ground Pin Current versus Output Current**

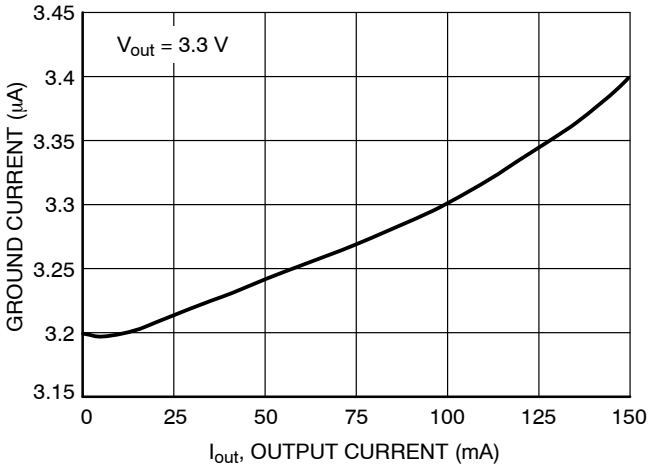



**Figure 3. Ground Pin Current versus Output Current**

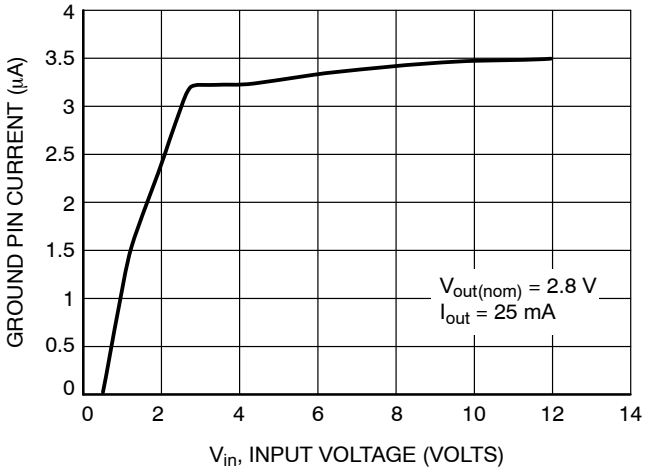



**Figure 4. Ground Pin Current versus Input Voltage**

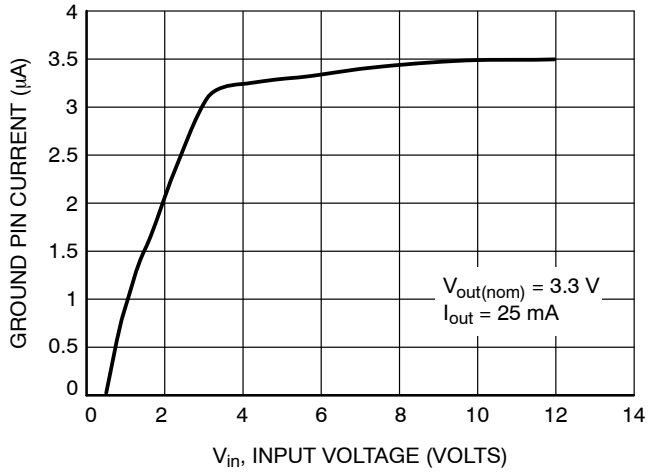



**Figure 5. Ground Pin Current versus Input Voltage**

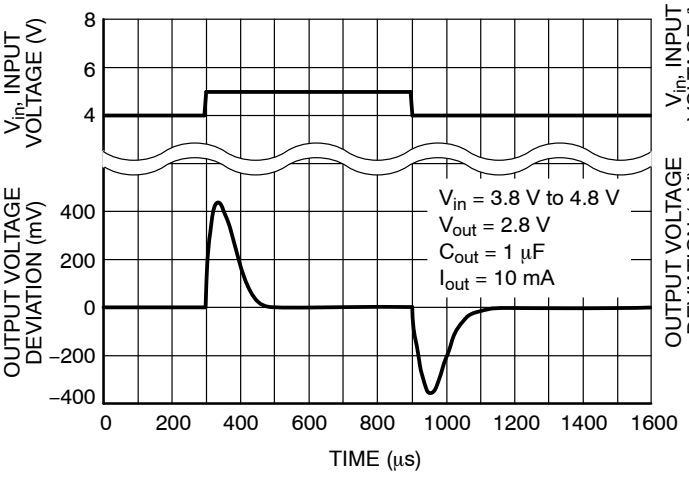



**Figure 6. Line Transient Response**

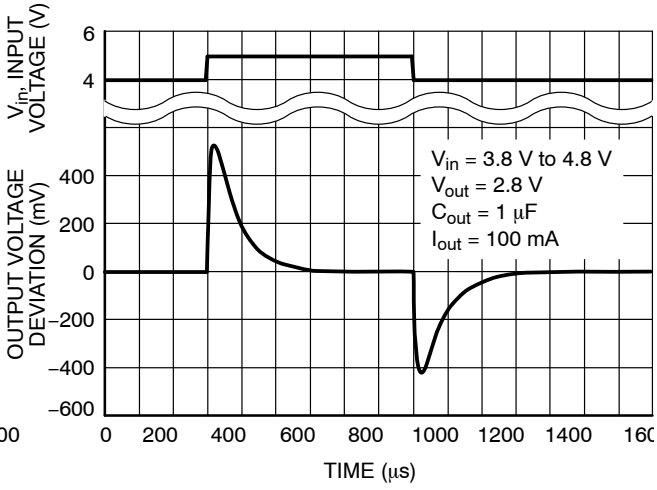



**Figure 7. Line Transient Response**



Share Feedback
Your Opinion Matters

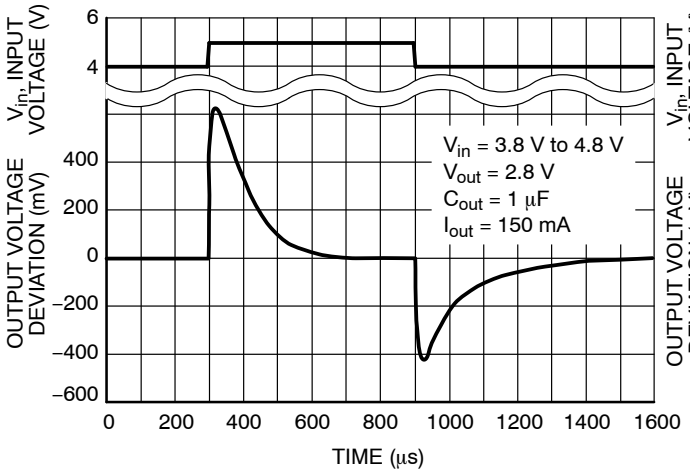



**Figure 8. Line Transient Response**

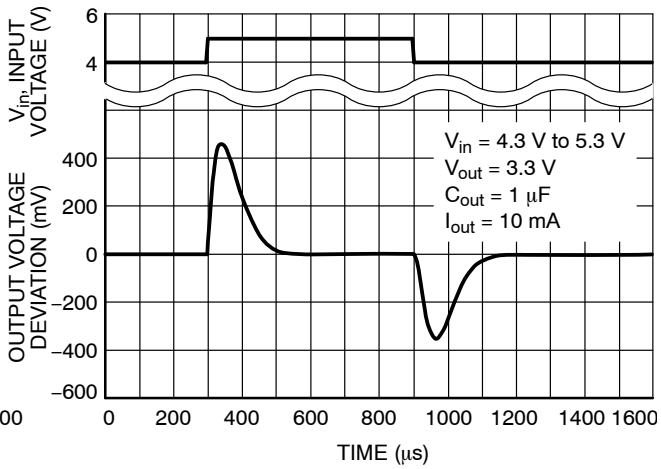



**Figure 9. Line Transient Response**

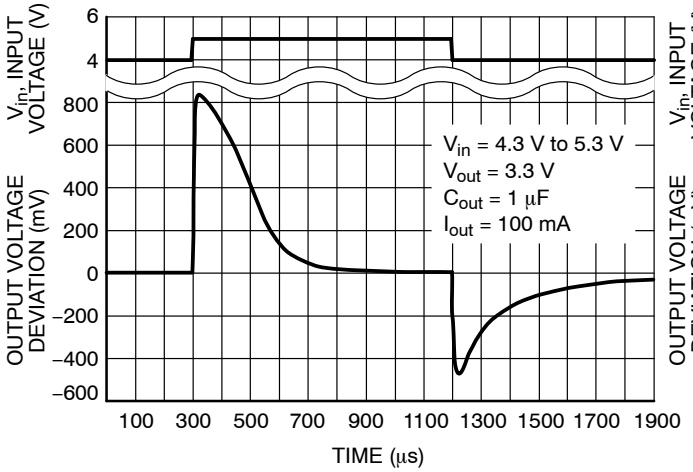



**Figure 10. Line Transient Response**

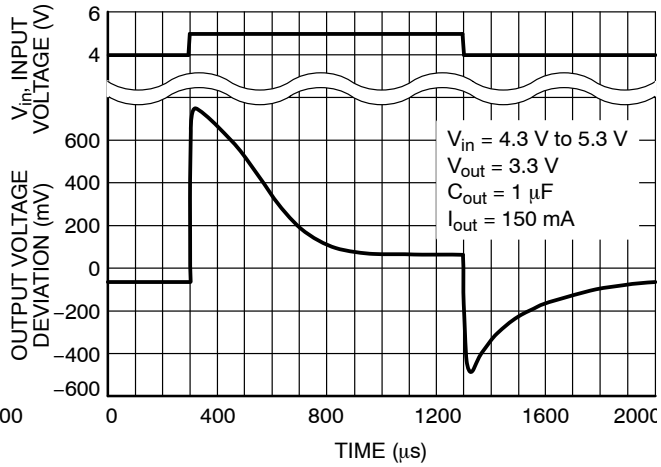



**Figure 11. Line Transient Response**

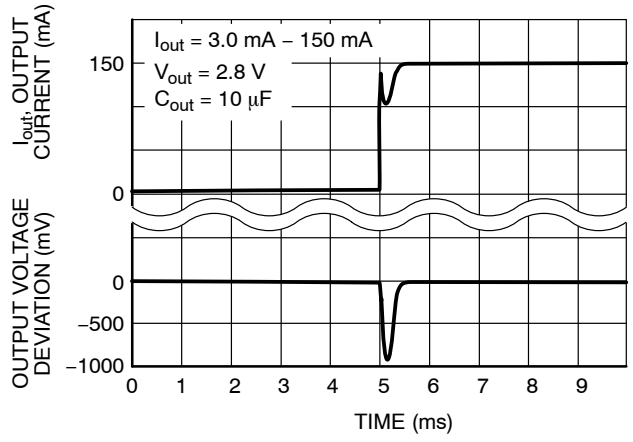



**Figure 12. Load Transient Response ON**

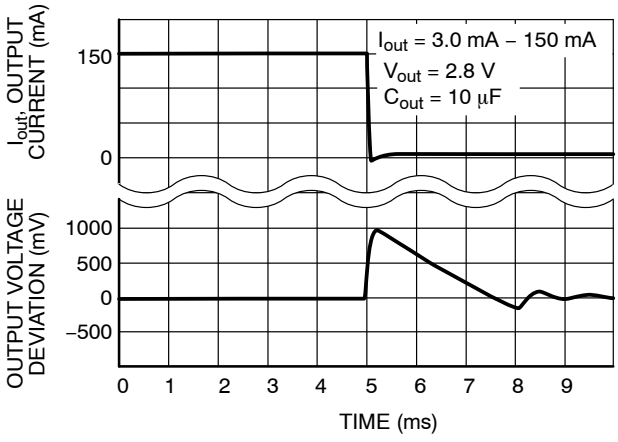



**Figure 13. Load Transient Response OFF**



Share Feedback
Your Opinion Matters

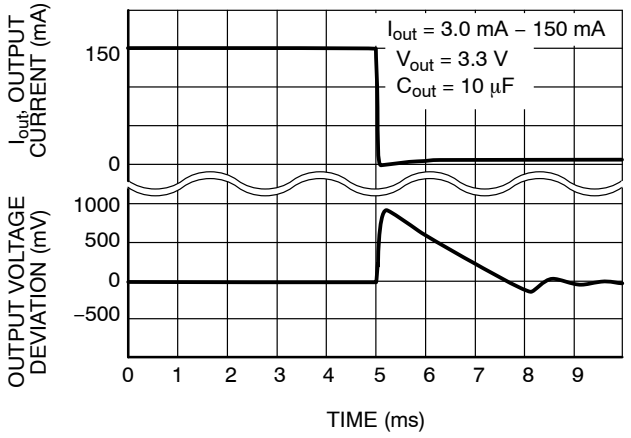



**Figure 14. Load Transient Response OFF**

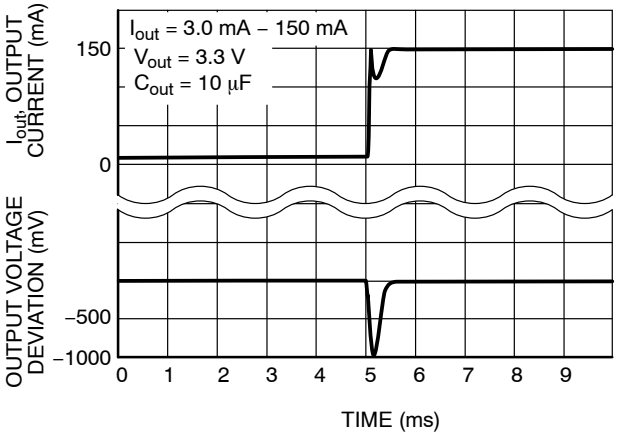



**Figure 15. Load Transient Response ON**

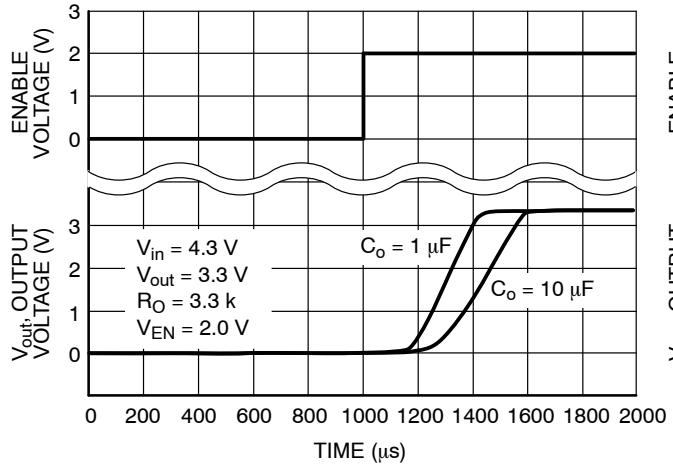



**Figure 16. Turn-On Response**

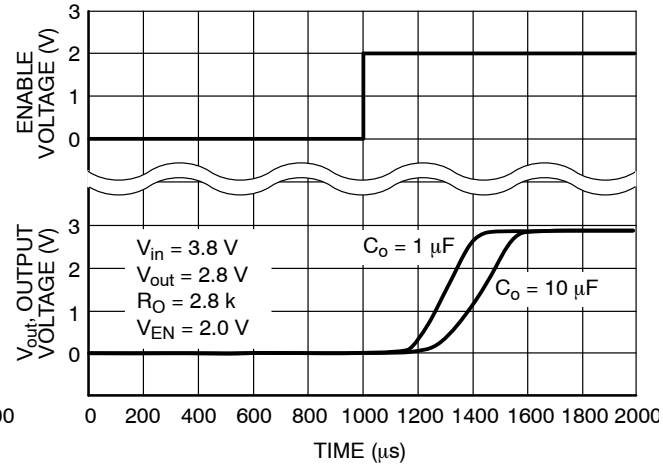



**Figure 17. Turn-On Response**

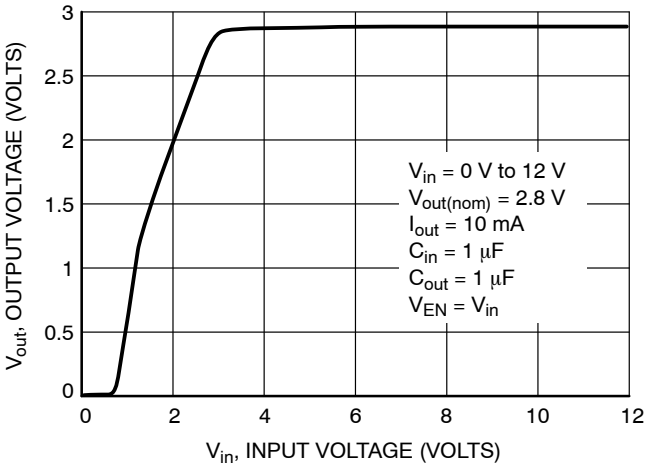



**Figure 18. Output Voltage versus Input Voltage**

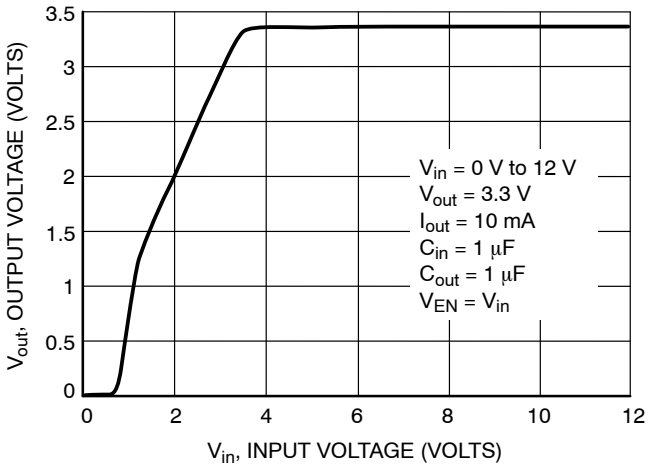



**Figure 19. Output Voltage versus Input Voltage**



Share Feedback
Your Opinion Matters

## APPLICATIONS INFORMATION

A typical application circuit for the NCP551 series is shown in Figure 20.

### Input Decoupling (C1)

A 0.1 μF capacitor either ceramic or tantalum is recommended and should be connected close to the NCP551 package. Higher values and lower ESR will improve the overall line transient response.

### Output Decoupling (C2)

The NCP551 is a stable Regulator and does not require any specific Equivalent Series Resistance (ESR) or a minimum output current. Capacitors exhibiting ESRs ranging from a few mΩ up to 3.0 Ω can thus safely be used. The minimum decoupling value is 0.1 μF and can be augmented to fulfill stringent load transient requirements. The regulator accepts ceramic chip capacitors as well as tantalum devices. Larger values improve noise rejection and load regulation transient response.

### Enable Operation

The enable pin will turn on or off the regulator. These limits of threshold are covered in the electrical specification section of this data sheet. If the enable is not used then the pin should be connected to $V_{in}$.

### Hints

Please be sure the $V_{in}$ and GND lines are sufficiently wide. When the impedance of these lines is high, there is a chance to pick up noise or cause the regulator to malfunction.

Set external components, especially the output capacitor, as close as possible to the circuit, and make leads as short as possible.

### Thermal

As power across the NCP551 increases, it might become necessary to provide some thermal relief. The maximum power dissipation supported by the device is dependent upon board design and layout. Mounting pad configuration on the PCB, the board material, and also the ambient temperature effect the rate of temperature rise for the part. This is stating that when the NCP551 has good thermal conductivity through the PCB, the junction temperature will be relatively low with high power dissipation applications.

The maximum dissipation the package can handle is given by:

$$PD = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

If junction temperature is not allowed above the maximum 125 °C, then the NCP551 can dissipate up to 400 mW @ 25 °C.

The power dissipated by the NCP551 can be calculated from the following equation:

$$P_{tot} = [V_{in} * I_{gnd}(I_{out})] + [V_{in} - V_{out}] * I_{out}$$

or

$$V_{inMAX} = \frac{P_{tot} + V_{out} * I_{out}}{I_{GND} + I_{out}}$$

If a 150 mA output current is needed then the ground current from the data sheet is 4.0 μA. For an NCP551SN30T1 (3.0 V), the maximum input voltage will then be 5.6 V.

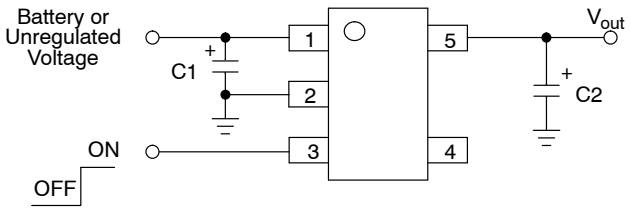



**Figure 20. Typical Application Circuit**



Share Feedback
Your Opinion Matters

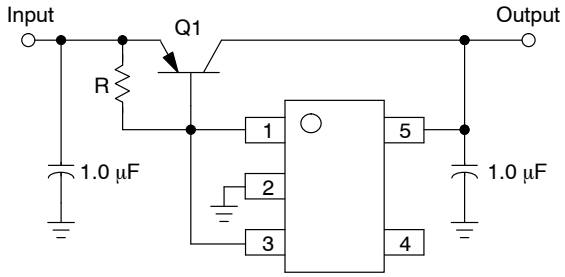



**Figure 21. Current Boost Regulator**

The NCP551 series can be current boosted with a PNP transistor. Resistor R in conjunction with $V_{BE}$ of the PNP determines when the pass transistor begins conducting; this circuit is not short circuit proof. Input/Output differential voltage minimum is increased by $V_{BE}$ of the pass resistor.

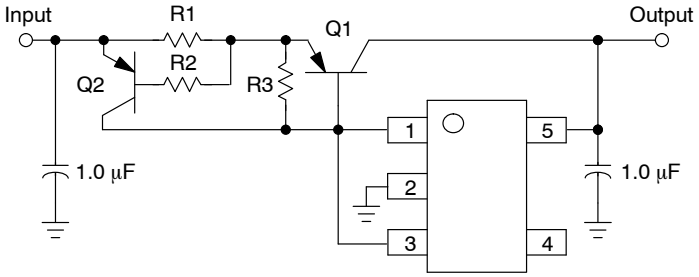



**Figure 22. Current Boost Regulator with Short Circuit Limit**

Short circuit current limit is essentially set by the $V_{BE}$ of Q2 and R1. $I_{SC} = ((V_{BEQ2} - ib * R2) / R1) + I_{O(max)\ Regulator}$

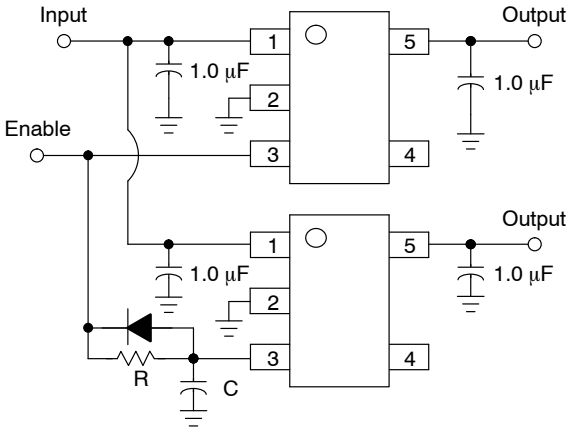



**Figure 23. Delayed Turn-on**

If a delayed turn-on is needed during power up of several voltages then the above schematic can be used. Resistor R, and capacitor C, will delay the turn-on of the bottom regulator.

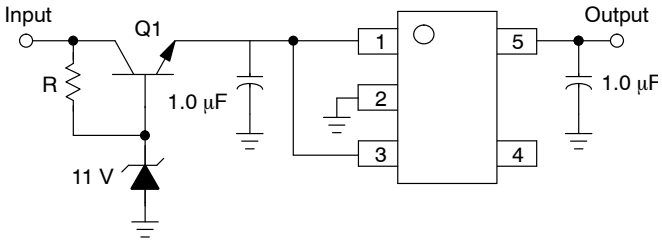



**Figure 24. Input Voltages Greater than 12 V**

A regulated output can be achieved with input voltages that exceed the 12 V maximum rating of the NCP551 series with the addition of a simple pre-regulator circuit. Care must be taken to prevent Q1 from overheating when the regulated output ($V_{out}$) is shorted to GND.



Share Feedback
Your Opinion Matters

## ORDERING INFORMATION

| Device | Nominal Output Voltage | Marking | Package | Shipping† |
|---|---|---|---|---|
| NCP551SN15T1G | 1.5 | LAO | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCP551SN18T1G | 1.8 | LAP | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCP551SN25T1G | 2.5 | LAQ | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCP551SN27T1G | 2.7 | LAR | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCP551SN28T1G | 2.8 | LAS | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCP551SN30T1G | 3.0 | LAT | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCP551SN33T1G | 3.3 | LAU | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCP551SN50T1G | 5.0 | LAV | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCV551SN15T1G* | 1.5 | LFZ | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCV551SN18T1G* | 1.8 | LGA | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCV551SN25T1G* | 2.5 | LGB | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCV551SN28T1G* | 2.8 | LGD | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCV551SN30T1G* | 3.0 | LGE | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCV551SN33T1G* | 3.3 | LGG | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCV551SN36T1G* | 3.6 | AEJ | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCV551SN38T1G* | 3.8 | AD5 | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCV551SN50T1G* | 5.0 | LGF | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |

**DISCONTINUED** (Note 6)

| | | | | |
|---|---|---|---|---|
| NCP551SN29T1G | 2.9 | LJL | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCP551SN31T1G | 3.1 | LJM | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCP551SN32T1G | 3.2 | LIV | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCV551SN14T1G* | 1.4 | AAT | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCV551SN27T1G* | 2.7 | LGC | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |



Share Feedback
Your Opinion Matters

**ORDERING INFORMATION** (continued)

| Device | Nominal Output Voltage | Marking | Package | Shipping† |
|---|---|---|---|---|
| **DISCONTINUED** (Note 6) | | | | |
| NCV551SN31T1G* | 3.1 | LJR | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |
| NCV551SN32T1G* | 3.2 | LFR | TSOP-5 (Pb-Free) | 3000 / Tape & Reel |

NOTE: Additional voltages in 100 mV steps are available upon request by contacting your **onsemi** representative.

† For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

* NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

6. **DISCONTINUED:** These devices are not available. Please contact your **onsemi** representative for information. The most current information on these devices may be available on www.onsemi.com.



Share Feedback
Your Opinion Matters


## REVISION HISTORY

| Revision | Description of Changes | Date |
|---|---|---|
| 20 | Rebranded the Data Sheet to **onsemi** format.<br>NCP551SN29T1G, NCP551SN31T1G, NCP551SN32T1G, NCV551SN14T1G, NCV551SN27T1G, NCV551SN31T1G, NCV551SN32T1G OPNs Marked as Discontinued. | 1/30/2026 |

This document has undergone updates prior to the inclusion of this revision history table. The changes tracked here only reflect updates made on the noted approval dates.




Share Feedback
Your Opinion Matters




**TSOP−5 3.00x1.50x0.95, 0.95P**
CASE 483
ISSUE P


DATE 01 APR 2024

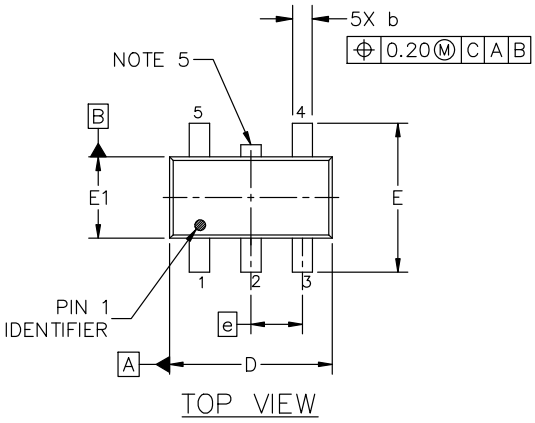


TOP VIEW

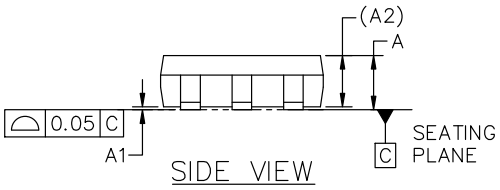



SIDE VIEW




DETAIL "A"
SCALE 2:1

NOTES:


1. DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5−2018.
2. ALL DIMENSION ARE IN MILLIMETERS (ANGLES IN DEGREES).
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OF GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE. DIMENSION D.
5. OPTIONAL CONSTRUCTION: AN ADDITIONAL TRIMMED LEAD IS ALLOWED IN THIS LOCATION. TRIMMED LEAD NOT TO EXTEND MORE THAN 0.2 FROM BODY.




END VIEW

| DIM | MILLIMETERS | | |
|---|---|---|---|
| | MIN. | NOM. | MAX. |
| A | 0.900 | 1.000 | 1.100 |
| A1 | 0.010 | 0.055 | 0.100 |
| A2 | | 0.950 REF. | |
| b | 0.250 | 0.375 | 0.500 |
| c | 0.100 | 0.180 | 0.260 |
| D | 2.850 | 3.000 | 3.150 |
| E | 2.500 | 2.750 | 3.000 |
| E1 | 1.350 | 1.500 | 1.650 |
| e | | 0.950 BSC | |
| L | 0.200 | 0.400 | 0.600 |
| θ | 0° | 5° | 10° |


**GENERIC**
**MARKING DIAGRAM***




**Analog**

XXX = Specific Device Code
A = Assembly Location
Y = Year
W = Work Week
▪ = Pb−Free Package


(Note: Microdot may be in either location)




**Discrete/Logic**

XXX = Specific Device Code
M = Date Code
▪ = Pb−Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

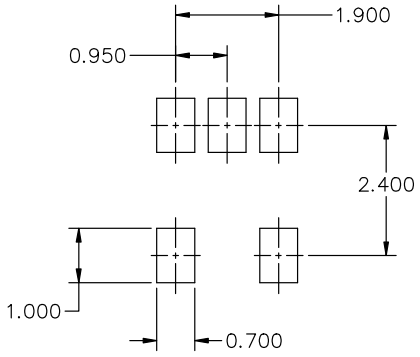


RECOMMENDED MOUNTING FOOTPRINT*

* FOR ADDITIONAL INFORMATION ON OUR Pb−FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

| | | |
|---|---|---|
| **DOCUMENT NUMBER:** | **98ARB18753C** | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| **DESCRIPTION:** | **TSOP−5 3.00x1.50x0.95, 0.95P** | **PAGE 1 OF 1** |

**onsemi** and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2018

**onsemi**, , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS**:
**Technical Library:** www.onsemi.com/design/resources/technical−documentation
**onsemi Website:** www.onsemi.com

**ONLINE SUPPORT**: www.onsemi.com/support
**For additional information, please contact your local Sales Representative at** www.onsemi.com/support/sales

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

# Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

### Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

**www.entegreci.com**

### Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

**Kategorilere göz atın**

### Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

**Üreticileri görün**

### Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

**Teklif isteyin**

**www.entegreci.com** | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.