LDO Regulator - CMOS, Ultra Low, Iq, I_{GND}, Enable

150 mA

NCP698

This series of fixed output low-dropout linear regulators are designed for handheld communication equipment and portable battery powered applications which require low quiescent and ground current. This series features an ultra-low quiescent current of 2.5 μA. Each device contains a voltage reference unit, an error amplifier, a PMOS power transistor, resistors for setting output voltage, current limit, and temperature limit protection circuits. The NCP698 series provides an enable pin for ON/OFF control.


The NCP698 has been designed to be used with low cost ceramic capacitors and requires a minimum output capacitor of 0.1 μF. The device is housed in the micro-miniature SC82-AB surface mount package. Standard voltage versions are 1.3, 1.5, 1.8, 2.5, 2.8, 3.0, 3.3, 3.5 and 5.0 V. Other voltages are available in 100 mV steps.

Features

- Ultra Low Quiescent Current of 2.5 μA Typical
- Output Voltage Accuracy of 2.0%
- Operating Temperature Range of −40 °C to 85 °C
- Enable Function
- This is a Pb-Free Device


Typical Applications

- Battery Powered Instruments
- Hand-Held Instruments
- Camcorders and Cameras

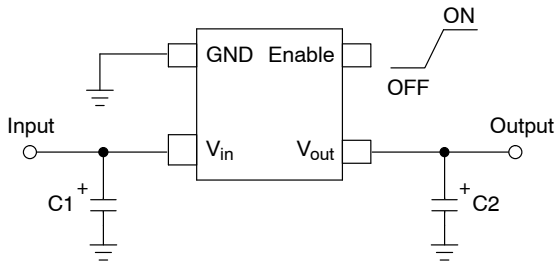


This device contains 28 active transistors

Figure 1. Typical Application Diagram



SC82-AB (SC70-4)
SQ SUFFIX
CASE 419C

PIN CONNECTIONS & MARKING DIAGRAMS



(Top View)

xxx = Specific Device Code
M = Month Code*
▪ = Pb-Free Package

(Note: Microdot may be in either location)

* Date Code orientation and/or position and underbar may vary depending upon manufacturing location.

ORDERING INFORMATION

See detailed ordering and shipping information in on page 8 of this data sheet.

NOTE: Some of the devices on this data sheet have been **DISCONTINUED**. Please refer to the table on page 8.

© Semiconductor Components Industries, LLC, 2014

PIN FUNCTION DESCRIPTION

Pin No.	Pin Name	Description
1	GND	Power supply ground.
2	Vin	Positive power supply input voltage.
3	Vout	Regulated output voltage.
4	Enable	This input is used to place the device into low-power standby. When this input is pulled low, the device is disabled. If this function is not used, Enable should be connected to Vin.
–	N/C	No internal connection.

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Input Voltage	V_{in}	6.0	V
Enable Voltage	Enable	−0.3 to V_{in} +0.3	V
Output Voltage	V_{out}	−0.3 to V_{in} +0.3	V
Power Dissipation and Thermal Characteristics (Note 1) Power Dissipation Thermal Resistance, Junction-to-Ambient (1 oz copper, 1 in^2 copper area)	 P_D $R_{\theta JA}$	 Internally Limited 235	 W °C/W
Operating Junction Temperature	T_J	+150	°C
Operating Ambient Temperature	T_A	−40 to +85	°C
Storage Temperature	T_{stg}	−55 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Refer to Electrical Characteristics and Application Information for Safe Operating Area.
2. This device series contains ESD protection and exceeds the following tests:
   Human Body Model 2000 V per MIL-STD-883, Method 3015
   Machine Model Method 200 V
3. Latch up capability (85 °C) ±100 mA DC with trigger voltage.

Share Feedback
Your Opinion Matters

ELECTRICAL CHARACTERISTICS

(V_{in} = $V_{out(nom.)}$ + 1.0 V, V_{enable} = V_{in}, C_{in} = 1.0 μF, C_{out} = 1.0 μF, T_A = 25 °C, unless otherwise noted. Note 4)

Characteristic	Symbol	Min	Typ	Max	Unit
Output Voltage (I_{out} = 1.0 mA)	V_{out}				V
1.3 V		1.261	1.3	1.339	
1.5 V		1.455	1.5	1.545	
1.8 V		1.746	1.8	1.854	
2.5 V		2.425	2.5	2.575	
2.8 V		2.744	2.8	2.856	
3.0 V		2.940	3.0	3.060	
3.3 V		3.234	3.3	3.366	
3.5 V		3.430	3.5	3.570	
5.0 V		4.900	5.0	5.100	
Output Voltage (T_A = −40 °C to +85 °C, I_{out} = 1.0 mA)	V_{out}				V
1.3 V		1.261	1.3	1.339	
1.5 V		1.455	1.5	1.545	
1.8 V		1.746	1.8	1.854	
2.5 V		2.425	2.5	2.575	
2.8 V		2.716	2.8	2.884	
3.0 V		2.910	3.0	3.090	
3.3 V		3.201	3.3	3.399	
3.5 V		3.430	3.5	3.570	
5.0 V		4.900	5.0	5.100	
Line Regulation	Reg_{line}				mV
1.5 V−4.4 V (V_{in} = $V_{o(nom.)}$ + 1.0 V to 6.0 V		–	10	20	
4.5 V−5.0 V (V_{in} = 5.5 V to 6.0 V)		–	10	20	
Load Regulation (I_{out} = 10 mA to 150 mA)	Reg_{load}	–	20	60	mV
Output Current (V_{out} = (V_{out} at I_{out} = 150 mA) −3.0%)	$I_{o(nom.)}$				mA
1.3 V to 3.9 V (V_{in} = $V_{out(nom.)}$ + 2.0 V)		150	280	–	
4.0 V−5.0 V (V_{in} = 6.0 V)		150	280	–	
Dropout Voltage (T_A = −40 °C to 85 °C, I_{out} = 80 mA, Measured at V_{out} −3.0%)	V_{in}−V_{out}				mV
1.3 V		–	750	1200	
1.5 V		–	550	800	
1.8 V		–	400	550	
2.5 V−2.8 V		–	250	400	
3.0 V−3.5 V		–	200	350	
5.0 V		–	140	200	
Dropout Voltage (T_A = −40 °C to 85 °C, I_{out} = 150 mA, Measured at V_{out} −3.0%)	V_{in}−V_{out}				mV
1.3 V		–	1050	1500	
1.5 V		–	870	1070	
1.8 V		–	700	900	
2.5 V−2.8 V		–	520	700	
3.0 V−3.5 V		–	370	525	
5.0 V		–	280	400	
Disable Current (Enable Input = 0 V)	I_{DIS}	–	0.1	1.0	μA
Quiescent Current (Enable Input = V_{in}, I_{out} = 0 mA)	I_Q	–	2.5	6.0	μA
Ground Current (Enable Input = V_{in}, I_{out} = 1.0 mA to 150 mA)	I_{GND}	–	2.5	6.0	μA
Output Short Circuit Current	$I_{out(max)}$				mA
1.3 V to 3.9 V (V_{in} = V_{nom} + 2.0 V)		150	300	600	
4.0 V−5.0 V (V_{in} = 6.0 V)		150	300	600	
Output Voltage Noise (f = 100 Hz to 100 kHz, V_{out} = 3.0 V)	V_n	–	100	–	μVrms

Share Feedback
Your Opinion Matters

ELECTRICAL CHARACTERISTICS (continued)
(V_{in} = $V_{out(nom.)}$ + 1.0 V, V_{enable} = V_{in}, C_{in} = 1.0 μF, C_{out} = 1.0 μF, T_A = 25 °C, unless otherwise noted. Note 4)

Characteristic	Symbol	Min	Typ	Max	Unit
Enable Input Threshold Voltage (Voltage Increasing, Output Turns On, Logic High) (Voltage Decreasing, Output Turns Off, Logic Low)	$V_{th(en)}$	 1.3 –	 – –	 – 0.3	V
Output Voltage Temperature Coefficient	T_C	–	±100	–	ppm/°C

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Performance guaranteed over the indicated operating temperature range by design and/or characterization, production tested at T_J = T_A = 25 °C. Low duty cycle pulse techniques are used during testing to maintain the junction temperature as close to ambient as possible.
5. Maximum package power dissipation limits must be observed.

$$PD = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

Share Feedback
Your Opinion Matters

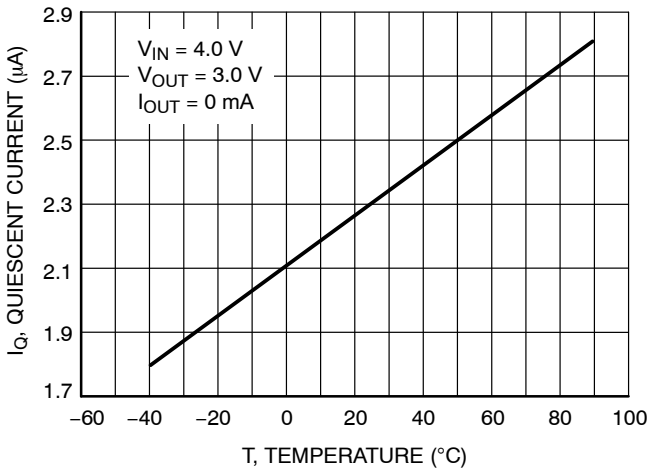


Figure 2. Quiescent Current versus Temperature

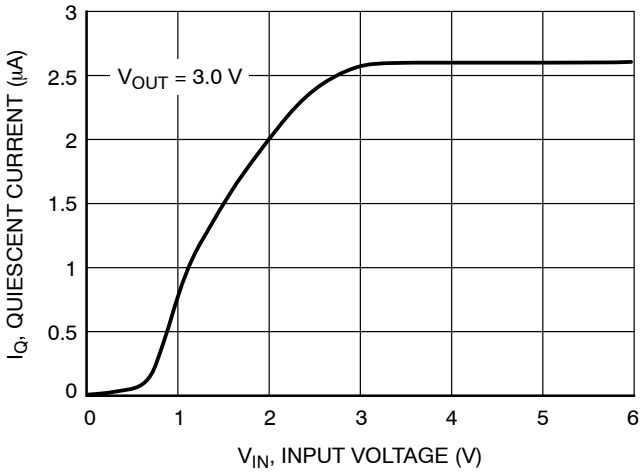


Figure 3. Quiescent Current versus Input Voltage

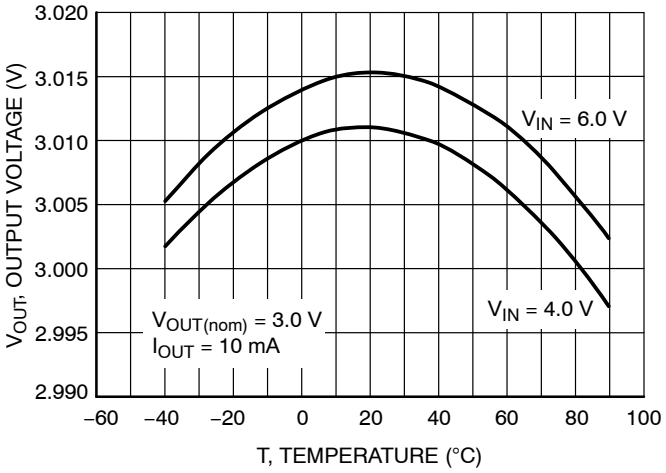


Figure 4. Output Voltage versus Temperature

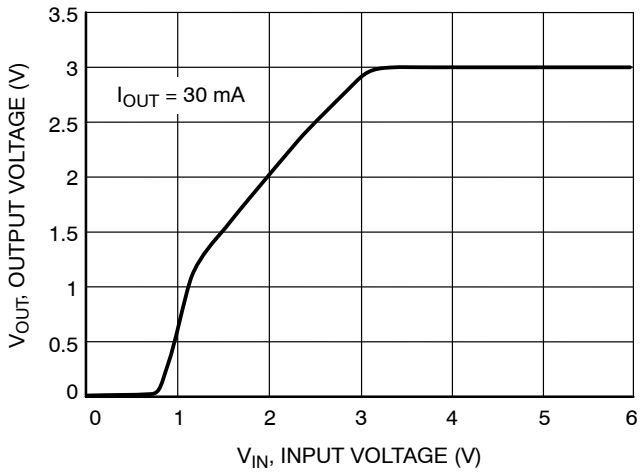


Figure 5. Output Voltage versus Input Voltage

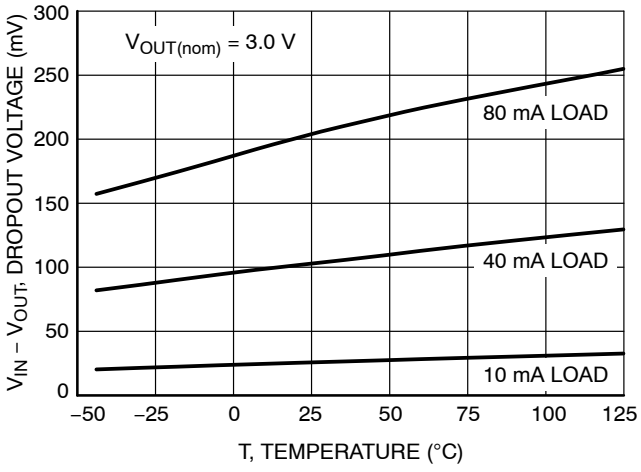


Figure 6. Dropout Voltage versus Temperature

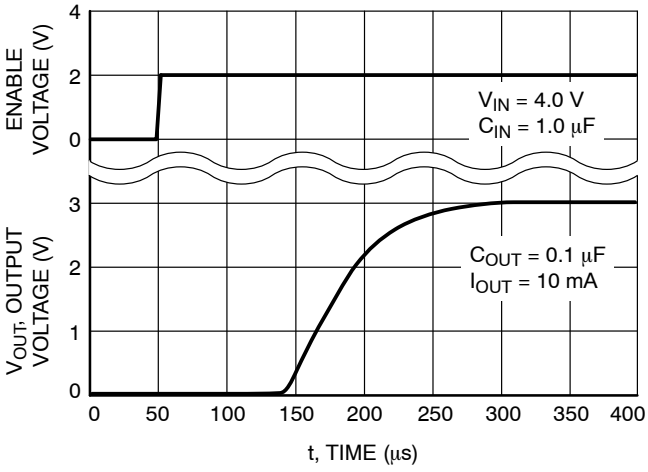


Figure 7. Turn-On Response

Share Feedback
Your Opinion Matters

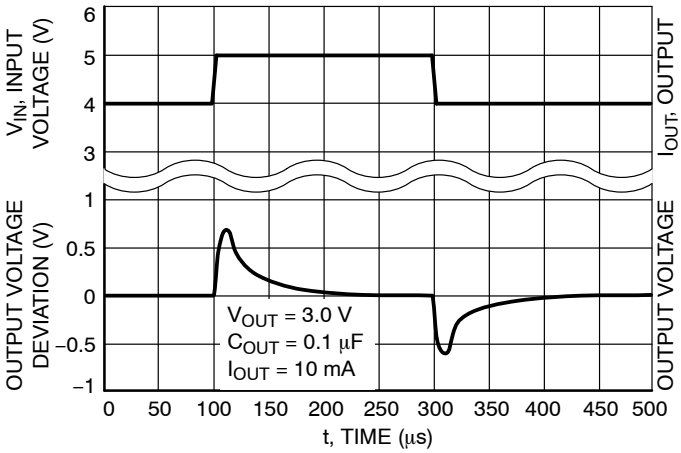


Figure 8. Line Transient Response

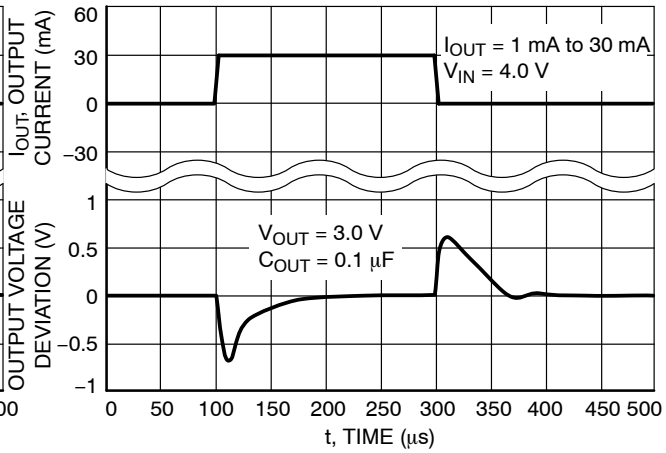


Figure 9. Load Transient Response

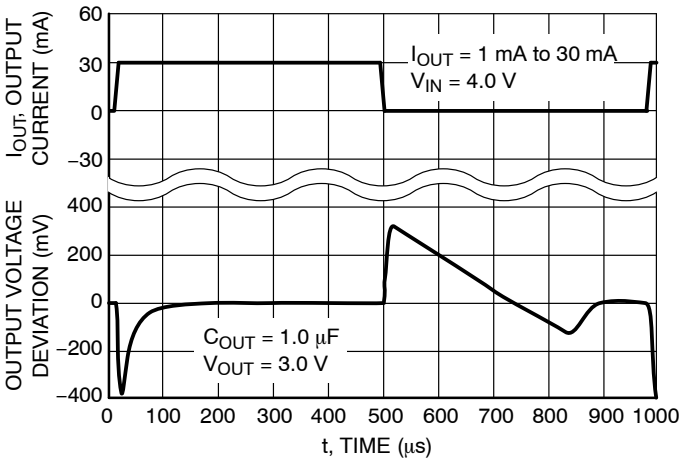


Figure 10. Load Transient Response

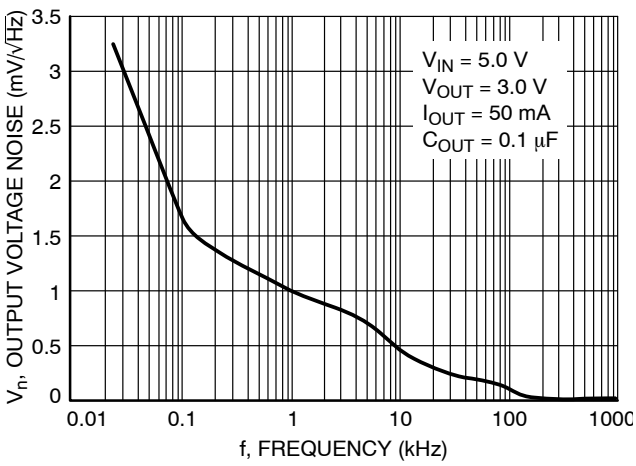


Figure 11. Output Voltage Noise

DEFINITIONS

Load Regulation

The change in output voltage for a change in output current at a constant temperature.

Dropout Voltage

The input/output differential at which the regulator output no longer maintains regulation against further reductions in input voltage. Measured when the output drops 3.0% below its nominal. The junction temperature, load current, and minimum input supply requirements affect the dropout level.

Maximum Power Dissipation

The maximum total dissipation for which the regulator will operate within its specifications.

Quiescent Current

The quiescent current is the current which flows through the ground when the LDO operates without a load on its output: internal IC operation, bias, etc. When the LDO becomes loaded, this term is called the Ground current. It is actually the difference between the input current (measured through the LDO input pin) and the output current.

Line Regulation

The change in output voltage for a change in input voltage. The measurement is made under conditions of low dissipation or by using pulse technique such that the average chip temperature is not significantly affected.

Line Transient Response

Typical over and undershoot response when input voltage is excited with a given slope.

Thermal Protection

Internal thermal shutdown circuitry is provided to protect the integrated circuit in the event that the maximum junction temperature is exceeded. When activated at typically 160 °C, the regulator turns off. This feature is provided to prevent failures from accidental overheating.

Maximum Package Power Dissipation

The maximum power package dissipation is the power dissipation level at which the junction temperature reaches its maximum operating value, i.e. 125 °C. Depending on the ambient power dissipation and thus the maximum available output current.

Share Feedback
Your Opinion Matters

APPLICATIONS INFORMATION

A typical application circuit for the NCP698 is shown in Figure 1.

Input Decoupling (C1)

A 1.0 μF capacitor either ceramic or tantalum is recommended and should be connected close to the NCP698 package. Higher values and lower ESR will improve the overall line transient response.
TDK capacitor: C2012X5R1C105K, or C1608X5R1A105K

Output Decoupling (C2)

The NCP698 is a very stable regulator and does not require any specific Equivalent Series Resistance (ESR) or a minimum output current. Capacitors exhibiting ESRs ranging from a few mΩ up to 10 Ω can thus safely be used. The minimum decoupling value is 0.1 μF and can be augmented to fulfill stringent load transient requirements. The regulator accepts ceramic chip capacitors as well as tantalum devices. Larger values improve noise rejection and load regulation transient response.
TDK capacitor: C2012X5R1C105K, C1608X5R1A105K, or C3216X7R1C105K

Enable Operation

The enable pin will turn on the regulator when pulled high and turn off the regulator when pulled low. These limits of threshold are covered in the electrical specification section of this data sheet. If the enable is not used, then the pin should be connected to V_{in}.

Hints

Please be sure the Vin and GND lines are sufficiently wide. When the impedance of these lines is high, there is a chance to pick up noise or cause the regulator to malfunction.

Place external components, especially the output capacitor, as close as possible to the circuit, and make leads as short as possible.

Thermal

As power across the NCP698 increases, it might become necessary to provide some thermal relief. The maximum power dissipation supported by the device is dependent upon board design and layout. Mounting pad configuration on the PCB, the board material and also the ambient temperature effect the rate of temperature rise for the part. This is stating that when the devices have good thermal conductivity through the PCB, the junction temperature will be relatively low with high power dissipation applications.

The maximum dissipation the package can handle is given by:

$$PD = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

If junction temperature is not allowed above the maximum 125 °C, then the NCP698 can dissipate up to 250 mW @ 25 °C.

The power dissipated by the NCP698 can be calculated from the following equation:

$$P_{tot} = [V_{in} * I_{gnd}(I_{out})] + [V_{in} - V_{out}] * I_{out}$$

or

$$V_{inMAX} = \frac{P_{tot} + V_{out} * I_{out}}{I_{gnd} + I_{out}}$$

If an 80 mA output current is needed then the ground current from the data sheet is 2.5 μA. For an NCP698 (3.0 V), the maximum input voltage will then be 6.0 V.

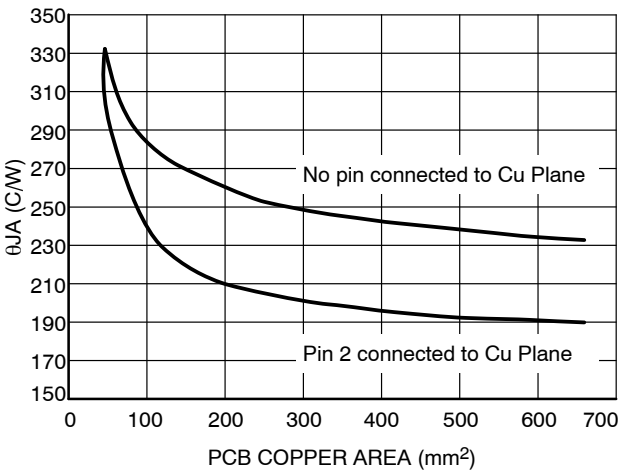


Figure 12. $R_{\theta JA}$ vs. Pad Copper Area (1 oz Cu thickness)

Share Feedback
Your Opinion Matters

ORDERING INFORMATION

Device	Nominal Output Voltage	Marking	Package	Shipping†
NCP698SQ13T1G	1.3	LJW	SC82-AB	3000 / Tape & Reel
NCP698SQ15T1G	1.5	LJX		
NCP698SQ18T1G	1.8	LJY		
NCP698SQ25T1G	2.5	LJZ		
NCP698SQ28T1G	2.8	LKD		
NCP698SQ30T1G	3.0	LKA		
NCP698SQ33T1G	3.3	LKB		
NCP698SQ35T1G	3.5	LKE		

DISCONTINUED (Note 6)

NCP698SQ50T1G	5.0	LKC	SC82-AB	3000 / Tape & Reel

† For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

6. **DISCONTINUED:** This device is not available. Please contact your **onsemi** representative for information. The most current information on this device may be available on www.onsemi.com.


Share Feedback
Your Opinion Matters

REVISION HISTORY

Revision	Description of Changes	Date
3	Rebranded the Data Sheet to **onsemi** format. NCP698SQ50T1G OPN Marked as Discontinued.	2/3/2025

This document has undergone updates prior to the inclusion of this revision history table. The changes tracked here only reflect updates made on the noted approval dates.


Share Feedback
Your Opinion Matters



SCALE 4:1

SC−82AB
CASE 419C−02
ISSUE F


DATE 22 JUN 2012

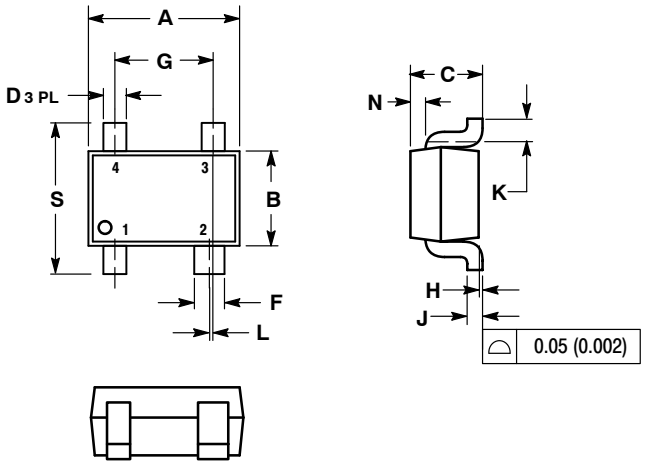

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. 419C−01 OBSOLETE. NEW STANDARD IS 419C−02.
4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.


	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	1.80	2.20	0.071	0.087
B	1.15	1.35	0.045	0.053
C	0.80	1.10	0.031	0.043
D	0.20	0.40	0.008	0.016
F	0.30	0.50	0.012	0.020
G	1.10	1.50	0.043	0.059
H	0.00	0.10	0.000	0.004
J	0.10	0.26	0.004	0.010
K	0.10	−−−	0.004	−−−
L	0.05 BSC		0.002 BSC	
N	0.20 REF		0.008 REF	
S	1.80	2.40	0.07	0.09

SOLDERING FOOTPRINT*

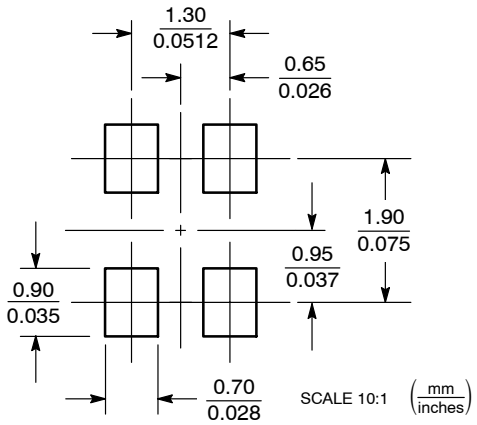

*For additional information on our Pb−Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

GENERIC MARKING DIAGRAM*



XXX = Specific Device Code
M = Month Code
▪ = Pb−Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “▪”, may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	**98ARB18939C**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.	
DESCRIPTION:	**SC−82AB**		**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2019

onsemi, , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.