LDO Regulator - High Performance, Low-Power, Enable

NCV8560





DFN6
MN SUFFIX
CASE 488AE

DFN6
MN SUFFIX
CASE 506BA

TSOP−5
SN SUFFIX
CASE 483

The NCV8560 provides 150 mA of output current at fixed voltage options, or an adjustable output voltage from 5.0 V down to 1.250 V. It is designed for portable battery powered applications and offers high performance features such as low power operation, fast enable response time, and low dropout.

The device is designed to be used with low cost ceramic capacitors and is packaged in the DFN6, 3x3 and TSOP−5 packages.

Features

- Output Voltage Options:
  Adjustable, 1.3 V, 1.5 V, 1.8 V, 2.5 V, 2.8 V, 3.0 V, 3.3 V, 3.5 V, 5.0 V
- Ultra−Low Dropout Voltage of 150 mV at 150 mA
- Adjustable Output by External Resistors from 5.0 V down to 1.250 V
- Fast Enable Turn−on Time of 15 μs
- Wide Supply Voltage Range Operating Range
- Excellent Line and Load Regulation
- High Accuracy up to 1.5% Output Voltage Tolerance over All Operating Conditions
- Typical Noise Voltage of 50 μV_{rms} without a Bypass Capacitor
- NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC−Q100 Qualified and PPAP Capable
- These Devices are Pb−Free and are RoHS Compliant

Typical Applications

- SMPS Post−Regulation
- Hand−held Instrumentation
- Noise Sensitive Circuits – VCO, RF Stages, etc.
- Camcorders and Cameras


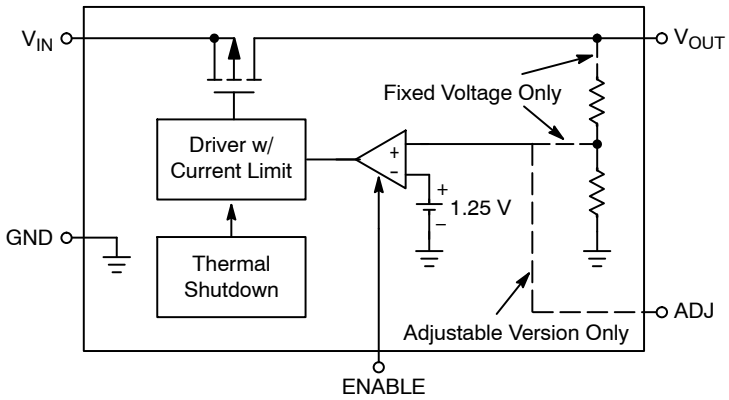


Figure 1. Simplified Block Diagram


MARKING DIAGRAMS

DFN6



V8560 or AQ = Specific Device Code
xxx = ADJ, 150, 180, 250, 280, 300, 330, 350 or 500
A = Assembly Location
L = Wafer Lot
Y = Year
W = Work Week
M = Date Code
▪ = Pb−Free Package

TSOP−5



xxx = Specific Device Code
A = Assembly Location
Y = Year
W = Work Week
▪ = Pb−Free Package

(Note: Microdot may be in either location)


ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 13 of this data sheet.

NOTE: Some of the devices on this data sheet have been **DISCONTINUED**. Please refer to the table on page 13.

© Semiconductor Components Industries, LLC, 2013


PIN CONNECTIONS

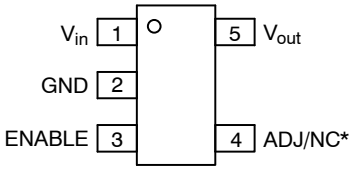

(Top View)

* ADJ – Adjustable Version
NC – Fixed Voltage Version


Figure 2. TSOP5



(Top View)

* ADJ – Adjustable Version
NC – Fixed Voltage Version

Figure 3. DFN6 (3x3)



(Top View)

Figure 4. DFN6 (2x2.2)

PIN FUNCTION DESCRIPTION

Pin No.			Pin Name	Description
DFN6 (2x2.2)	DFN6 (3x3)	TSOP−5		
3	1	4	ADJ/NC	Output Voltage Adjust Input (Adjustable Version), No Connection (Fixed Voltage Versions) (Note 1)
2, 5, EPAD	2, 5, EPAD	2	GND	Power Supply Ground; Device Substrate
4	3	3	ENABLE	The Enable Input places the device into low−power standby when pulled to logic low (< 0.4 V). Connect to V_{in} if the function is not used.
6	4	1	V_{in}	Positive Power Supply Input
1	6	5	V_{out}	Regulated Output Voltage

1. True no connect. Printed circuit board traces are allowable.

ABSOLUTE MAXIMUM RATINGS

Rating	Symbol	Min	Max	Unit
Input Voltage (Note 2)	V_{in}	−0.3	6	V
Output, Enable, Adjustable Voltage	V_{out}, ENABLE, ADJ	−0.3	V_{in} + 0.3 V	V
Maximum Junction Temperature	$T_{J(max)}$	–	150	°C
Storage Temperature	T_{STG}	−65	150	°C
ESD Capability, Human Body Model (Note 3)	ESD_{HBM}	3500	–	V
ESD Capability, Machine Model (Note 3)	ESD_{MM}	200	–	V
Moisture Sensitivity Level	MSL	MSL1/260		–

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

2. Refer to ELECTRICAL CHARACTERISTICS and APPLICATION INFORMATION for Safe Operating Area.
3. This device series incorporates ESD protection and is tested by the following methods:
   ESD Human Body Model tested per AEC−Q100−002 (EIA/JESD22−A114)
   ESD Machine Model tested per AEC−Q100−003 (EIA/JESD22−A115)
   Latchup Current Maximum Rating: ≤150 mA per JEDEC standard: JESD78.

THERMAL CHARACTERISTICS

Rating	Symbol	Value	Unit
Thermal Characteristics, DFN6, 3x3.3 mm (Note 4) Thermal Resistance, Junction−to−Air (Note 5)	$R_{\theta JA}$	107	°C/W
Thermal Characteristics, TSOP−5 (Note 4) Thermal Resistance, Junction−to−Air (Note 5)	$R_{\theta JA}$	205	°C/W
Thermal Characteristics, DFN6, 2x2.2 mm (Note 4) Thermal Resistance, Junction−to−Air (Note 5)	$R_{\theta JA}$	122	°C/W

4. Refer to ELECTRICAL CHARACTERISTICS and APPLICATION INFORMATION for Safe Operating Area.
5. As measured using a copper heat spreading area of 650 mm², 1 oz copper thickness.

Share Feedback
Your Opinion Matters

OPERATING RANGES

Rating	Symbol	Min	Max	Unit
Operating Input Voltage (Note 6)	V_{in}	V_{out} + V_{DO}, 1.75 V (Note 7)	6	V
Adjustable Output Voltage Range (Adjustable Version Only)	V_{out}	1.25	5.0	V
Operating Ambient Temperature Range	T_A	−40	125	°C

6. Refer to ELECTRICAL CHARACTERISTICS and APPLICATION INFORMATION for Safe Operating Area.
7. Minimum V_{in} = 1.75 V or (V_{out} + V_{DO}), whichever is higher.

ELECTRICAL CHARACTERISTICS (V_{in} = 1.750 V, V_{out} = 1.250 V (adjustable version)), (V_{in} = V_{out} + 0.5 V (fixed version)), C_{in} = C_{out} =1.0 μF, −40°C ≤ T_A ≤ 125°C, Figure 5, unless otherwise specified.) (Note 8)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
GENERAL						
Disable Current	I_{DIS}	ENABLE = 0 V, Vin = 6 V −40°C ≤ T_A ≤ 85°C	–	0.01	1.0	μA
Ground Current Adjustable Option 1.3 V Option 1.5 V Option 1.8 V to 3.0 V Option 3.3 V to 5.0 V Option	I_{GND}	ENABLE = 0.9 V, I_{out} = 1.0 mA to 150 mA	 – – – – –	 100 135 135 140 145	 135 150 170 175 180	μA
Thermal Shutdown Temperature (Note 9)	T_{SD}		150	175	200	°C
Thermal Shutdown Hysteresis	T_{SH}		–	10	–	°C
ADJ Input Bias Current	I_{ADJ}		−0.75	–	0.75	μA
CHIP ENABLE						
ENABLE Input Threshold Voltage Voltage Increasing, Logic High Voltage Decreasing, Logic Low	$V_{th(EN)}$		 0.9 –	 – –	 – 0.4	V
Enable Input Bias Current (Note 9)	I_{EN}		–	3.0	100	nA
TIMING						
Output Turn On Time Adjustable Option 1.3 V to 3.5 V Option 5.0 V Option	t_{EN}	ENABLE = 0 V to V_{in}	 – – –	 15 15 30	 25 25 50	μs

8. Performance guaranteed over the indicated operating temperature range by design and/or characterization, production tested at T_J = T_A = 25°C. Low duty cycle pulse techniques are used during testing to maintain the junction temperature as close to ambient as possible.
9. Values based on design and/or characterization.

Share Feedback
Your Opinion Matters

ELECTRICAL CHARACTERISTICS

(V_{in} = 1.750 V, V_{out} = 1.250 V, C_{in} = C_{out} =1.0 μF, −40°C ≤ T_A ≤ 125°C, Figure 5, unless otherwise specified.) (Note 10)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
REGULATOR OUTPUT (Adjustable Voltage Version)						
Output Voltage	V_{out}	I_{out} = 1.0 mA to 150 mA V_{in} = 1.75 V to 6.0 V, V_{out} = ADJ	1.231 (−1.5%)	1.250	1.269 (+1.5%)	V
Ripple Rejection (V_{in} = V_{out} + 1.0 V + 0.5 V_{p-p})	RR	I_{out} = 1.0 mA to 150 mA f = 120 Hz f = 1.0 kHz f = 10 kHz	 – – –	 62 55 38	 – – –	dB
Line Regulation	Reg_{line}	V_{in} = 1.750 V to 6.0 V, I_{out} = 1.0 mA	–	1.0	10	mV
Load Regulation	Reg_{load}	I_{out} = 1.0 mA to 150 mA	–	2.0	15	mV
Output Noise Voltage (Note 11)	V_n	f = 10 Hz to 100 kHz	–	50	–	μV_{rms}
Output Short Circuit Current	I_{sc}		300	550	800	mA
Dropout Voltage V_{out} = 1.25 V V_{out} = 1.3 V V_{out} = 1.5 V V_{out} = 1.8 V V_{out} = 2.5 V V_{out} ≥ 2.8 V	V_{DO}	Measured at: V_{out} − 2.0%, I_{out} = 150 mA, Figure 6	 – – – – – –	 175 175 150 125 100 75	 250 250 225 175 150 125	mV
REGULATOR OUTPUT (Fixed Voltage Version) (V_{in} = V_{out} + 0.5 V, C_{in} = C_{out} =1.0 μF, −40°C ≤ T_A ≤ 125°C, Figure 7, unless otherwise specified.) (Note 10)						
Output Voltage 1.3 V Option 1.5 V Option 1.8 V Option 2.5 V Option 2.8 V Option 3.0 V Option 3.3 V Option 3.5 V Option 5.0 V Option	V_{out}	I_{out} = 1.0 mA to 150 mA V_{in} = (V_{out} + 0.5 V) to 6.0 V	 1.274 1.470 1.764 2.450 2.744 2.940 3.234 3.430 4.900 (−2%)		 1.326 1.530 1.836 2.550 2.856 3.060 3.366 3.570 5.100 (+2%)	V
Power Supply Ripple Rejection (Note 11) (V_{in} = V_{out} + 1.0 V + 0.5 V_{p-p})	PSRR	I_{out} = 1.0 mA to 150 mA f = 120 Hz f = 1.0 kHz f = 10 kHz	 – – –	 62 55 38	 – – –	dB
Line Regulation	Reg_{line}	V_{in} = 1.750 V to 6.0 V, I_{out} = 1.0 mA	–	1.0	10	mV
Load Regulation 1.3 V to 1.5 V Option 1.8 V Option 2.5 V to 5.0 V Option	Reg_{load}	I_{out} = 1.0 mA to 150 mA	 – – –	 2.0 2.0 2.0	 20 25 30	mV
Output Noise Voltage (Note 11)	V_n	f = 10 Hz to 100 kHz	–	50	–	μV_{rms}
Output Short Circuit Current	I_{sc}		300	550	800	mA
Dropout Voltage 1.3 V Option 1.5 V Option 1.8 V Option 2.5 V Option 2.8 V to 5.0 V Option	V_{DO}	Measured at: V_{out} − 2.0%	 – – – – –	 175 150 125 100 75	 250 225 175 150 125	mV

10. Performance guaranteed over the indicated operating temperature range by design and/or characterization, production tested at T_J = T_A = 25°C. Low duty cycle pulse techniques are used during testing to maintain the junction temperature as close to ambient as possible.
11. Values based on design and/or characterization.

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

Share Feedback
Your Opinion Matters

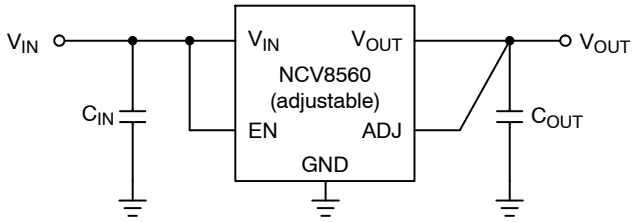


Figure 5. Typical Application Circuit for V_{out} = 1.25 V (Adjustable Version)

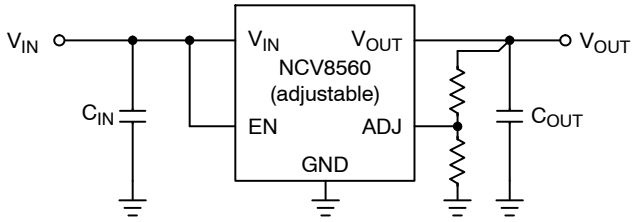


Figure 6. Typical Application Circuit for Adjustable V_{out}

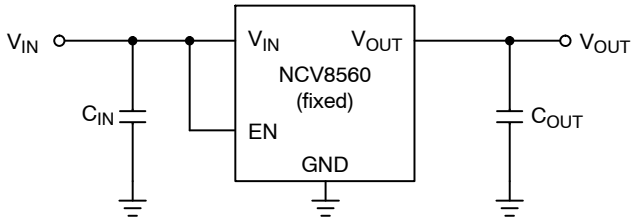


Figure 7. Typical Application Circuit (Fixed Voltage Version)

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS

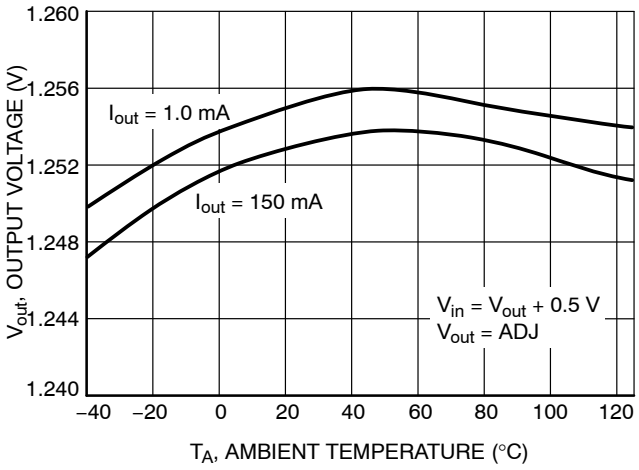


Figure 8. Output Voltage vs. Temperature (V_{in} = V_{out} + 0.5 V)

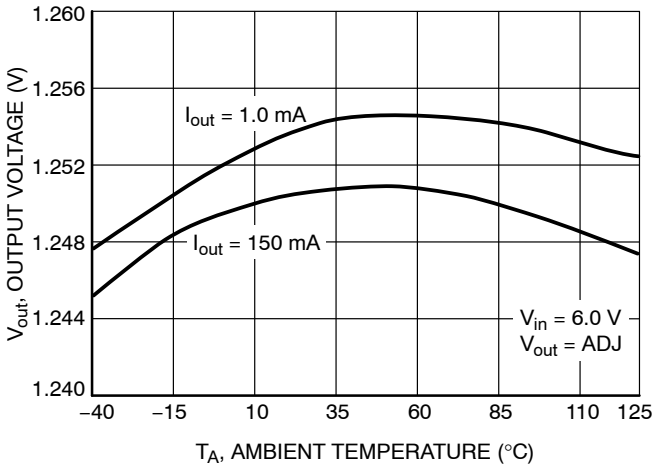


Figure 9. Output Voltage vs. Temperature (V_{in} = 6.0 V)

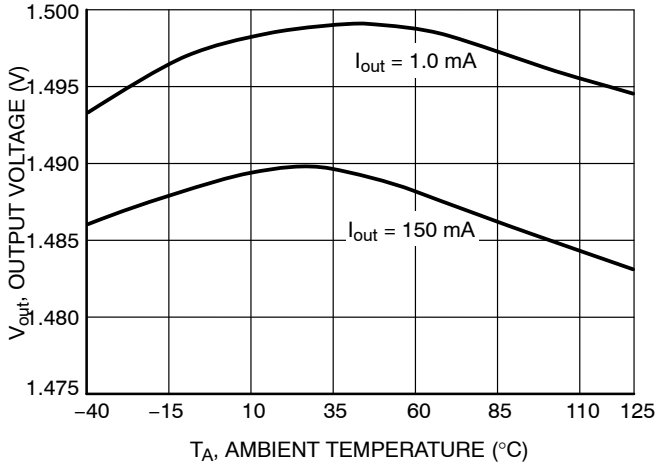


Figure 10. Output Voltage vs. Temperature (1.5 V Fixed Output, V_{in} = 2 V)

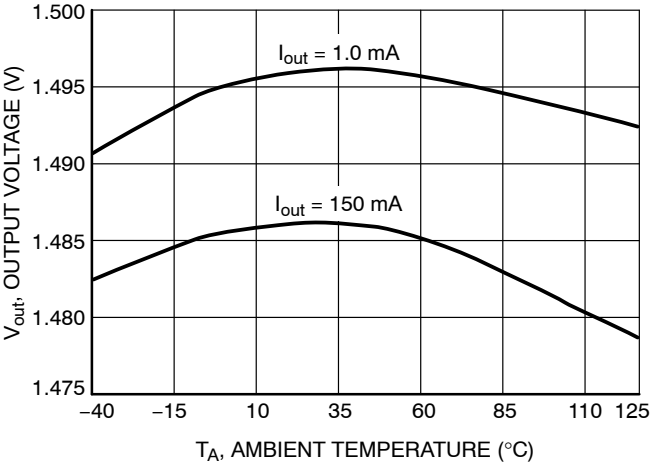


Figure 11. Output Voltage vs. Temperature (1.5 V Fixed Output, V_{in} = 6 V)

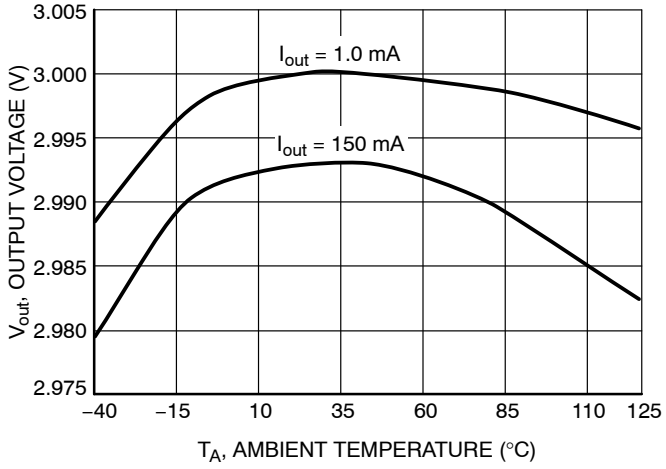


Figure 12. Output Voltage vs. Temperature (3.0 V Fixed Output, V_{in} = 3.5 V)

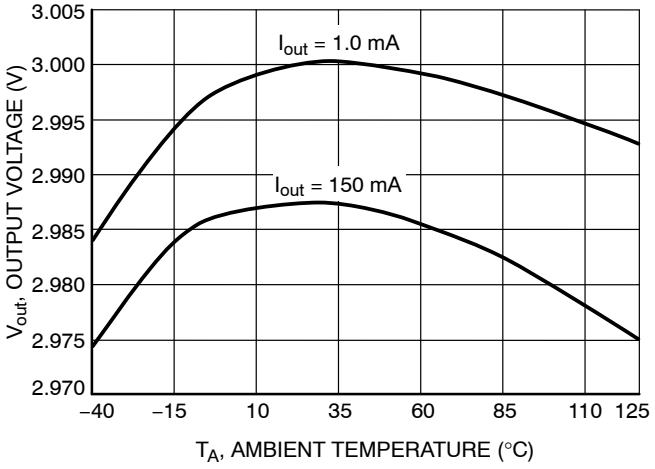


Figure 13. Output Voltage vs. Temperature (3.0 V Fixed Output, V_{in} = 6 V)

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS

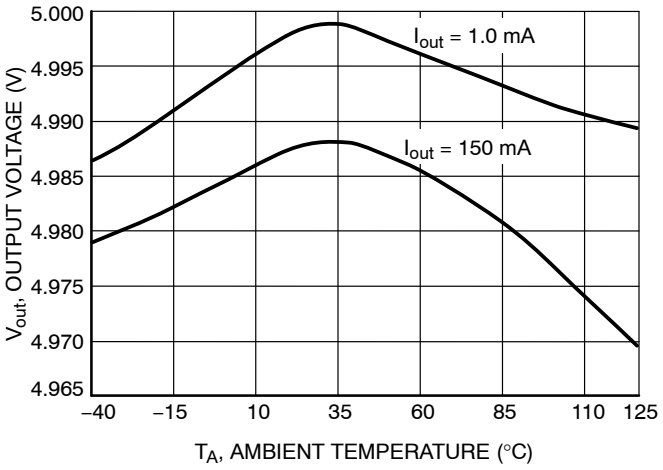


Figure 14. Output Voltage vs. Temperature (5.0 V Fixed Output, V_{in} = 5.5 V)

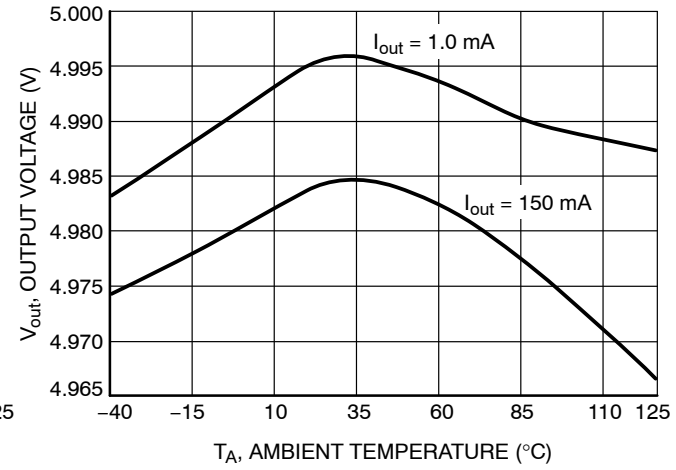


Figure 15. Output Voltage vs. Temperature (5.0 V Fixed Output, V_{in} = 6 V)

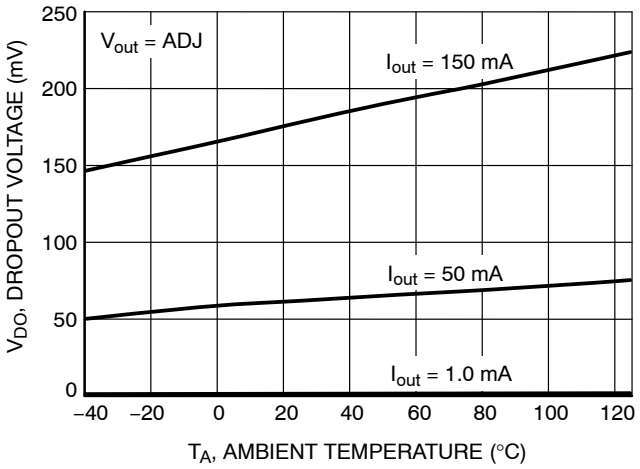


Figure 16. Dropout Voltage vs. Temperature (Over Current Range)

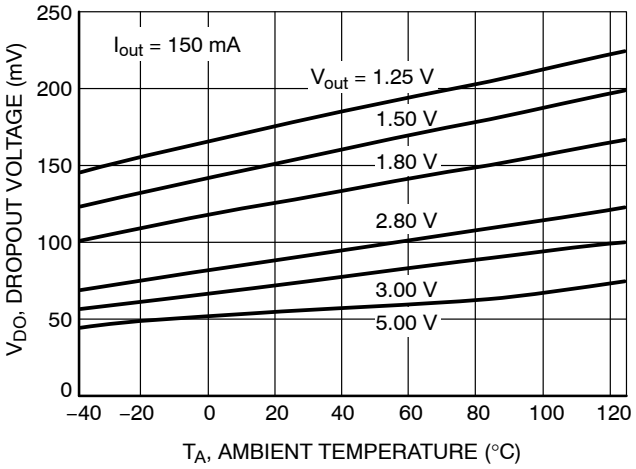


Figure 17. Dropout Voltage vs. Temperature (Over Output Voltage)

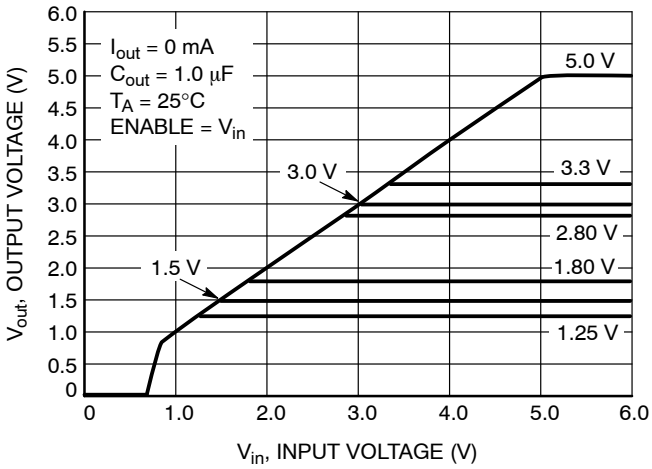


Figure 18. Output Voltage vs. Input Voltage

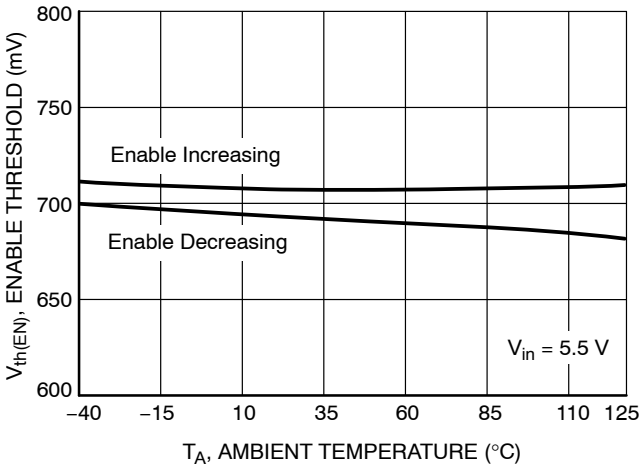


Figure 19. Enable Threshold vs. Temperature

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS

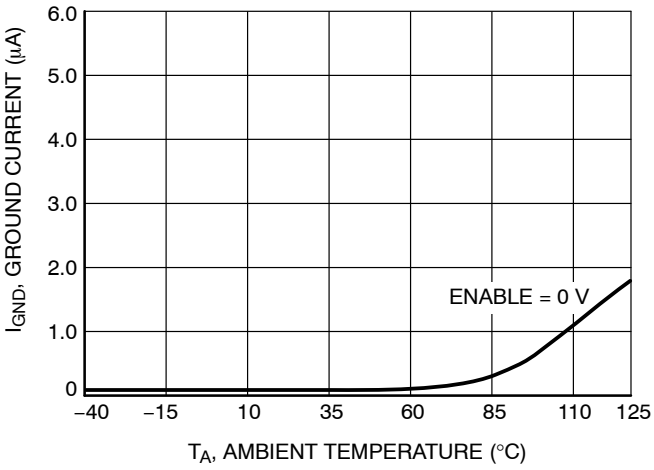


Figure 20. Ground Current (Sleep Mode) vs. Temperature

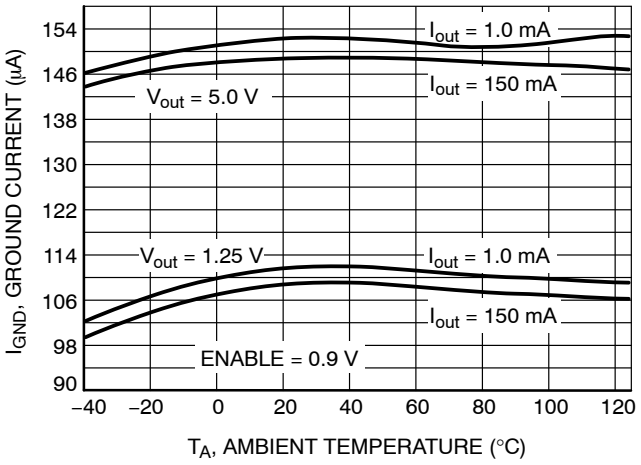


Figure 21. Ground Current (Run Mode) vs. Temperature

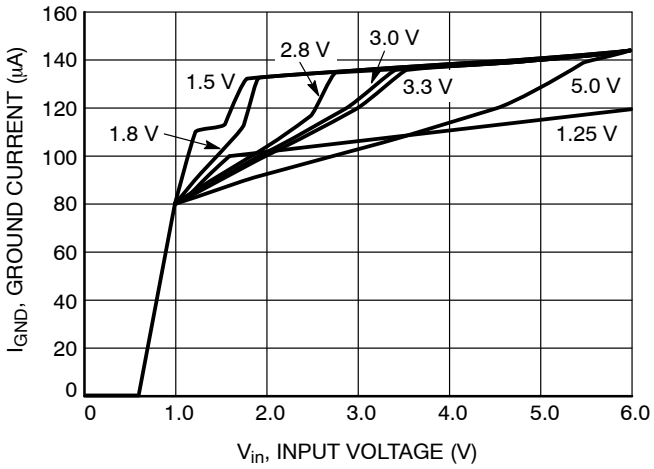


Figure 22. Ground Current vs. Input Voltage

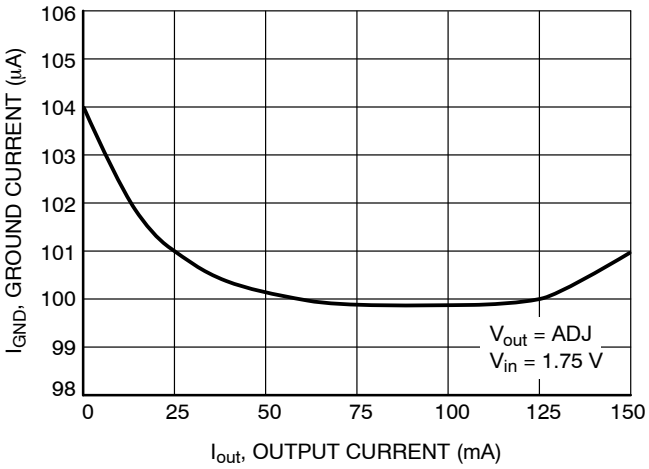


Figure 23. Ground Current vs. Output Current

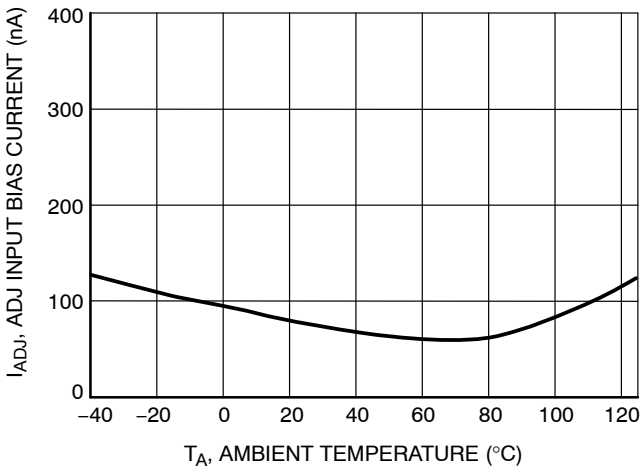


Figure 24. ADJ Input Bias Current vs. Temperature

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS

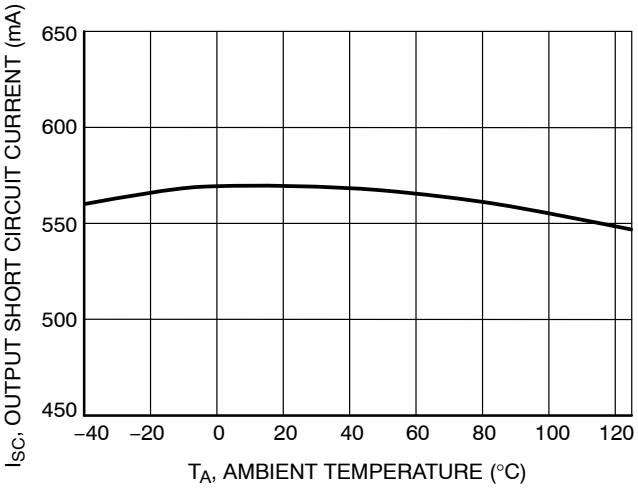


Figure 25. Output Short Circuit Current vs. Temperature

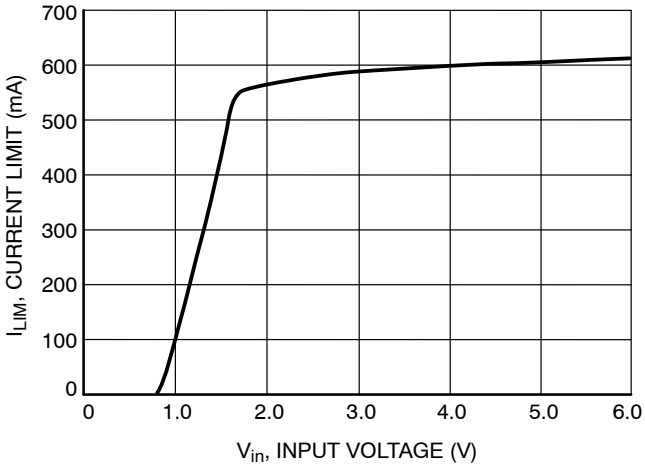


Figure 26. Current Limit vs. Input Voltage

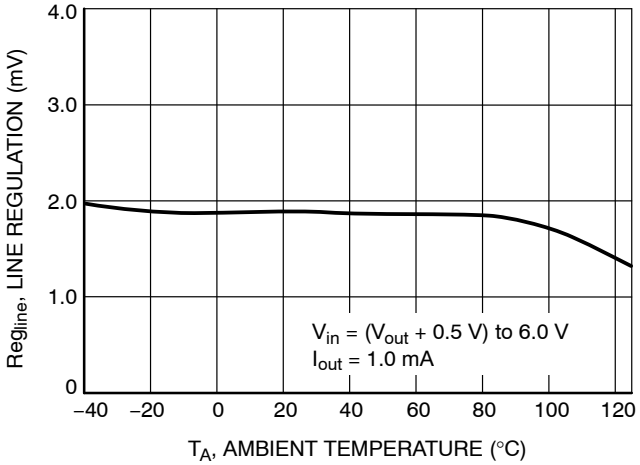


Figure 27. Line Regulation vs. Temperature

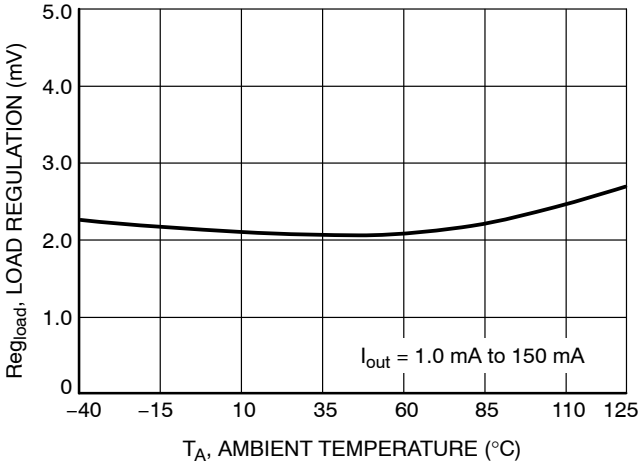


Figure 28. Load Regulation vs. Temperature

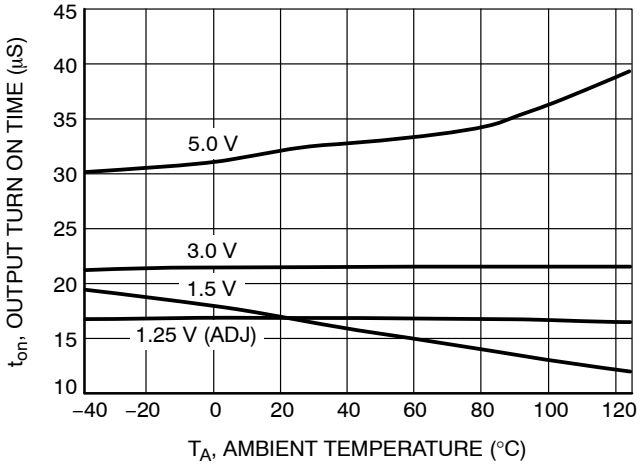


Figure 29. Output Turn On Time vs. Temperature

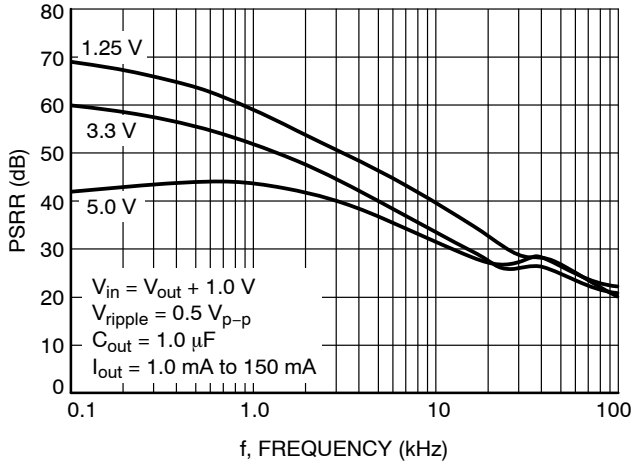


Figure 30. Power Supply Ripple Rejection vs. Frequency

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS

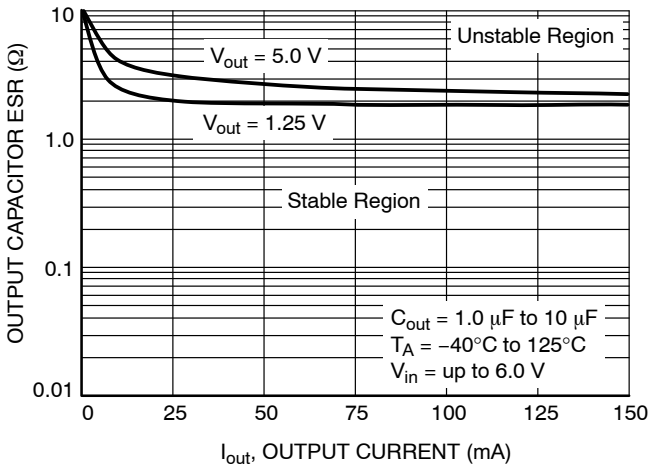


Figure 31. Output Stability with Output Capacitor ESR over Output Current

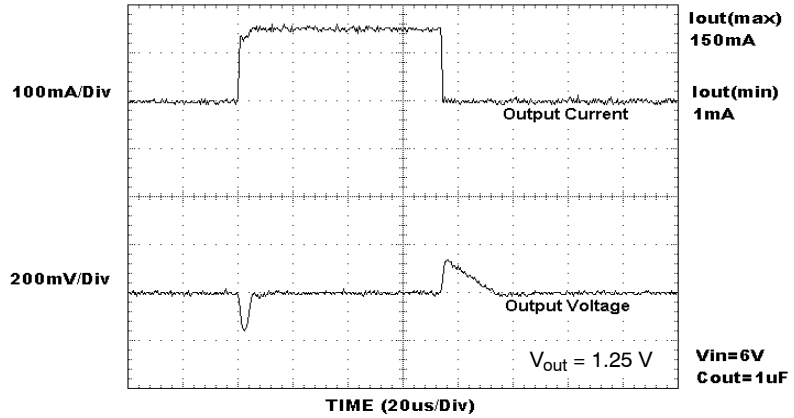


Figure 32. Load Transient Response (1.0 μF)

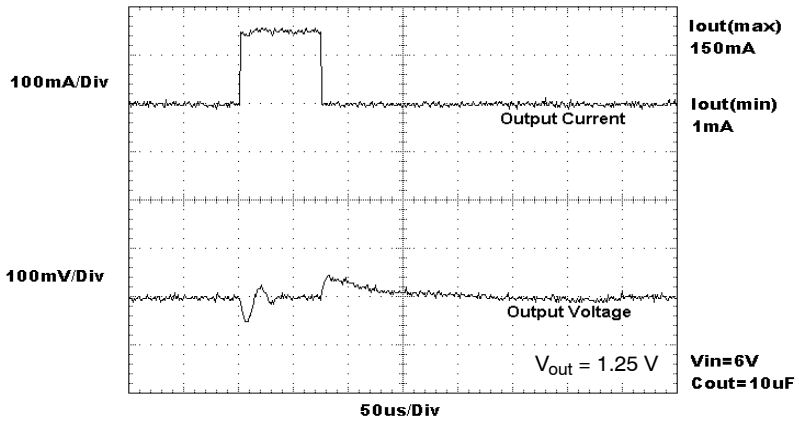


Figure 33. Load Transient Response (10 μF)

Share Feedback
Your Opinion Matters

DEFINITIONS

Load Regulation

The change in output voltage for a change in output load current at a constant temperature.

Dropout Voltage

The input/output differential at which the regulator output no longer maintains regulation against further reductions in input voltage. Measured when the output drops 2% below its nominal. The junction temperature, load current, and minimum input supply requirements affect the dropout level.

Output Noise Voltage

This is the integrated value of the output noise over a specified frequency range. Input voltage and output load current are kept constant during the measurement. Results are expressed in μV_{rms} or $nV/\sqrt{Hz}$.

Ground Current

Ground Current (I_{GND}) is the current that flows through the ground pin when the regulator operates with a load on its output. This consists of internal IC operation, bias, etc. It is actually the difference between the input current (measured through the LDO input pin) and the output load current. If the regulator has an input pin that reduces its internal bias and shuts off the output (enable/disable function), this term is called the disable current (I_{DIS}).

Line Regulation

The change in output voltage for a change in input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that the average junction temperature is not significantly affected.

Line Transient Response

Typical output voltage overshoot and undershoot response when the input voltage is excited with a given slope.

Load Transient Response

Typical output voltage overshoot and undershoot response when the output current is excited with a given slope between no−load and full−load conditions.

Thermal Protection

Internal thermal shutdown circuitry is provided to protect the integrated circuit in the event that the maximum junction temperature is exceeded. When activated at typically 175°C, the regulator turns off. This feature is provided to prevent failures from accidental overheating.

Maximum Package Power Dissipation

The power dissipation level at which the junction temperature reaches its maximum operating value.

APPLICATIONS INFORMATION

The NCV8560 series regulator is self−protected with internal thermal shutdown and internal current limit. Typical application circuits are shown in Figures 5 and 6.

Input Decoupling (C_{in})

A ceramic or tantalum 1.0 μF capacitor is recommended and should be connected close to the NCV8560 package. Higher capacitance and lower ESR will improve the overall line transient response.

Output Decoupling (C_{out})

The NCV8560 is a stable component and does not require a minimum Equivalent Series Resistance (ESR) for the output capacitor. The minimum output decoupling value is 1.0 μF and can be augmented to fulfill stringent load transient requirements. The regulator works with ceramic chip capacitors as well as tantalum devices. Larger values improve noise rejection and load regulation transient response. Figure 31 shows the stability region for a range of operating conditions and ESR values.

No−Load Regulation Considerations

The NCV8560 adjustable regulator will operate properly under conditions where the only load current is through the resistor divider that sets the output voltage. However, in the case where the NCV8560 is configured to provide a 1.250 V output, there is no resistor divider. If the part is enabled under no−load conditions, leakage current through the pass transistor at junction temperatures above 85°C can approach several microamps, especially as junction temperature approaches 150°C. If this leakage current is not directed into a load, the output voltage will rise up to a level approximately 20 mV above nominal.

The NCV8560 contains an overshoot clamp circuit to improve transient response during a load current step release. When output voltage exceeds the nominal by approximately 20 mV, this circuit becomes active and clamps the output from further voltage increase. Tying the ENABLE pin to V_{in} will ensure that the part is active whenever the supply voltage is present, thus guaranteeing that the clamp circuit is active whenever leakage current is present.

When the NCV8560 adjustable regulator is disabled, the overshoot clamp circuit becomes inactive and the pass transistor leakage will charge any capacitance on V_{out}. If no load is present, the output can charge up to within a few millivolts of V_{in}. In most applications, the load will present some impedance to V_{out} such that the output voltage will be inherently clamped at a safe level. A minimum load of 10 μA is recommended.

Share Feedback
Your Opinion Matters

Noise Decoupling

The NCV8560 is a low noise regulator and needs no external noise reduction capacitor. Unlike other low noise regulators which require an external capacitor and have slow startup times, the NCV8560 operates without a noise reduction capacitor, has a typical 15 μs start up delay and achieves a 50 μV_{rms} overall noise level between 10 Hz and 100 kHz.

Enable Operation

The enable pin will turn the regulator on or off. The threshold limits are covered in the electrical characteristics table in this data sheet. The turn−on/turn−off transient voltage being supplied to the enable pin should exceed a slew rate of 10 mV/μs to ensure correct operation. If the enable function is not to be used then the pin should be connected to V_{in}.

Output Voltage Adjust

The output voltage can be adjusted from 1 times (Figure 5) to 4 times (Figure 6) the typical 1.250 V regulation voltage via the use of resistors between the output and the ADJ input. The output voltage and resistors are chosen using Equation 1 and Equation 2.

$$V_{out} = 1.250 \left(1 + \frac{R_1}{R_2}\right) + \left(I_{ADJ} \times R_1\right) \quad \text{(eq. 1)}$$

$$R_2 \cong \frac{R_1}{\frac{V_{out}}{1.25} - 1} \quad \text{(eq. 2)}$$

Input bias current I_{ADJ} is typically less than 150 nA. Choose R2 arbitrarily to minimize errors due to the bias current and to minimize noise contribution to the output voltage. Use Equation 2 to find the required value for R1.

Thermal

As power in the NCV8560 increases, it might become necessary to provide some thermal relief. The maximum power dissipation supported by the device is dependent upon board design and layout. Mounting pad configuration on the PCB, the board material, and the ambient temperature affect the rate of junction temperature rise for the part. When the NCV8560 has good thermal conductivity through the PCB, the junction temperature will be relatively low with high power applications. The maximum dissipation the NCV8560 can handle is given by:

$$P_{D(MAX)} = \frac{T_{J(MAX)} - T_A}{R_{\theta JA}} \quad \text{(eq. 3)}$$

Since T_J is not recommended to exceed 125°C ($T_{J(MAX)}$), then the NCV8560 in a DFN6 package can dissipate up to 600 mW when the ambient temperature (T_A) is 25°C, and PCB area is 150mm^2 and larger, see Figure 34.

The power dissipated by the NCV8560 can be calculated from the following equations:

$$P_D \approx V_{in}\left(I_{GND} @ I_{out}\right) + I_{out}\left(V_{in} - V_{out}\right) \quad \text{(eq. 4)}$$

or

$$V_{in(MAX)} \approx \frac{P_{D(MAX)} + \left(V_{out} \times I_{out}\right)}{I_{out} + I_{GND}} \quad \text{(eq. 5)}$$

If a 150 mA output current is needed, the quiescent current I_{GND} is taken from the data sheet electrical characteristics table or extracted from Figure 21 and Figure 23. I_{GND} is approximately 108 μA when I_{out} = 150 mA. For an output voltage of 1.250 V, the maximum input voltage will then be 3.9 V, good for a 1 Cell Li−ion battery.

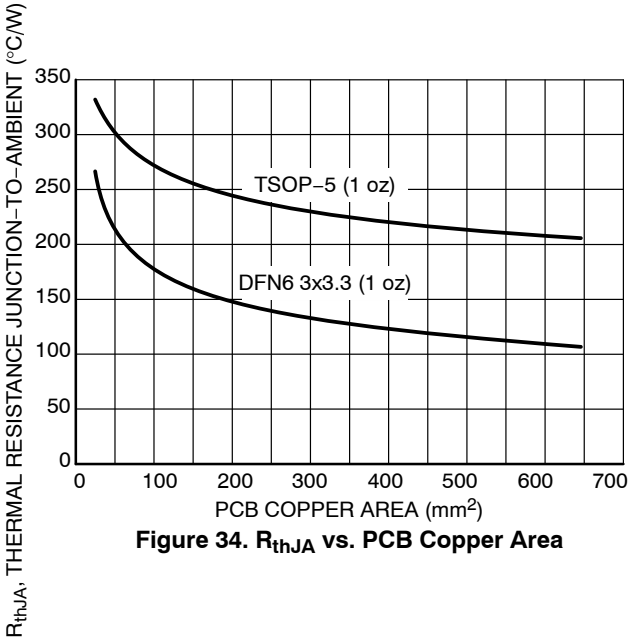


Figure 34. R_{thJA} vs. PCB Copper Area

Hints

V_{in} and GND printed circuit board traces should be as wide as possible. When the impedance of these traces is high, there is a chance to pick up noise or cause the regulator to malfunction. Place external components, especially the output capacitor, as close as possible to the NCV8560, and make traces as short as possible.

Share Feedback
Your Opinion Matters

DEVICE ORDERING INFORMATION

Device*	Marking Code	Version	Package	Shipping†
NCV8560MN150R2G	1st Line: V8560 2nd Line: 150	1.5 V	DFN6 (3x3) (Pb−Free)	3000 / Tape & Reel
NCV8560MN330R2G	1st Line: V8560 2nd Line: 330	3.3 V		
NCV8560SN130T1G	LJ2	1.3 V	TSOP−5 (Pb−Free)	3000 / Tape & Reel
NCV8560SN180T1G	LJ3	1.8 V		
NCV8560SN250T1G	AAQ	2.5 V		
NCV8560SN280T1G	AAR	2.8 V		
NCV8560SN330T1G	LJ5	3.3 V		
NCV8560SN350T1G	LJ7	3.5 V		

DISCONTINUED (Note 12)

NCV8560MNADJR2G	1st Line: V8560 2nd Line: ADJ	ADJ	DFN6 (3x3) (Pb−Free)	3000 / Tape & Reel
NCV8560MN180R2G	1st Line: V8560 2nd Line: 180	1.8 V	DFN6 (3x3) (Pb−Free)	3000 / Tape & Reel
NCV8560MN250R2G	1st Line: V8560 2nd Line: 250	2.5 V		
NCV8560MN280R2G	1st Line: V8560 2nd Line: 280	2.8 V		
NCV8560MN300R2G	1st Line: V8560 2nd Line: 300	3.0 V		
NCV8560MN350R2G	1st Line: V8560 2nd Line: 350	3.5 V	DFN6 (3x3) (Pb−Free)	3000 / Tape & Reel
NCV8560MN500R2G	1st Line: V8560 2nd Line: 500	5.0 V		
NCV8560MN130R2G	1st Line: AQ(M)	1.3 V	DFN6 (2x2.2) (Pb−Free)	3000 / Tape & Reel
NCV8560SNADJT1G	LJ9	ADJ	TSOP−5 (Pb−Free)	3000 / Tape & Reel
NCV8560SN150T1G	AAJ	1.5 V	TSOP−5 (Pb−Free)	3000 / Tape & Reel
NCV8560SN300T1G	LJ4	3.0 V	TSOP−5 (Pb−Free)	3000 / Tape & Reel
NCV8560SN500T1G	LJ8	5.0 V	TSOP−5 (Pb−Free)	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


*NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC−Q100 Qualified and PPAP Capable


12. **DISCONTINUED:** These devices are not recommended for new design. Please contact your **onsemi** representative for information. The most current information on these devices may be available on www.onsemi.com.

Share Feedback
Your Opinion Matters

PACKAGE DIMENSIONS

DFN6, 2x2.2, 0.65P
CASE 506BA−01
ISSUE A

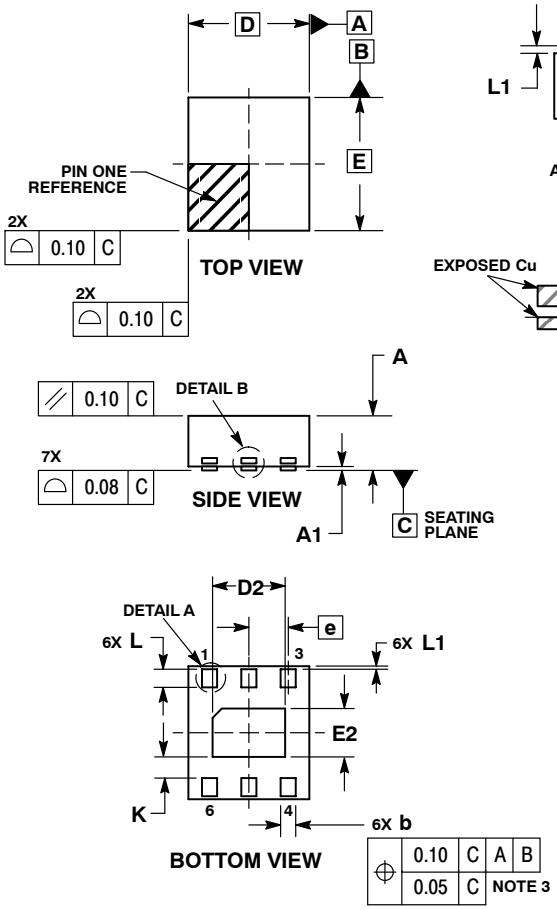


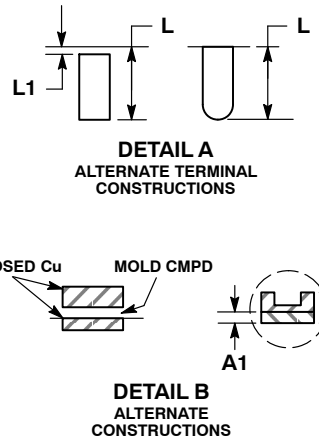

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.20 mm FROM TERMINAL.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

	MILLIMETERS	
DIM	MIN	MAX
A	0.80	1.00
A1	0.00	0.05
b	0.20	0.30
D	2.00 BSC	
D2	1.10	1.30
E	2.20 BSC	
E2	0.70	0.90
e	0.65 BSC	
K	0.20	---
L	0.25	0.35
L1	0.00	0.10


SOLDERING FOOTPRINT*

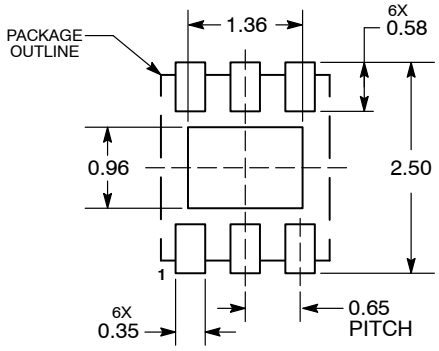

DIMENSIONS: MILLIMETERS


*For additional information on our Pb−Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

Share Feedback
Your Opinion Matters




TSOP−5 3.00x1.50x0.95, 0.95P
CASE 483
ISSUE P


DATE 01 APR 2024

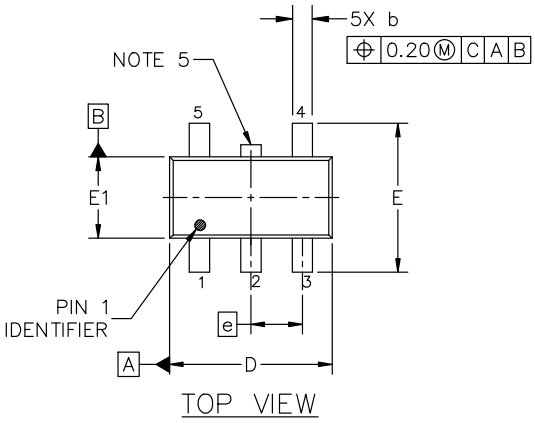

TOP VIEW

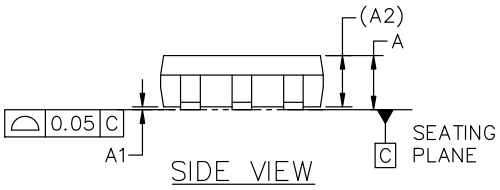


SIDE VIEW



DETAIL "A"
SCALE 2:1

NOTES:


1. DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5−2018.
2. ALL DIMENSION ARE IN MILLIMETERS (ANGLES IN DEGREES).
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OF GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE. DIMENSION D.
5. OPTIONAL CONSTRUCTION: AN ADDITIONAL TRIMMED LEAD IS ALLOWED IN THIS LOCATION. TRIMMED LEAD NOT TO EXTEND MORE THAN 0.2 FROM BODY.



END VIEW

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	0.900	1.000	1.100
A1	0.010	0.055	0.100
A2		0.950 REF.	
b	0.250	0.375	0.500
c	0.100	0.180	0.260
D	2.850	3.000	3.150
E	2.500	2.750	3.000
E1	1.350	1.500	1.650
e		0.950 BSC	
L	0.200	0.400	0.600
θ	0°	5°	10°


GENERIC
MARKING DIAGRAM*



Analog

XXX = Specific Device Code
A = Assembly Location
Y = Year
W = Work Week
▪ = Pb−Free Package


(Note: Microdot may be in either location)



Discrete/Logic

XXX = Specific Device Code
M = Date Code
▪ = Pb−Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

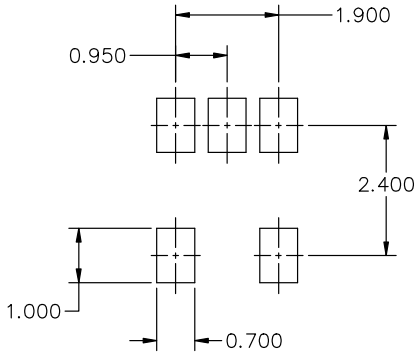

RECOMMENDED MOUNTING FOOTPRINT*

* FOR ADDITIONAL INFORMATION ON OUR Pb−FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

DOCUMENT NUMBER:	**98ARB18753C**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	**TSOP−5 3.00x1.50x0.95, 0.95P**	**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.


© Semiconductor Components Industries, LLC, 2018


6 PIN DFN, 3x3x0.9
CASE 488AE
ISSUE B


DATE 30 NOV 2005





SCALE 2:1

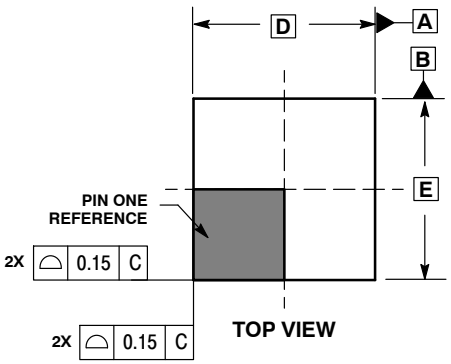





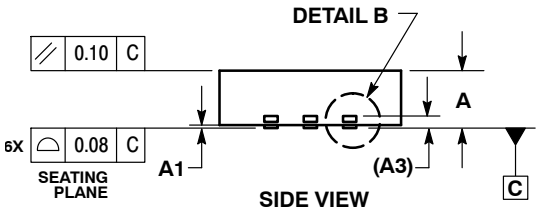

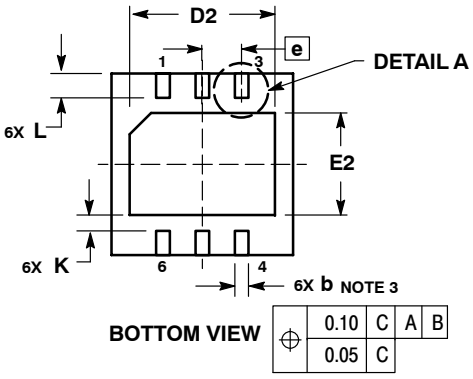

NOTES:
1. DIMENSIONS AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.25 AND 0.30 MM FROM TERMINAL.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.
5. TERMINAL b MAY HAVE MOLD COMPOUND MATERIAL ALONG SIDE EDGE. MOLD FLASHING MAY NOT EXCEED 30 MICRONS ONTO BOTTOM SURFACE OF TERMINAL b.

	MILLIMETERS	
DIM	MIN	MAX
A	0.80	1.00
A1	0.00	0.05
A3	0.20	0.25
b	0.18	0.30
D	3.00 BSC	
D2	2.25	2.55
E	3.00 BSC	
E2	1.55	1.85
e	0.65 BSC	
K	0.20	–––
L	0.30	0.50
L1	0.00	0.021

GENERIC MARKING DIAGRAM*



XXXX = Specific Device Code
A = Assembly Location
L = Wafer Lot
Y = Year
W = Work Week

*This information is generic. Please refer to device data sheet for actual part marking. Pb–Free indicator, “G” or microdot “ ▪”, may or may not be present.

DOCUMENT NUMBER:	**98AON15231D**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**6 PIN DFN, 3X3X0.9 MM, 0.65 MM PITCH**	**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2004

onsemi, , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.