# 36 V, 0.8% Accuracy, 300 mA, Voltage Regulator for Automotive Applications

NO.EC-321-240724

## OUTLINE

The R1513S is a CMOS-based voltage regulator (VR) that specifically designed for automotive applications featuring 300 mA output current and 36 V input voltage. Internally, the R1513S consists of a fold-back protection circuit, a short current protection circuit and a thermal shutdown circuit in addition to the basic regulator circuit.
The performance is specified for 25°C with ±0.8% output voltage accuracy and for the −40°C to 125°C temperature range with ±1.0% output voltage accuracy. The operating temperature range is −40°C to 125°C and the maximum input voltage is 36 V. All these features make the R1513S ideal for power source for car accessories and electronic control units in automotive vehicles.
The R1513S is available in 1.2 V, 1.5 V, 1.8 V, 3.3 V, 3.4 V, 4.0 V and 5.0 V fixed output voltage options. By using external divider resistors, the output voltage can be set over a 1.2 V to 18.0 V range.
The R1513S is offered in a 6-pin HSOP-6J high wattage package.

## FEATURES


- Input Voltage (Maximum Ratings) ····· 3.5 V to 36 V (50 V)
- Operating Temperature Range ····· −40°C to 125°C
- Supply Current ····· Typ. 75 μA
- Standby Current ····· Typ. 0.1 μA
- Dropout Voltage ····· Typ. 0.32 V ($I_{OUT}$ = 300 mA, $V_{OUT}$ = 5.0 V)
- Output Voltage Accuracy ····· ±0.8% (Ta = 25°C)
  ±1.0% (−40°C to 125°C)
- Line Regulation ····· Typ. 0.01%/V ($V_{DD}$ = $V_{OUT}$ + 1 V to 36 V)
- Package Type ····· HSOP-6J
- Output Voltage ····· 1.2 V / 1.5 V / 1.8 V / 3.3 V / 3.4 V / 4.0 V / 5.0 V
- Short-current Protection Circuit ····· Current Limit Typ. 50 mA
- Fold-back Protection Circuit ····· Current Limit Typ. 450 mA
- Thermal Shutdown Circuit ····· Shutdown at Typ. 160°C
- Ripple Rejection ····· Typ. 70 dB (f = 100 Hz)
- Ceramic Capacitor Compatible ····· C1 = 1.0 μF or more, C2 = 4.7 μF or more

## APPLICATIONS


- Power source for car accessories including car audio equipment, car navigation system, and ETC system.
- Power source for control units including EV inverter and charge control.

# BLOCK DIAGRAM

**R1513SxxxB Block Diagram**

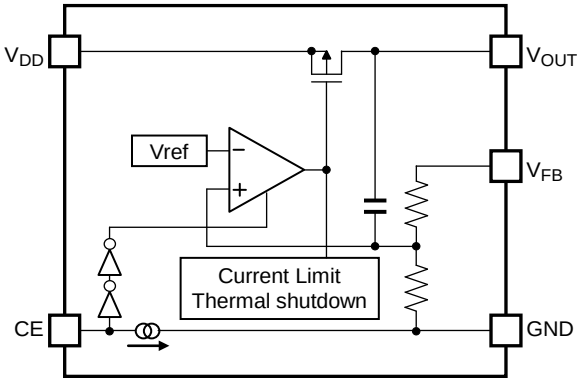


**R1513SxxxD Block Diagram**

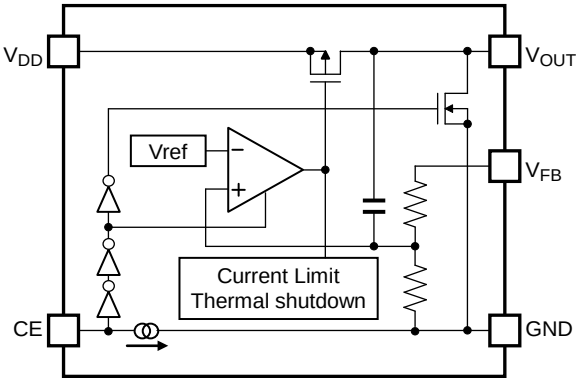


# SELECTION GUIDE

The set output voltage and the auto-discharge option[*1] are user-selectable options.

**Selection Guide**

| Product Name | Package | Quantity per Reel | Pb Free | Halogen Free |
|---|---|---|---|---|
| R1513Sxx1∗-E2-#E | HSOP-6J | 1,000 pcs | Yes | Yes |

xx: Specify the set output voltage ($V_{SET}$) from below.

1.2 V (12) / 1.5 V (15) / 1.8 V (18) / 3.3 V (33) / 3.4 V (34) / 4.0 V (40) / 5.0 V (50)


∗: Specify the auto-discharge option.
B: Auto-discharge option not included
D: Auto-discharge option included

#: Specify the automotive class code.

| | Operating Temperature Range | Guaranteed Specs Temperature Range | Screening |
|---|---|---|---|
| A | −40°C to 125°C | 25°C | High Temperature |
| K | −40°C to 125°C | −40°C to 125°C | High and Low Temperature |

[*1] Auto-discharge function quickly lowers the output voltage to 0 V, when the chip enable signal is switched from the active mode to the standby mode, by releasing the electrical charge accumulated in the external capacitor.

## PIN DESCRIPTION




**HSOP-6J Pin Configuration**

**HSOP-6J Pin Description**

| Pin No. | Symbol | Description |
|---|---|---|
| 1 | $V_{OUT}$ | Output Pin |
| 2 | GND*1 | Ground Pin |
| 3 | $V_{FB}$ | Feedback Pin |
| 4 | CE | Chip Enable Pin, Active-high |
| 5 | GND*1 | Ground Pin |
| 6 | $V_{DD}$ | Input Pin |

*1 The GND pins must be wired together when they are mounted on board.

# ABSOLUTE MAXIMUM RATINGS

**Absolute Maximum Ratings**

| Symbol | Item | | Rating | Unit |
|---|---|---|---|---|
| $V_{IN}$ | Input Voltage | | −0.3 to 50 | V |
| $V_{IN}$ | Peak Input Voltage*1 | | 60 | V |
| $V_{CE}$ | CE Pin Input Voltage | | −0.3 to 50 | V |
| $V_{FB}$ | $V_{FB}$ Pin Input Voltage | | −0.3 to $V_{OUT}$ + 0.3 ≤ 50 | V |
| $V_{OUT}$ | Output Voltage | | −0.3 to $V_{IN}$ + 0.3 ≤ 50 | V |
| $P_D$ | Power Dissipation*2 | Ultra High Wattage Land Pattern | 3400 | mW |
| | | Standard Land Pattern | 2100 | |
| Tj | Junction Temperature | | −40 to 150 | °C |
| Tstg | Storage Temperature Range | | −55 to 150 | °C |

*1 Duration time = 200 ms

*2 Refer to *PACKAGE INFORMATION* for detailed informatoin.

**ABSOLUTE MAXIMUM RATINGS**

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause permanent damage and may degrade the life time and safety for both device and system using the device in the field. The functional operation at or over these absolute maximum ratings is not assured.

# RECOMMENDED OPERATING CONDITIONS

**Recommended Operating Conditions**

| Symbol | Item | Rating | Unit |
|---|---|---|---|
| $V_{IN}$ | Input Voltage | 3.5 to 36 | V |
| Ta | Operating Temperature Range | −40 to 125 | °C |

**RECOMMENDED OPERATING CONDITIONS**

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

# ELECTRICAL CHARACTERISTICS

C1 = 1.0 µF, C2 = 4.7 µF, $V_{OUT} = V_{FB}$, $V_{SET}$ = Set Output Voltage, unless otherwise noted.
The specifications surrounded by ☐ are guaranteed by design engineering at −40°C ≤ Ta ≤ 125°C.

**R1513SxxxB/D (-AE) Electrical Characteristics** (Ta = 25°C)

| Symbol | Item | Conditions | | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|---|---|
| $I_{SS}$ | Supply Current | $V_{IN}$ = 14 V, $I_{OUT}$ = 0 mA | | | 75 | 110 | µA |
| Istandby | Standby Current | $V_{IN}$ = 36 V, $V_{CE}$ = 0 V | | | 0.1 | 2.0 | µA |
| $V_{OUT}$ | Output Voltage | 3.5 V ≤ $V_{SET}$ +1 V ≤ $V_{IN}$ ≤ 36 V, $I_{OUT}$ = 1 mA | $V_{SET}$ ≤ 1.8 V | −18 | | 18 | mV |
| | | | 1.8 V < $V_{SET}$ | ×0.99 | | ×1.01 | V |
| | | 3.5 V ≤ $V_{SET}$ +1 V ≤ $V_{IN}$ ≤ 14 V, 1 mA ≤ $I_{OUT}$ ≤ 50 mA | $V_{SET}$ ≤ 1.8 V | −18 | | 18 | mV |
| | | | 1.8 V < $V_{SET}$ | ×0.99 | | ×1.01 | V |
| $\Delta V_{OUT}$ /$\Delta V_{IN}$ | Line Regulation | 3.5 V ≤ $V_{SET}$ +1 V ≤ $V_{IN}$ ≤ 36 V, $I_{OUT}$ = 1 mA | | −0.02 | 0.01 | 0.02 | %/V |
| $\Delta V_{OUT}$ /$\Delta I_{OUT}$ | Load Regulation | 3.5V ≤ $V_{IN}$ = $V_{SET}$ +1 V, 1 mA ≤ $I_{OUT}$ ≤ 300 mA | $V_{SET}$ ≤ 1.8 V | −5 | | 5 | mV |
| | | | $V_{SET}$ ≤ 3.4 V | −8 | | 8 | |
| | | | $V_{SET}$ ≤ 5.0 V | −12 | | 12 | |
| $V_{DIF}$ | Dropout Voltage | $I_{OUT}$ = 300 mA | $V_{SET}$ = 1.2 V | | | 2.30 | V |
| | | | 1.5V ≤ $V_{SET}$ | | | 2.00 | |
| | | | 1.8V ≤ $V_{SET}$ | | | 1.70 | |
| | | | 3.3V ≤ $V_{SET}$ | | 0.39 | 0.74 | |
| | | | 5.0V ≤ $V_{SET}$ | | 0.32 | 0.60 | |
| $I_{LIM}$ | Output Current Limit | $V_{IN}$ = $V_{SET}$ +1.5 V | | 300 | 450 | | mA |
| $I_{SC}$ | Short Current Limit | $V_{OUT}$ = 0 V | | 40 | 50 | | mA |
| $R_{FB}$ | Feedback Resistance | | | 1.0 | 2.4 | | MΩ |
| $V_{CEH}$ | CE Input Voltage "H" | | | 2.2 | | 36 | V |
| $V_{CEL}$ | CE Input Voltage "L" | | | 0 | | 1.0 | V |
| $I_{PD}$ | CE Pull-down Current | $V_{CE}$ = 5.0 V | | | 0.2 | 0.6 | µA |
| | | $V_{CE}$ = 36 V | | | 0.5 | 1.3 | |
| $T_{TSD}$ | Thermal Shutdown Temperature | Junction Temperature | | 150 | 160 | | °C |
| $T_{TSR}$ | Thermnal Shutdown Released Temperature | Junction Temperature | | 125 | 135 | | °C |
| $R_{LOW}$ | Low Output Nch Tr. ON Resistance (R1513SxxxD) | $V_{IN}$ = 14.0 V, $V_{CE}$ = 0 V | | 1.5 | 3.2 | 6.7 | kΩ |

All test items listed under *Electrical Characteristics* are done under the pulse load condition (Tj ≈ Ta = 25°C).

The specifications surrounded by ▭ are guaranteed by design engineering at −40°C ≤ Ta ≤ 125°C.

**Product-specific Electrical Characteristics (-AE)**

(Ta = 25°C)

| Product Name | $V_{OUT}$ [V] | | | $\Delta V_{OUT}/\Delta I_{OUT}$ [mV] | | $V_{DIF}$ [V] | |
|---|---|---|---|---|---|---|---|
| | MIN. | TYP. | MAX. | MIN. | MAX. | TYP. | MAX. |
| R1513S121x | 1.182 | 1.200 | 1.218 | -5 | 5 | | 2.30 |
| R1513S151x | 1.482 | 1.500 | 1.518 | -5 | 5 | | 2.00 |
| R1513S181x | 1.782 | 1.800 | 1.818 | -5 | 5 | | 1.70 |
| R1513S331x | 3.267 | 3.300 | 3.333 | -8 | 8 | 0.39 | 0.74 |
| R1513S341x | 3.366 | 3.400 | 3.434 | -8 | 8 | 0.39 | 0.74 |
| R1513S401x | 3.960 | 4.000 | 4.040 | -12 | 12 | 0.39 | 0.74 |
| R1513S501x | 4.950 | 5.000 | 5.050 | -12 | 12 | 0.32 | 0.60 |

C1 = 1.0 µF, C2 = 4.7 µF, $V_{OUT} = V_{FB}$, $V_{SET}$ = Set Output Voltage, unless otherwise noted.

**R1513SxxxB/D (-KE) Electrical Characteristics** (−40°C ≤ Ta ≤ 125°C)


| Symbol | Item | Conditions | | Min. | Typ. | Max. | Unit |
|---|---|---|---|---|---|---|---|
| $I_{SS}$ | Supply Current | $V_{IN}$ = 14 V, $I_{OUT}$ = 0 mA | | | 75 | 110 | µA |
| Istandby | Standby Current | $V_{IN}$ = 36 V, $V_{CE}$ = 0 V | | | 0.1 | 2.0 | µA |
| $V_{OUT}$ | Output Voltage | 3.5 V ≤ $V_{SET}$ + 1 V ≤ $V_{IN}$ ≤ 36 V, $I_{OUT}$ = 1 mA | $V_{SET}$ ≤ 1.8 V | −18 | | 18 | mV |
| | | | 1.8 V < $V_{SET}$ | ×0.99 | | ×1.01 | V |
| | | 3.5 V ≤ $V_{SET}$ + 1 V ≤ $V_{IN}$ ≤ 14 V, 1 mA ≤ $I_{OUT}$ ≤ 50 mA | $V_{SET}$ ≤ 1.8 V | −18 | | 18 | mV |
| | | | 1.8 V < $V_{SET}$ | ×0.99 | | ×1.01 | V |
| $\Delta V_{OUT}$ /$\Delta V_{IN}$ | Line Regulation | 3.5 V ≤ $V_{SET}$ + 1 V ≤ $V_{IN}$ ≤ 36 V, $I_{OUT}$ = 1 mA | | −0.02 | 0.01 | 0.02 | %/V |
| $\Delta V_{OUT}$ /$\Delta I_{OUT}$ | Load Regulation | 3.5 V ≤ $V_{IN}$ = $V_{SET}$ + 1 V, 1 mA ≤ $I_{OUT}$ ≤ 300 mA | $V_{SET}$ ≤ 1.8 V | −5 | | 5 | mV |
| | | | $V_{SET}$ ≤ 3.4 V | −8 | | 8 | |
| | | | $V_{SET}$ ≤ 5.0 V | −12 | | 12 | |
| $V_{DIF}$ | Dropout Voltage | $I_{OUT}$ = 300 mA | $V_{SET}$ = 1.2 V | | | 2.30 | V |
| | | | 1.5V ≤ $V_{SET}$ | | | 2.00 | |
| | | | 1.8V ≤ $V_{SET}$ | | | 1.70 | |
| | | | 3.3V ≤ $V_{SET}$ | | 0.39 | 0.74 | |
| | | | 5.0V ≤ $V_{SET}$ | | 0.32 | 0.60 | |
| $I_{LIM}$ | Output Current Limit | $V_{IN}$ = $V_{SET}$ + 1.5 V | | 300 | 450 | | mA |
| $I_{SC}$ | Short Current Limit | $V_{OUT}$ = 0 V | | 40 | 50 | | mA |
| $R_{FB}$ | Feedback Resistance | | | 1.0 | 2.4 | | MΩ |
| $V_{CEH}$ | CE Input Voltage "H" | | | 2.2 | | 36 | V |
| $V_{CEL}$ | CE Input Voltage "L" | | | 0 | | 1.0 | V |
| $I_{PD}$ | CE Pull-down Current | $V_{CE}$ = 5.0 V | | | 0.2 | 0.6 | µA |
| | | $V_{CE}$ = 36 V | | | 0.5 | 1.3 | |
| $T_{TSD}$ | Thermal Shutdown Temperature | Junction Temperature | | 150 | 160 | | °C |
| $T_{TSR}$ | Thermnal Shutdown Released Temperature | Junction Temperature | | 125 | 135 | | °C |
| $R_{LOW}$ | Low Output Nch Tr. ON Resistance (R1513SxxxD) | $V_{IN}$ = 14.0 V, $V_{CE}$ = 0 V | | 1.5 | 3.2 | 6.7 | kΩ |

**Product-specific Electrical Characteristics (-KE)**

(−40°C ≤ Ta ≤ 125°C)

| Product Name | $V_{OUT}$ [V] | | | $\Delta V_{OUT}/\Delta I_{OUT}$ [mV] | | $V_{DIF}$ [V] | |
|---|---|---|---|---|---|---|---|
| | MIN. | TYP. | MAX. | MIN. | MAX. | TYP. | MAX. |
| R1513S121x | 1.182 | 1.200 | 1.218 | -5 | 5 | | 2.30 |
| R1513S151x | 1.482 | 1.500 | 1.518 | -5 | 5 | | 2.00 |
| R1513S181x | 1.782 | 1.800 | 1.818 | -5 | 5 | | 1.70 |
| R1513S331x | 3.267 | 3.300 | 3.333 | -8 | 8 | 0.39 | 0.74 |
| R1513S341x | 3.366 | 3.400 | 3.434 | -8 | 8 | 0.39 | 0.74 |
| R1513S401x | 3.960 | 4.000 | 4.040 | -12 | 12 | 0.39 | 0.74 |
| R1513S501x | 4.950 | 5.000 | 5.050 | -12 | 12 | 0.32 | 0.60 |

# TYPICAL APPLICATION

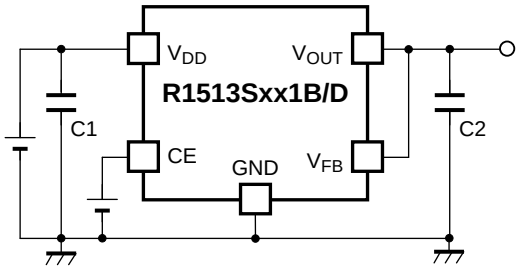


**R1513S Typical Application**

**External Components List**

| Symbol | Description |
|---|---|
| C1 | 1.0 µF, Ceramic Capacitor |
| C2 | 4.7µF, Ceramic Capacitor |

# TECHNICAL NOTES

### Phase Compensation

Phase compensation is provided to secure stable operation even when the load current is varied. For this purpose, use a 4.7 µF or more output capacitor (C2) with good frequency characteristics and proper ESR (Equivalent Series Resistance). Connect a 1.0 µF or more input capacitor (C1) between the $V_{DD}$ pin and the GND pin as close as possible to the pins.

In case of using a tantalum type capacitor with a large ESR, the output might become unstable. Evaluate your circuit including consideration of frequency characteristics.

Depending on the capacitor size, manufacturer, and part number, the bias characteristics and the temperature characteristics vary.

### PCB Layout

Ensure the $V_{DD}$ and GND lines are sufficiently robust. If their impedance is too high, noise pickup or unstable operation may result. No. 2 pin and No.5 pin must be wired together when mounting on board. Connect a capacitor with a suitable between the $V_{DD}$ and GND pins, and as close as possible to the pins. The load regulation can be improved by short-circuiting $V_{OUT}$ and $V_{FB}$ close to the load device.

### Thermal Shutdown Function

Thermal shutdown function detects overheating of the regulator and stops the regulator operation to protect the device from damage. Thermal shutdown circuit stops the regulator operation if the junction temperature becomes higher than 160°C (Typ.) and restarts the regulator operation if the junction temperature drops below 135°C (Typ.). The regulator repeats turning on and off and creates pulse waveform until the cause of the overheating is removed.


### Adjustable Output Voltage Setting

Output voltage can be adjusted by using the external divider resistors (R1, R2). By using the following equation, the output voltage ($V_{OUT}$) can be determined. The voltage which is fixed inside the IC is described as $V_{FB}$.

$$V_{OUT} = V_{FB} \times ((R1 + R2) / R2)$$

Recommended Output Voltage Range: 1.2 V ≤ $V_{OUT}$ ≤ 18 V

$V_{FB} = V_{SET}$

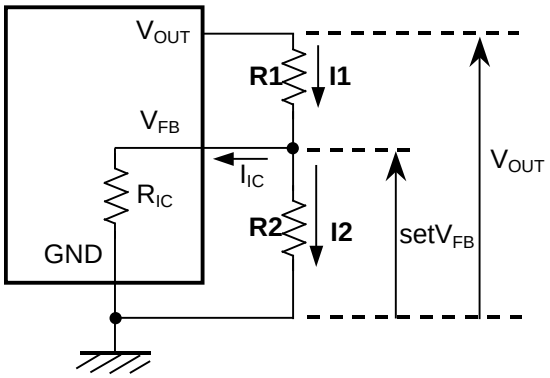



**Output Voltage Adjustment Using External Divider Resistors (R1, R2)**

The minimum resistance value for a resistor ($R_{IC}$) is 1 MΩ (Ta = 25°C, guaranteed by design). For better accuracy, setting R1 << $R_{IC}$ reduces errors. The resistance value for a resistor (R2) should be set to 33 kΩ or lower. If the resistance values set for R1 and R2 are larger, the impedance of the $V_{FB}$ pin becomes larger.

$R_{IC}$ could be affected by temperature; therefore, evaluate the circuit taking the actual conditions of use into account when deciding the resistance values for R1 and R2.


## TYPICAL APPLICATION FOR IC CHIP BREAKDOWN PREVENTION

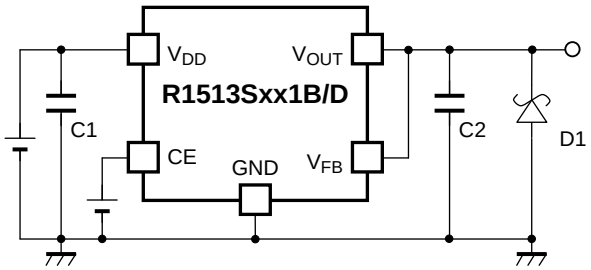



**R1513S Typical Application for IC Chip Breakdown Prevention**

When a sudden surge of electrical current travels along the $V_{OUT}$ pin and GND due to a short-circuit, electrical resonance of a circuit involving an output capacitor (C2) and a short circuit inductor generates a negative voltage and may damage the device or the load devices. Connecting a schottky diode (D1) between the $V_{OUT}$ pin and GND has the effect of preventing damage to them.


## PIN EQUIVALENT CIRCUIT DIAGRAMS




**$V_{OUT}$ Pin Equivalent Circuit Diagrams**




**CE Pin Equivalent Circuit Diagrams**




**$V_{FB}$ Pin Equivalent Circuit Diagrams**

# PACKAGE INFORMATION

## POWER DISSIPATION (HSOP-6J)


The power dissipation of the package is dependent on PCB material, layout, and environmental conditions. The following conditions are used in this measurement.

**Measurement Conditions**


| | Ultra-high Wattage Land Pattern | Standard Land Pattern |
|---|---|---|
| Environment | Mounting on Board<br>(Wind Velocity = 0 m/s) | Mounting on Board<br>(Wind Velocity = 0 m/s) |
| Board Material | Glass Cloth Epoxy Plastic<br>(Four-layer Board) | Glass Cloth Epoxy Plastic<br>(Double-sided Board) |
| Board Dimensions | 76.2 mm × 114.3 mm × 0.8 mm | 50 mm × 50 mm × 1.6 mm |
| Copper Ratio | 96% | 50% |
| Through-holes | ϕ 0.3 mm × 28 pcs | ϕ 0.5 mm × 24 pcs |

**Measurement Result** (Ta = 25°C, Tjmax = 150°C)

| | Ultra-high Wattage Land Pattern | Standard Land Pattern | Free Air |
|---|---|---|---|
| Power Dissipation | 3400 mW | 2100 mW | 675 mW |
| Thermal Resistance | 37°C/W | 59°C/W | 185°C/W |

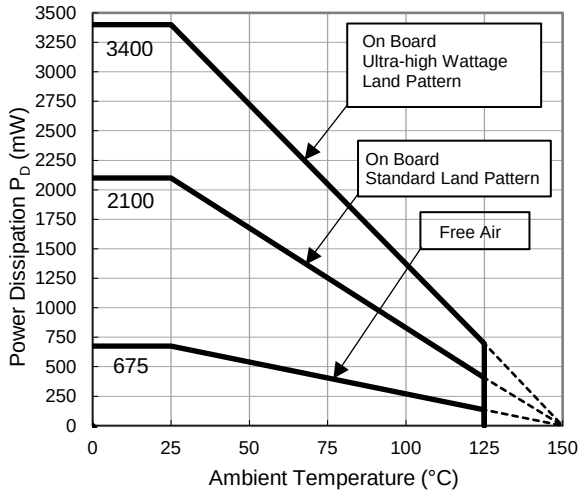



**Power Dissipation vs. Ambient Temperature**

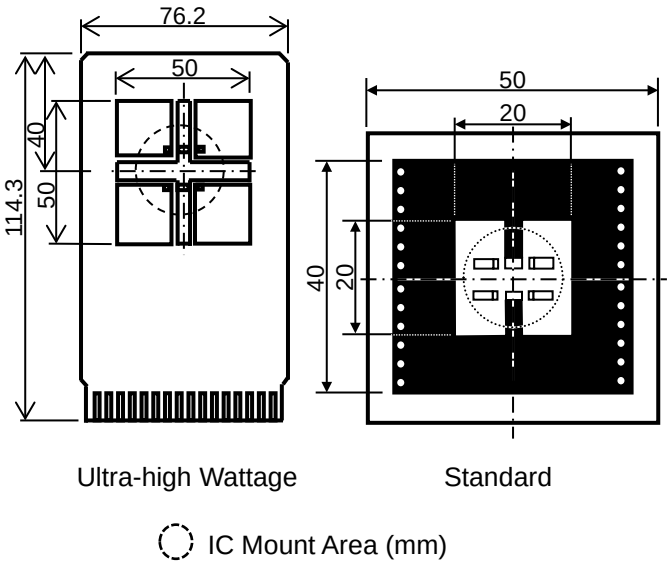


**Measurement Board Pattern**

## PACKAGE DIMENSIONS (HSOP-6J)

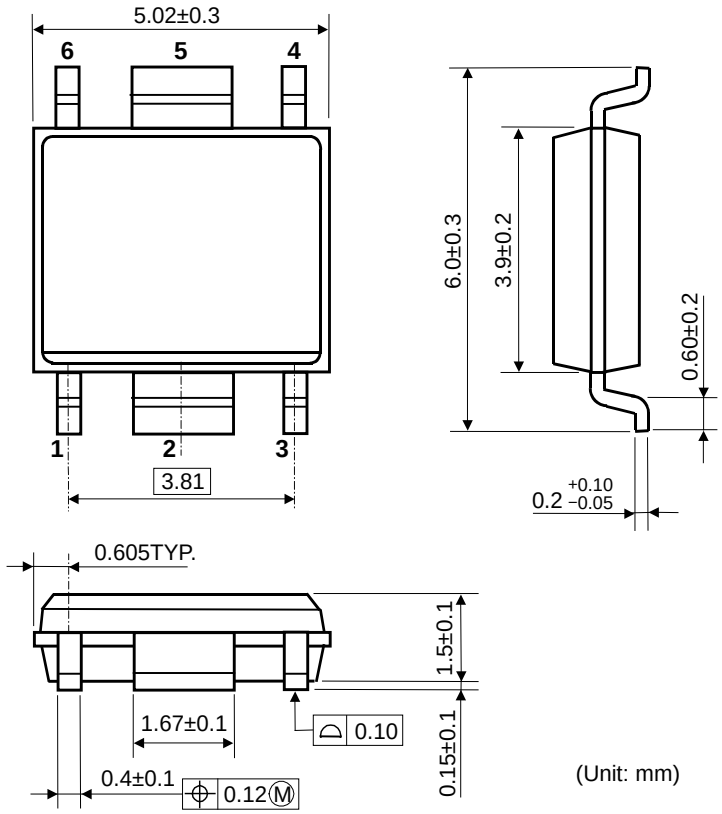



**HSOP-6J Package Dimensions**

## MARK SPECIFICATION (HSOP-6J)

①②③④: Product Code … **Refer to *MARK SPECIFICATION TABLE (HSOP-6J).***

⑤⑥: Lot Number … Alphanumeric Serial Number




**HSOP-6J Mark Specification**

## MARK SPECIFICATION TABLE (HSOP-6J)

**Mark Specification Table**


| Product Name | ①②③④ |
|---|---|
| R1513S121B | Z 1 2 B |
| R1513S151B | Z 1 5 B |
| R1513S181B | Z 1 8 B |
| R1513S331B | Z 3 3 B |
| R1513S341B | Z 3 4 B |
| R1513S401B | Z 4 0 B |
| R1513S501B | Z 5 0 B |
| R1513S121D | Z 1 2 D |
| R1513S151D | Z 1 5 D |
| R1513S181D | Z 1 8 D |
| R1513S331D | Z 3 3 D |
| R1513S341D | Z 3 4 D |
| R1513S401D | Z 4 0 D |
| R1513S501D | Z 5 0 D |

# TYPICAL CHARACTERISTICS


Note: Typical Characteristics are intended to be used as reference data; they are not guaranteed.

**1) Output Voltage vs. Output Current (Ta = 25°C)**


**R1513S121B/D**

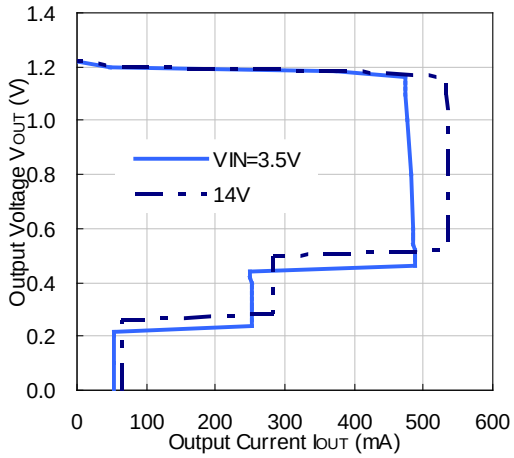


**R1513S331B/D**

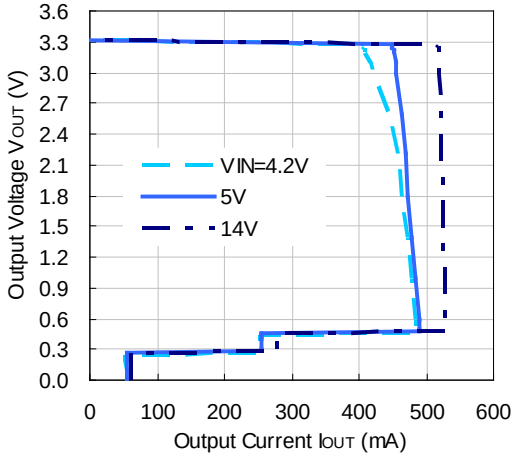



**R1513S501B/D**

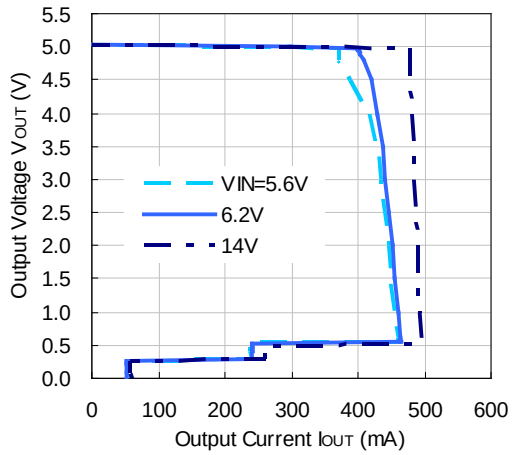



**2) Output Voltage vs. Input Voltage (Ta = 25°C)**


**R1513S121B/D**

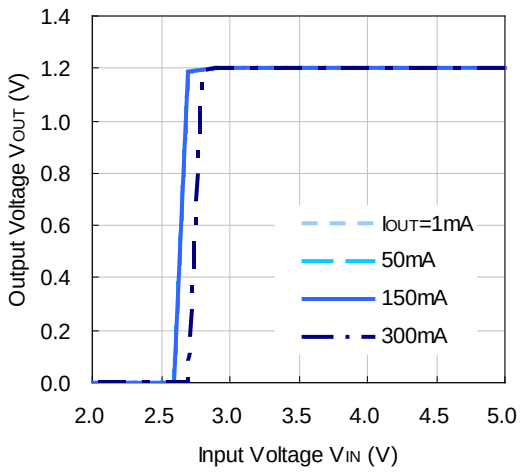


**R1513S331B/D**

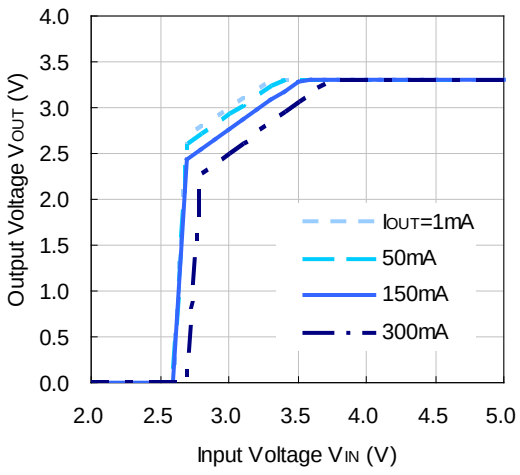


**R1513S501B/D**

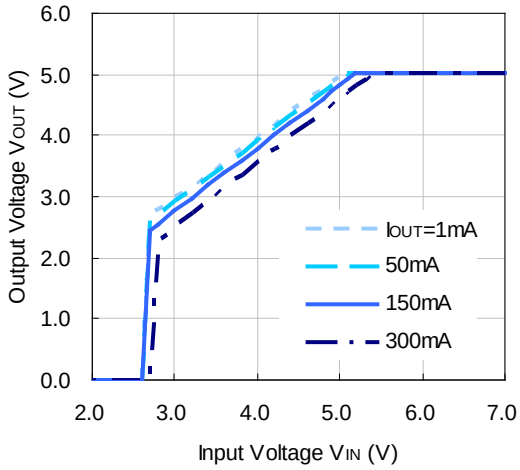



### 3) Supply Current vs. Input Voltage (Ta = 25°C)


**R1513S121B/D**

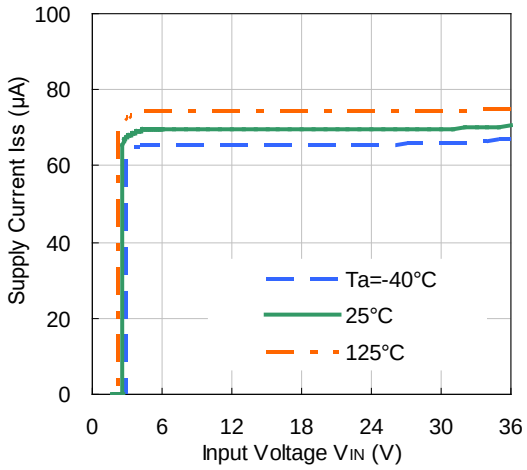



**R1513S331B/D**

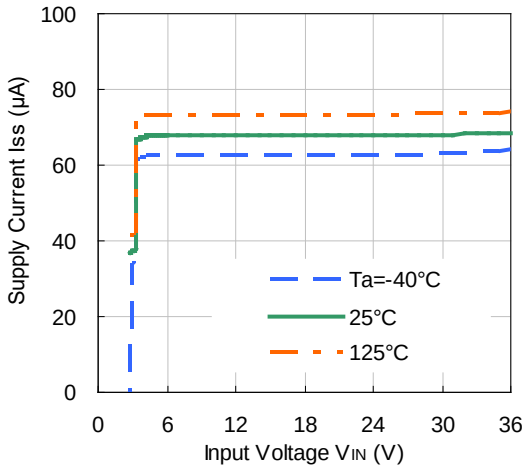


**R1513S501B/D**

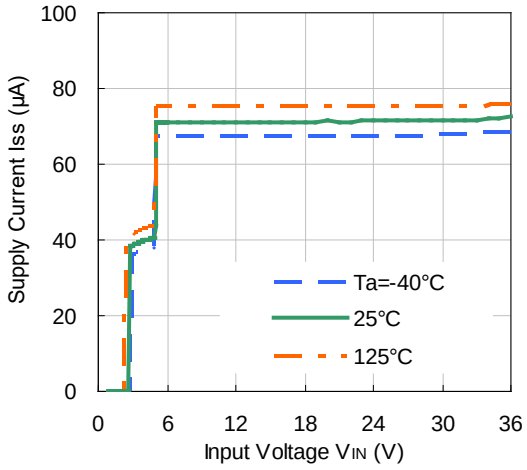



### 4) GND Pin Current vs. Output Current (Ta = 25°C)

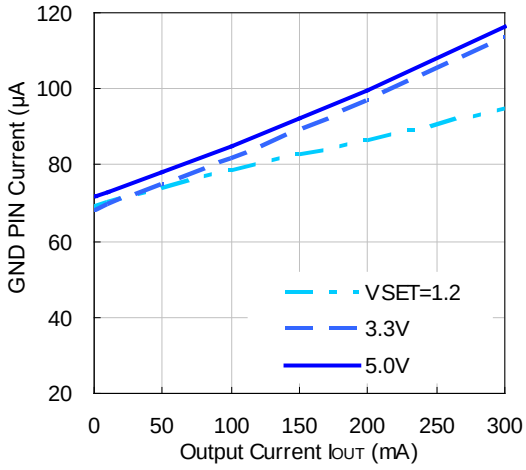


### 5) Output Voltage vs. Ambient Temperature


**R1513S121B/D**

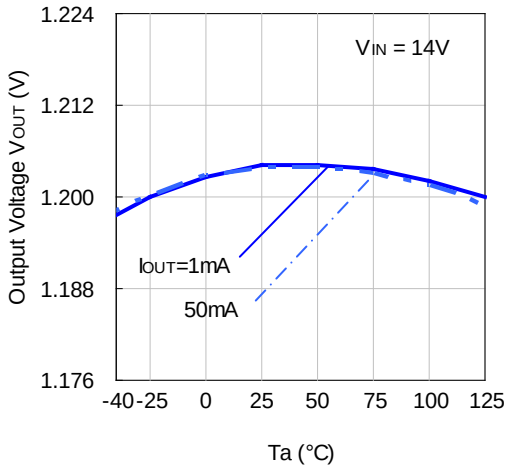



**R1513S331B/D**

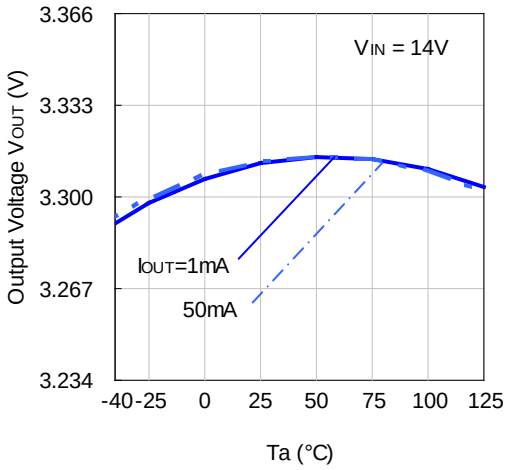


**R1513S501B/D**

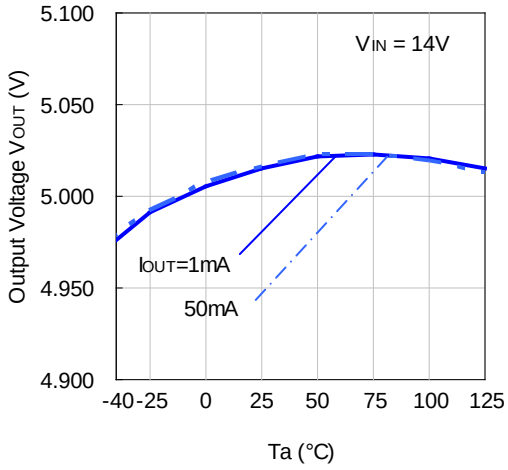



**R1513S121B/D**
**(Output Voltage Adjusted to 17.2 V)**

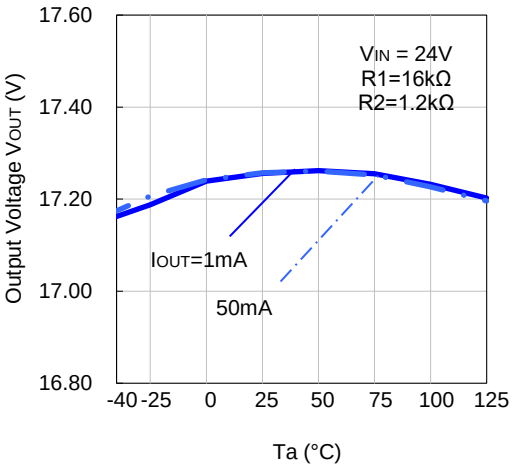



### 6) Dropout Voltage vs. Output Current

**R1513S121B/D**

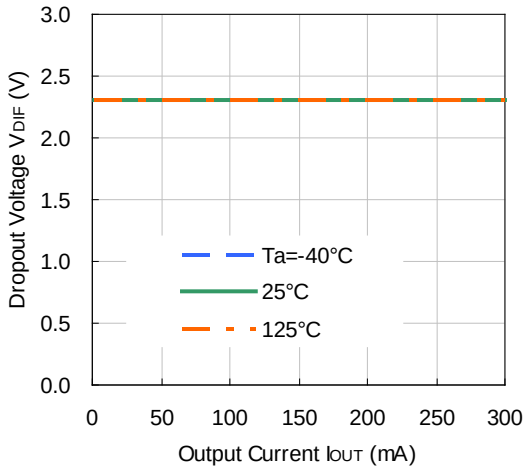




**R1513S331B/D**

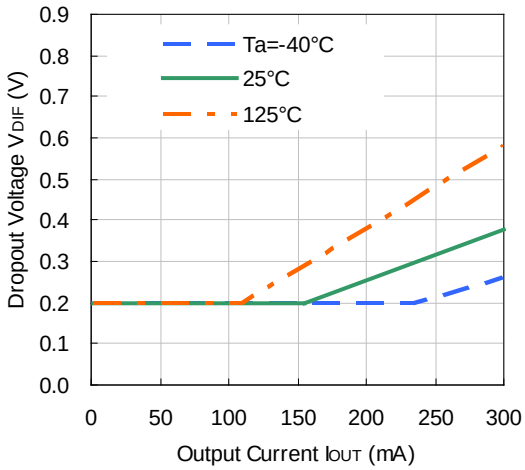

**R1513S501B/D**


**7) Dropout Voltage vs. Output Voltage (Ta = 25°C)**

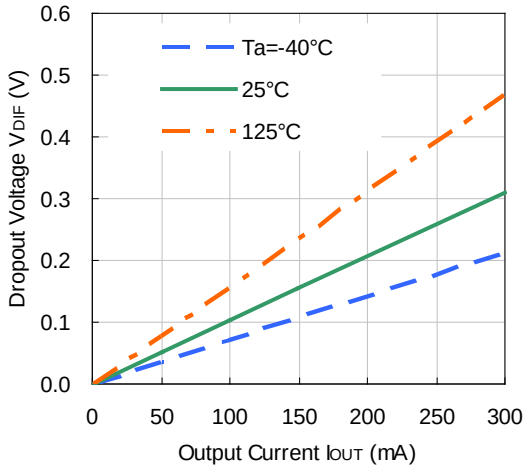

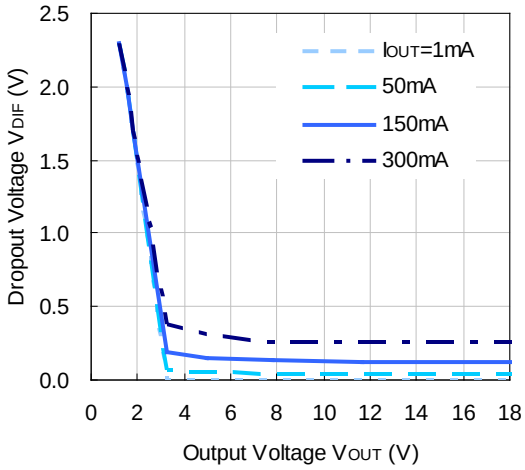




**8) Ripple Rejection vs. Input Voltage (Ta = 25°C, Ripple = 0.5 Vpp)**

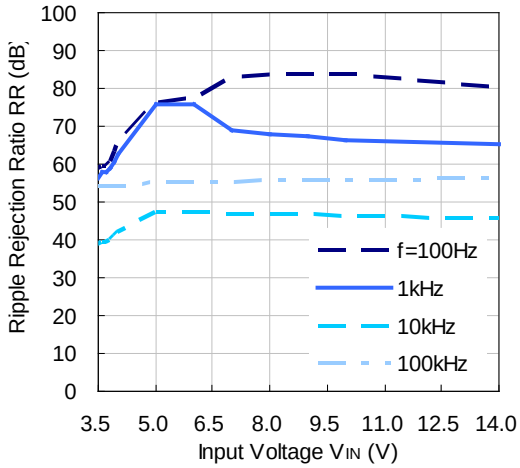
**R1513S121B/D ($I_{OUT}$ = 1 mA)**

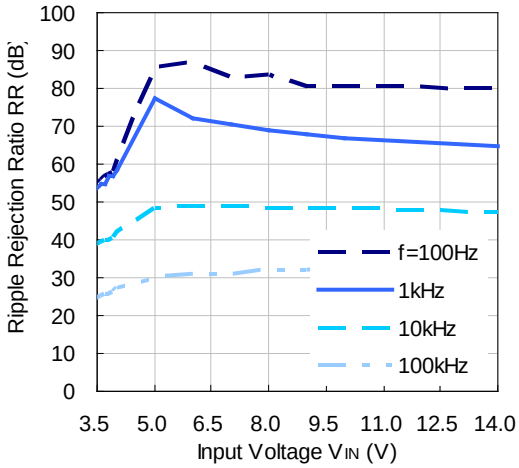



**R1513S121B/D ($I_{OUT}$ = 50 mA)**





**R1513S331B/D ($I_{OUT}$ = 1 mA)**

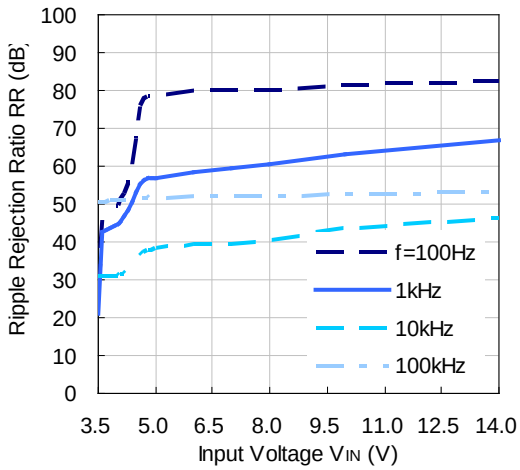



**R1513S331B/D ($I_{OUT}$ = 50 mA)**

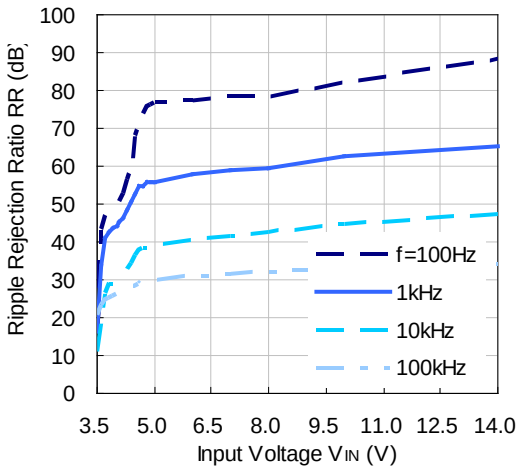

**R1513S501B/D ($I_{OUT}$ = 1 mA)**

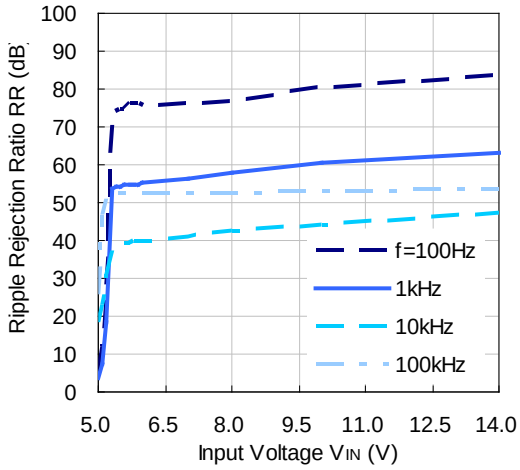



**R1513S501B/D ($I_{OUT}$ = 50 mA)**

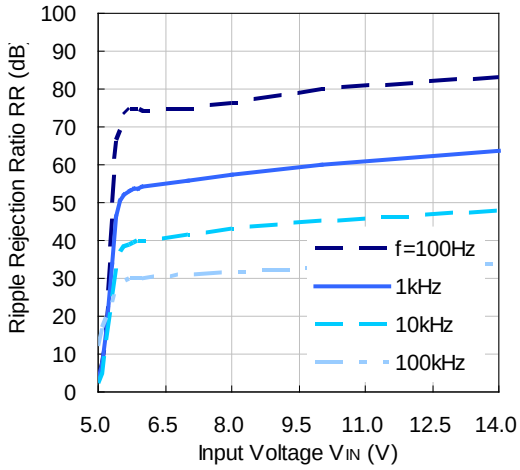



**9) Ripple Rejection vs. Frequency (Ta = 25°C, Ripple = 0.5 Vpp)**


**R1513S121B/D**

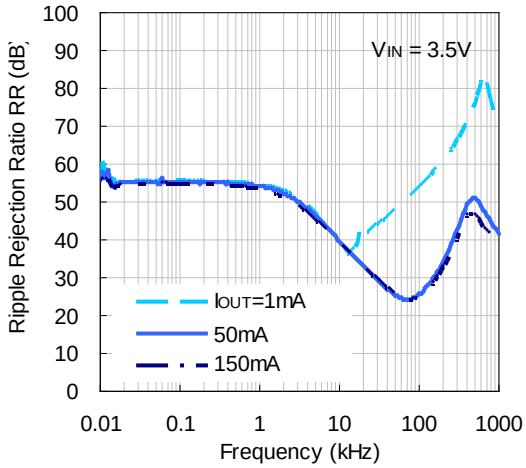


**R1513S331B/D**

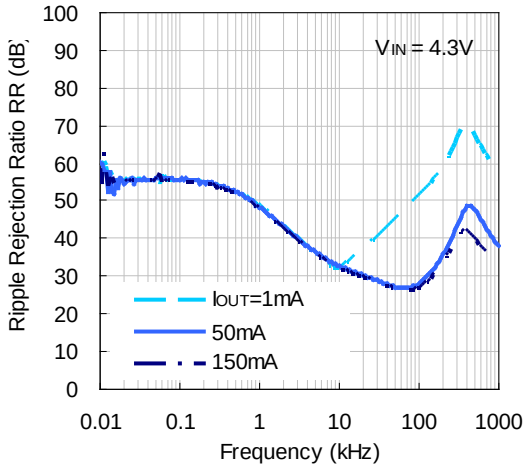



**R1513S501B/D**

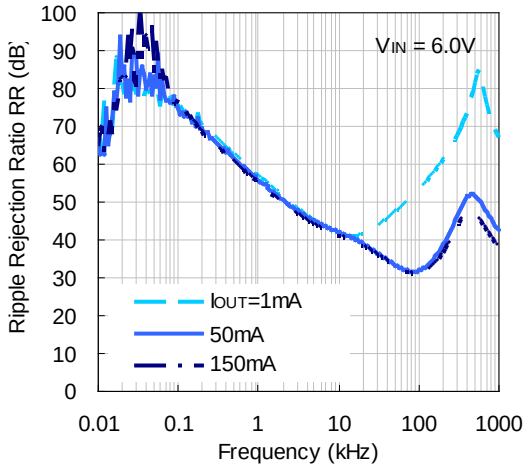


**10) Input Transient Response (Ta = 25°C, C2 = 4.7µF)**


**R1513S121B/D**

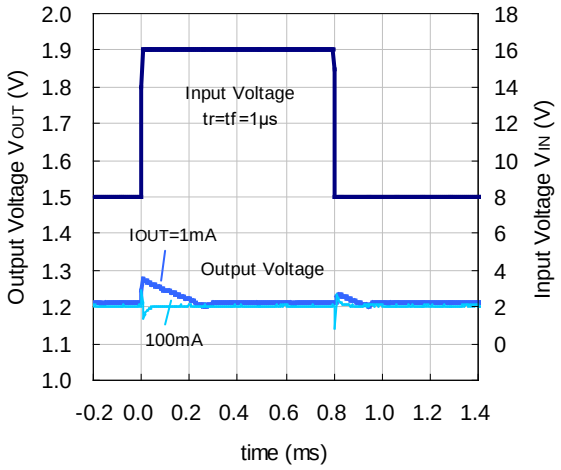


**R1513S331B/D**

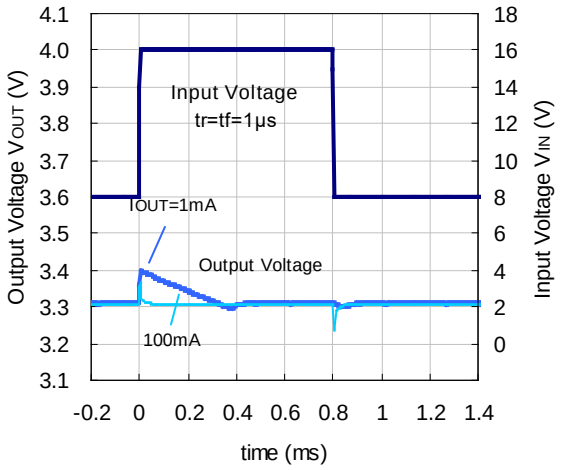



**R1513S501B/D**

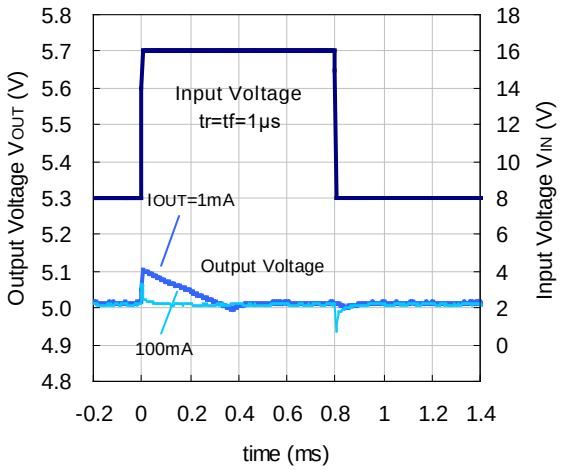



**11) Cranking (Ta = −18°C)**

**R1513S501B/D**

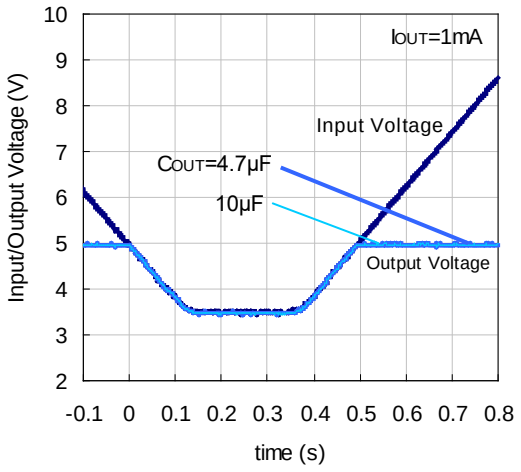



**12) Load Dumping (Ta = 25°C, C2 = 4.7 µF)**


**R1513S121B/D**

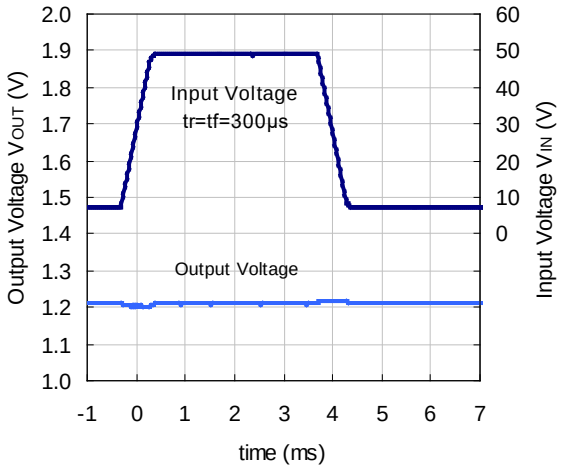

**R1513S331B/D**

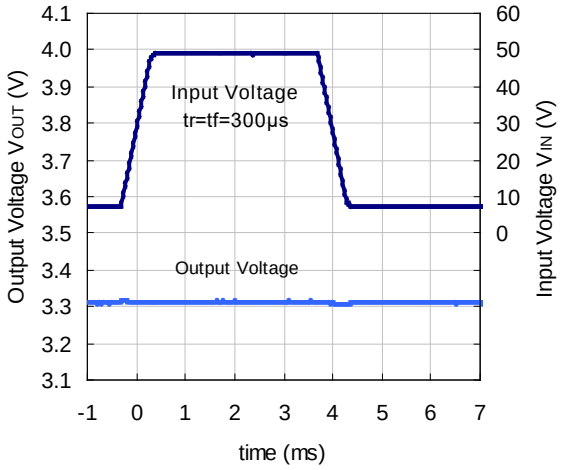



**R1513S501B/D**

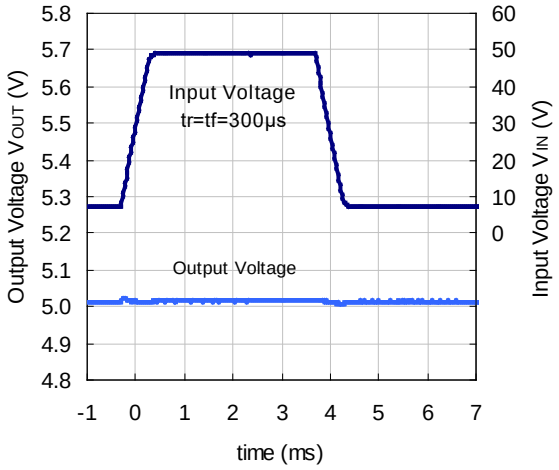



## 13) Load Transient Response (Ta = 25°C)


**R1513S121B/D**

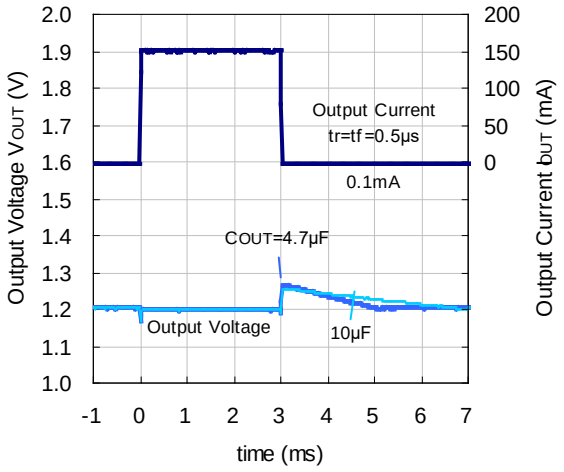


**R1513S331B/D**

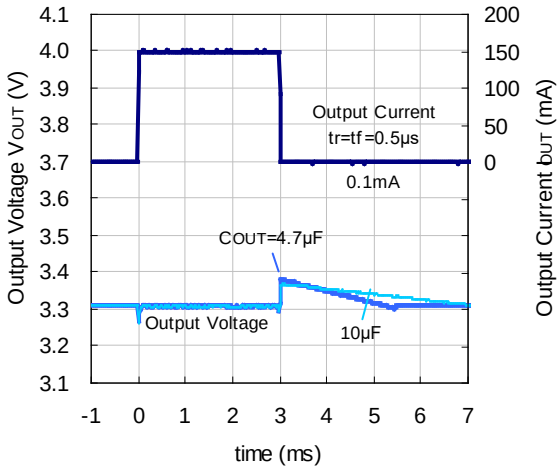




**R1513S501B/D**

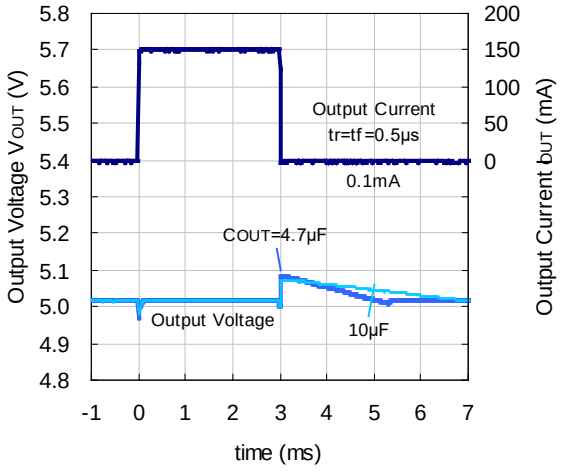


### 14) CE Transient Response (Ta = 25°C)


**R1513S121B/D ($V_{IN}$ = 3.5 V)**

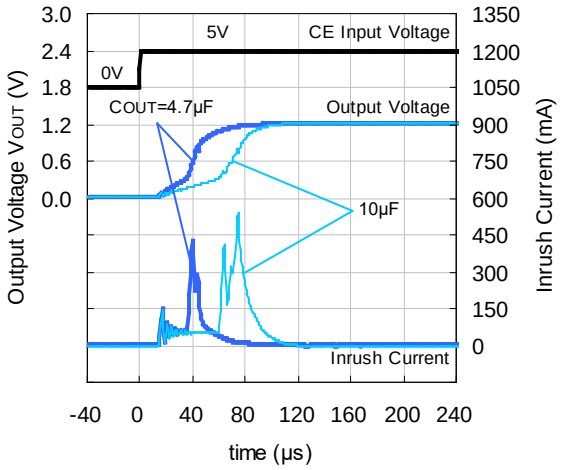

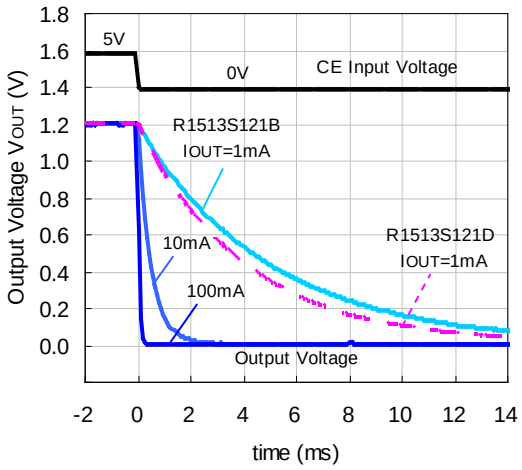



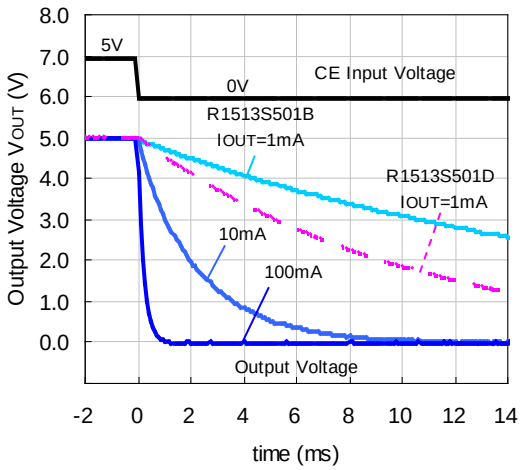

**R1513S331B/D ($V_{IN}$ = 4.3 V)**

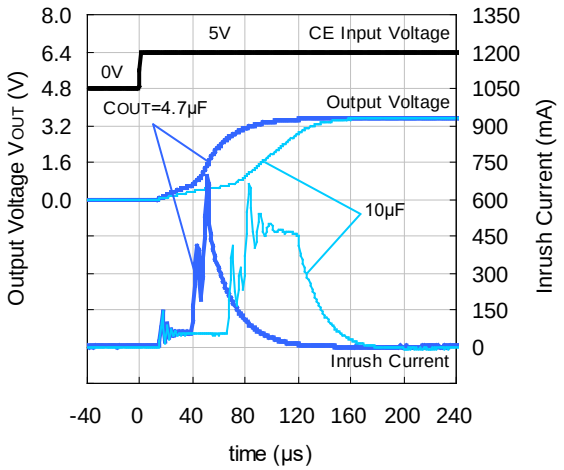

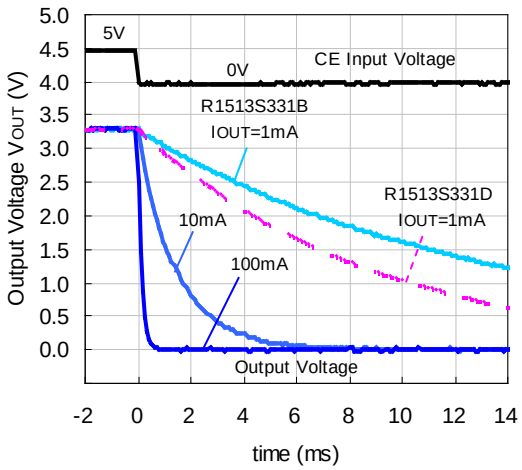

**R1513S501B/D ($V_{IN}$ = 6.0 V)**



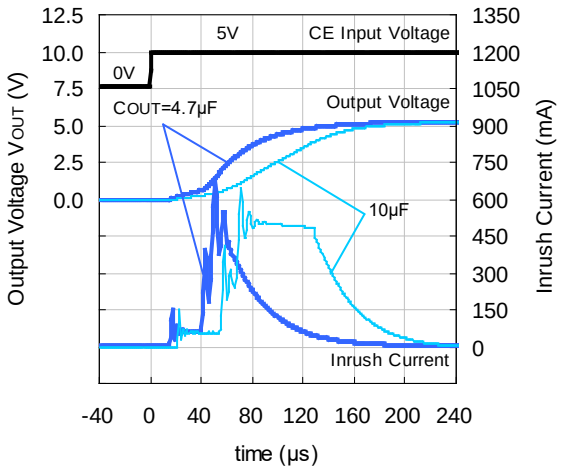



### 15) Power-on Transient Response (Ta = 25°C, $V_{CE}$ = 5 V)


**R1513S121B/D**

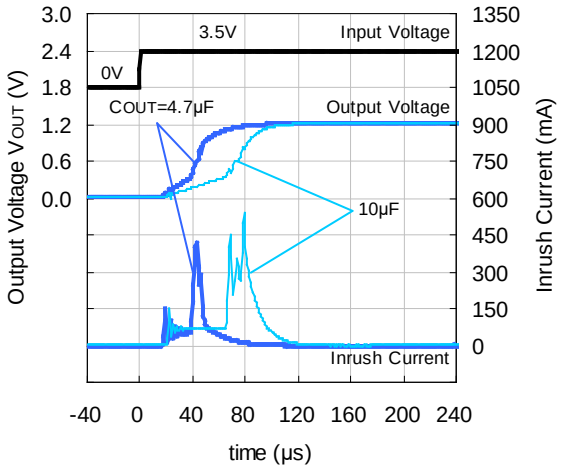


**R1513S331B/D**

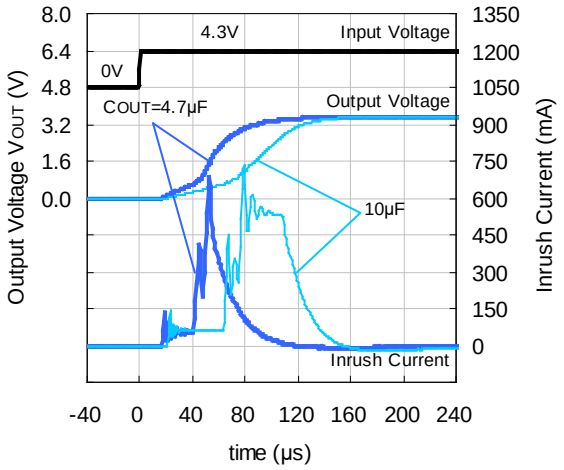



**R1513S501B/D**

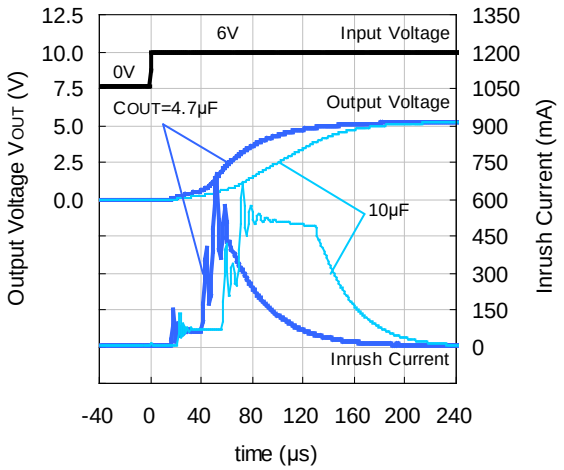



### 16) Thermal Shutdown

**R1513S501B/D**

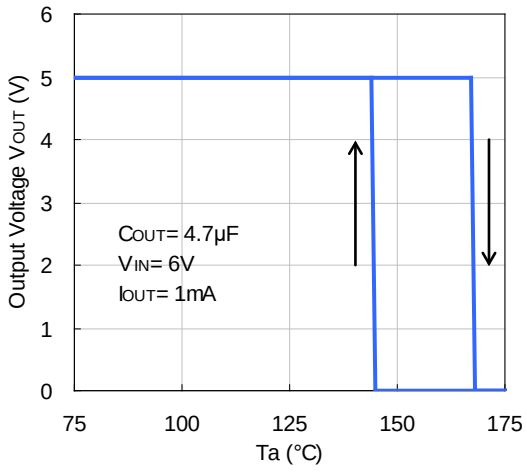



### 17) CE Pin Current vs. CE Pin Voltage (Ta = 25°C)

**R1513Sxx1B/D**

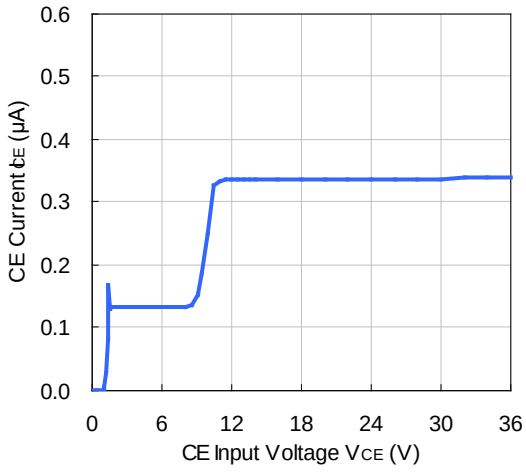


## Equivalent Series Resistance (ESR) vs. Output Current

It is recommended that a ceramic type capacitor be used for this device. However, other types of capacitors having lower ESR can also be used. The relation between the output current ($I_{OUT}$) and the ESR of output capacitor is shown below.

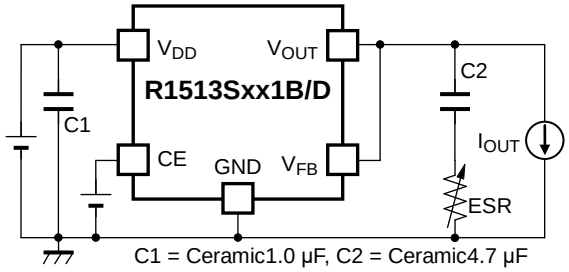


C1 = Ceramic1.0 µF, C2 = Ceramic4.7 µF

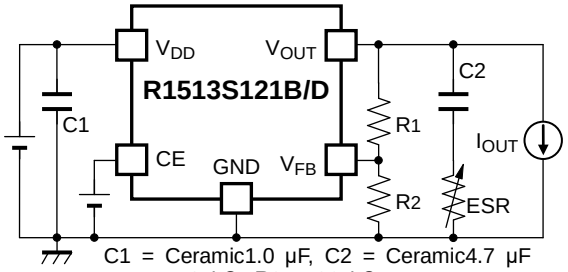


C1 = Ceramic1.0 µF, C2 = Ceramic4.7 µF
R1 = 510 kΩ, R2 = 36 kΩ

**Measurement Conditions**


Frequency Band: 10 Hz to 2 MHz

Ambient Temperature: −40°C to 125°C


Hatched Area: Noise level below 40 µV (average)

Capacitor: C1 = 1.0 µF Ceramic Capacitor, C2 = 4.7 µF Ceramic Capacitor (CGA4J3X7R1C475K125AB)


**R1513S121B/D**

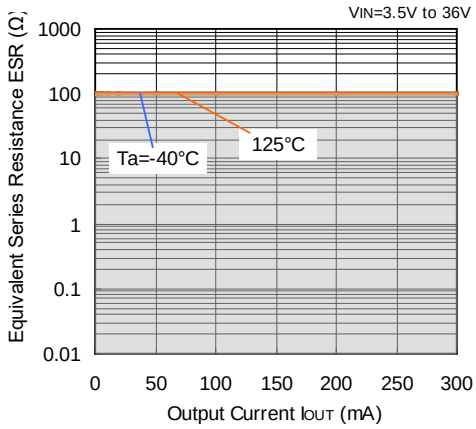



**R1513S331B/D**

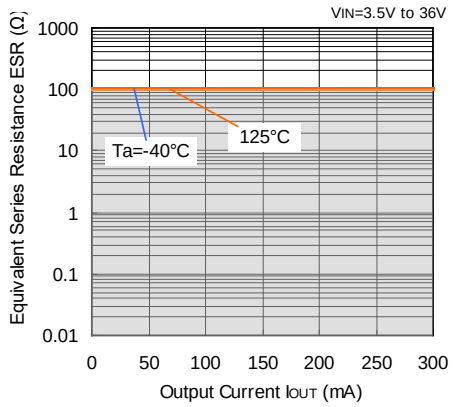


**R1513S501B/D**

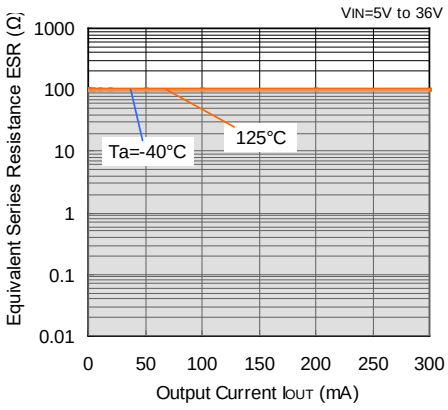


**R1513S121B/D ($V_{OUT}$ to 18.2 V)**

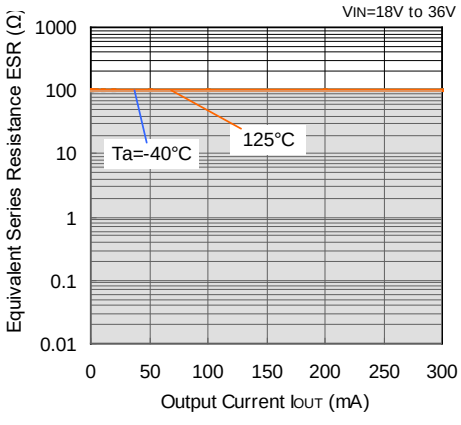

1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to our sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without the prior written consent of us.
3. This product and any technical information relating thereto are subject to complementary export controls (so-called KNOW controls) under the Foreign Exchange and Foreign Trade Law, and related politics ministerial ordinance of the law. (Note that the complementary export controls are inapplicable to any application-specific products, except rockets and pilotless aircraft, that are insusceptible to design or program changes.) Accordingly, when exporting or carrying abroad this product, follow the Foreign Exchange and Foreign Trade Control Law and its related regulations with respect to the complementary export controls.
4. The technical information described in this document shows typical characteristics and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under our or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for automotive applications. Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death should first contact us.
    - Aerospace Equipment
    - Equipment Used in the Deep Sea
    - Power Generator Control Equipment (nuclear, steam, hydraulic, etc.)
    - Life Maintenance Medical Equipment
    - Fire Alarms / Intruder Detectors
    - Vehicle Control Equipment (airplane, railroad, ship, etc.)
    - Various Safety Devices
    - Traffic control system
    - Combustion equipment

    In case your company desires to use this product for any applications other than general electronic equipment mentioned above, make sure to contact our company in advance. Note that the important requirements mentioned in this section are not applicable to cases where operation requirements such as application conditions are confirmed by our company in writing after consultation with your company.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. The products have been designed and tested to function within controlled environmental conditions. Do not use products under conditions that deviate from methods or applications specified in this datasheet. Failure to employ the products in the proper applications can lead to deterioration, destruction or failure of the products. We shall not be responsible for any bodily injury, fires or accident, property damage or any consequential damages resulting from misuse or misapplication of the products.
8. Quality Warranty

    8-1. Quality Warranty Period

    In the case of a product purchased through an authorized distributor or directly from us, the warranty period for this product shall be one (1) year after delivery to your company. For defective products that occurred during this period, we will take the quality warranty measures described in section 8-2. However, if there is an agreement on the warranty period in the basic transaction agreement, quality assurance agreement, delivery specifications, etc., it shall be followed.

    8-2. Quality Warranty Remedies

    When it has been proved defective due to manufacturing factors as a result of defect analysis by us, we will either deliver a substitute for the defective product or refund the purchase price of the defective product.
    Note that such delivery or refund is sole and exclusive remedies to your company for the defective product.

    8-3. Remedies after Quality Warranty Period

    With respect to any defect of this product found after the quality warranty period, the defect will be analyzed by us. On the basis of the defect analysis results, the scope and amounts of damage shall be determined by mutual agreement of both parties. Then we will deal with upper limit in Section 8-2. This provision is not intended to limit any legal rights of your company.
9. Anti-radiation design is not implemented in the products described in this document.
10. The X-ray exposure can influence functions and characteristics of the products. Confirm the product functions and characteristics in the evaluation stage.
11. WLCSP products should be used in light shielded environments. The light exposure can influence functions and characteristics of the products under operation or storage.
12. Warning for handling Gallium and Arsenic (GaAs) products (Applying to GaAs MMIC, Photo Reflector). These products use Gallium (Ga) and Arsenic (As) which are specified as poisonous chemicals by law. For the prevention of a hazard, do not burn, destroy, or process chemically to make them as gas or power. When the product is disposed of, please follow the related regulation and do not mix this with general industrial waste or household waste.
13. Please contact our sales representatives should you have any questions or comments concerning the products or the technical information.

NISSHINBO

Nisshinbo Micro Devices Inc.

**Official website**
**https://www.nisshinbo-microdevices.co.jp/en/**

**Purchase information**
**https://www.nisshinbo-microdevices.co.jp/en/buy/**

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

# Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

### Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

**www.entegreci.com**

### Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

**Kategorilere göz atın**

### Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

**Üreticileri görün**

### Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

**Teklif isteyin**

**www.entegreci.com** | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.