60 V 100 mA Low Power Voltage Regulator

No. EA-397-240322

OVERVIEW

The R1561x is a CMOS-based low power voltage regulator featuring 60 V input voltage and 100 mA output current. The device includes a short current limit circuit, an overcurrent protection circuit and a thermal shutdown. These features make the R1561x an ideal constant voltage power source for electrical appliances.

KEY BENEFITS

- Low power consumption and excellent transient response help to provide stable power supply.
- The input voltage range is as wide as 5.5 V to 60 V, and the output voltage accuracy is as high as ±0.8%.
- High heat dissipation and space-saving HSOP-6J and TO-252-5-P2 packages.

KEY SPECIFICATIONS


- Input Voltage Range (Max. Rating): 5.5 V to 60 V (80 V)
- Operating Temperature Range: −40°C to 105°C
- Supply Current: Typ. 20 µA
- Dropout Voltage: Typ. 1.3 V
  (I_{OUT} = 100 mA, V_{OUT} = 5.0 V)
- Output Voltage Accuracy: ±0.8% (Ta = 25°C)
- Temp. Coefficient of Output Voltage: Typ. ±100 ppm/°C
- Line Regulation: Typ. 0.01%/V (6 V ≤ V_{IN} ≤ 60 V)
- Short-circuit Current Limiting: limits to Typ. 50 mA
- Overcurrent Protection: triggers at Typ. 150 mA
- Thermal Shutdown: triggers at Typ.165°C

SELECTION GUIDE


Product Name	Package
R1561Sxx1B-E2-FE	HSOP-6J
R1561Jxx1B-T1-FE	TO-252-5-P2

xx: Set Output Voltage (V_{SET})
1.8 V (18) / 2.5 V (25) / 2.8 V (28) / 3.0 V (30) / 3.3 V (33) / 3.4 V (34) / 5.0 V (50) / 7.0 V (70) / 8.0 V (80) / 9.0 V (90) / 10.0 V (A0) / 12.0 V (C0) / 14.0 V (E0)


TYPICAL APPLICATIONS

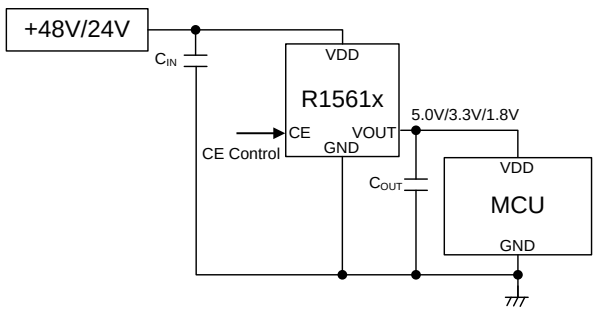

PACKAGES



HSOP-6J
5.02 x 6.0 x 1.5 (mm)



TO-252-5-P2
6.6 x 9.9 x 2.3 (mm)

APPLICATIONS

- Refrigerators, Rice Cookers and Electric Kettles
- Laptop PCs, Digital TVs, Telephones and Home LAN System

SELECTION GUIDE

The output voltage and the package type are user-selectable options.


Selection Guide

Product Name	Package	Quantity per Reel	Pb Free	Halogen Free
R1561Sxx1B-E2-FE	HSOP-6J	1,000 pcs	Yes	Yes
R1561Jxx1B-T1-FE	TO-252-5-P2	3,000 pcs	Yes	Yes

xx: Set Output Voltage (V_{SET})


1.8 V (18) / 2.5 V (25) / 2.8 V (28) / 3.0 V (30) / 3.3 V (33) / 3.4 V (34) / 5.0 V (50) /
7.0 V (70) / 8.0 V (80) / 9.0 V (90) / 10.0 V (A0) / 12.0 V (C0) / 14.0 V (E0)

BLOCK DIAGRAM

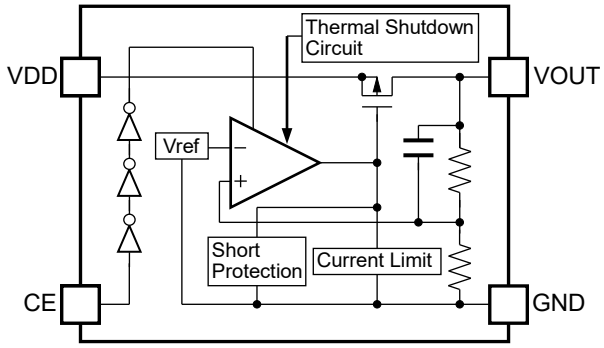


R1561x Block Diagram

PIN DESCRIPTIONS



HSOP-6J Pin Configuration



TO-252-5-P2 Pin Configuration


HSOP-6J Pin Description

Pin No.	Pin Name	Description
1	VOUT	Output Pin
2	GND(1)	Ground Pin
3	CE	Chip Enable Pin, Active-high
4	GND(1)	Ground Pin
5	GND(1)	Ground Pin
6	VDD	Input Pin


TO-252-5-P2 Pin Description

Pin No.	Pin Name	Description
1	VDD	Input Pin
2	NC	No Connection
3	GND	Ground Pin
4	VOUT	Output Pin
5	CE	Chip Enable Pin, Active-high

Pin Equivalent Circuit Diagrams



VOUT Pin Equivalent Circuit Diagram



CE Pin Equivalent Circuit Diagram

(1) The GND pins are connected to each other on the board.

ABSOLUTE MAXIMUM RATINGS

Absolute Maximum Ratings

Symbol	Parameter			Rating	Unit
V_{IN}	Input Voltage			−0.3 to 80	V
V_{IN}	Peak Inrush Voltage(1)			90	V
V_{CE}	CE Pin Input Voltage			−0.3 to 80	V
V_{OUT}	Output Voltage			−0.3 to V_{IN} + 0.3 ≤ 80	V
I_{OUT}	Output Current			150	mA
P_D	Power Dissipation(2)	HSOP-6J	JEDEC STD.51-7	2700	mW
		TO-252-5-P2	JEDEC STD.51-7	3800	
Tj	Junction Temperature			−40 to 125	°C
Tstg	Storage Temperature Range			−55 to 125	°C

ABSOLUTE MAXIMUM RATINGS
Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause permanent damage and may degrade the life time and safety for both device and system using the device in the field. The functional operation at or over these absolute maximum ratings is not assured.

RECOMMENDED OPERATING CONDITIONS

Recommended Operating Conditions

Symbol	Parameter	Rating	Unit
V_{IN}	Input Voltage	5.5 to 60	V
Ta	Operating Temperature Range	−40 to 105	°C

RECOMMENDED OPERATING CONDITONS
All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

(1) Duration: 200 ms or less
(2) Refer to *POWER DISSIPATION* for detailed information.

ELECTRICAL CHARACTERISTICS

C_{IN} = 0.1 µF / C_{OUT} = 10 µF, unless otherwise noted.

The specifications surrounded by [ ] are guaranteed by design engineering at −40°C ≤ Ta ≤ 105°C.

R1561x Electrical Characteristics (Ta = 25°C)

Symbol	Parameter	Test Conditions/Comments		Min.	Typ.	Max.	Unit
I_{SS}	Supply Current	V_{IN} = 14 V V_{CE} = 14 V I_{OUT} = 0 mA	V_{SET} ≤ 5.0 V		20.0	[30.0]	µA
		V_{IN} = 18 V V_{CE} = 18 V I_{OUT} = 0 mA	V_{SET} > 5.0 V		23.0	[38.0]	
Istandby	Standby Current	V_{IN} = 60 V, V_{CE} = 0 V			0.1	[2.0]	µA
V_{OUT}	Output Voltage	V_{SET} ≤ 5.0 V V_{IN} = 14 V I_{OUT} = 1 mA	Ta = 25°C	×0.992		×1.008	V
			−40°C ≤ Ta ≤ 105°C	[×0.985]		[×1.015]	
		V_{SET} > 5.0 V V_{IN} = 18 V I_{OUT} = 1 mA	Ta = 25°C	×0.988		×1.012	
			−40°C ≤ Ta ≤ 105°C	[×0.980]		[×1.020]	
ΔV_{OUT} /ΔI_{OUT}	Load Regulation	V_{IN} = 8 V (V_{SET} ≤ 5.0 V) V_{IN} = V_{SET} + 3V (V_{SET} > 5.0 V) 1 mA ≤ I_{OUT} ≤ 100 mA		Refer to Voltage-specific Electrical Characteristics			
ΔV_{OUT} /ΔV_{IN}	Line Regulation	6 V ≤ V_{IN} ≤ 60 V I_{OUT} = 1 mA	V_{SET} ≤ 5.0 V	[−0.02]	0.01	[0.02]	%/V
		V_{SET}+1 V ≤ V_{IN} ≤ 60 V I_{OUT} = 1 mA	V_{SET} > 5.0 V	[−0.02]	0.01	[0.02]	
V_{DIF}	Dropout Voltage	I_{OUT} = 100 mA		Refer to Voltage-specific Electrical Characteristics			
I_{LIM}	Output Current Limit	V_{IN} = 8.0 V (V_{SET} ≤ 5.0 V) V_{IN} = V_{SET} + 3 V (V_{SET} > 5.0 V)		[100]	150	[250]	mA
I_{SC}	Short-circuit Current	V_{IN} = 8.0 V (V_{SET} ≤ 5.0 V) V_{IN} = V_{SET} + 3 V (V_{SET} > 5.0 V) V_{OUT} = 0 V		[20]	50	[75]	mA
V_{CEH}	CE Input Voltage “H”	V_{IN} = 60 V		[3.0]		60	V
V_{CEL}	CE Input Voltage “L”	V_{IN} = 60 V		0		[0.3]	V
I_{PD}	CE Pull-down Current	V_{IN} = 60 V, V_{CE} = 3 V			0.4	[0.8]	µA
T_{TSD}	Thermal Shutdown Temperature	Junction Temperature		[150]	165		°C
T_{TSR}	Thermal Shutdown Release Temperature (1)	Junction Temperature		[125]	135		°C

All parameters are tested under the pulse load condition (Tj ≈ Ta = 25°C).

(1) If the VDD and CE pins are turned on at the same time when Ta > 125°C, the thermal shutdown can be activated.

R1561x Product-specific Electrical Characteristics (Ta = 25°C)


Product Name	V_{OUT} (V) (Ta = 25°C)			V_{OUT} (V) (−40°C ≤ Ta ≤ 105°C)			$\Delta V_{OUT}/\Delta I_{OUT}$ (mV)			V_{DIF} (V)	
	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.	Max.
R1561x181B	1.7856	1.80	1.8144	1.7730	1.80	1.8270				3.7	4.0
R1561x251B	2.4800	2.50	2.5200	2.4625	2.50	2.5375				3.0	3.6
R1561x281B	2.7776	2.80	2.8224	2.7580	2.80	2.8420				2.7	3.6
R1561x301B	2.9760	3.00	3.0240	2.9550	3.00	3.0450	-30	3	30	2.5	3.6
R1561x331B	3.2736	3.30	3.3264	3.2505	3.30	3.3495				2.2	3.0
R1561x341B	3.3728	3.40	3.4272	3.3490	3.40	3.4510				2.1	3.0
R1561x501B	4.9600	5.00	5.0400	4.9250	5.00	5.0750				1.3	2.5
R1561x701B	6.9160	7.00	7.0840	6.8600	7.00	7.1400				1.3	2.5
R1561x801B	7.9040	8.00	8.0960	7.8400	8.00	8.1600				1.3	2.5
R1561x901B	8.8920	9.00	9.1080	8.8200	9.00	9.1800				1.3	2.5
R1561xA01B	9.8800	10.00	10.120	9.8000	10.0	10.200	-40	4	40	1.3	2.5
R1561xC01B	11.856	12.00	12.144	11.760	12.0	12.240				1.3	2.5
R1561xE01B	13.832	14.00	14.168	13.720	14.0	14.280				1.3	2.5

THEORY OF OPERATION

Thermal Shutdown

If the junction temperature increases above 165°C (Typ.), the operation of the regulator would stop. And if the junction temperature decreases below 135°C (Typ.), the operation of the regulator would restart. Unless the causes of temperature rising are removed, the regulator repeats turning on and off and the output waveform becomes a pulse shape.


APPLICATION INFORMATION

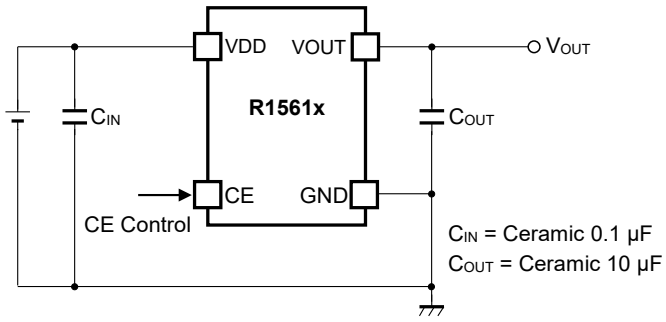

R1561x Typical Applications

Equivalent Series Resistance vs. Output Current

It is recommended that a ceramic type capacitor be used for this device. However, other types of capacitors having lower ESR can also be used. The relation between the output current (I_{OUT}) and the ESR of output capacitor is shown below.

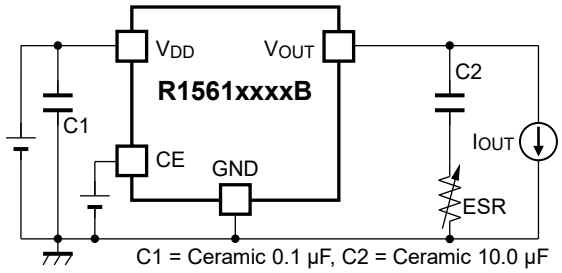

Measurement Conditions

Frequency Band: 10 Hz to 2 MHz
Measurement Temperature: −40°C to 105°C
Capacitor: C1 = Ceramic 0.1 µF, C2 = Ceramic 10.0 µF
ESR: 0 to 100 Ω
V_{OUT}: 1.8 V, 5.0 V
It is confirmed that the output noise level is less than the specified value (40 µVrms) under the measurement conditions above.

TECHNICAL NOTES

The performance of a power source circuit using this device is highly dependent on a peripheral circuit. A peripheral component or the device mounted on PCB should not exceed its rated voltage, rated current or rated power. When designing a peripheral circuit, please be fully aware of the following points.

Phase Compensation

A phase compensation is provided to secure stable operation even when the load current is varied. For this purpose, use a 10-µF or more output capacitor (C_{OUT}) with good frequency characteristics and proper ESR (Equivalent Series Resistance). In case of using a tantalum type capacitor with a large ESR, the output might become unstable. Evaluate your circuit including consideration of frequency characteristics. Connect a 0.1-µF or more input capacitor (C_{IN}) between the VDD and GND pins with shortest-distance wiring.

PCB Layout

As for the HSOP-6J package, ensure that the GND pins (Pin No. 2, 4 and 5) are connected to each other and the ground plane.

Operating the Device below the Minimum Operating Voltage

Operating the device below the recommended operating voltage range can make the output voltage unstable and make the output voltage higher than the set output voltage (V_{SET}) of the device.

In the case of turning on the VIN and CE pins at the same time, both pins must be turned on using a 100-V/ms or more slew rate in order to prevent the unstable operation upon start-up. In the case of turning on the VIN pin using a 100-V/ms or less slew rate, the CE pin must be turned on after the supply voltage becomes 5.5 V or more.


In the case of turning off the VIN and CE pins at the same time, both pins must be turned off using a steep slew rate, -100 V/ms or higher in order to prevent the unstable operation. In the case of turning off the VIN pin using a slow rate, lower than -100 V/ms, the CE pin must be turned off before the supply voltage decreases to 5.5 V.

TYPICAL CHARACTERISTICS


Note: Typical Characteristics are intended to be used as reference data; they are not guaranteed.

1) Output Voltage vs. Output Current (Ta = 25°C)


R1561x181B

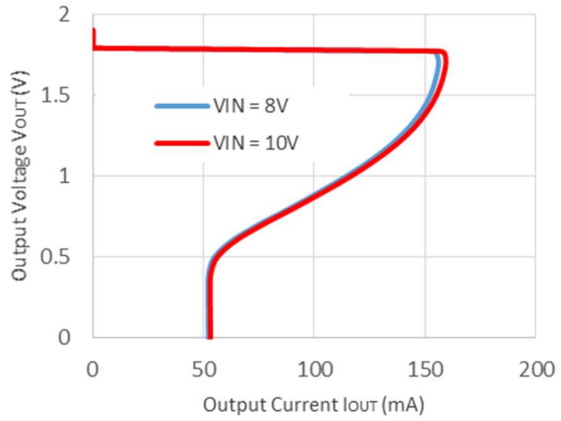

R1561x501B

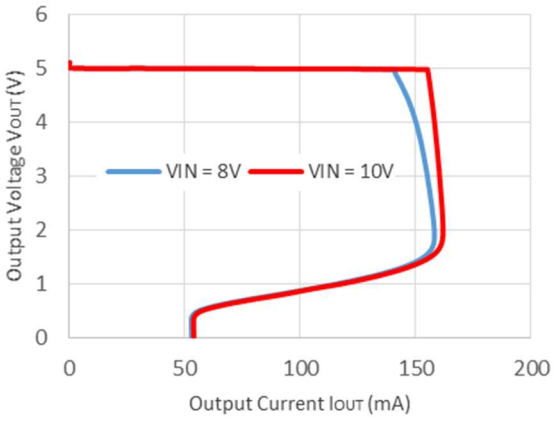


R1561xE01B

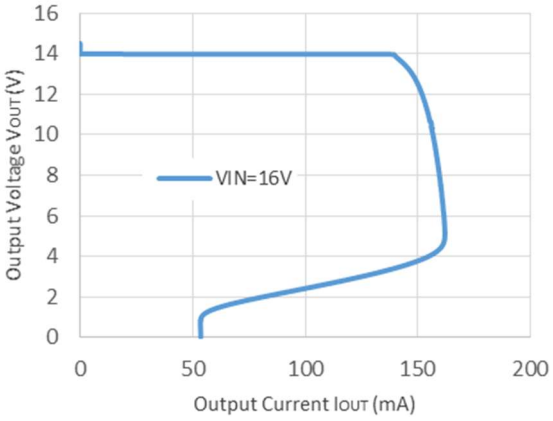


2) Output Voltage vs. Input Voltage (Ta = 25°C)


R1561x181B

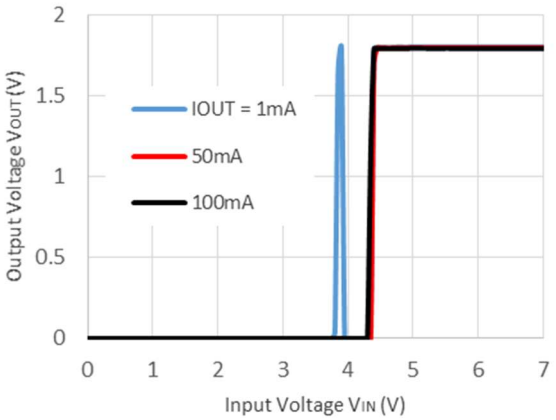

R1561x501B

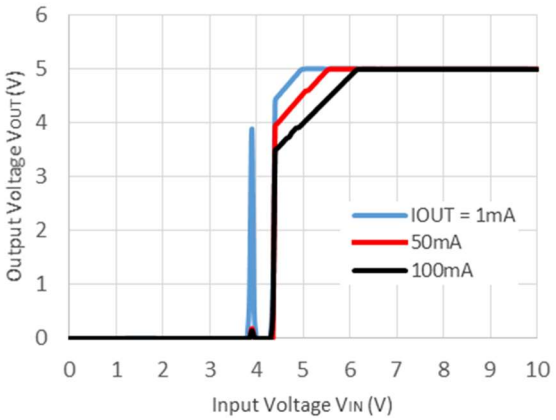


R1561xE01B

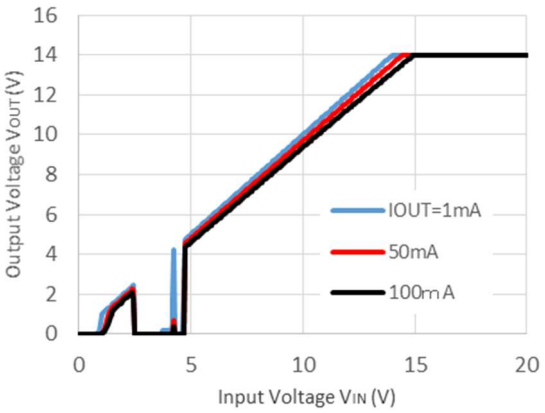


3) Supply Current vs. Temperature


R1561x181B

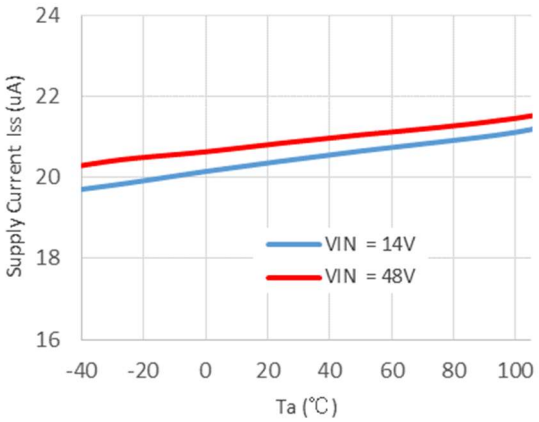

R1561x501B

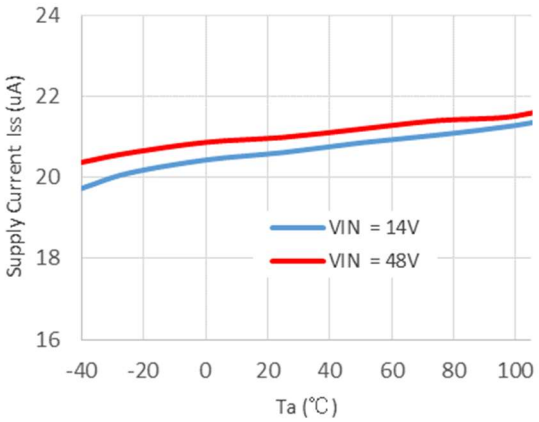


R1561xE01B

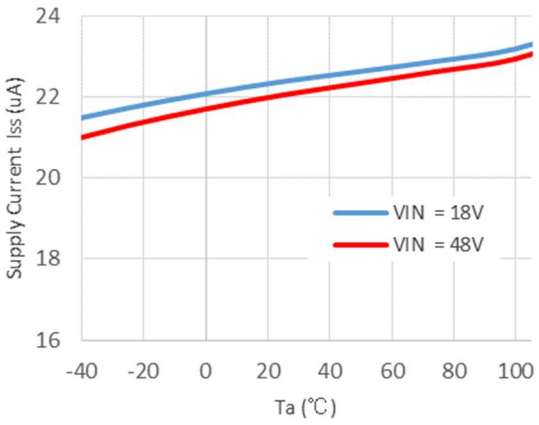


4) Output Voltage vs. Temperature (I_{OUT} = 1 mA)


R1561x181B

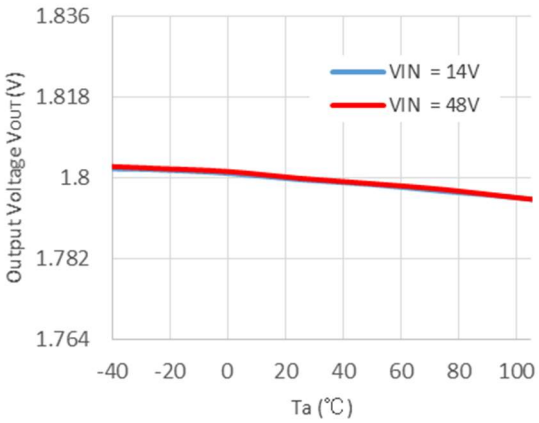

R1561x501B

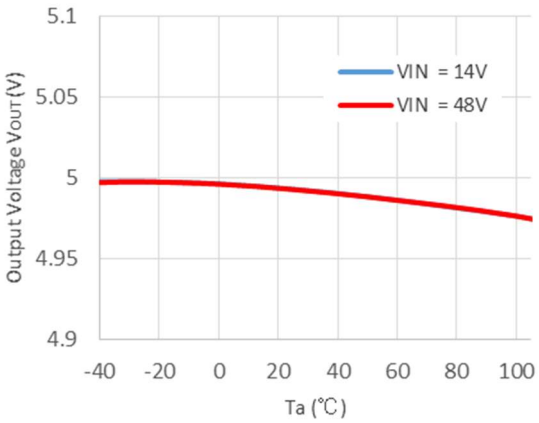


R1561xE01B

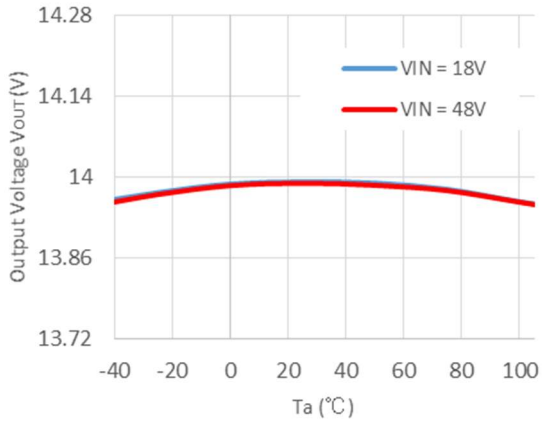


5) Supply Current vs. Input Voltage


R1561x181B

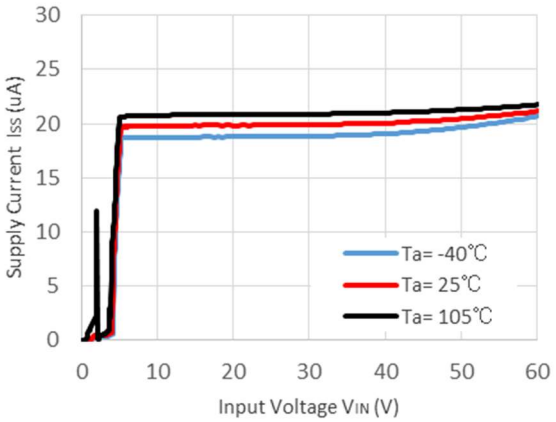

R1561x501B

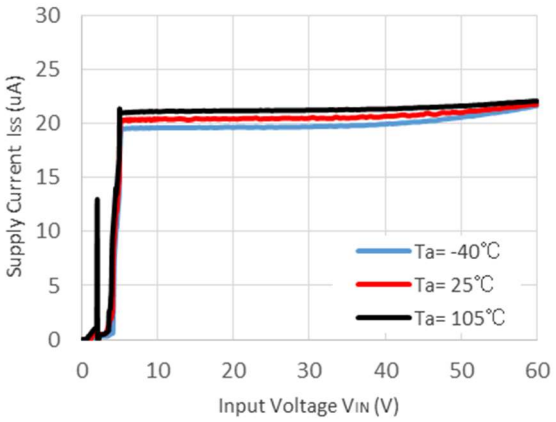


R1561xE01B

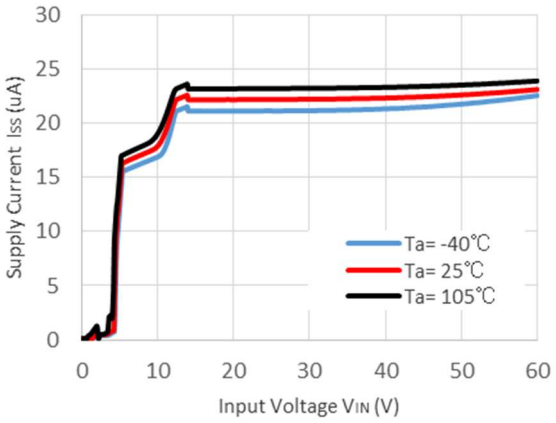


6) Dropout Voltage vs. Output Current


R1561x181B

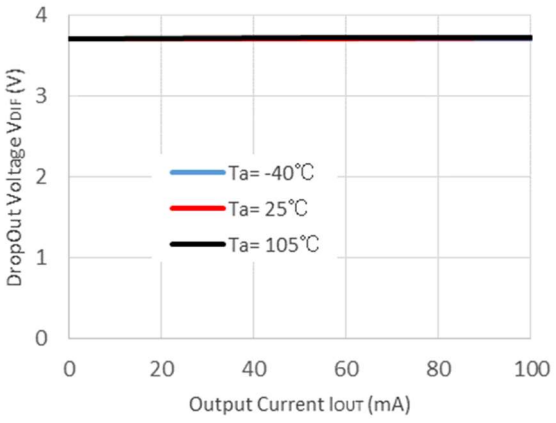

R1561x501B

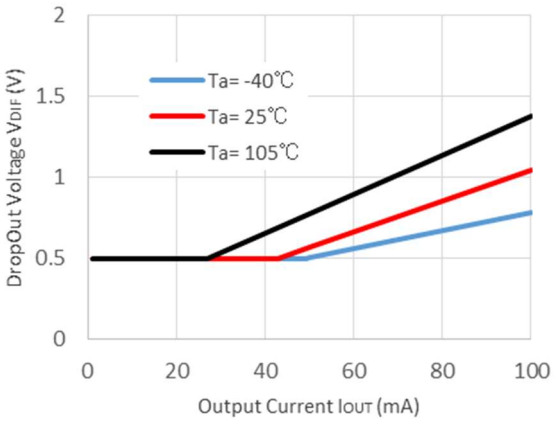


R1561xE01B

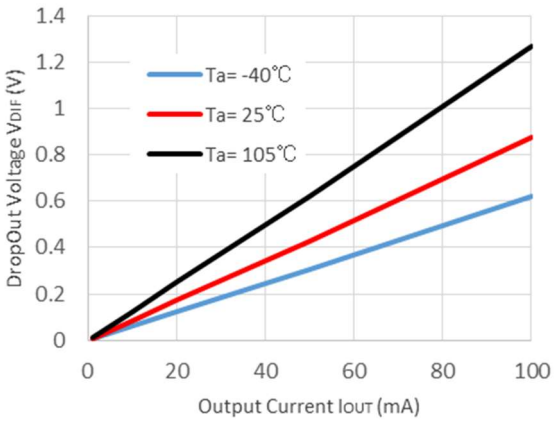


7) Ripple Rejection vs. Input Bias Voltage (Ta = 25°C, V_{RIPPLE} = ± 0.2 V, C_{OUT} = 10 µF)


R1561x181B

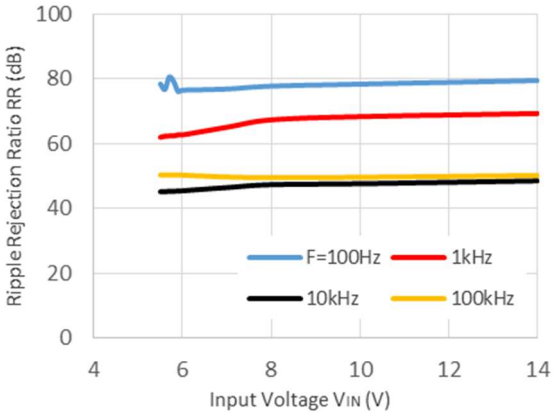

R1561x501B

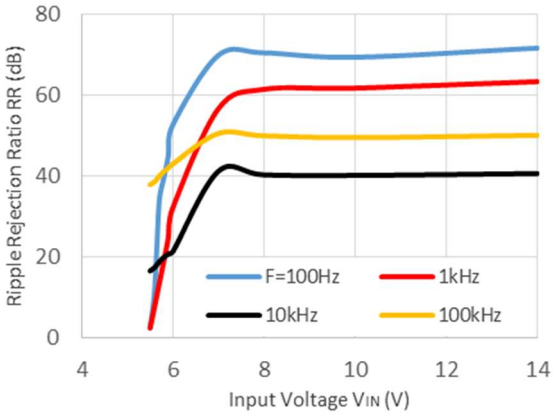


R1561xE01B

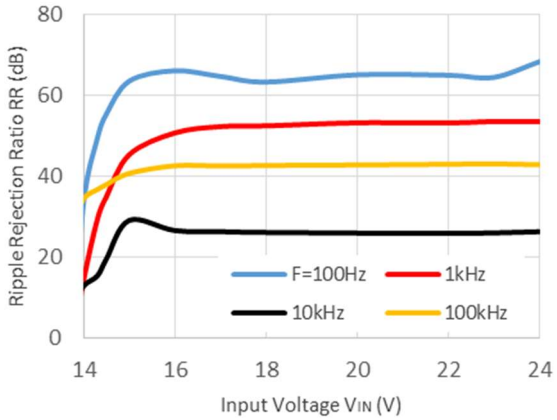

8) Ripple Rejection vs. Frequency (Ta = 25°C, C_{OUT} = 10 µF)


R1561x181B

V_{IN} = 14 V ± 0.2 V ripple

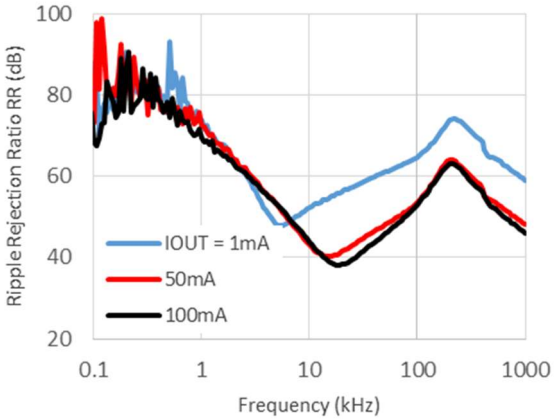


R1561x501B

V_{IN} = 14 V ± 0.2 V ripple

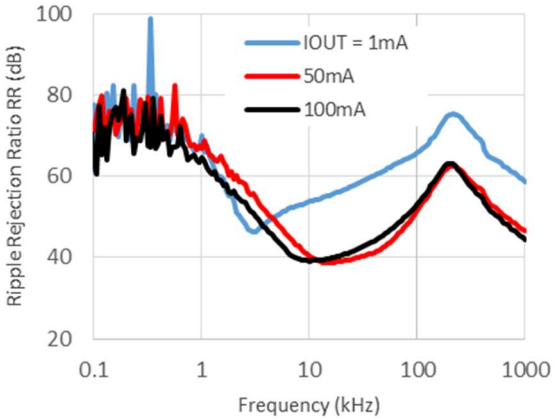


R1561xE01B

V_{IN} = 18 V ± 0.2 V ripple

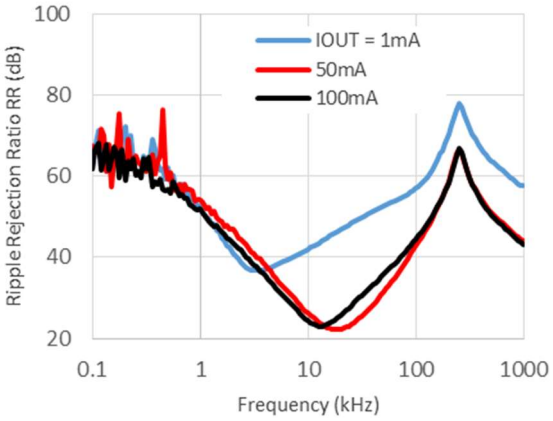


9) Input Transient Response (Ta = 25°C, I_{OUT} = 1 mA, C_{OUT} = 10 µF)


R1561x181B

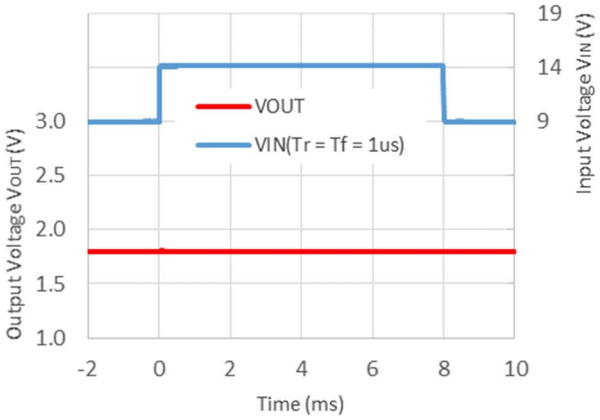

R1561x501B

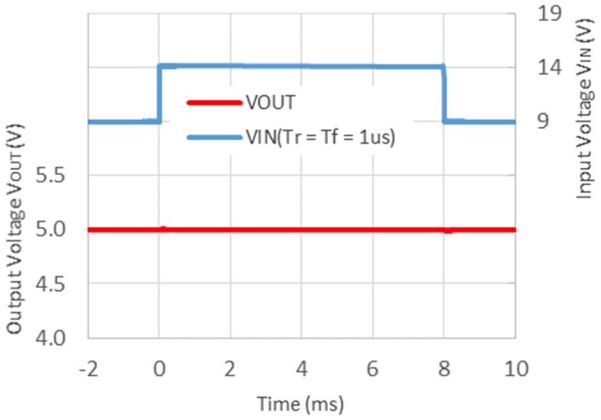


R1561xE01B

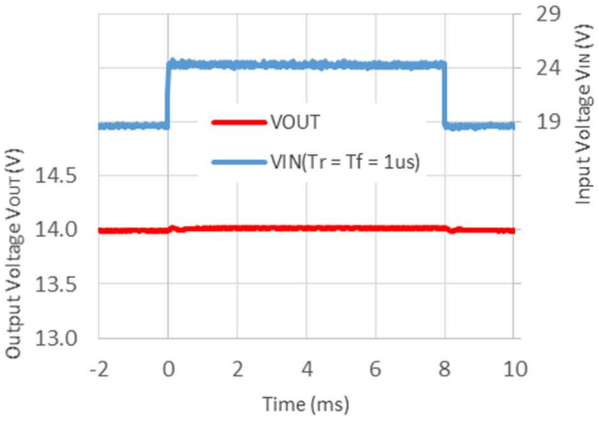


10) Load Dump (Ta = 25°C, I_{OUT} = 1 mA, C_{OUT} = 10 µF)


R1561x181B

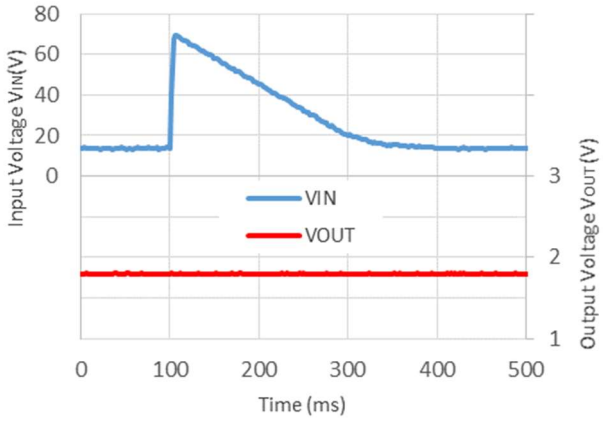

R1561x501B

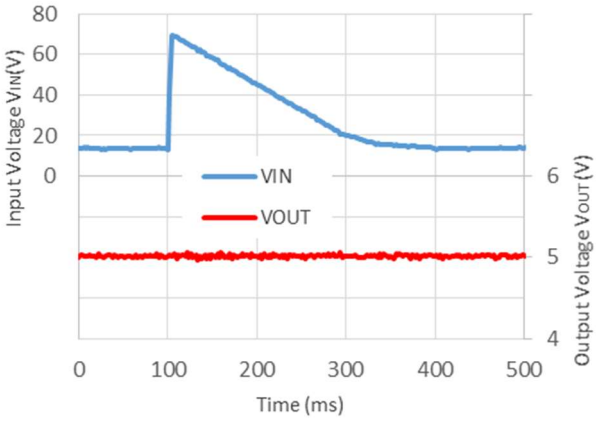


R1561xE01B

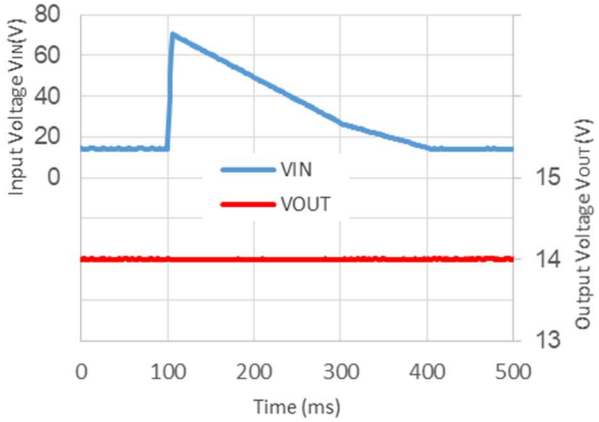

11) Load Transient Response (Ta = 25°C, I_{OUT} = 1 mA ↔ 50 mA, C_{OUT} = 10 µF)


R1561x181B

V_{IN} = 14 V, I_{OUT} = 1 mA → 50 mA

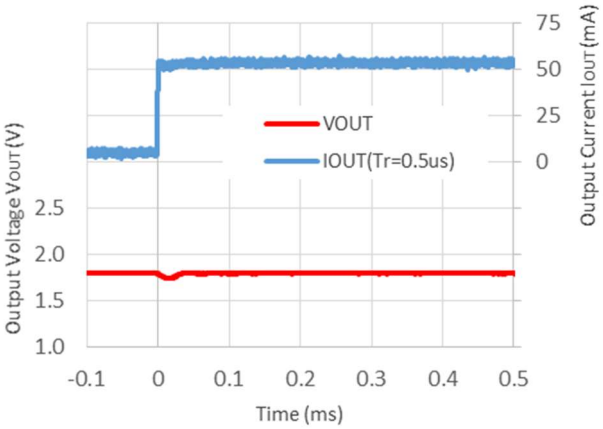


R1561x181B

V_{IN} = 14 V, I_{OUT} = 50 mA → 1 mA

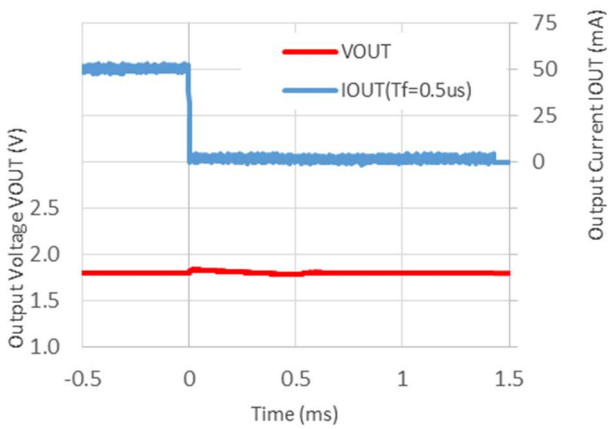


R1561x501B

V_{IN} = 14 V, I_{OUT} = 1 mA → 50 mA

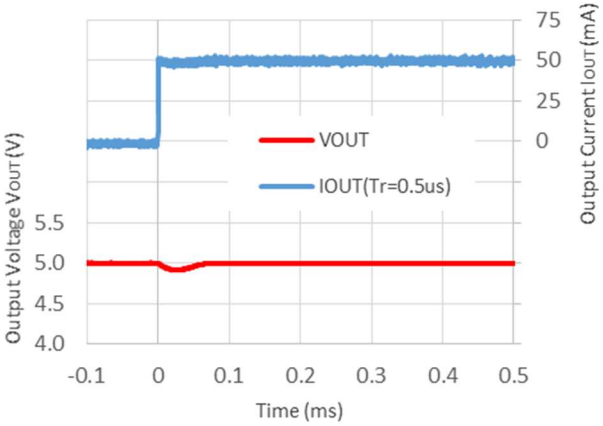


R1561x501B

V_{IN} = 14 V, I_{OUT} = 50 mA → 1 mA

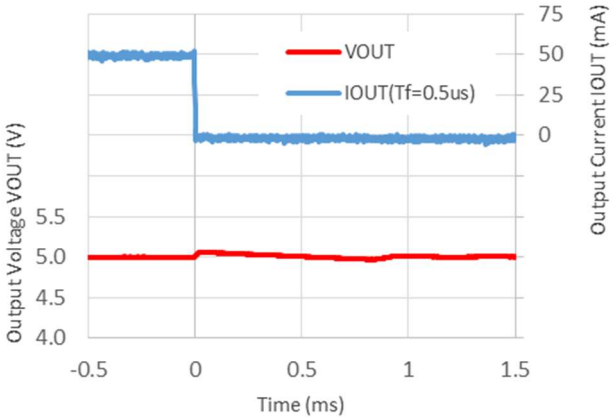


R1561xE01B

V_{IN} = 18 V, I_{OUT} = 1 mA → 50 mA

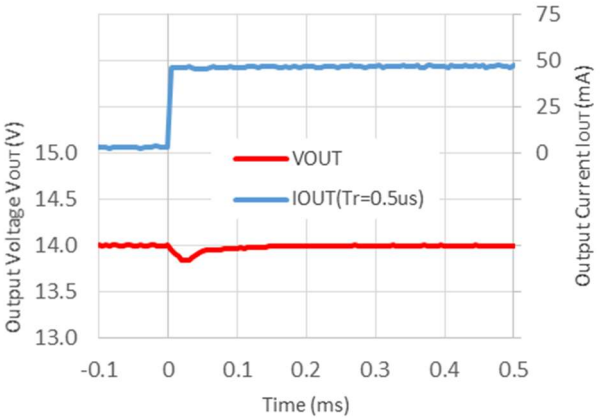

R1561xE01B


V_{IN} = 18 V, I_{OUT} = 50 mA → 1 mA

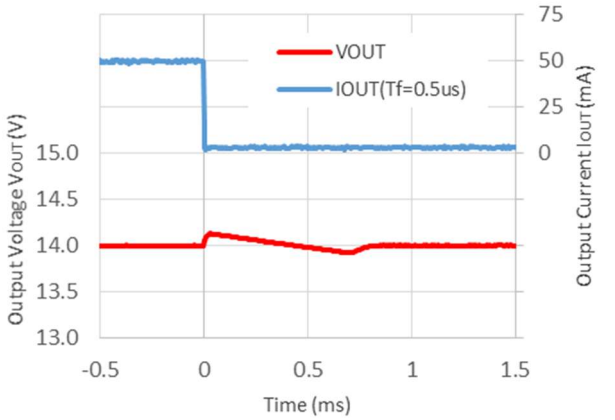

12) CE Start-up (Ta = 25°C)


R1561x181B

V_{IN} = 14 V, C_{OUT} = 10 µF

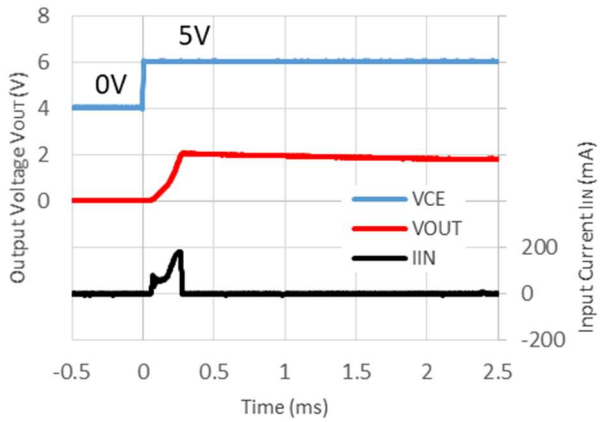


R1561x501B

V_{IN} = 14 V, C_{OUT} = 10 µF

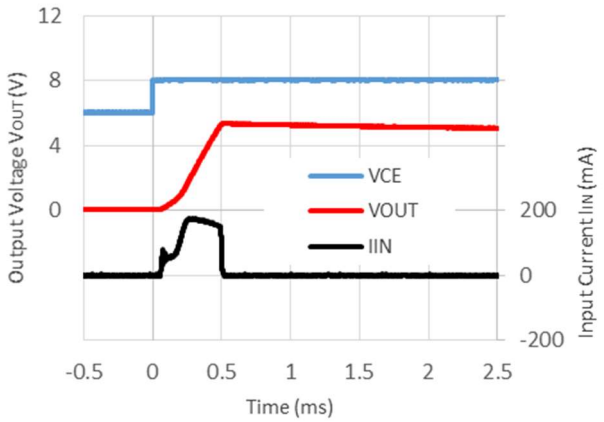

R1561xE01B

V_{IN} = 18 V, C_{OUT} = 10 µF

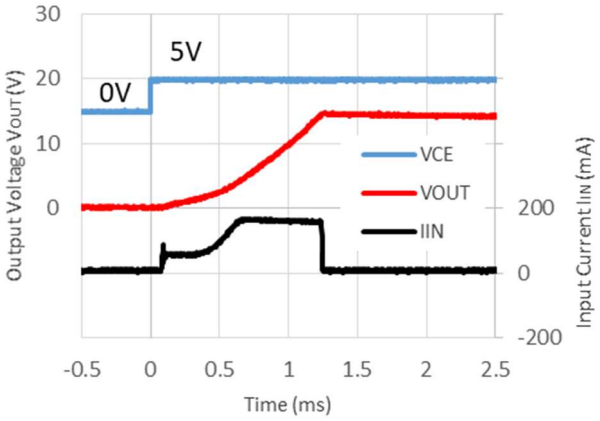

PD-HSOP-6J-(105125)-JE-A

The power dissipation of the package is dependent on PCB material, layout, and environmental conditions. The following measurement conditions are based on JEDEC STD. 51-7.

Measurement Conditions


Item	Measurement Conditions
Environment	Mounting on Board (Wind Velocity = 0 m/s)
Board Material	Glass Cloth Epoxy Plastic (Four-Layer Board)
Board Dimensions	76.2 mm × 114.3 mm × 0.8 mm
Copper Ratio	Outer Layer (First Layer): Less than 95% of 50 mm Square Inner Layers (Second and Third Layers): Approx. 100% of 50 mm Square Outer Layer (Fourth Layer): Approx. 100% of 50 mm Square
Through-holes	ϕ 0.3 mm × 28 pcs

Measurement Result (Ta = 25°C, Tjmax = 125°C)


Item	Measurement Result
Power Dissipation	2700 mW
Thermal Resistance (θja)	θja = 37°C/W
Thermal Characterization Parameter (ψjt)	ψjt = 7°C/W

θja: Junction-to-Ambient Thermal Resistance


ψjt: Junction-to-Top Thermal Characterization Parameter

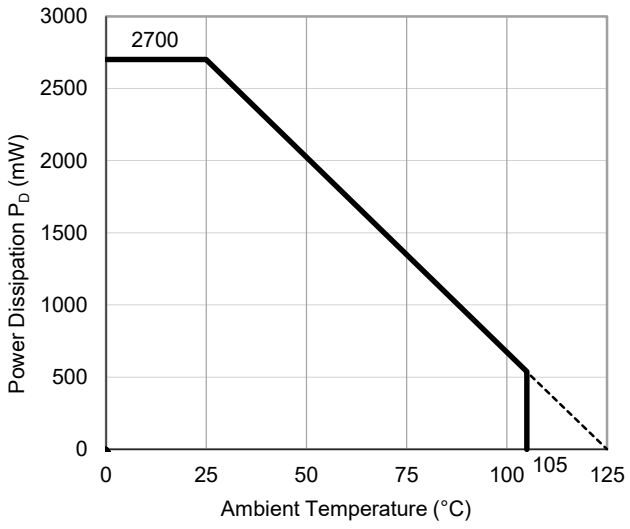

Power Dissipation vs. Ambient Temperature

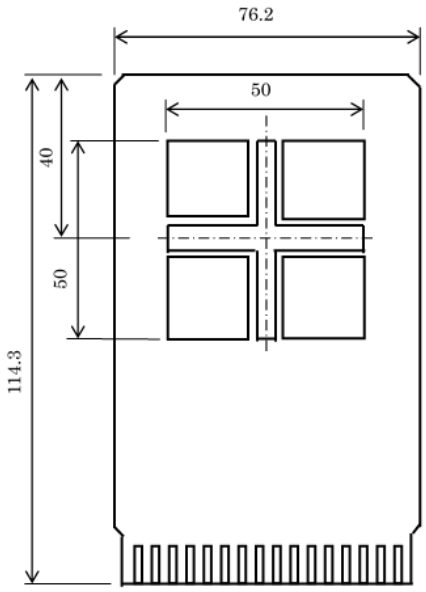

Measurement Board Pattern

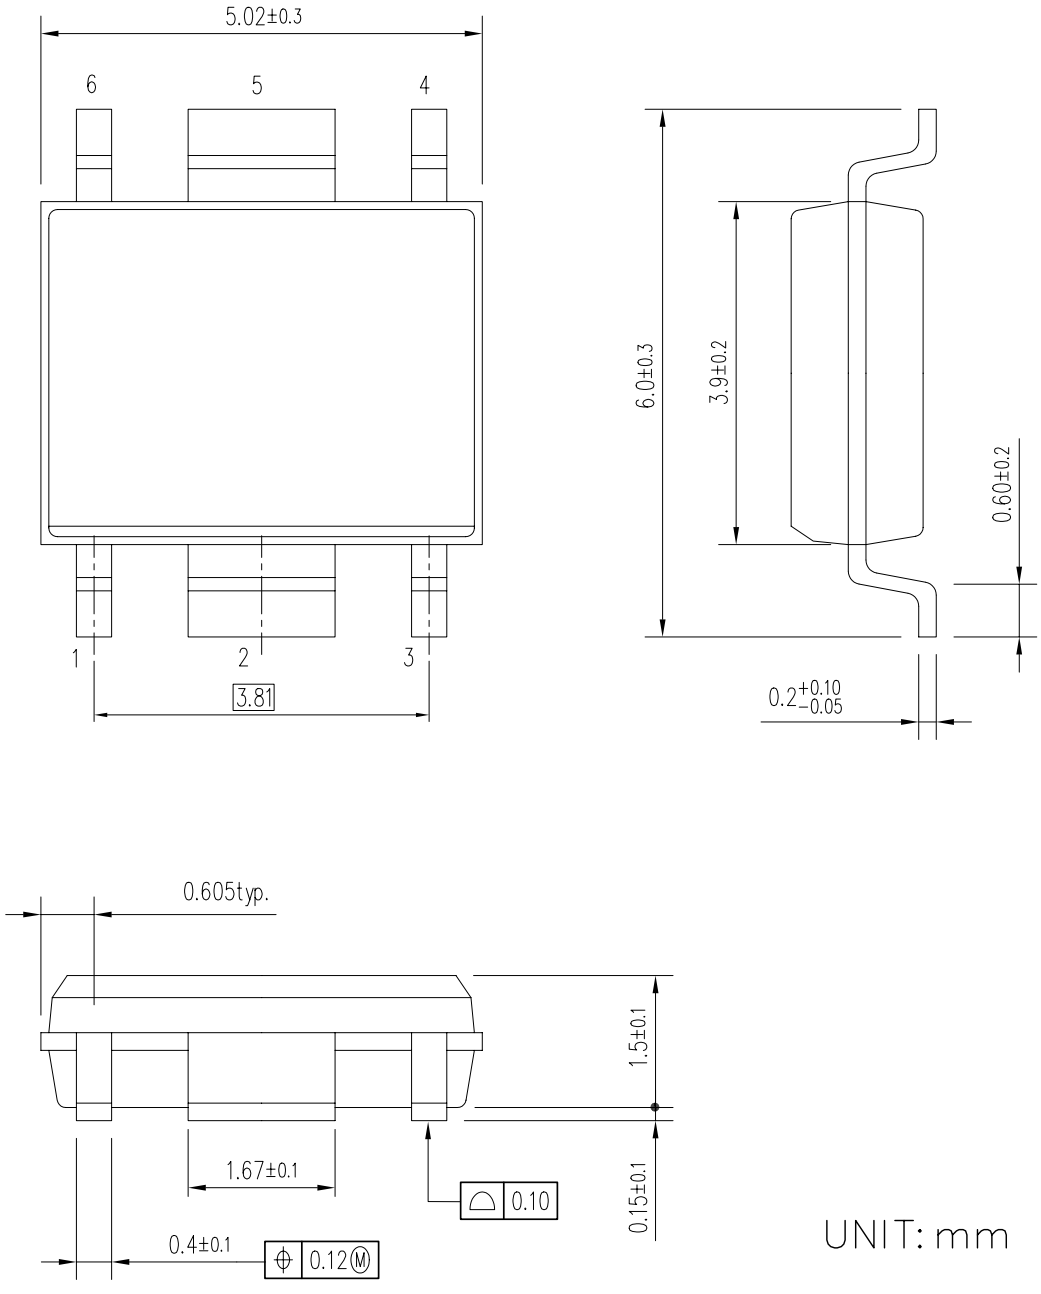


HSOP-6J Package Dimensions

MK-R1561S-JAEA-B

①②③④: Product Code ⋯ Refer to *Part Marking List*

⑤⑥: Lot Number ⋯ Alphanumeric Serial Number

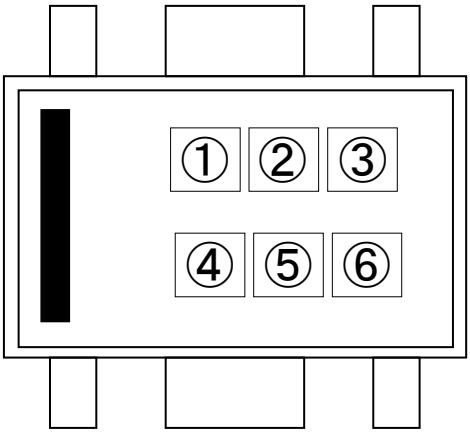

HSOP-6J Part Markings

NOTICE
There can be variation in the marking when different AOI (Automated Optical Inspection) equipment is used. In the case of recognizing the marking characteristic with AOI, please contact our sales or our distributor before attempting to use AOI.

R1561SxxxB Part Marking List

Product Name	① ② ③ ④
R1561S181B	E 1 8 B
R1561S251B	E 2 5 B
R1561S281B	E 2 8 B
R1561S301B	E 3 0 B
R1561S331B	E 3 3 B
R1561S341B	E 3 4 B
R1561S501B	E 5 0 B
R1561S701B	E 7 0 B
R1561S801B	E 8 0 B
R1561S901B	E 9 0 B
R1561SA01B	E A 0 B
R1561SC01B	E C 0 B
R1561SE01B	E E 0 B

PD-TO-252-5-P2-(105125)-JE-C

The power dissipation of the package is dependent on PCB material, layout, and environmental conditions. The following measurement conditions are based on JEDEC STD. 51.

Measurement Conditions


Item	Measurement Conditions
Environment	Mounting on Board (Wind Velocity = 0 m/s)
Board Material	Glass Cloth Epoxy Plastic (Four-Layer Board)
Board Dimensions	76.2 mm × 114.3 mm × 0.8 mm
Copper Ratio	Outer Layer (First Layer): Less than 95% of 50 mm Square Inner Layers (Second and Third Layers): Approx. 100% of 50 mm Square Outer Layer (Fourth Layer): Approx. 100% of 50 mm Square
Through-holes	ϕ 0.4mm × 30pcs

Measurement Result (Ta = 25°C, Tjmax = 125°C)


Item	Measurement Result
Power Dissipation	3800 mW
Thermal Resistance (θja)	θja = 26°C/W
Thermal Characterization Parameter (ψjt)	ψjt = 7°C/W

θja: Junction-to-Ambient Thermal Resistance

ψjt: Junction-to-Top Thermal Characterization Parameter

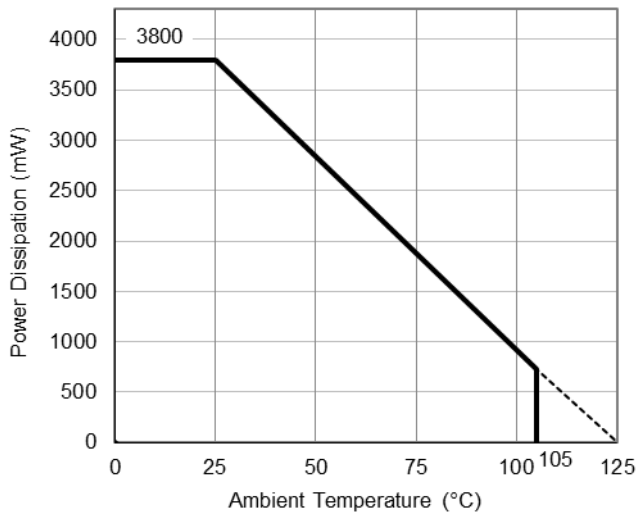


Power Dissipation vs. Ambient Temperature

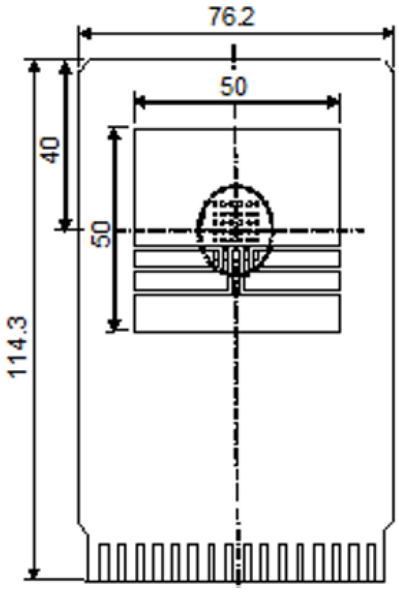

Measurement Board Pattern

DM-TO-252-5-P2-JE-C

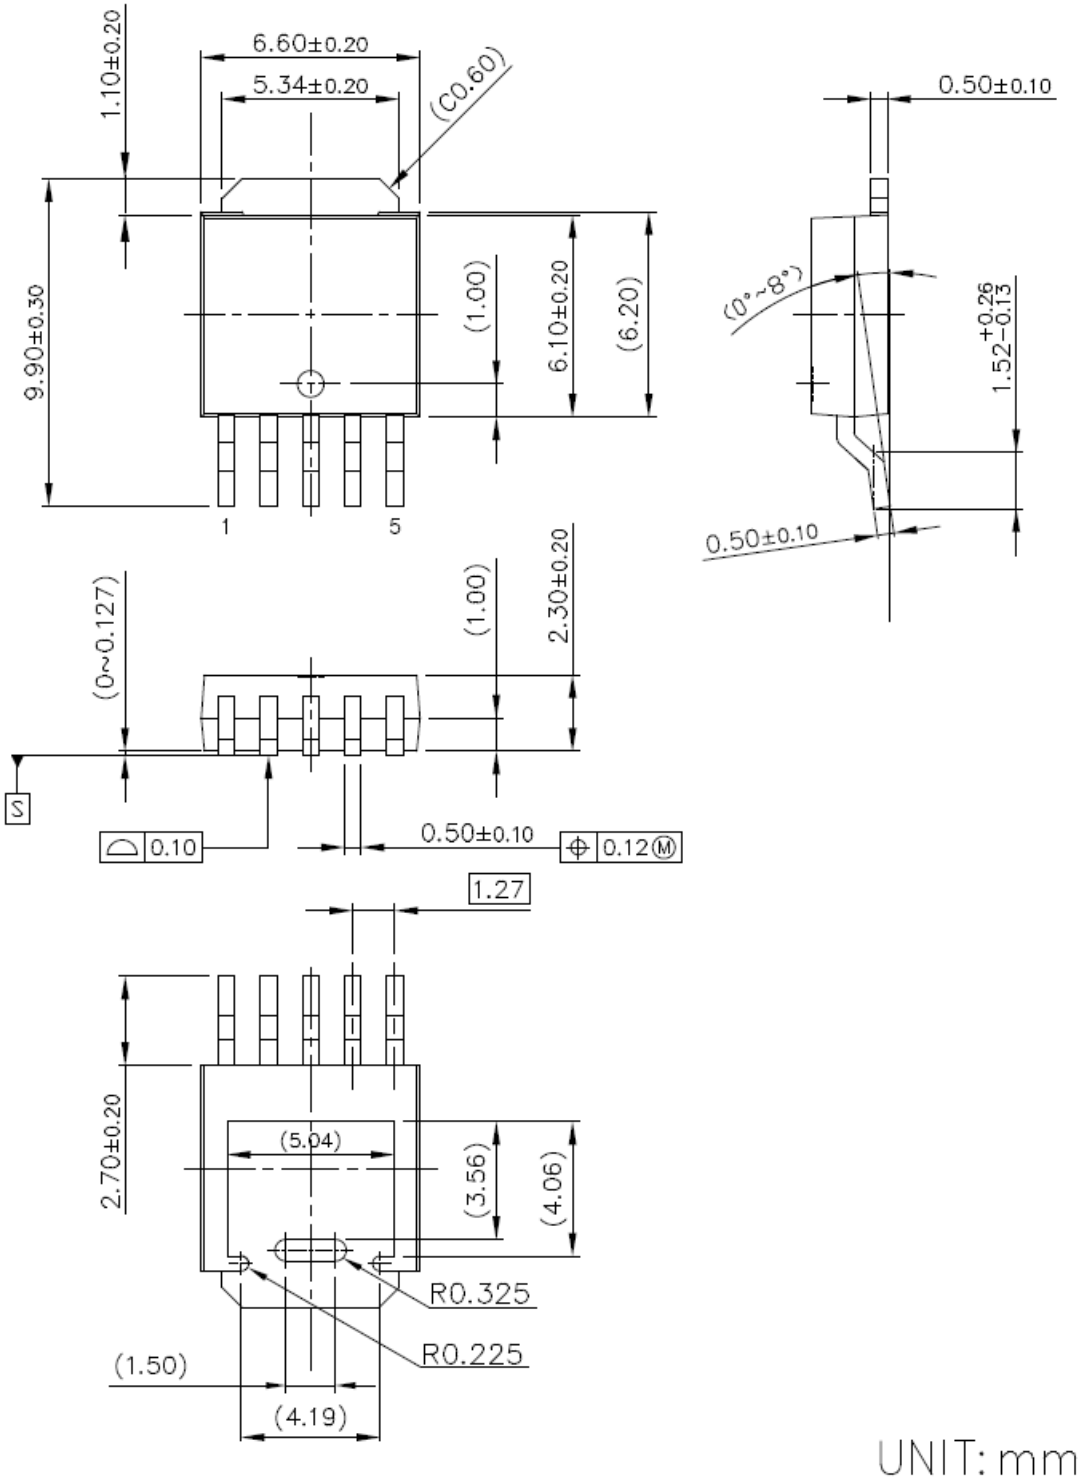


UNIT: mm

MK-R1561J-JAEA-C

①②③④⑤⑥⑦⑧: Product Code ⋯ Refer to *Part Marking List*

⑨⑩: Lot Number ⋯ Alphanumeric Serial Number

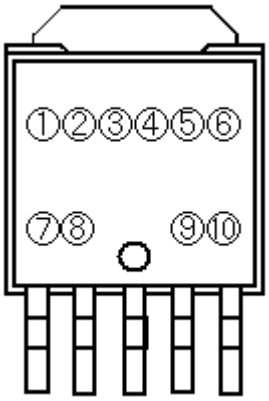

TO-252-5-P2 Part Markings

NOTICE
There can be variation in the marking when different AOI (Automated Optical Inspection) equipment is used. In the case of recognizing the marking characteristic with AOI, please contact our sales or our distributor before attempting to use AOI.

R1561JxxxB Part Marking List

Product Name	①②③④⑤⑥⑦⑧
R1561J181B	R 1 J 1 8 1 B _
R1561J251B	R 1 J 2 5 1 B _
R1561J281B	R 1 J 2 8 1 B _
R1561J301B	R 1 J 3 0 1 B _
R1561J331B	R 1 J 3 3 1 B _
R1561J341B	R 1 J 3 4 1 B _
R1561J501B	R 1 J 5 0 1 B _
R1561J701B	R 1 J 7 0 1 B _
R1561J801B	R 1 J 8 0 1 B _
R1561J901B	R 1 J 9 0 1 B _
R1561JA01B	R 1 J A 0 1 B _
R1561JC01B	R 1 J C 0 1 B _
R1561JE01B	R 1 J E 0 1 B _

1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to our sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without the prior written consent of us.
3. This product and any technical information relating thereto are subject to complementary export controls (so-called KNOW controls) under the Foreign Exchange and Foreign Trade Law, and related politics ministerial ordinance of the law. (Note that the complementary export controls are inapplicable to any application-specific products, except rockets and pilotless aircraft, that are insusceptible to design or program changes.) Accordingly, when exporting or carrying abroad this product, follow the Foreign Exchange and Foreign Trade Control Law and its related regulations with respect to the complementary export controls.
4. The technical information described in this document shows typical characteristics and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under our or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death should first contact us.
    - Aerospace Equipment
    - Equipment Used in the Deep Sea
    - Power Generator Control Equipment (nuclear, steam, hydraulic, etc.)
    - Life Maintenance Medical Equipment
    - Fire Alarms / Intruder Detectors
    - Vehicle Control Equipment (automotive, airplane, railroad, ship, etc.)
    - Various Safety Devices
    - Traffic control system
    - Combustion equipment

    In case your company desires to use this product for any applications other than general electronic equipment mentioned above, make sure to contact our company in advance. Note that the important requirements mentioned in this section are not applicable to cases where operation requirements such as application conditions are confirmed by our company in writing after consultation with your company.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. The products have been designed and tested to function within controlled environmental conditions. Do not use products under conditions that deviate from methods or applications specified in this datasheet. Failure to employ the products in the proper applications can lead to deterioration, destruction or failure of the products. We shall not be responsible for any bodily injury, fires or accident, property damage or any consequential damages resulting from misuse or misapplication of the products.
8. Quality Warranty
    8-1. Quality Warranty Period
    In the case of a product purchased through an authorized distributor or directly from us, the warranty period for this product shall be one (1) year after delivery to your company. For defective products that occurred during this period, we will take the quality warranty measures described in section 8-2. However, if there is an agreement on the warranty period in the basic transaction agreement, quality assurance agreement, delivery specifications, etc., it shall be followed.
    8-2. Quality Warranty Remedies
    When it has been proved defective due to manufacturing factors as a result of defect analysis by us, we will either deliver a substitute for the defective product or refund the purchase price of the defective product.
    Note that such delivery or refund is sole and exclusive remedies to your company for the defective product.
    8-3. Remedies after Quality Warranty Period
    With respect to any defect of this product found after the quality warranty period, the defect will be analyzed by us. On the basis of the defect analysis results, the scope and amounts of damage shall be determined by mutual agreement of both parties. Then we will deal with upper limit in Section 8-2. This provision is not intended to limit any legal rights of your company.
9. Anti-radiation design is not implemented in the products described in this document.
10. The X-ray exposure can influence functions and characteristics of the products. Confirm the product functions and characteristics in the evaluation stage.
11. WLCSP products should be used in light shielded environments. The light exposure can influence functions and characteristics of the products under operation or storage.
12. Warning for handling Gallium and Arsenic (GaAs) products (Applying to GaAs MMIC, Photo Reflector). These products use Gallium (Ga) and Arsenic (As) which are specified as poisonous chemicals by law. For the prevention of a hazard, do not burn, destroy, or process chemically to make them as gas or power. When the product is disposed of, please follow the related regulation and do not mix this with general industrial waste or household waste.
13. Please contact our sales representatives should you have any questions or comments concerning the products or the technical information.

NISSHINBO

Nisshinbo Micro Devices Inc.

Official website
https://www.nisshinbo-microdevices.co.jp/en/

Purchase information
https://www.nisshinbo-microdevices.co.jp/en/buy/

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.