
RGPR30BM40

400V 30A Ignition IGBT Datasheet

BV_{CES}	400±30V
I_C	30A
$V_{CE(sat)}$ (Typ.)	1.6V
E_{AS}	300mJ

●Outline

TO-252



●Features

1) Low Collector - Emitter Saturation Voltage

2) High Self-Clamped Inductive Switching Energy


3) Built in Gate-Emitter Protection Diode

4) Built in Gate-Emitter Resistance

5) Qualified to AEC-Q101

6) Pb - free Lead Plating ; RoHS Compliant

●Inner Circuit



(1) Gate
(2) Collector
(3) Emitter

●Applications

Ignition Coil Driver Circuits

Solenoid Driver Circuits

●Packaging Specifications

Type	Packaging	Taping
	Reel Size (mm)	330
	Tape Width (mm)	16
	Basic Ordering Unit (pcs)	2,500
	Packing Code	TL
	Marking	RGPR30BM40

●Absolute Maximum Ratings (at T_C = 25°C unless otherwise specified)

Parameter		Symbol	Value	Unit
Collector - Emitter Voltage		V_{CES}	430	V
Emitter-Collector Voltage (V_{GE} = 0V)		V_{EC}	25	V
Gate - Emitter Voltage		V_{GES}	±10	V
Collector Current		I_C	30	A
Avalanche Energy (Single Pulse)	T_j = 25°C	E_{AS}	300	mJ
	T_j = 150°C	E_{AS} *2	180	mJ
Power Dissipation		P_D	125	W
Operating Junction Temperature		T_j	−40 to +175	°C
Storage Temperature		T_{stg}	−55 to +175	°C

© 2017 ROHM Co., Ltd. All rights reserved.

●Thermal Resistance

Parameter	Symbol	Values			Unit
		Min.	Typ.	Max.	
Thermal Resistance IGBT Junction - Case	$R_{\theta(j-c)}$	-	-	1.20	°C/W

●Electrical Characteristics (at T_j = 25°C unless otherwise specified)

Parameter	Symbol	Conditions	Values			Unit
			Min.	Typ.	Max.	
Collector - Emitter Breakdown Voltage	BV_{CES}	I_C = 2mA, V_{GE} = 0V				
		T_j = 25°C	370	400	430	V
		T_j = −40 to 175°C*2	365	-	435	V
Emitter - Collector Breakdown Voltage	BV_{EC}	I_C = −10mA, V_{GE} = 0V	25	35	-	V
Gate - Emitter Breakdown Voltage	BV_{GES}	I_G = ±5mA, V_{CE} = 0V	±12	-	±17	V
Collector Cut - off Current	I_{CES}	V_{CE} = 250V, V_{GE} = 0V				
		T_j = 25°C	-	-	7	μA
		T_j = 150°C*2	-	-	100	μA
Gate - Emitter Leakage Current	I_{GES}	V_{GE} = ±10V, V_{CE} = 0V	±0.4	±0.6	±1.2	mA
Gate - Emitter Threshold Voltage	$V_{GE(th)}$	V_{CE} = 5V, I_C = 12mA				
		T_j = 25°C	1.3	1.7	2.1	V
		T_j = 150°C*2	-	1.3	-	V
Collector - Emitter Saturation Voltage	$V_{CE(sat)}$	I_C = 12A, V_{GE} = 5V				
		T_j = 25°C	-	1.60	2.00	V
		T_j = 150°C	-	1.80	-	V
Collector - Emitter Saturation Voltage	$V_{CE(sat)}$	I_C = 5A, V_{GE} = 4.5V				
		T_j = 25°C	-	1.17	1.50	V
		T_j = 150°C	-	1.19	-	V

© 2017 ROHM Co., Ltd. All rights reserved.

●**Electrical Characteristics** (at T_j = 25°C unless otherwise specified)

Parameter	Symbol	Conditions	Values			Unit
			Min.	Typ.	Max.	
Collector - Emitter Saturation Voltage	$V_{CE(sat)}$	I_C = 12A, V_{GE} = 4V				
		T_j = 25°C	-	1.70	2.10	V
		T_j = 150°C	-	1.90	-	V
Input Capacitance	C_{ies}	V_{CE} = 10V	-	1330	-	pF
Output Capacitance	C_{oes}	V_{GE} = 0V	-	220	-	
Reverse Transfer Capacitance	C_{res}	f = 1MHz	-	71	-	
Total Gate Charge	Q_g	V_{CE} = 12V, I_C = 10A, V_{GE} = 5V	-	22	-	nC
Turn - on Delay Time[*1,*2]	$t_{d(on)}$	I_C = 8A, V_{CC} = 300V, V_{GE} = 5V, R_G = 100Ω, L=5mH, T_j=25°C	0.11	0.19	0.50	μs
Rise Time[*1,*2]	t_r		0.10	0.18	0.50	
Turn - off Delay Time[*1,*2]	$t_{d(off)}$		0.9	1.4	4.0	
Fall Time[*1,*2]	t_f		0.8	1.8	5.5	
Turn - on Delay Time[*1]	$t_{d(on)}$	I_C = 8A, V_{CC} = 300V, V_{GE} = 5V, R_G = 100Ω, L=5mH, T_j=150°C	-	0.18	-	μs
Rise Time[*1]	t_r		-	0.21	-	
Turn - off Delay Time[*1]	$t_{d(off)}$		-	1.7	-	
Fall Time[*1]	t_f		-	3.0	-	
Avalanche Energy (Single Pulse)	E_{AS}	L = 5mH, V_{GE} = 5V, V_{CC} = 30V, R_G = 1kΩ,				
		T_j = 25°C	300	-	-	mJ
		T_j = 150°C[*2]	180	-	-	mJ
Gate Series Resistance	R_G		70	100	130	Ω
Gate - Emitter Resistance	R_{GE}		8	16	24	kΩ

*1) Assurance items according to our measurement definition (Fig.18)

*2) Design assurance items

© 2017 ROHM Co., Ltd. All rights reserved.

●Electrical Characteristic Curves

Fig.1 Typical Output Characteristics

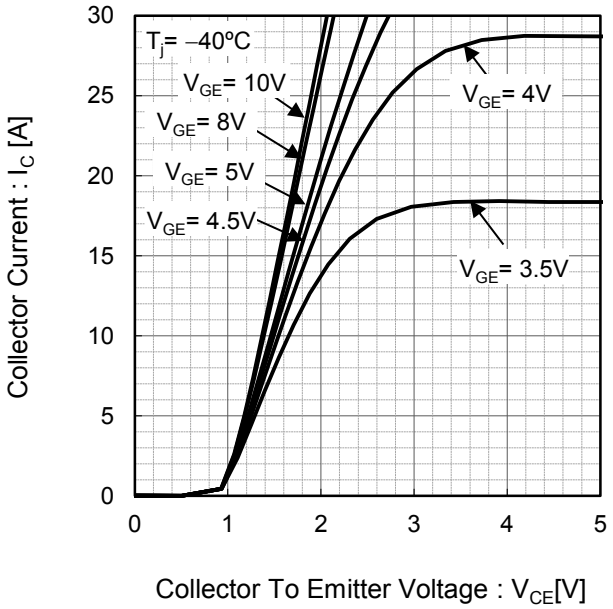


Fig.2 Typical Output Characteristics

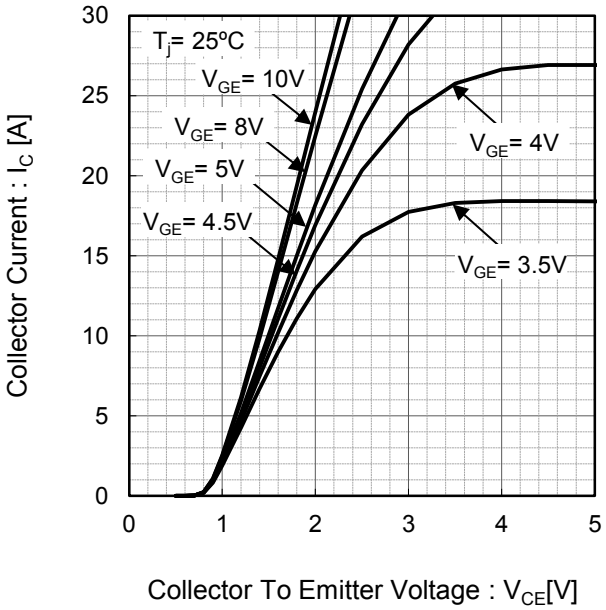


Fig.3 Typical Output Characteristics


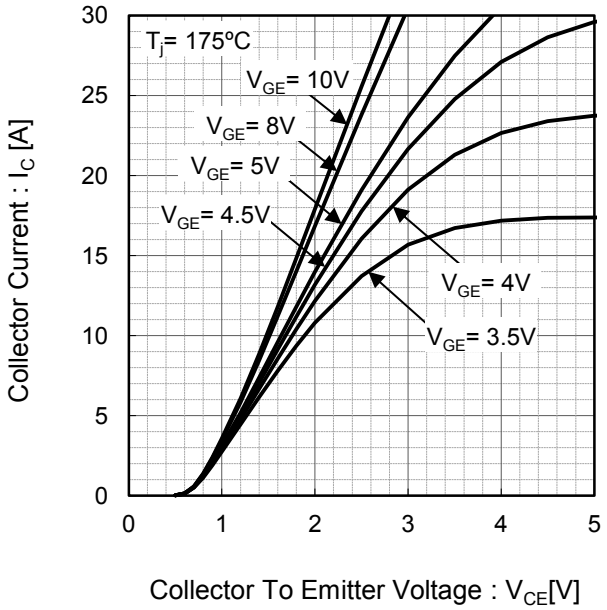


Fig.4 Typical Collector To Emitter Saturation Voltage vs. Junction Temperature

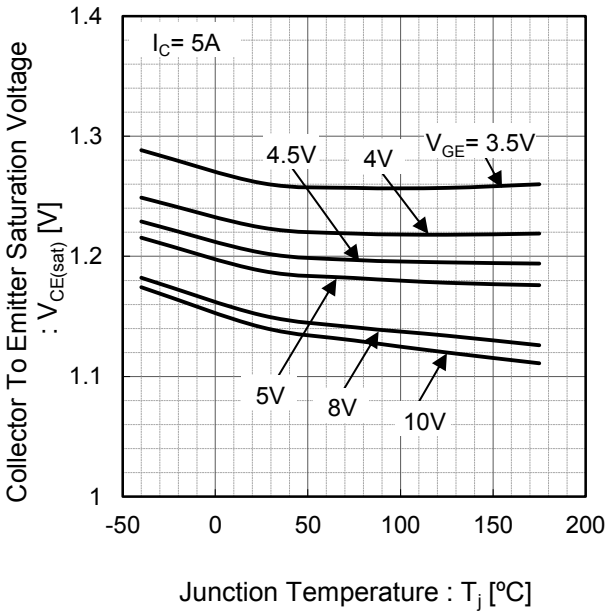

© 2017 ROHM Co., Ltd. All rights reserved.

●Electrical Characteristic Curves

Fig.5 Typical Collector To Emitter Saturation Voltage vs. Junction Temperature

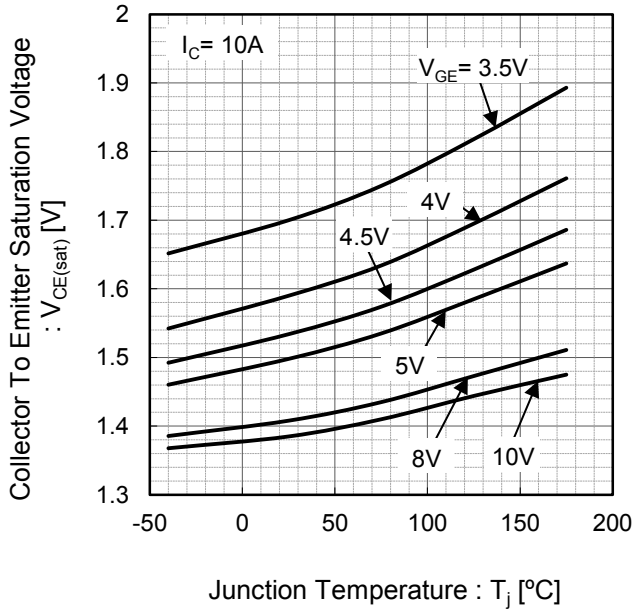


Fig.6 Typical Collector To Emitter Saturation Voltage vs. Junction Temperature

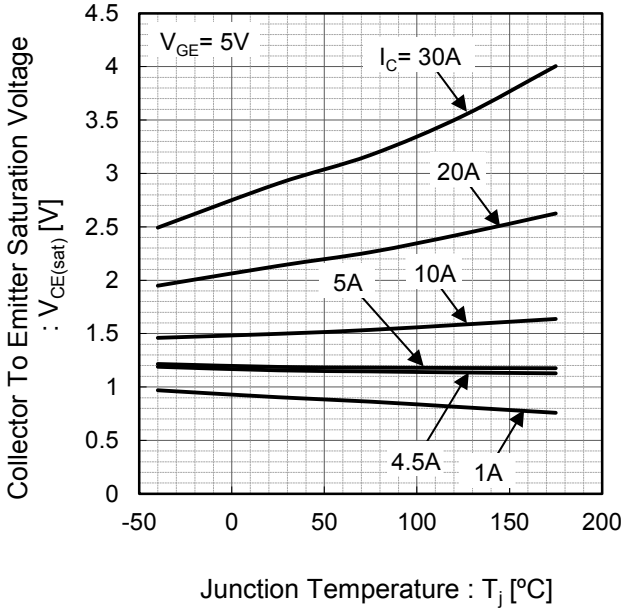


Fig.7 Typical Transfer Characteristics


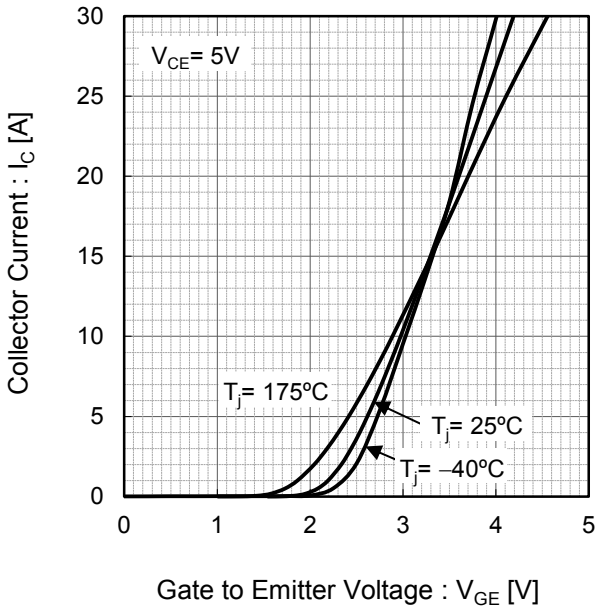


Fig.8 Typical Gate To Emitter Threshold Voltage vs. Junction Temperature

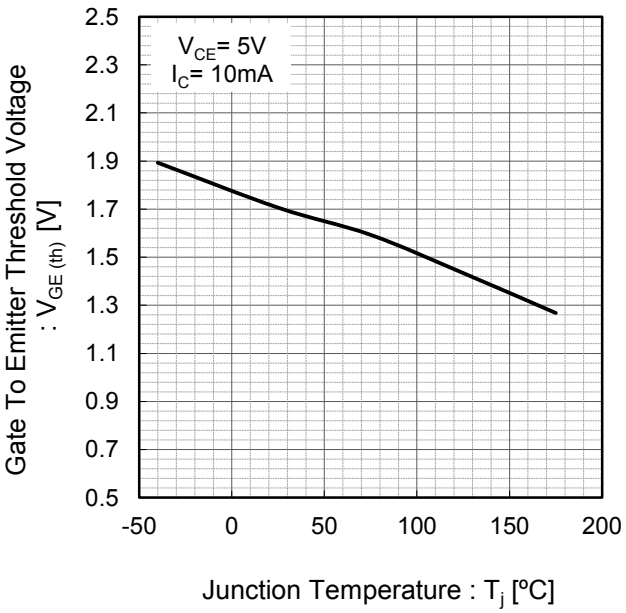

© 2017 ROHM Co., Ltd. All rights reserved.

●Electrical Characteristic Curves

Fig.9 Typical Leakage Current vs. Junction Temperature

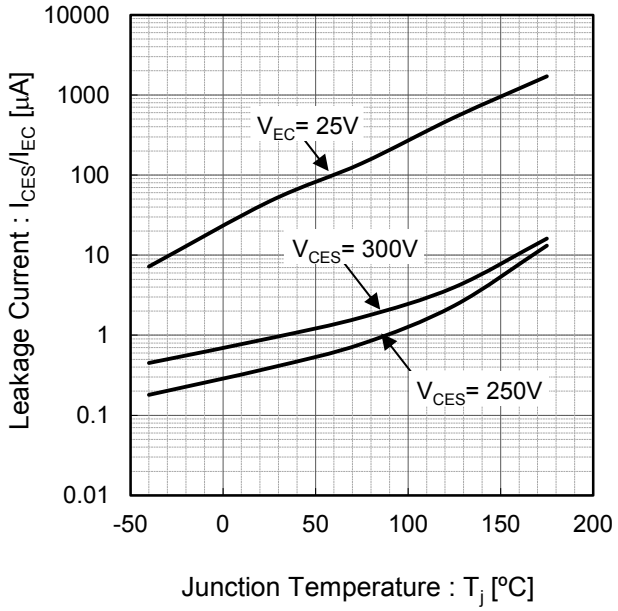


Fig.10 Typical Collector To Emitter Breakdown Voltage vs. Junction Temperature

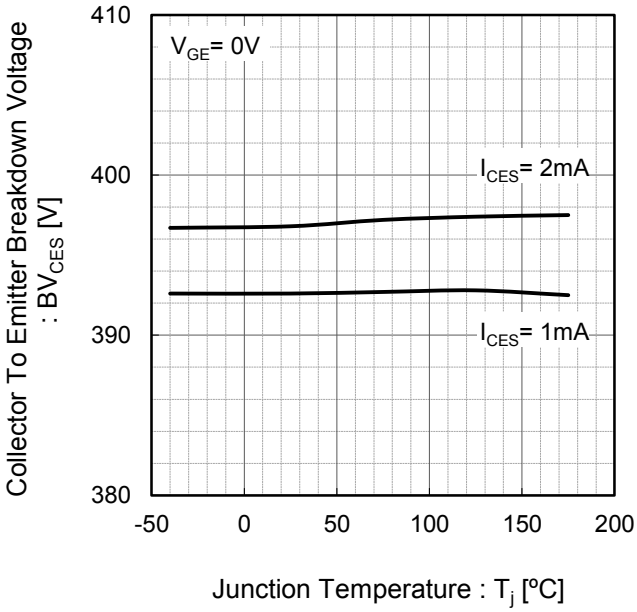


Fig.11 Typical Self Clamped Inductive Switching Current vs. Inductance


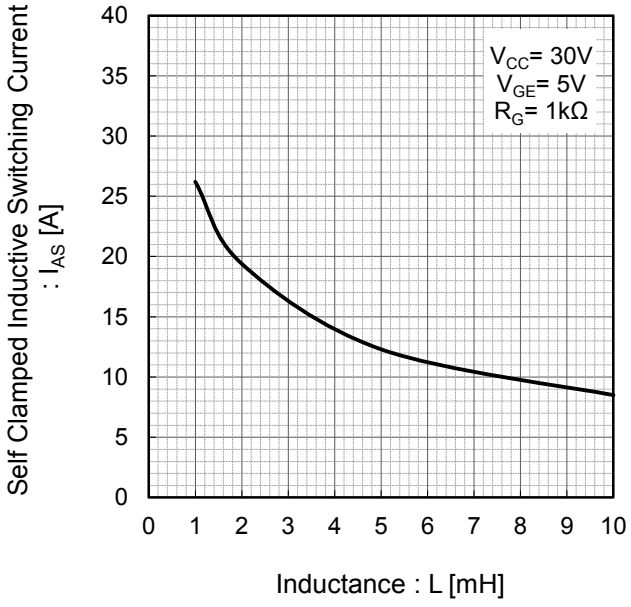


Fig.12 Typical Gate Charge

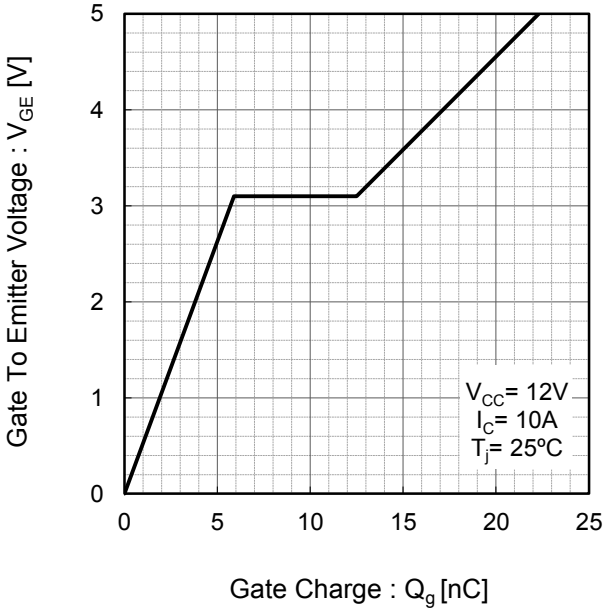

© 2017 ROHM Co., Ltd. All rights reserved.

●Electrical Characteristic Curves

Fig.13 Typical Capacitance vs. Collector To Emitter Voltage

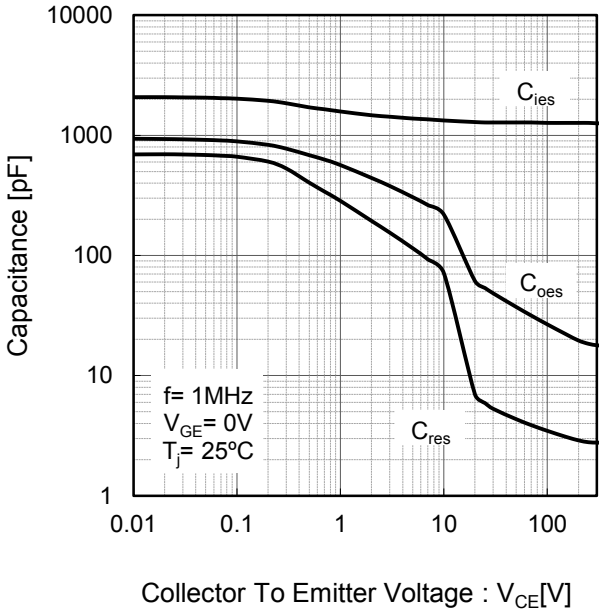


Fig.14 Typical Switching Time vs. Junction Temperature


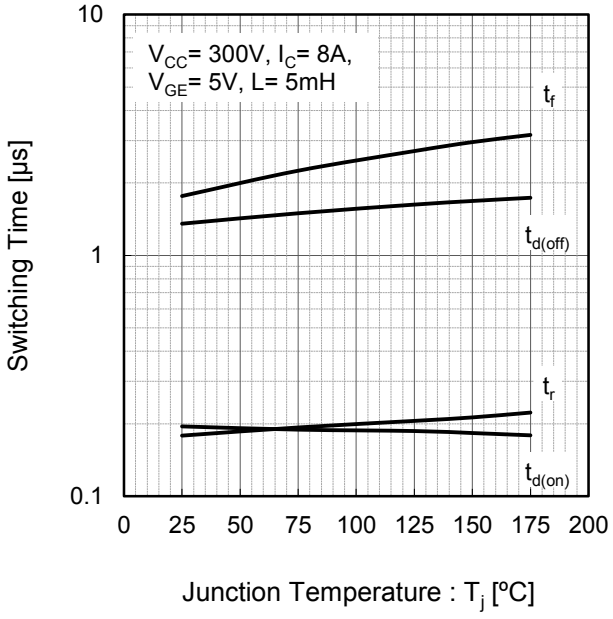



Fig.15 Forward Bias Safe Operating Area

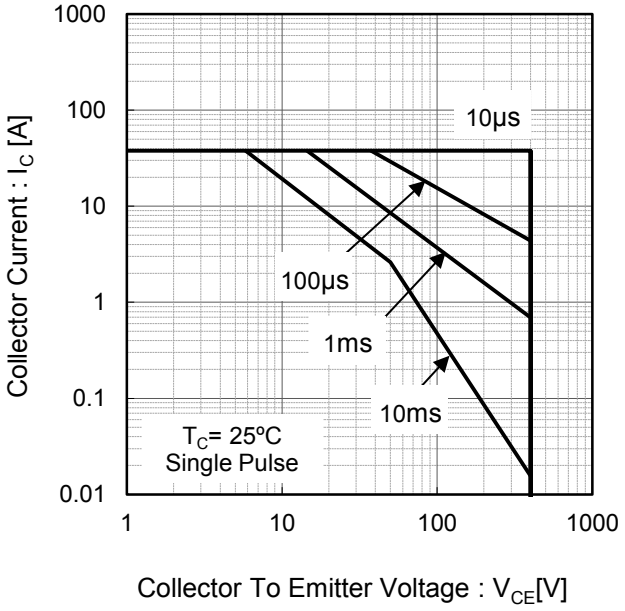

© 2017 ROHM Co., Ltd. All rights reserved.

●Electrical Characteristic Curves

Fig.16 Transient Thermal Impedance

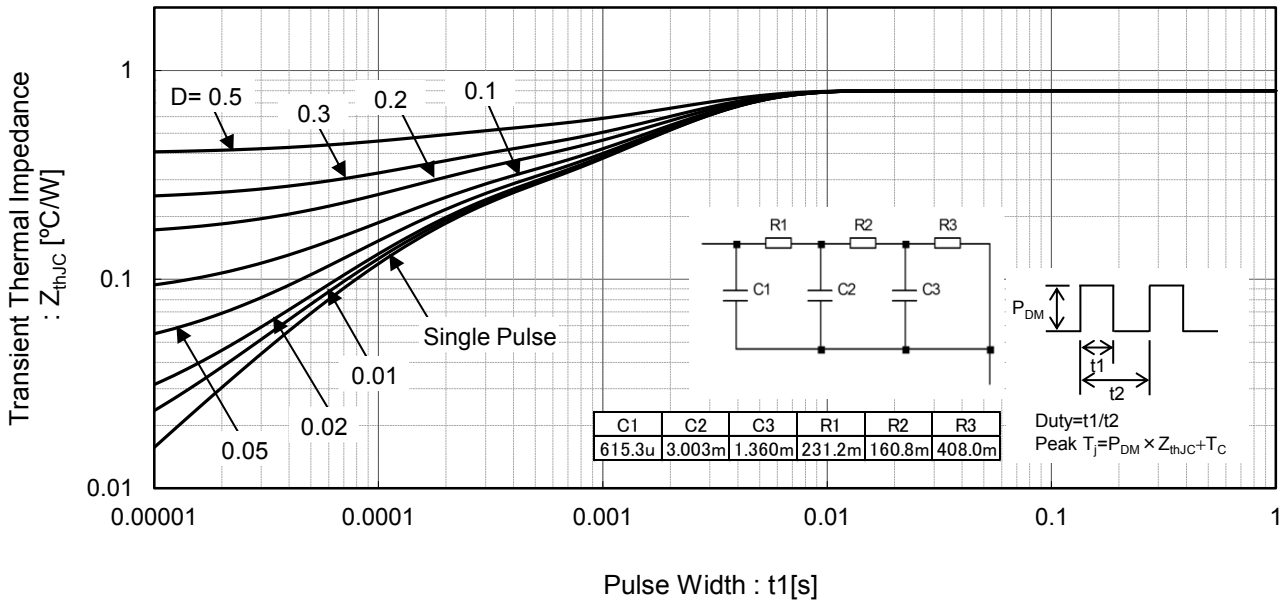

C1	C2	C3	R1	R2	R3
615.3u	3.003m	1.360m	231.2m	160.8m	408.0m

© 2017 ROHM Co., Ltd. All rights reserved.

●Inductive Load Switching Circuit and Waveform

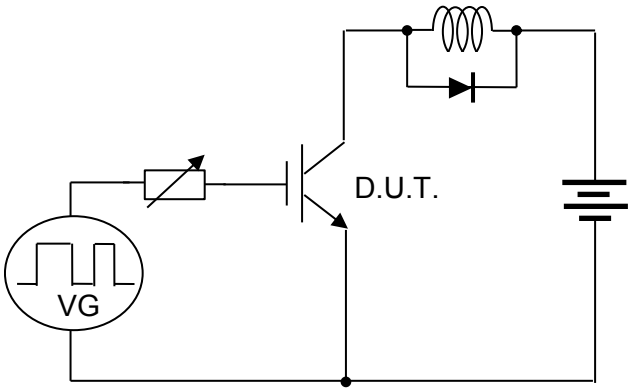


Fig.17 Inductive Load Switching Circuit

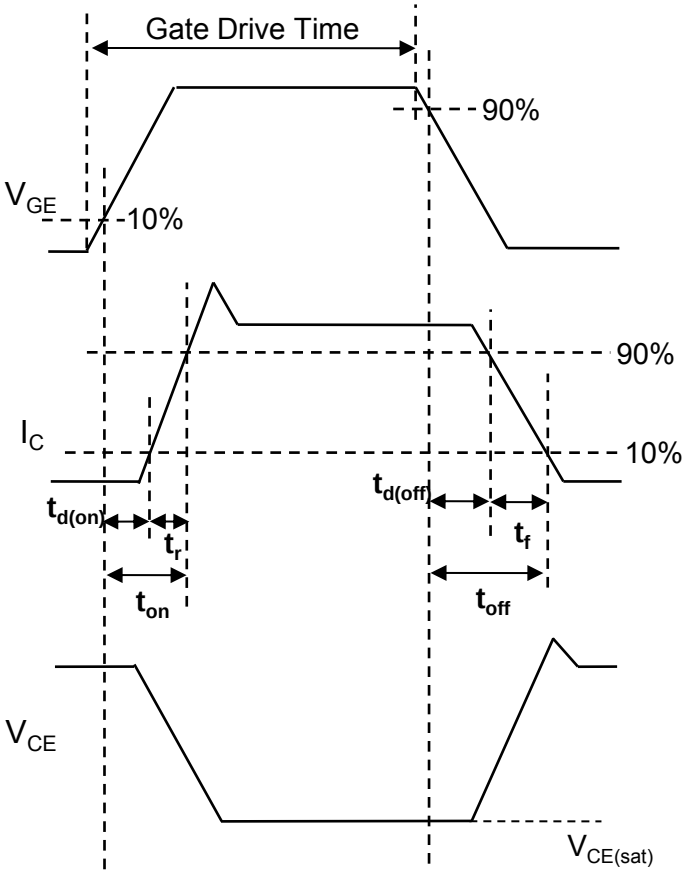


Fig.18 Inductive Load Switching Waveform

●Self Clamped Inductive Switching Circuit and Waveform

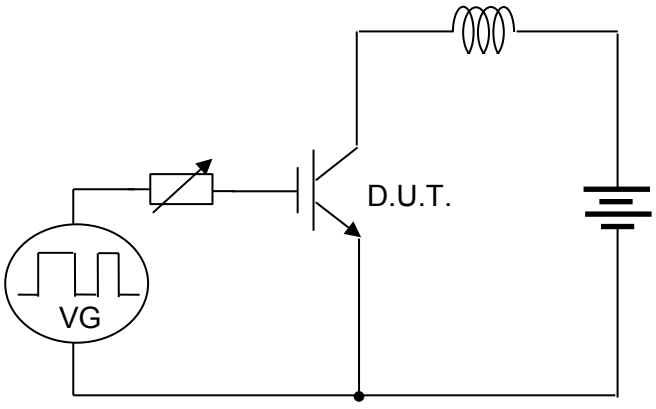


Fig.19 Self Clamped Inductive Switching Ciruit

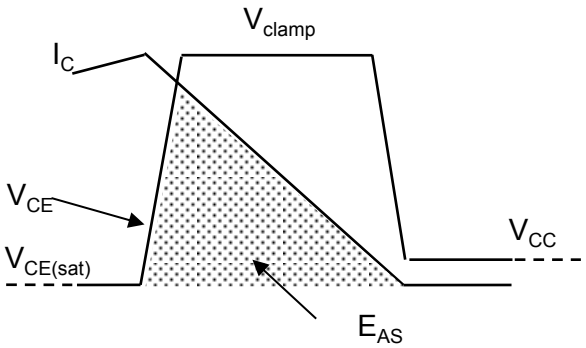


Fig.20 Self Clamped Inductive Switching Waveform

© 2017 ROHM Co., Ltd. All rights reserved.

Notes

1) The information contained herein is subject to change without notice.

2) Before you use our Products, please contact our sales representative and verify the latest specifications :

3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.
Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Poducts beyond the rating specified by ROHM.

4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.

6) The Products specified in this document are not designed to be radiation tolerant.

7) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, servers, solar cells, and power transmission systems.

8) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.

9) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.

10) ROHM has used reasonable care to ensur the accuracy of the information contained in this document. However, ROHM does not warrants that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.

11) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting non-compliance with any applicable laws or regulations.

12) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.

13) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.

ROHM SEMICONDUCTOR

Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/

© 2016 ROHM Co., Ltd. All rights reserved.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.