SANKEN ELECTRIC

MLD685D

Feb. 2011

Features

- Low on-state resistance
- Built-in gate protection diode

Package

MT100 (TO3P)




Applications

- Electric power steering
- High current switching

Key Specifications

- $V_{(BR)DSS}$=60V (ID=100μA)
- $R_{DS(ON)}$=4.7mΩ Max. (VGS=10V,ID=42A)

Internal Equivalent Circuit



Absolute maximum ratings

Characteristic	Symbol	Rating	Unit
Drain to Source Voltage	V_{DSS}	60	V
Gate to Source Voltage	V_{GSS}	±20	V
Continuous Drain Current	I_D	±85	A
Pulsed Drain Current	$I_{D(pulse)}$ ※1	±280	A
Maximum Power Dissipation	P_D	150 (Tc=25℃)	W
Single Pulse Avalanche Energy	E_{AS} ※2	280	mJ
Channel Temperature	Tch	-55~150	℃
Storage Temperature	Tstg	-55~150	℃

※1 PW≦100μsec. duty cycle≦1%

※2 V_{DD}=20V, L=1mH, I_L=20A, unclamped, See Fig.1

The information included herein is believed to be accurate and reliable. However, SANKEN ELECTRIC CO., LTD assumes no responsibility for its use ; nor for any infringements of patents or other rights of third parties that may result from its use.

Copy Right: SANKEN ELECTRIC CO.,LTD.

Electrical characteristics

(Ta=25°C)


Characteristic	Symbol	Test Conditions	Limits			Unit
			MIN	TYP	MAX	
Drain to Source breakdown Voltage	$V_{(BR)DSS}$	I_D=100μA,V_{GS}=0V	60			V
Gate to Source Leakage Current	I_{GSS}	V_{GS}=±20V			±10	μA
Drain to Source Leakage Current	I_{DSS}	V_{DS}=60V, V_{GS}=0V			100	μA
Gate Threshold Voltage	V_{TH}	V_{DS}=10V, I_D=1mA	2.0	2.5	3.0	V
Forward Transconductance	Re(yfs)	V_{DS}=10V, I_D=42A	30			S
Static Drain to Source On-Resistance	$R_{DS(ON)}$	I_D=42A, V_{GS}=10V		4.0	4.7	mΩ
Input Capacitance	Ciss	V_{DS}=10V V_{GS}=0V f=1MHz		11500		pF
Output Capacitance	Coss			1500		
Reverse Transfer Capacitance	Crss			1100		
Turn-On Delay Time	$t_{d(on)}$	I_D=42A, V_{DD}≒16V R_G=22Ω, V_{GS}=10V See Fig.2		60		ns
Rise Time	t_r			25		
Turn-Off Delay Time	$t_{d(off)}$			370		
Fall Time	t_f			65		
Source-Drain Diode Forward Voltage	V_{SD}	I_{SD}=50A,V_{GS}=0V		0.87	1.5	V
Source-Drain Diode Reverse Recovery Time	trr	I_{SD}=50A di/dt=100A/us		70		ns

The information included herein is believed to be accurate and reliable. However, SANKEN ELECTRIC CO., LTD assumes no responsibility for its use ; nor for any infringements of patents or other rights of third parties that may result from its use.

Copy Right: SANKEN ELECTRIC CO.,LTD.


Characteristic Curves (Tc=25°C)

ID - VDS characteristics (typical)

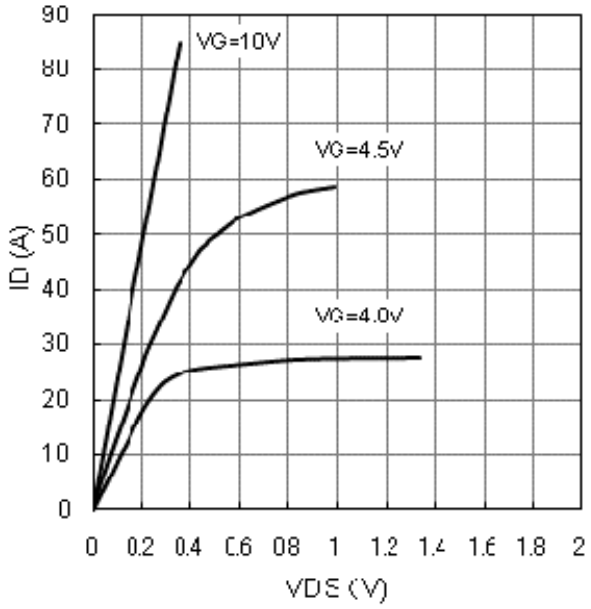


ID - VGS characteristics (typical)

VDS=10V

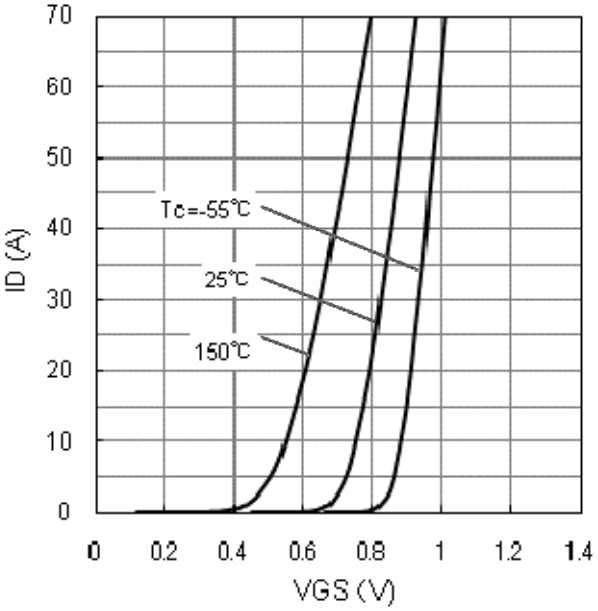


RDS(ON) - Tc characteristics (typical)

VGS=10V

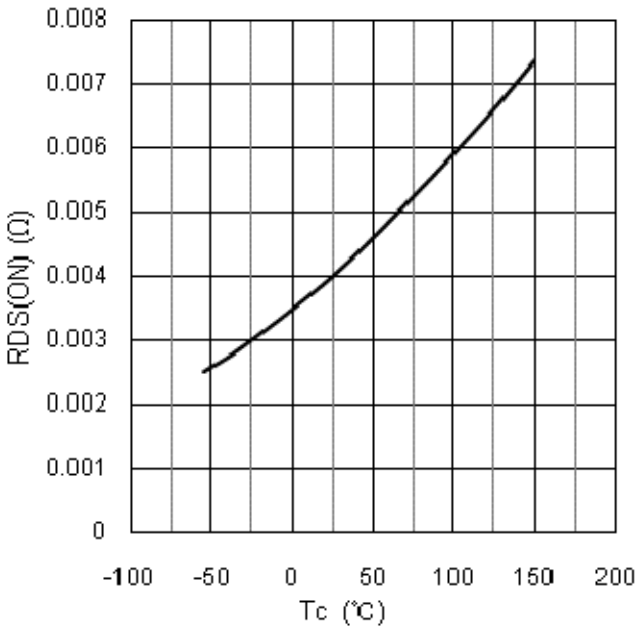

RDS(ON) - ID characteristics (typical)

VGS=10V

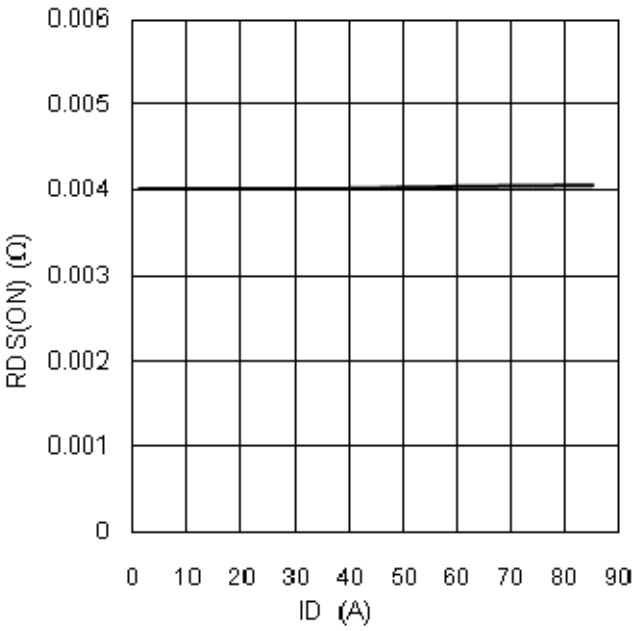


The information included herein is believed to be accurate and reliable. However, SANKEN ELECTRIC CO., LTD assumes no responsibility for its use ; nor for any infringements of patents or other rights of third parties that may result from its use.


Copy Right: SANKEN ELECTRIC CO.,LTD.

Characteristic Curves (Tc=25°C)


VDS - VGS characteristics (typical)

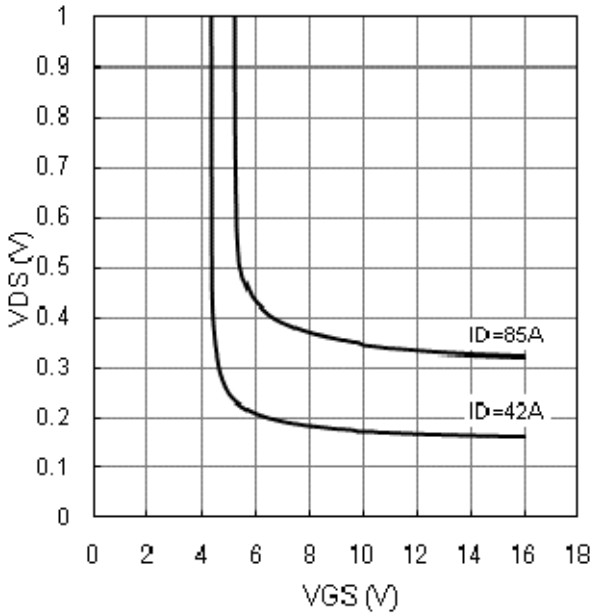


Re(yfs) - ID characteristics (typical)

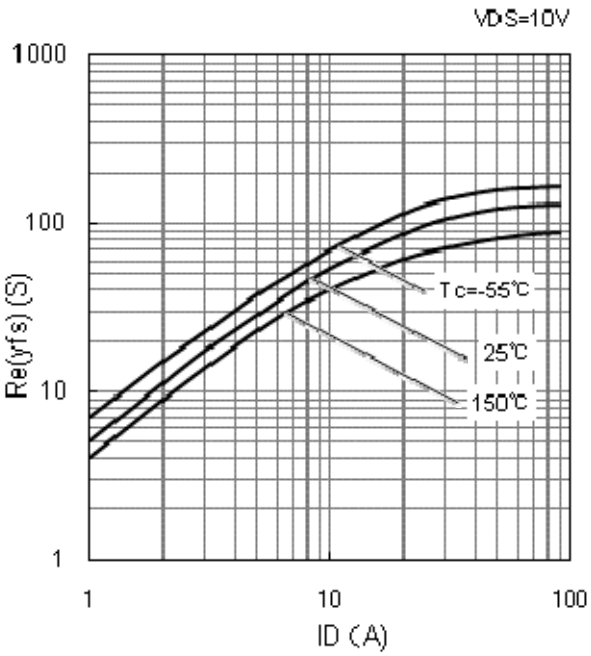

Capacitance - VDS characteristics (typical)

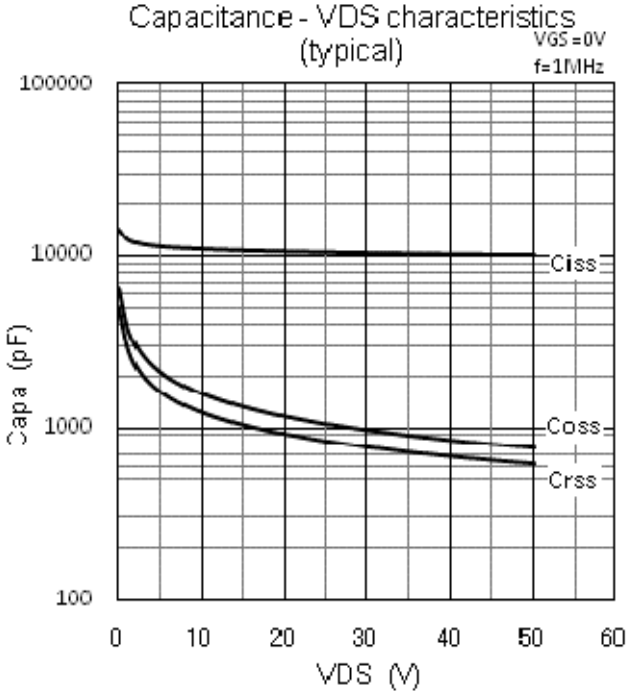


IDR - VSD characteristics (typical)

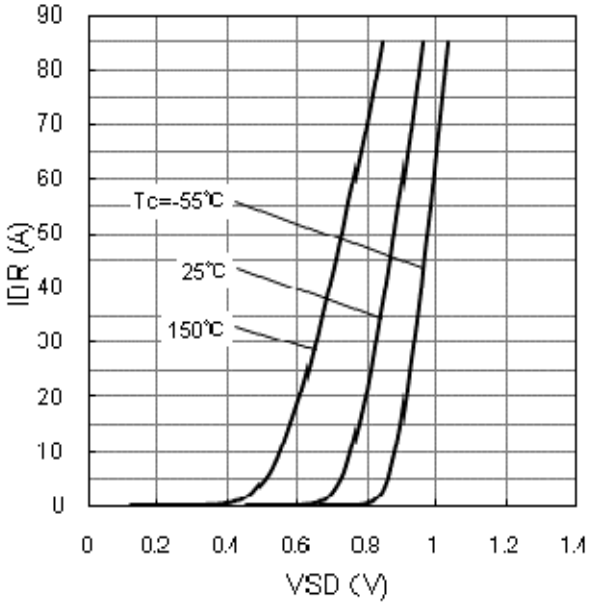



The information included herein is believed to be accurate and reliable. However, SANKEN ELECTRIC CO., LTD assumes no responsibility for its use ; nor for any infringements of patents or other rights of third parties that may result from its use.

Copy Right: SANKEN ELECTRIC CO.,LTD.

Characteristic Curves (Tc=25°C)

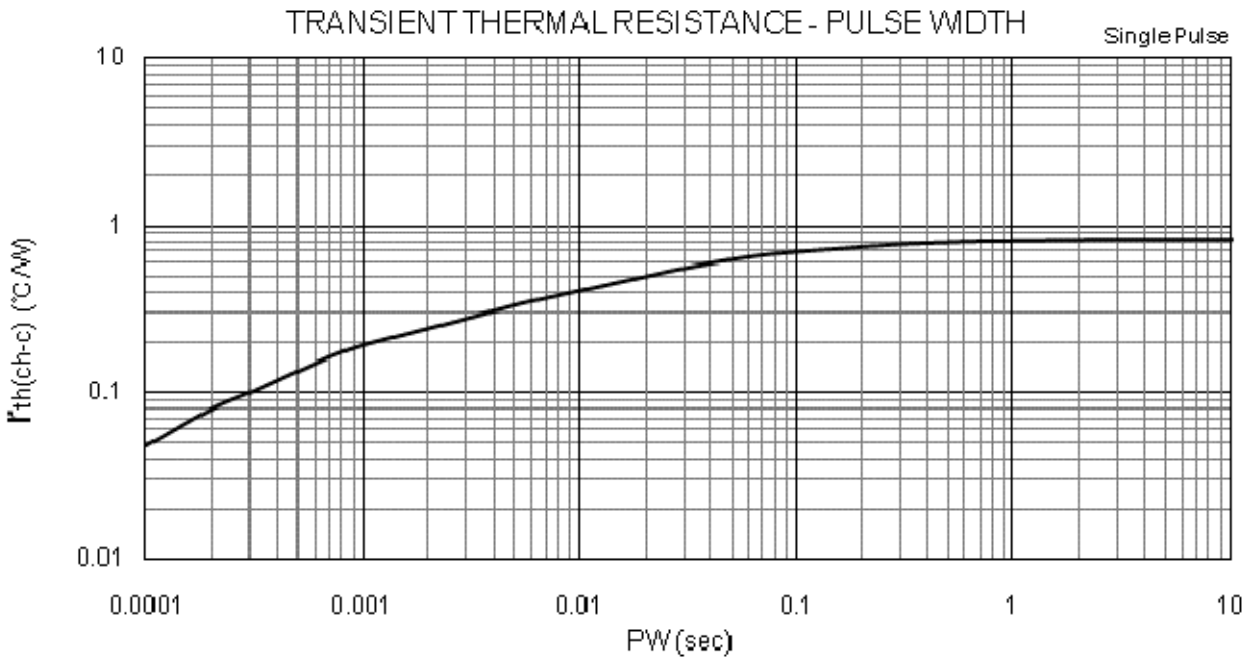

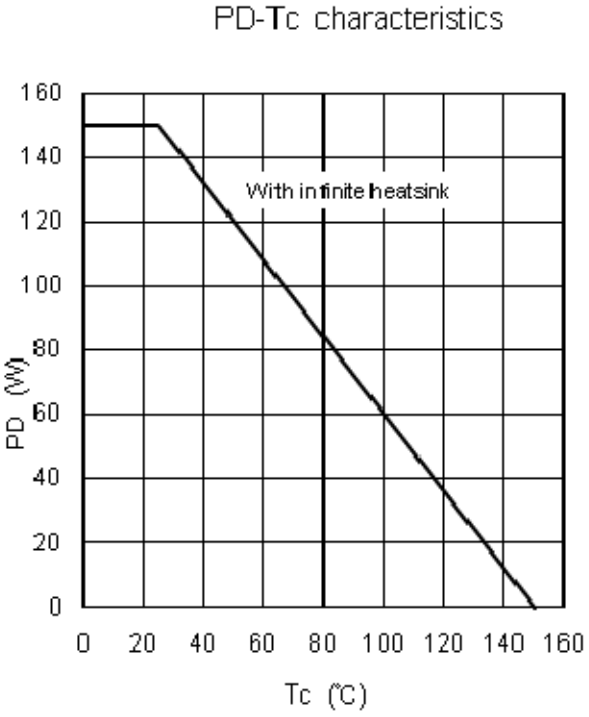

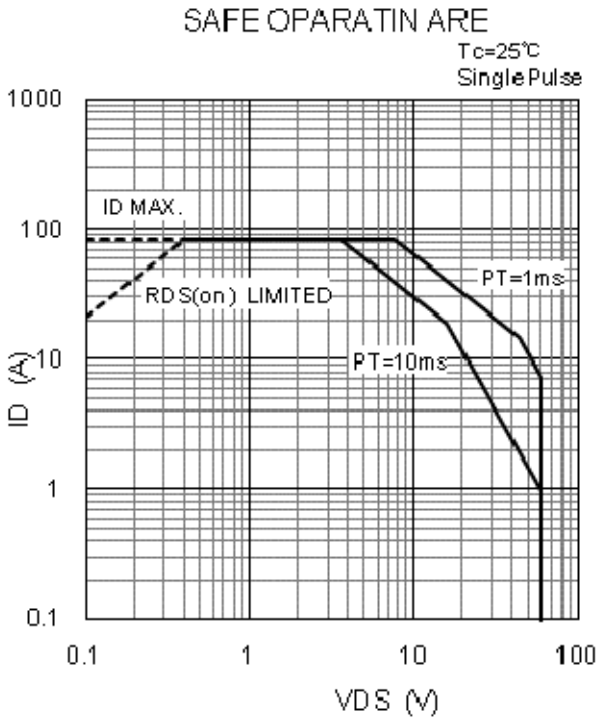


The information included herein is believed to be accurate and reliable. However, SANKEN ELECTRIC CO., LTD assumes no responsibility for its use ; nor for any infringements of patents or other rights of third parties that may result from its use.

Copy Right: SANKEN ELECTRIC CO.,LTD.


Fig.1 Unclamped Inductive Test Method

$$EAS = \frac{1}{2} \cdot L \cdot I_{LP}^2 \cdot \frac{V_{(BR)DSS}}{V_{(BR)DSS} - V_{DD}}$$

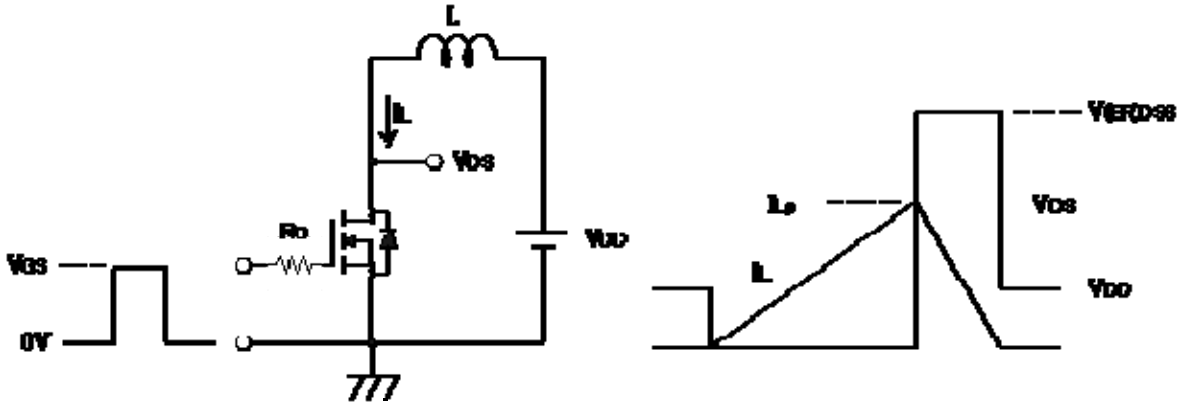

(a) Test Circuit (b) Waveforms

Fig.2 Switching Time Test Method

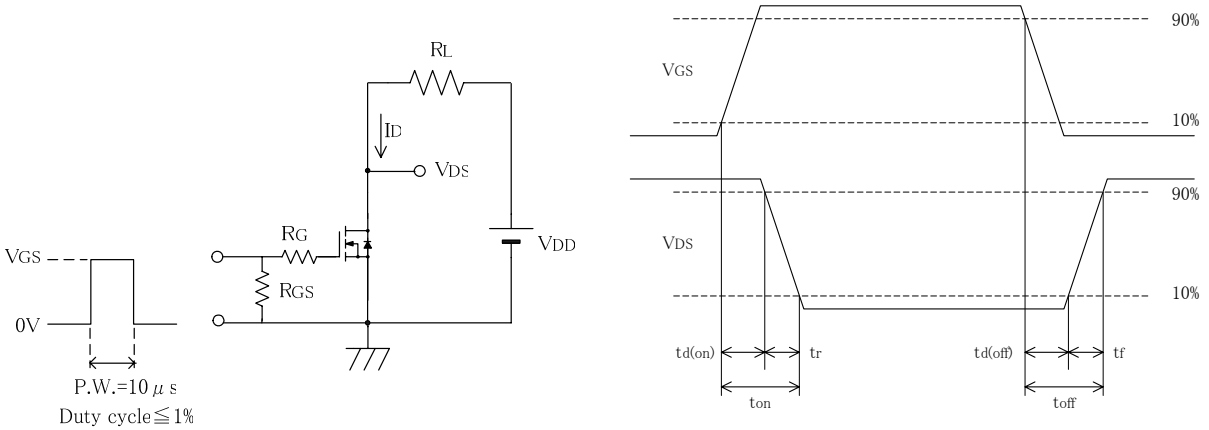


(a) Test Circuit (b) Waveforms

The information included herein is believed to be accurate and reliable. However, SANKEN ELECTRIC CO., LTD assumes no responsibility for its use ; nor for any infringements of patents or other rights of third parties that may result from its use.

Copy Right: SANKEN ELECTRIC CO.,LTD.

Outline

MT100 (TO3P)

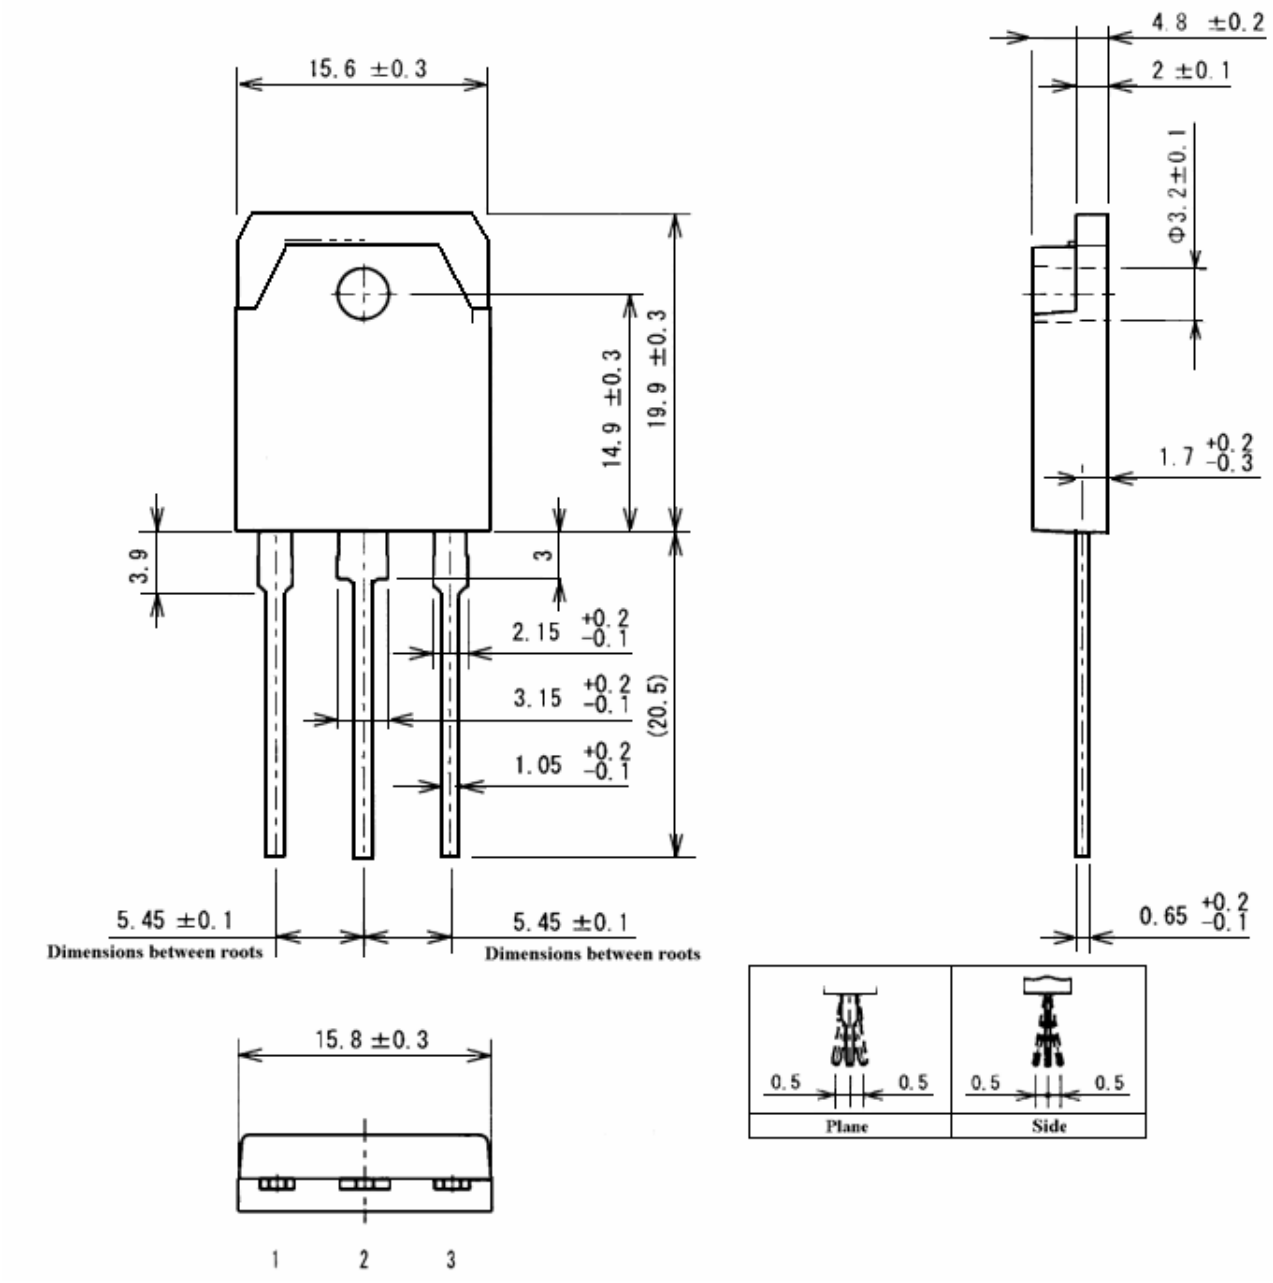

(1) Gate
(2) Drain (Back Side)
(3) Source

Weight Approx. 6g

The information included herein is believed to be accurate and reliable. However, SANKEN ELECTRIC CO., LTD assumes no responsibility for its use ; nor for any infringements of patents or other rights of third parties that may result from its use.

Copy Right: SANKEN ELECTRIC CO.,LTD.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.