

Buck chopper MOSFET Power Module

V_{DSS} = 200V
R_{DSon} = 8mΩ typ @ Tj = 25°C
I_D = 208A @ Tc = 25°C

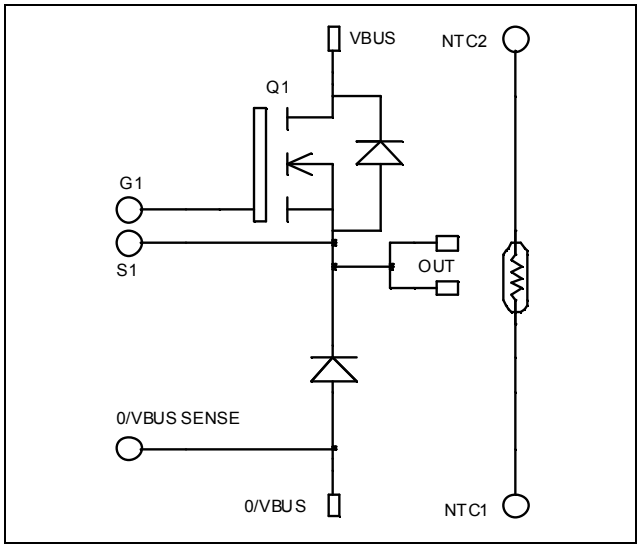

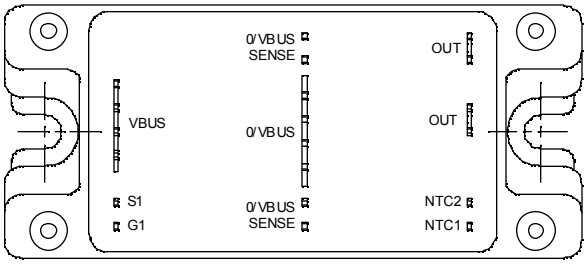

Application

- AC and DC motor control
- Switched Mode Power Supplies

Features

- Power MOS 7® MOSFETs
  - Low R_{DSon}
  - Low input and Miller capacitance
  - Low gate charge
  - Avalanche energy rated
  - Very rugged
- Kelvin source for easy drive
- Very low stray inductance
  - Symmetrical design
  - Lead frames for power connections
- Internal thermistor for temperature monitoring
- High level of integration

Benefits

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Solderable terminals both for power and signal for easy PCB mounting
- Low profile
- RoHS Compliant

Absolute maximum ratings

Symbol	*Parameter*		*Max ratings*	*Unit*
V_{DSS}	Drain - Source Breakdown Voltage		200	V
I_D	Continuous Drain Current	T_c = 25°C	208	A
		T_c = 80°C	155	
I_{DM}	Pulsed Drain current		832	
V_{GS}	Gate - Source Voltage		±30	V
R_{DSon}	Drain - Source ON Resistance		10	mΩ
P_D	Maximum Power Dissipation	T_c = 25°C	781	W
I_{AR}	Avalanche current (repetitive and non repetitive)		100	A
E_{AR}	Repetitive Avalanche Energy		50	mJ
E_{AS}	Single Pulse Avalanche Energy		3000	

CAUTION: These Devices are sensitive to Electrostatic Discharge. Proper Handing Procedures Should Be Followed. See application note APT0502 on www.microsemi.com

All ratings @ T_j = 25°C unless otherwise specified

Electrical Characteristics

Symbol	Characteristic	Test Conditions		Min	Typ	Max	Unit
I_{DSS}	Zero Gate Voltage Drain Current	V_{GS} = 0V, V_{DS} = 200V	T_j = 25°C			375	µA
		V_{GS} = 0V, V_{DS} = 160V	T_j = 125°C			1500	
$R_{DS(on)}$	Drain – Source on Resistance	V_{GS} = 10V, I_D = 104A			8	10	mΩ
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS} = V_{DS}, I_D = 5mA		3		5	V
I_{GSS}	Gate – Source Leakage Current	V_{GS} = ±30 V, V_{DS} = 0V				±150	nA

Dynamic Characteristics

Symbol	Characteristic	Test Conditions	Min	Typ	Max	Unit
C_{iss}	Input Capacitance	V_{GS} = 0V V_{DS} = 25V f = 1MHz		14.4		nF
C_{oss}	Output Capacitance			4.66		
C_{rss}	Reverse Transfer Capacitance			0.29		
Q_g	Total gate Charge	V_{GS} = 10V V_{Bus} = 100V I_D = 208A		280		nC
Q_{gs}	Gate – Source Charge			106		
Q_{gd}	Gate – Drain Charge			134		
$T_{d(on)}$	Turn-on Delay Time	**Inductive switching @ 125°C** V_{GS} = 15V V_{Bus} = 133V I_D = 208A R_G = 2.5Ω		32		ns
T_r	Rise Time			64		
$T_{d(off)}$	Turn-off Delay Time			88		
T_f	Fall Time			116		
E_{on}	Turn-on Switching Energy	**Inductive switching @ 25°C** V_{GS} = 15V, V_{Bus} = 133V I_D = 208A, R_G = 2.5Ω		1698		µJ
E_{off}	Turn-off Switching Energy			1858		
E_{on}	Turn-on Switching Energy	**Inductive switching @ 125°C** V_{GS} = 15V, V_{Bus} = 133V I_D = 208A, R_G = 2.5Ω		1872		µJ
E_{off}	Turn-off Switching Energy			1972		

Chopper diode ratings and characteristics

Symbol	Characteristic	Test Conditions		Min	Typ	Max	Unit
V_{RRM}	Maximum Peak Repetitive Reverse Voltage			200			V
I_{RM}	Maximum Reverse Leakage Current	V_R=200V	T_j = 25°C			500	µA
			T_j = 125°C			750	
I_F	DC Forward Current		T_c = 80°C		180		A
V_F	Diode Forward Voltage	I_F = 180A			1.1	1.15	V
		I_F = 360A			1.4		
		I_F = 180A	T_j = 125°C		0.9		
t_{rr}	Reverse Recovery Time	I_F = 180A V_R = 133V di/dt = 600A/µs	T_j = 25°C		31		ns
			T_j = 125°C		60		
Q_{rr}	Reverse Recovery Charge		T_j = 25°C		180		nC
			T_j = 125°C		750		

Thermal and package characteristics

Symbol	Characteristic			Min	Typ	Max	Unit
R_{thJC}	Junction to Case Thermal Resistance		Transistor			0.16	°C/W
			Diode			0.32	
V_{ISOL}	RMS Isolation Voltage, any terminal to case t =1 min, I isol<1mA, 50/60Hz			2500			V
T_J	Operating junction temperature range			-40		150	°C
T_{STG}	Storage Temperature Range			-40		125	
T_C	Operating Case Temperature			-40		100	
Torque	Mounting torque	To Heatsink	M5	2.5		4.7	N.m
Wt	Package Weight					160	g


Temperature sensor NTC (see application note APT0406 on www.microsemi.com for more information).

Symbol	Characteristic	Min	Typ	Max	Unit
R_{25}	Resistance @ 25°C		50		kΩ
$B_{25/85}$	T_{25} = 298.15 K		3952		K

$$R_T = \frac{R_{25}}{\exp\left[B_{25/85}\left(\frac{1}{T_{25}} - \frac{1}{T}\right)\right]}$$

T: Thermistor temperature
R_T: Thermistor value at T


SP4 Package outline (dimensions in mm)

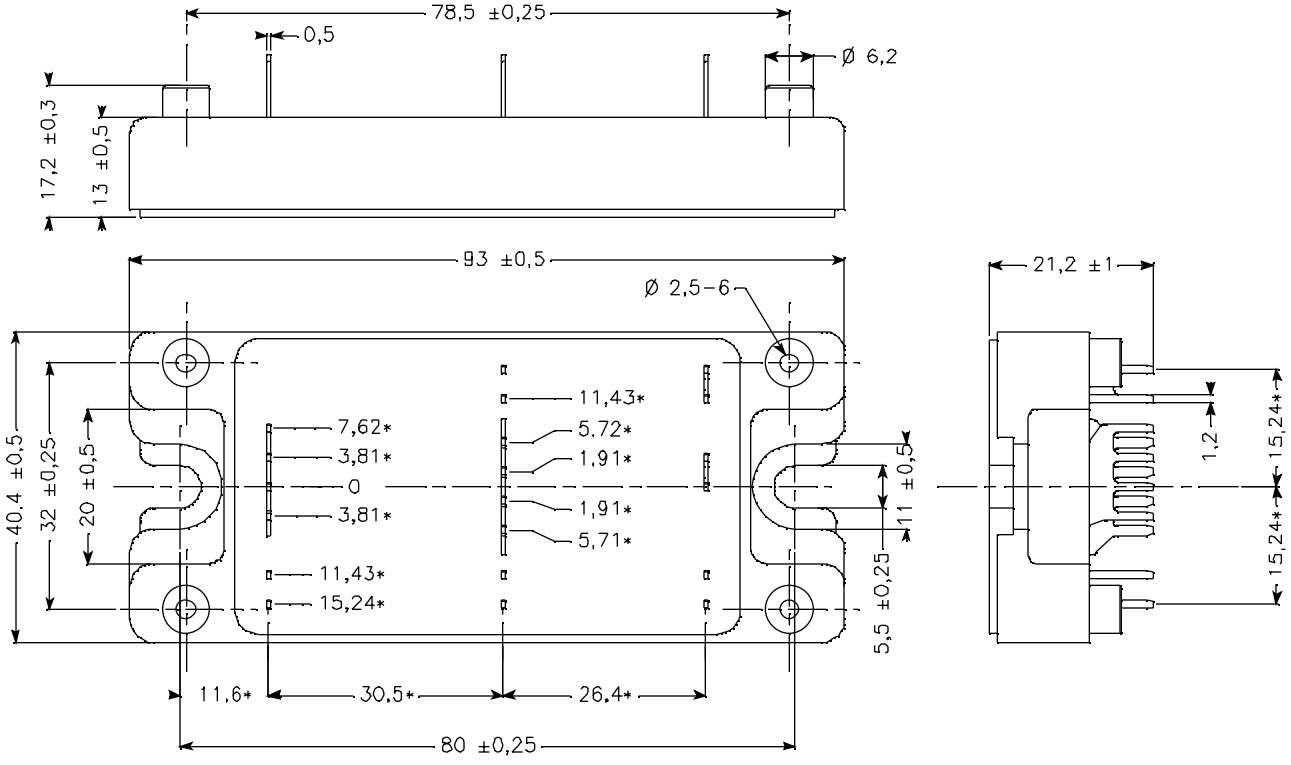



ALL DIMENSIONS MARKED " * " ARE TOLERENCED AS : ⌖ Ø1


See application note APT0501 - Mounting Instructions for SP4 Power Modules on www.microsemi.com


Typical Performance Curve

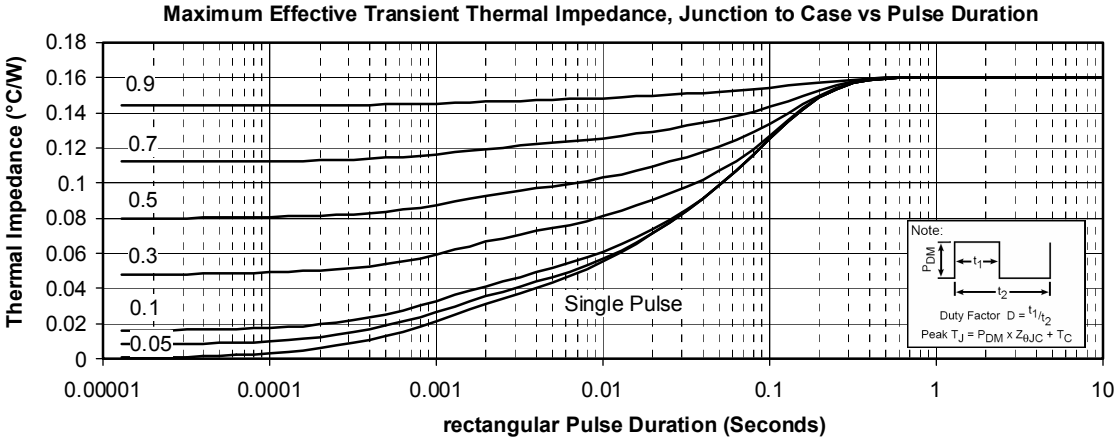

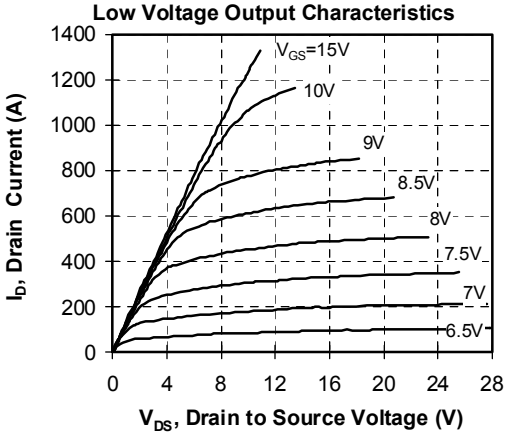


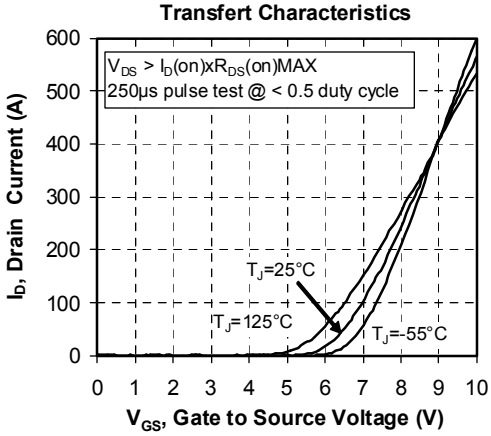

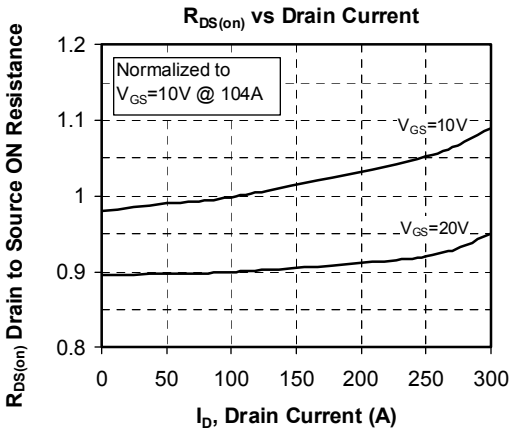


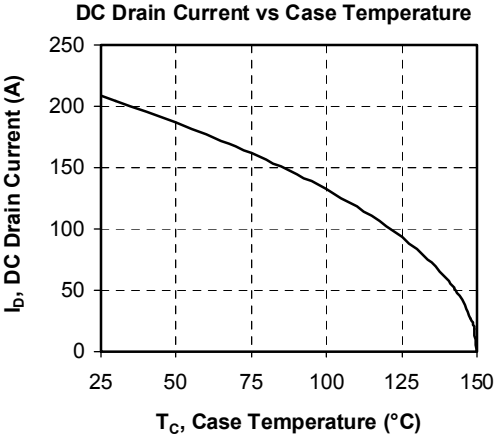


Breakdown Voltage vs Temperature

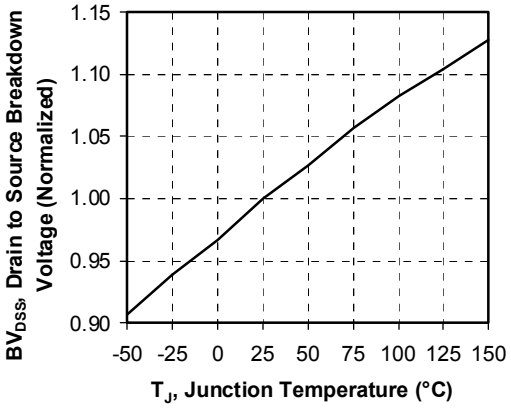


ON resistance vs Temperature

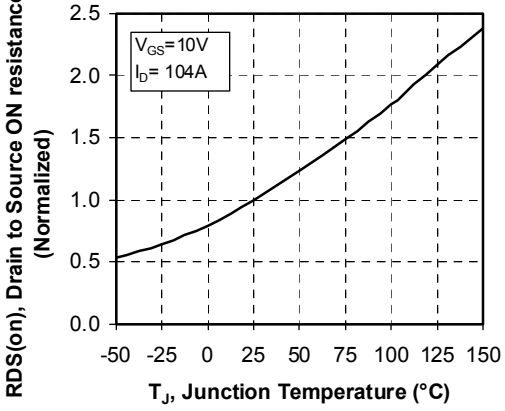


Threshold Voltage vs Temperature

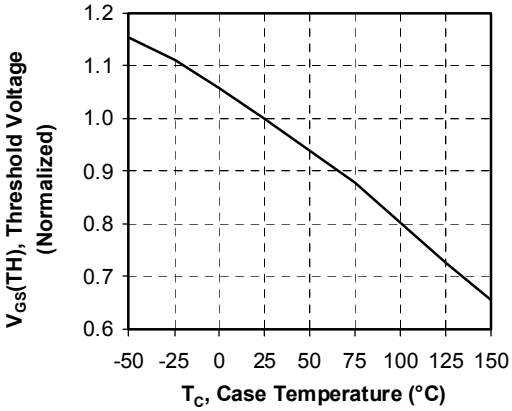


Maximum Safe Operating Area

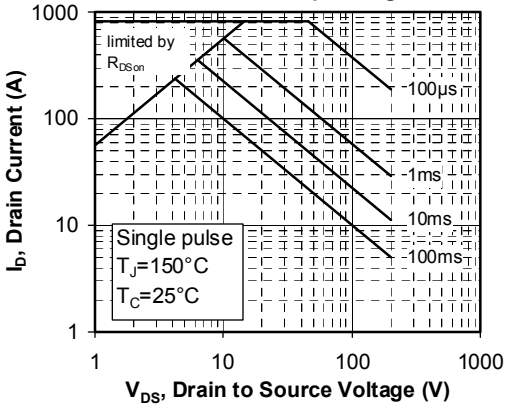


Capacitance vs Drain to Source Voltage

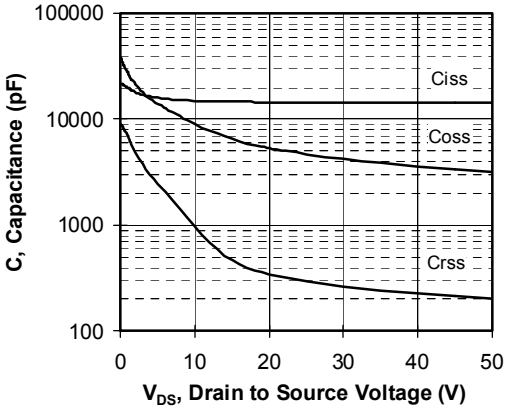


Gate Charge vs Gate to Source Voltage

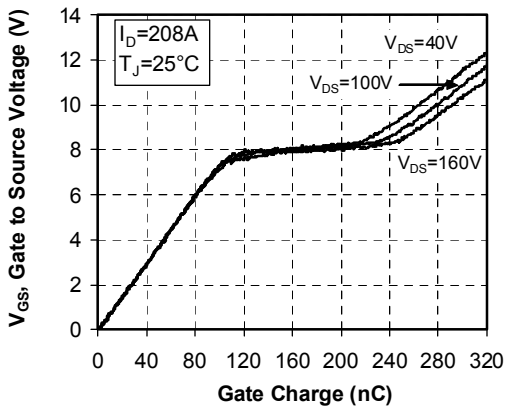


Delay Times vs Current

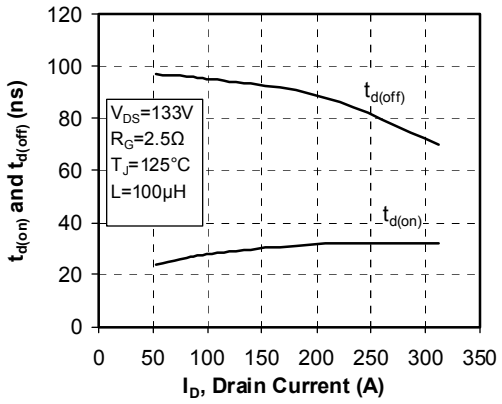


Rise and Fall times vs Current

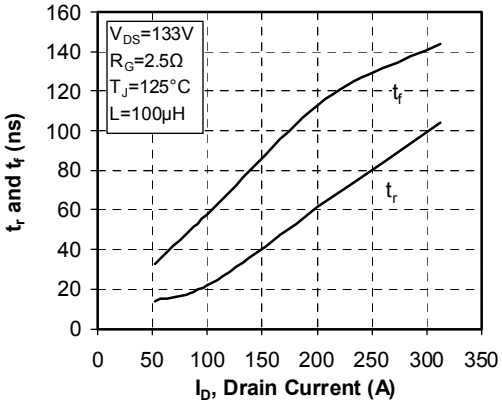


Switching Energy vs Current

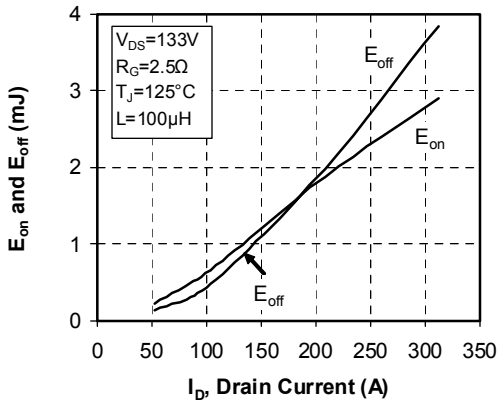


Switching Energy vs Gate Resistance

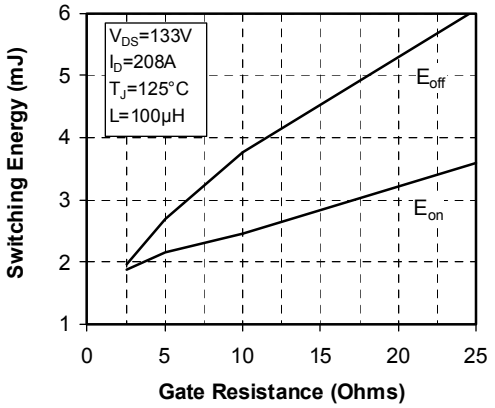

Operating Frequency vs Drain Current

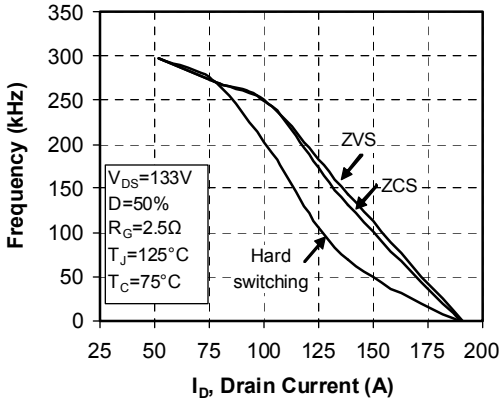

Source to Drain Diode Forward Voltage

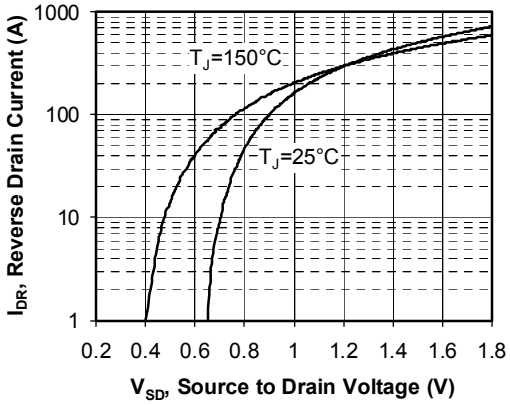

Microsemi reserves the right to change, without notice, the specifications and information contained herein

Microsemi's products are covered by one or more of U.S patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. U.S and Foreign patents pending. All Rights Reserved.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.