300-mA High PSRR, Ultra-low Noise LDO

Features

- Input Voltage Range: 1.75 V to 5.5 V
- Output Voltage Range: 0.9 V to 5 V
- ±2% Output Accuracy Over Line, Load Regulation, and Operating Temperature Range
- 300-mA Maximum Output Current
- Low Dropout Voltage: 180 mV Maximum at 300 mA
- High PSRR:
  - 81.9 dB at 1 kHz
  - 87.9 dB at 10 kHz
  - 61.4 dB at 100 kHz
  - 44.7 dB at 1 MHz
- 8.6-μV_{RMS} Output Voltage Noise
- Excellent Transient Response
- Output Reverse Current Protection
- Stable with a 1-µF or Larger Ceramic Output Capacitor
- Thermal Shutdown and Over-Current Protection
- Junction Temperature Range: –40°C to +125°C
- Package Options:
  - SOT23-5
  - DFN1x1-4
  - WLCSP0.65x0.65-4

Applications

- Portable and Battery-Powered Equipment
- Mobile Phones and Tablets
- Digital Cameras and Audio Devices Power Supply
- Video Surveillance

Description

The TPL9032 series products are 300-mA high PSRR, ultra-low noise, and low dropout linear regulators with high output accuracy. The TPL9032 series products support both fixed output voltage ranges from 0.9 V to 5 V and are stable with 1 µF or larger ceramic output capacitor.

The TPL9032 series products have high PSRR with 87.9 dB at 10 kHz and 8.6 μV_{RMS} ultra-low noise. These features make TPL9032 series products very suitable for noise-sensitive applications with high noise from previous stage power supply, such as high-performance analog devices, or high-definition imaging equipment. Output shortage protection and thermal overload protection circuits improve the reliability under heavy load conditions.

The TPL9032 series products provide SOT23-5, DFN1x1-4, and WLCSP0.65x0.65-4 packages with guaranteed operating junction temperature range (T_J) from –40°C to +125°C.

Typical Application Circuit

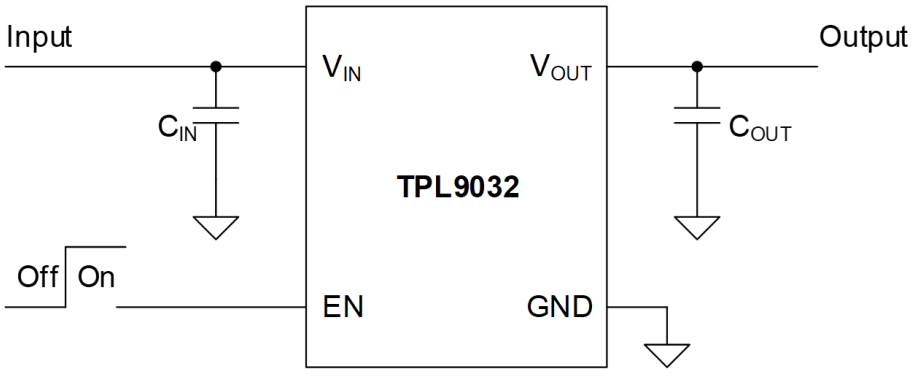


Table of Contents

Features 1
Applications 1
Description 1
Typical Application Circuit 1
Product Family Table 3
Revision History 4
Pin Configuration and Functions 5
Specifications 6
Absolute Maximum Ratings (1) 6
ESD, Electrostatic Discharge Protection 6
Recommended Operating Conditions 6
Thermal Information 6
Electrical Characteristics 7
Typical Performance Characteristics 8
Detailed Description 10
Overview 10
Functional Block Diagram 10
Feature Description 10
Application and Implementation 12
Application Information 12
Typical Application 12
Layout 13
Layout Guideline 13
Tape and Reel Information 14
Package Outline Dimensions 16
SOT23-5 16
DFN1x1-4 17
WLCSP0.65x0.65-4 18
Order Information 19
IMPORTANT NOTICE AND DISCLAIMER 21

Product Family Table


Part Number	Orderable Number	Output Voltage	Package	Transport Media, Quantity	MSL	Marking Information
TPL9032	TPL903212-S5TR	1.2 V	SOT23-5	Tape and Reel, 3,000	MSL3	L8G
TPL9032	TPL903215-S5TR	1.5 V	SOT23-5	Tape and Reel, 3,000	MSL3	L8I
TPL9032	TPL903218-S5TR	1.8 V	SOT23-5	Tape and Reel, 3,000	MSL3	L8K
TPL9032	TPL903225-S5TR	2.5 V	SOT23-5	Tape and Reel, 3,000	MSL3	L8P
TPL9032	TPL903228-S5TR	2.8 V	SOT23-5	Tape and Reel, 3,000	MSL3	L8T
TPL9032	TPL903229-S5TR	2.9 V	SOT23-5	Tape and Reel, 3,000	MSL3	L8V
TPL9032	TPL903230-S5TR	3.0 V	SOT23-5	Tape and Reel, 3,000	MSL3	L8W
TPL9032	TPL903233-S5TR	3.3 V	SOT23-5	Tape and Reel, 3,000	MSL3	L8Z
TPL9032	TPL903236-S5TR	3.6 V	SOT23-5	Tape and Reel, 3,000	MSL3	L82
TPL9032	TPL903245-S5TR	4.5 V	SOT23-5	Tape and Reel, 3,000	MSL3	L85
TPL9032	TPL903212-DF1R	1.2 V	DFN1x1-4	Tape and Reel, 12,000	MSL3	L8G
TPL9032	TPL903218-DF1R	1.8 V	DFN1x1-4	Tape and Reel, 12,000	MSL3	L8K
TPL9032	TPL903225-DF1R	2.5 V	DFN1x1-4	Tape and Reel, 12,000	MSL3	L8P
TPL9032	TPL903228-DF1R	2.8 V	DFN1x1-4	Tape and Reel, 12,000	MSL3	L8T
TPL9032	TPL903229-DF1R	2.9 V	DFN1x1-4	Tape and Reel, 12,000	MSL3	L8V
TPL9032	TPL903230-DF1R	3.0 V	DFN1x1-4	Tape and Reel, 12,000	MSL3	L8W
TPL9032	TPL903231-DF1R	3.1 V	DFN1x1-4	Tape and Reel, 12,000	MSL3	L8X
TPL9032	TPL903233-DF1R	3.3 V	DFN1x1-4	Tape and Reel, 12,000	MSL3	L8Z
TPL9032	TPL903212-WS1R	1.2 V	WLCSP-4	Tape and Reel, 3,000	MSL3	8G
TPL9032	TPL903215-WS1R	1.5 V	WLCSP-4	Tape and Reel, 3,000	MSL3	8I
TPL9032	TPL903218-WS1R	1.8 V	WLCSP-4	Tape and Reel, 3,000	MSL3	8K
TPL9032	TPL90321875-WS1R	1.875 V	WLCSP-4	Tape and Reel, 3,000	MSL3	88
TPL9032	TPL903225-WS1R	2.5 V	WLCSP-4	Tape and Reel, 3,000	MSL3	8P
TPL9032	TPL9032285-WS1R	2.85 V	WLCSP-4	Tape and Reel, 3,000	MSL3	8U
TPL9032	TPL903231-WS1R	3.1 V	WLCSP-4	Tape and Reel, 3,000	MSL3	8X
TPL9032	TPL903233-WS1R	3.3 V	WLCSP-4	Tape and Reel, 3,000	MSL3	8Z

Revision History


Date	Revision	Notes
2019-08-31	Rev.Pre.0	Preliminary Version
2020-04-08	Rev.A.0	Initial Released
2021-05-14	Rev.A.1	Added Tape and Reel Information on Page 16
2024-01-12	Rev.A.2	1. Updated Thermal Information of WLCSP Package 2. Added Output Options of WLCSP Package
2024-04-30	Rev.A.3	1. Corrected Package Outline of WLCSP Package 2. Added missing Package Outline of DFN1x1-4 Package
2026-08-06	Rev.A.4	Added TPL903212-WS1R
2026-09-01	Rev.A.5	1. Updated the Figure.9 2. Added TPL903215-WS1R The actual product remains unchanged

Pin Configuration and Functions

TPL9032 Series
SOT23-5 Package
Top View

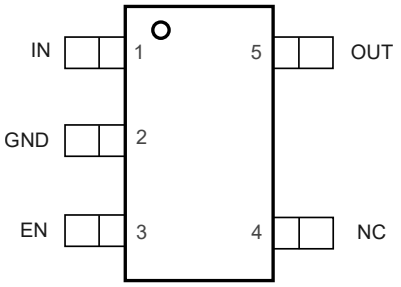

TPL9032 Series
DFN1x1-4 Package
Top View

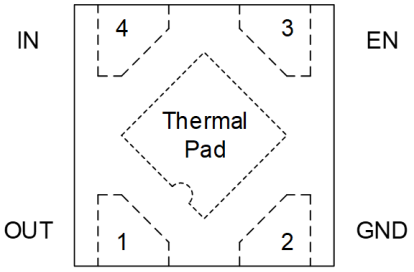

TPL9032 Series
WLCSP-4 Package
Top View

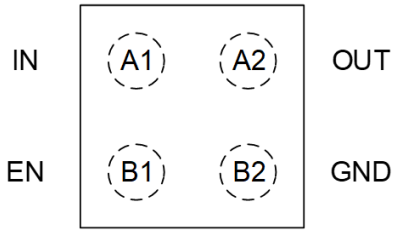


Table 1. Pin Functions: TPL9032 Series

Pin No.			Name	I/O	Description
SOT23-5	DFN-4	WLCSP-4			
3	3	B1	EN	I	Regulator enable pin. Drive EN high to turn on the regulator; drive EN low to turn off the regulator. For automatic startup, connect EN to IN directly.
2	2	B2	GND	–	Ground reference pin. Connect the GND pin to the PCB ground plane directly.
1	4	A1	IN	I	Input voltage pin. Bypass IN to GND with a 1 μF or greater capacitor.
4	–	–	NC	–	No connection.
5	1	A2	OUT	O	Regulated output voltage pin. Bypass OUT to GND with a 1 μF or greater capacitor.

(1) Thermal Pad **MUST** be connected to PCB ground plane directly.

Specifications

Absolute Maximum Ratings (1)

Parameter		Min	Max	Unit
IN, EN		−0.3	6	V
OUT		−0.3	6	V
T_J	Junction Temperature Range	−40	150	°C
T_{STG}	Storage Temperature Range	−65	150	°C
T_L	Lead Temperature (Soldering 10 sec)		260	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.
(2) All voltage values are with respect to GND.

ESD, Electrostatic Discharge Protection

Parameter		Condition	Minimum Level	Unit
HBM	Human Body Model ESD	ANSI/ESDA/JEDEC JS-001 (1)	±6000	V
CDM	Charged Device Model ESD	ANSI/ESDA/JEDEC JS-002 (2)	±1500	V

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

Recommended Operating Conditions

Parameter		Min	Max	Unit
IN		1.75	5.5	V
EN		0	V_{IN}	V
OUT		0	5.5	V
C_{OUT}		1	10	μF
ESR of C_{OUT}		0.001	0.1	Ω
T_J	Junction Temperature Range	−40	125	°C
P_D	Power Dissipation	0	400	mW

Thermal Information

Package Type	θ_{JA}	θ_{JC}	Unit
SOT23-5	280	62	°C/W
DFN1x1-4	210	110	°C/W
WLCSP0.65x0.65-4	220	6	°C/W

Electrical Characteristics


All test conditions: V_{IN} = $V_{OUT(NOM)}$ + 1 V, I_{OUT} = 1 mA, C_{IN} = 1 µF, C_{OUT} = 1 µF, −40°C ≤ T_J ≤ +125°C, unless otherwise noted.

Parameter		Conditions	Min	Typ	Max	Unit
Supply Voltage and Current						
V_{IN}	Input Supply Voltage range		1.75		5.5	V
I_{GND}	Ground Pin Current	I_{OUT} = 0 mA		120		µA
I_{SHDN}	Shutdown Current	EN = GND		0.02	2	µA
Enable Input Voltage and Current						
$V_{IH(EN)}$	EN Logic-input High Level	Output Enable	1.2		V_{IN}	V
$V_{IL(EN)}$	EN Logic-input Low Level	Output Disable	0		0.4	V
I_{EN}	EN Pin Leakage Current	V_{EN} = 5 V		1	2	µA
Regulated Output Voltage and Current						
V_{OUT}	Output Voltage Accuracy	−40°C ≤ T_J ≤ +125°C, 0 mA ≤ I_{OUT} ≤ 300 mA	−2%		2%	
ΔV_{OUT}	Line Regulation	V_{IN} = $V_{OUT(NOM)}$ + 1 V to 5.5 V		1		mV
	Load Regulation	V_{IN} = $V_{OUT(NOM)}$ + 1 V, I_{OUT} = 1 mA to 300 mA		5		mV
V_{DO} (1)	Dropout Voltage	V_{OUT} = 3.3 V, I_{OUT} = 100 mA		28		mV
		V_{OUT} = 3.3 V, I_{OUT} = 300 mA		80	180	mV
I_{OUT}	Output Current	V_{OUT} in regulation	0		300	mA
I_{CL}	Output Current Limit	V_{OUT} = 0.9 × $V_{OUT(NOM)}$	500	800		mA
I_{SC}	Short-circuit Current Limit	R_{LOAD} = 20 mΩ, T_A = 25°C		100		mA
R_{DIS}	Active Output Discharge Resistance	V_{EN} < $V_{IL(EN)}$		290		Ω
PSRR	Power Supply Rejection Ratio	I_{OUT} = 20 mA, f = 100 Hz		82.1		dB
		I_{OUT} = 20 mA, f = 1 kHz		81.9		dB
		I_{OUT} = 20 mA, f = 10 kHz		87.9		dB
		I_{OUT} = 20 mA, f = 100 kHz		61.4		dB
		I_{OUT} = 20 mA, f = 1 MHz		44.7		dB
V_N	Output Noise Voltage	I_{OUT} = 150 mA, BW = 10 Hz to 100 kHz		8.6		μV_{RMS}
t_{STR}	Start-up Time	VOUT reaches 95% of nominal output voltage after EN = high		750		µs
Temperature Range						
T_{SD}	Thermal Shutdown Temperature			165		ºC
	Thermal Shutdown Hysteresis			15		ºC

(1) Dropout voltage is the minimum input-to-output voltage differential needed to maintain regulation at a specified output current and measure for $V_{OUT(NOM)}$ ≥ 1.8 V. In the dropout mode, the output voltage will be equal to: V_{IN} − $V_{DROPOUT}$.


Typical Performance Characteristics

All test conditions: V_{IN} = $V_{OUT(NOM)}$ + 1 V, I_{OUT} = 1 mA, C_{IN} = 1 µF, C_{OUT} = 1 µF, –40°C ≤ T_J ≤ +125°C, unless otherwise noted.

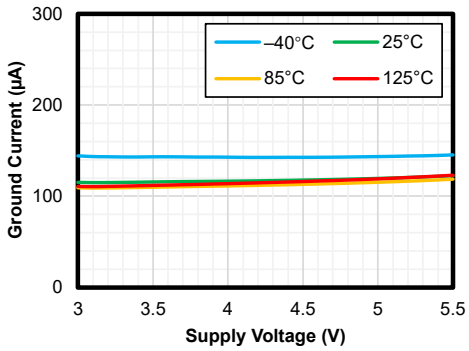


V_{OUT} = 2.8 V

Figure 1. Quiescent Current vs Input Voltage

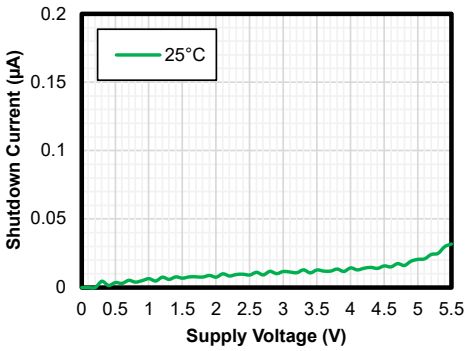


EN = GND

Figure 2. Quiescent Current vs Input Voltage

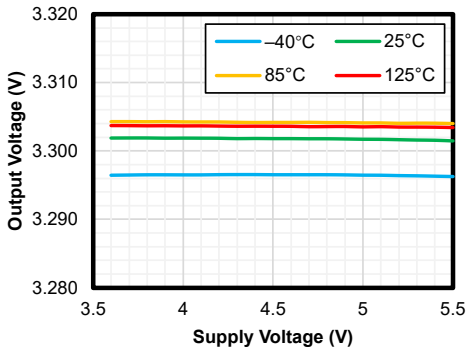


V_{OUT} = 3.3 V

Figure 3. Line Regulation

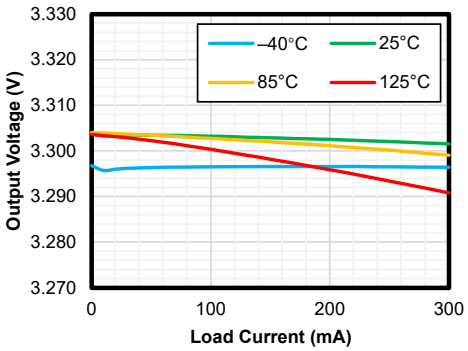


V_{OUT} = 3.3 V

Figure 4. Load Regulation

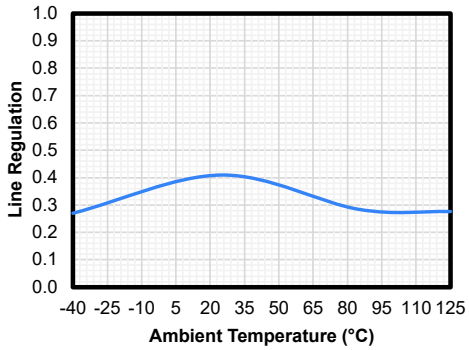

V_{OUT} = 3.3 V

Figure 5. Line Regulation vs. Temperature

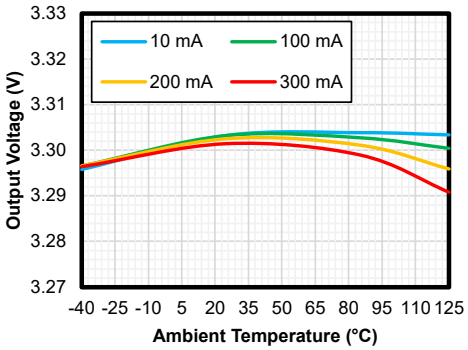

V_{OUT} = 3.3 V

Figure 6. Output Voltage vs. Temperature

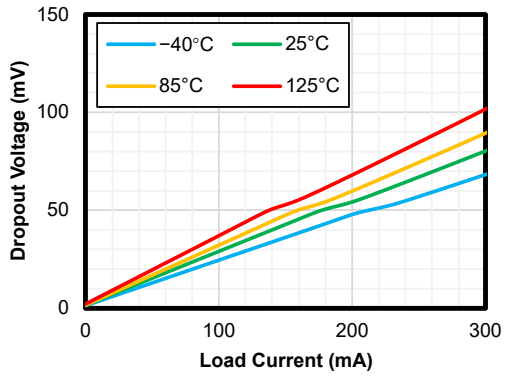


Figure 7. Dropout Voltage vs Output Current

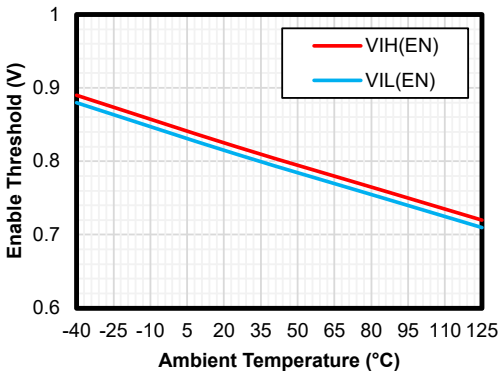


Figure 8. Enable Threshold vs. Temperature



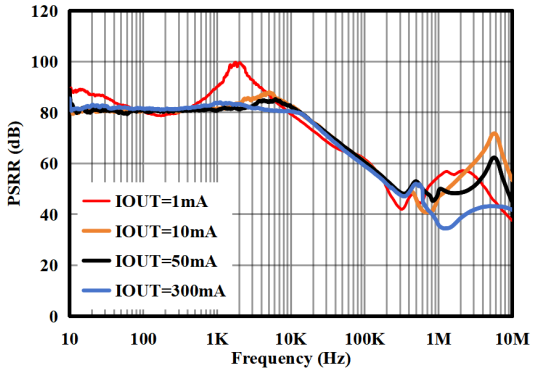


Figure 9. PSRR

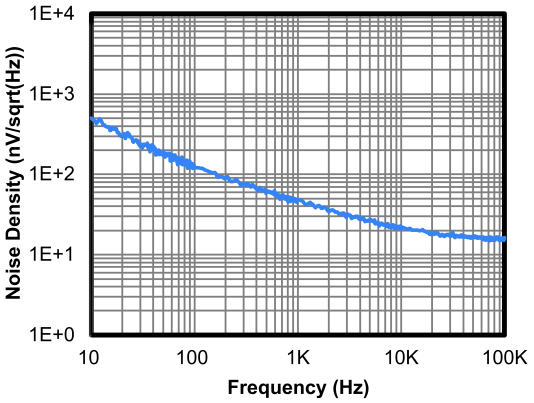


I_{OUT} = 100 mA

Figure 10. Noise

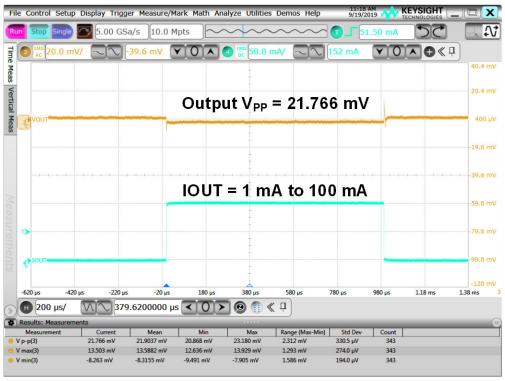

I_{OUT} = 1 mA to 100 mA, V_{PP} = 21.77 mV

Figure 11. Load Transient

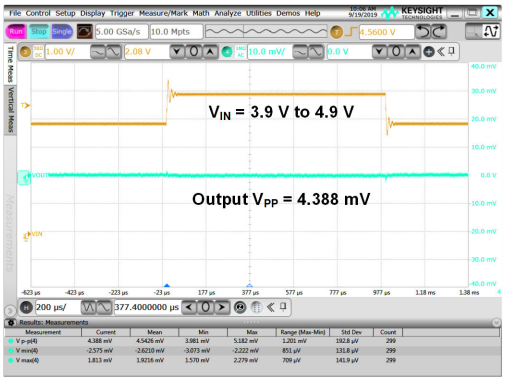

V_{IN} = 3.9 V to 4.9 V, V_{PP} = 4.388 mV

Figure 12. Line Transient

Detailed Description

Overview

The TPL9032 series products are 300-mA high PSRR, ultra-low noise, and low dropout linear regulators with high output accuracy. The TPL9032 series products support both fixed output voltage ranges from 0.9 V to 5 V and are stable with 1 µF or larger ceramic output capacitor.

The TPL9032 series products have high PSRR with 87.9 dB at 10 kHz and 8.6 μV_{RMS} ultra-low noise. These features make TPL9032 series products very suitable for noise-sensitive applications with high noise from the previous stage power supply, such as high-performance analog devices, or high-definition imaging equipment. Output shortage protection and thermal overload protection circuits improve reliability under heavy load conditions.

Functional Block Diagram

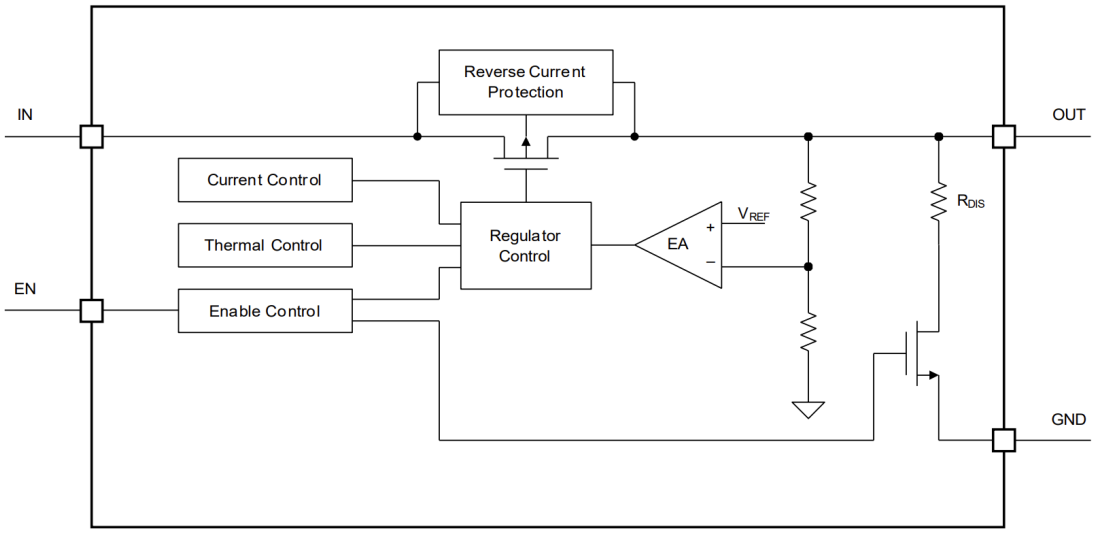


Figure 13. Functional Block Diagram

Feature Description

Enable (EN)

The enable pin (EN) is active high. Connect this pin to the GPIO of an external processor or digital logic control circuit to enable and disable the device. Or connect this pin to the IN pin for self-bias applications.

Operating Voltage Range (V_{IN})

The TPL9032 series does not include any dedicated UVLO circuitry. The output voltage of the TPL9032 series is not well regulated until VIN exceeds 1.75 V or (V_{OUT} + V_{DO}).

Regulated Output Voltage (V_{OUT})

The TPL9032 series are available in fixed voltage versions of 0.9 V to 5 V. When the input voltage is higher than $V_{OUT(NOM)}$ + 1 V, the output pin is the regulated output based on the selected voltage version. When the input voltage falls below $V_{OUT(NOM)}$ + 1 V, the output pin tracks the input voltage minus the dropout voltage based on the load current.

Reverse-Current Protection (RCP)

The TPL9032 series provides reverse-current protection (RCP) to prevent output reverse current. If large capacitors have been used at the output, there would be a large reverse current when the input voltage is lower than the output voltage. The TPL9032 series can shut off the regulator and body diode path to prevent the device damaged from reverse current fault.

Current Limit

The TPL9032 series integrates an internal current limit that helps to protect the regulator during fault conditions. When the output is shorted, the LDO supplies a typical current of 100 mA. The output voltage is not regulated when the device is in current limit, and $V_{OUT} = I_{CL} \times R_{LOAD}$.

Thermal Shutdown

During normal operation, the LDO junction temperature should not exceed 125°C. When the junction temperature exceeds the thermal shutdown threshold, the LDO shuts down the output immediately. When the junction temperature falls below a value, which equals to thermal-shutdown threshold minus thermal-shutdown hysteresis, the output turns on again.

Application and Implementation

> Note
>
> Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

Application Information

The TPL9032 devices are a series of 300-mA high PSRR, ultra-low noise, low-dropout linear regulator. The following application schematic shows a typical usage of the TPL9032 series.

Typical Application

Figure 14 shows the typical application schematic of the TPL9032 series.

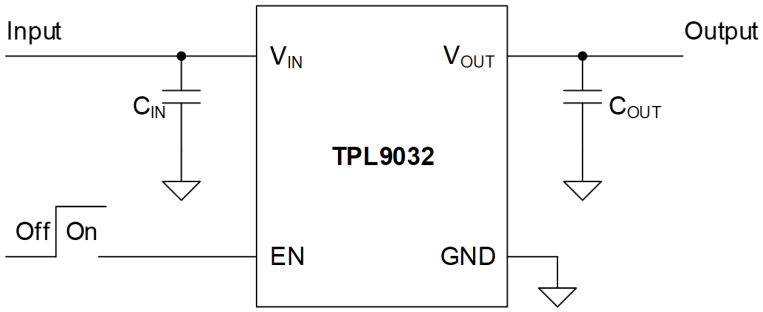


Figure 14. Typical Application Circuit

Input Capacitor and Output Capacitor

3PEAK recommends adding a 1-μF or greater capacitor with a 0.1-μF bypass capacitor in parallel at the IN pin to keep the input voltage stable. The voltage rating of the capacitors must be greater than the maximum input voltage.

To ensure loop stability, the TPL9032 series requires an output capacitor of 1 μF or greater. 3PEAK recommends selecting an X5R- or X7R-type ceramic capacitor with low ESR over temperature.

Both input capacitors and output capacitors must be placed as close to the device pins as possible.

Power Dissipation

During normal operation, the LDO junction temperature should not exceed 125°C. Use the below equations to calculate the power dissipation and estimate the junction temperature.

The power dissipation can be calculated using Equation 1.

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT} + V_{IN} \times I_{GND} \quad (1)$$

The junction temperature can be estimated using Equation 2. θ_{JA} is the junction-to-ambient thermal resistance.


$$T_J = T_A + P_D \times \theta_{JA} \quad (2)$$


Layout

Layout Guideline

- Both input capacitors and output capacitors must be placed as close to the device pins as possible.
- It is recommended to bypass the input pin to ground with a 0.1-μF bypass capacitor. The loop area formed by the bypass capacitor connection, the IN pin, and the GND pin of the system must be as small as possible.
- It is recommended to use wide and thick copper to minimize I×R drop and heat dissipation.

Tape and Reel Information

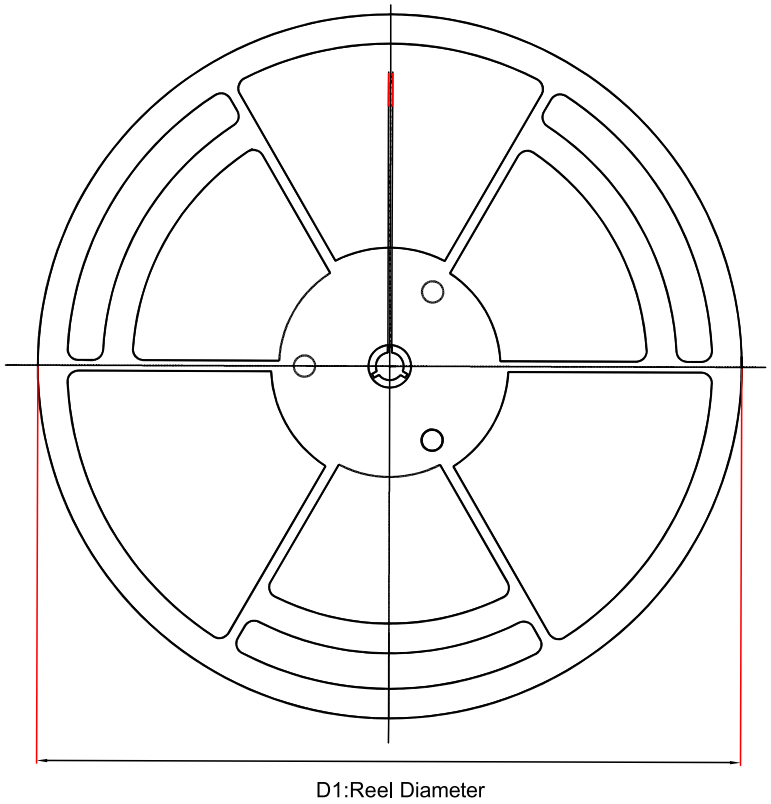

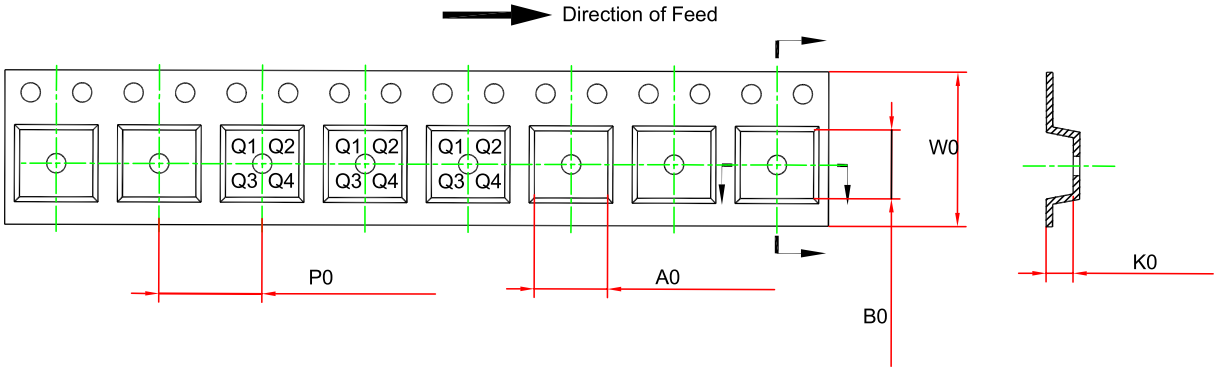

Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPL9032xx-S5TR-S (1)	SOT23-5	180.0	13.1	3.2	3.2	1.4	4.0	8.0	Q3
TPL9032xx-DF1R (2)	DFN1x1-4	180.0	10.0	1.16	1.16	0.5	2.0	8.0	Q1
TPL903228-DF1R	DFN1x1-4	180.0	10.0	1.16	1.16	0.5	2.0	8.0	Q2


Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPL903229-DF1R	DFN1x1-4	180.0	10.0	1.16	1.16	0.5	2.0	8.0	Q2
TPL9032xx-WS1R (1)	WLCSP0.65x0.65-4	180.0	12.3	0.75	0.75	0.5	4	8	Q1

(1) Output voltage value, xx = 12 to 36. e.g., 33 means 3.3 V output voltage.
(2) Output voltages 2.8 V and 2.9 V are not included.

Package Outline Dimensions

SOT23-5

Package Outline Dimensions S5T(SOT23-5-A)

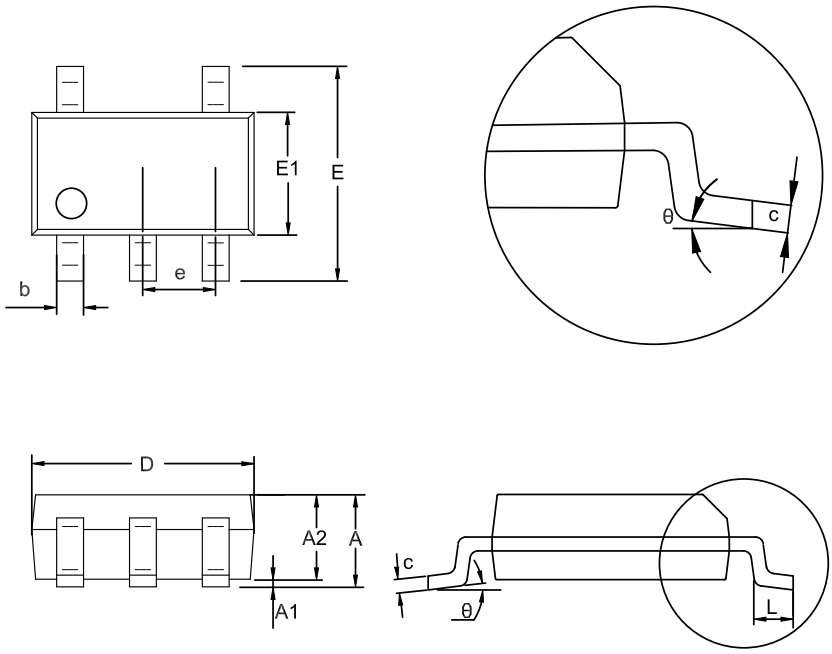


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.150	0.000	0.006
A2	1.000	1.200	0.039	0.047
b	0.280	0.500	0.011	0.020
c	0.100	0.230	0.004	0.009
D	2.820	3.020	0.111	0.119
E	2.600	3.000	0.102	0.118
E1	1.500	1.720	0.059	0.068
e	0.950 BSC		0.037 BSC	
L	0.300	0.600	0.012	0.024
θ	0	8°	0	8°

NOTES


1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

DFN1x1-4


Package Outline Dimensions DF1(DFN1X1-4-A)

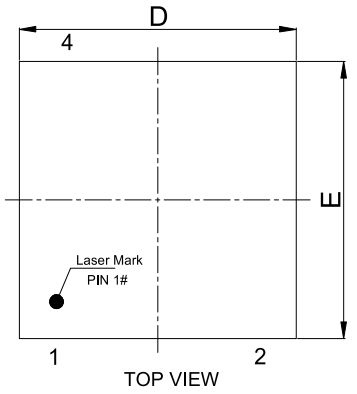

TOP VIEW

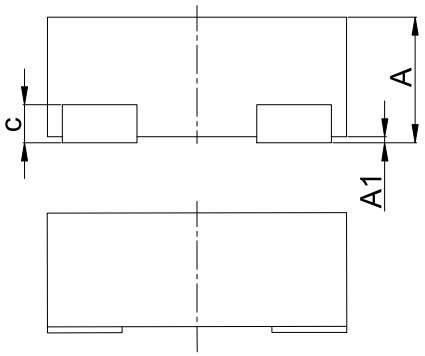

SIDE VIEW

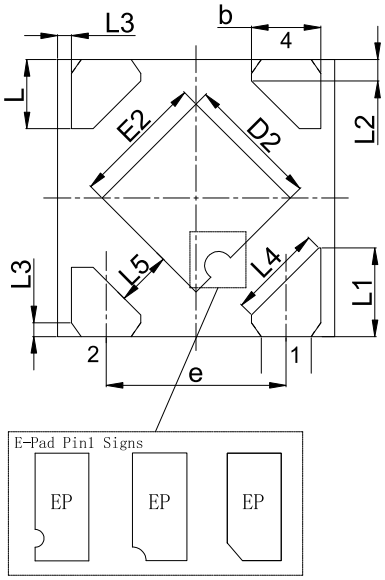

BOTTOM VIEW


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.350	0.400	0.014	0.016
A1	0.000	0.050	0.000	0.002
b	0.200	0.300	0.008	0.012
c	0.070	0.170	0.003	0.007
D	0.950	1.050	0.037	0.041
D2	0.430	0.530	0.017	0.021
E	0.950	1.050	0.037	0.041
E2	0.430	0.530	0.017	0.021
e	0.650 BSC		0.026 BSC	
L	0.200	0.300	0.008	0.012
L1	0.270	0.370	0.011	0.015
L2	0.077 BSC		0.003 BSC	
L3	0.050 BSC		0.002 BSC	
L4	0.340 BSC		0.013 BSC	
L5	0.200 BSC		0.008 BSC	

NOTES


1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.
3. The many types of E-pad Pin1 signs may appear in the product.

WLCSP0.65x0.65-4


Package Outline Dimensions WLP(WLCSP-A)



TOP VIEW
(MARK SIDE)

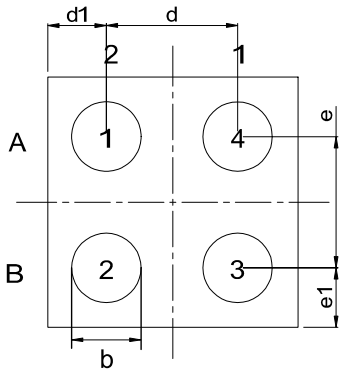

BOTTOM VIEW
(BALL SIDE)

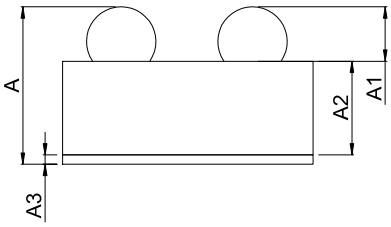

SIDE VIEW

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.390	0.450	0.015	0.018
A1	0.130	0.160	0.005	0.006
A2	0.238	0.262	0.009	0.010
A3	0.022	0.028	0.001	0.001
b	0.166	0.204	0.007	0.008
D	0.648	0.688	0.025	0.027
E	0.648	0.688	0.025	0.027
d	0.350		0.014	
d1	0.156		0.006	
e	0.350		0.014	
e1	0.159		0.006	

NOTES
1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

Order Information

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPL903212-S5TR	−40°C to +125°C	SOT23-5	L8G	MSL3	Tape and Reel, 3,000	Green
TPL903215-S5TR	−40°C to +125°C	SOT23-5	L8I	MSL3	Tape and Reel, 3,000	Green
TPL903218-S5TR	−40°C to +125°C	SOT23-5	L8K	MSL3	Tape and Reel, 3,000	Green
TPL903225-S5TR	−40°C to +125°C	SOT23-5	L8P	MSL3	Tape and Reel, 3,000	Green
TPL903228-S5TR	−40°C to +125°C	SOT23-5	L8T	MSL3	Tape and Reel, 3,000	Green
TPL903229-S5TR	−40°C to +125°C	SOT23-5	L8V	MSL3	Tape and Reel, 3,000	Green
TPL903230-S5TR	−40°C to +125°C	SOT23-5	L8W	MSL3	Tape and Reel, 3,000	Green
TPL903233-S5TR	−40°C to +125°C	SOT23-5	L8Z	MSL3	Tape and Reel, 3,000	Green
TPL903236-S5TR	−40°C to +125°C	SOT23-5	L82	MSL3	Tape and Reel, 3,000	Green
TPL903245-S5TR	−40°C to +125°C	SOT23-5	L85	MSL3	Tape and Reel, 3,000	Green
TPL903212-DF1R	−40°C to +125°C	DFN1x1-4	L8G	MSL3	Tape and Reel, 12,000	Green
TPL903218-DF1R	−40°C to +125°C	DFN1x1-4	L8K	MSL3	Tape and Reel, 12,000	Green
TPL903225-DF1R	−40°C to +125°C	DFN1x1-4	L8P	MSL3	Tape and Reel, 12,000	Green
TPL903228-DF1R	−40°C to +125°C	DFN1x1-4	L8T	MSL3	Tape and Reel, 12,000	Green
TPL903229-DF1R	−40°C to +125°C	DFN1x1-4	L8V	MSL3	Tape and Reel, 12,000	Green
TPL903230-DF1R	−40°C to +125°C	DFN1x1-4	L8W	MSL3	Tape and Reel, 12,000	Green
TPL903231-DF1R	−40°C to +125°C	DFN1x1-4	L8X	MSL3	Tape and Reel, 12,000	Green
TPL903233-DF1R	−40°C to +125°C	DFN1x1-4	L8Z	MSL3	Tape and Reel, 12,000	Green
TPL903212-WS1R	−40°C to +125°C	WLCSP-4	8G	MSL3	Tape and Reel, 3,000	Green
TPL903215-WS1R	−40°C to +125°C	WLCSP-4	8I	MSL3	Tape and Reel, 3,000	Green

Order Number	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPL903218-WS1R	−40°C to +125°C	WLCSP-4	8K	MSL3	Tape and Reel, 3,000	Green
TPL90321875-WS1R	−40°C to +125°C	WLCSP-4	88	MSL3	Tape and Reel, 3,000	Green
TPL903225-WS1R	−40°C to +125°C	WLCSP-4	8P	MSL3	Tape and Reel, 3,000	Green
TPL9032285-WS1R	−40°C to +125°C	WLCSP-4	8U	MSL3	Tape and Reel, 3,000	Green
TPL903231-WS1R	−40°C to +125°C	WLCSP-4	8X	MSL3	Tape and Reel, 3,000	Green
TPL903233-WS1R	−40°C to +125°C	WLCSP-4	8Z	MSL3	Tape and Reel, 3,000	Green

Green: 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

IMPORTANT NOTICE AND DISCLAIMER

Copyright© 3PEAK 2012-2026. All rights reserved.

Trademarks. Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

Performance Information. Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

Disclaimer. 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.

This page intentionally left blank

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.