MOSFET – P-Channel, POWERTRENCH® Integrated with Schottky Diode

-20 V, -3.1 A, 95 mΩ


FDFMA2P029Z, FDFMA2P029Z-F106

MOSFET

V_{DS} MAX	$r_{DS(on)}$ MAX	I_D MAX
−20 V	95 mΩ @ −4.5 V	−3.1 A
	141 mΩ @ −2.5 V	

SCHOTTKY DIODE

V_{RRM} MAX	V_F MAX	I_O MAX
20 V	0.37 V @ 500 mA	2 A



WDFN6 2x2, 0.65P
MicroFET
CASE 511DA

General Description

This device is designed specifically as a single package solution for the battery charge switch in cellular handset and other ultra−portable applications. It features a MOSFET with very low on−state resistance and an independently connected low forward voltage schottky diode allows for minimum conduction losses.

The MicroFET™ 2X2 package offers exceptional thermal performance for its physical size and is well suited to linear mode applications.

Features

MOSFET

- Max $r_{DS(on)}$ = 95 mΩ at V_{GS} = −4.5 V, I_D = −3.1 A
- Max $r_{DS(on)}$ = 141 mΩ at V_{GS} = −2.5 V, I_D = −2.5 A
- HBM ESD Protection Level > 2.5 kV (Note 1)

Schottky

- V_F < 0.37 V @ 500 mA
- Low Profile − 0.8 mm Maximum − In the New Package MicroFET 2x2 mm
- These Devices are Pb−Free and are RoHS Compliant

NOTE:

1. The diode connected between the gate and source serves only protection against ESD. No gate overvoltage rating is implied.


DISCONTINUED
THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN
PLEASE CONTACT YOUR onsemi
REPRESENTATIVE FOR INFORMATION

MARKING DIAGRAM



&Z = Assembly Plant Code
&2 = 2−Digit Date Code
&K = 2−Digits Lot Run Traceability Code
P29 = Device Code

PIN CONNECTIONS

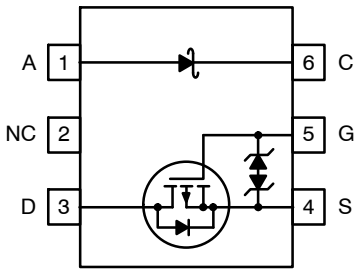

ORDERING INFORMATION

See detailed ordering and shipping information on page 6 of this data sheet.

© Semiconductor Components Industries, LLC, 2008

MOSFET MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)

Symbol	Parameter		Ratings	Unit
V_{DS}	Drain to Source Voltage		−20	V
V_{GS}	Gate to Source Voltage		±12	V
I_D	Drain Current	Continuous (Note 2a)	−3.1	A
		Pulsed	−6	
P_D	Power Dissipation	(Note 2a)	1.4	W
		(Note 2b)	0.7	
T_J, T_{STG}	Operating and Storage Junction Temperature Range		−55 to +150	°C
V_{RRM}	Schottky Repetitive Peak Reverse Voltage		20	V
I_O	Schottky Average Forward Current		2	A

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


THERMAL CHARACTERISTICS

Symbol	Parameter	Ratings	Unit
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (Note 2a)	86	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (Note 2b)	173	
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (Note 2c)	86	
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (Note 2d)	140	


2. $R_{\theta JA}$ is determined with the device mounted on a 1 in^2 oz. copper pad on a 1.5 x 1.5 in. board of FR−4 material. $R_{\theta JC}$ is guaranteed by design while $R_{\theta JA}$ is determined by the user's board design.
   a. MOSFET $R_{\theta JA}$ = 86°C/W when mounted on a 1 in^2 pad of 2 oz copper, 1.5" x 1.5" x 0.062" thick PCB.
   b. MOSFET $R_{\theta JA}$ = 173°C/W when mounted on a minimum pad of 2 oz copper.
   c. Schottky $R_{\theta JA}$ = 86°C/W when mounted on a 1 in^2 pad of 2 oz copper, 1.5" x 1.5" x 0.062" thick PCB.
   d. Schottky $R_{\theta JA}$ = 140°C/W when mounted on a minimum pad of 2 oz copper.




a. 86°C/W when mounted on a 1 in^2 pad of 2 oz copper.



b. 173°C/W when mounted on a minimum pad of 2 oz copper.



c. 86°C/W when mounted on a 1 in^2 pad of 2 oz copper.



d. 140°C/W when mounted on a minimum pad of 2 oz copper.

DISCONTINUED
THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN
PLEASE CONTACT YOUR onsemi
REPRESENTATIVE FOR INFORMATION

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

Symbol	Parameter	Test Conditions		Min	Typ	Max	Unit
OFF CHARACTERISTICS							
BV_{DSS}	Drain to Source Breakdown Voltage	I_D = −250 μA, V_{GS} = 0 V		−20	−	−	V
$\frac{\Delta BV_{DSS}}{\Delta T_J}$	Breakdown Voltage Temperature Coefficient	I_D = −250 μA, referenced to 25°C		−	−12	−	mV/°C
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = −16 V, V_{GS} = 0 V		−	−	−1	μA
I_{GSS}	Gate to Source Leakage Current	V_{GS} = ±12 V, V_{DS} = 0 V		−	−	±10	μA
ON CHARACTERISTICS							
$V_{GS(th)}$	Gate to Source Threshold Voltage	V_{GS} = V_{DS}, I_D = −250 μA		−0.6	−1.0	−1.5	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate to Source Threshold Voltage Temperature Coefficient	I_D = −250 μA, referenced to 25°C		−	4	−	mV/°C
$r_{DS(on)}$	Static Drain to Source On−Resistance	V_{GS} = −4.5 V, I_D = −3.1 A		−	60	95	mΩ
		V_{GS} = −2.5 V, I_D = −2.5 A		−	88	141	
		V_{GS} = −4.5 V, I_D = −3.1 A, T_J = 125°C		−	87	140	
g_{FS}	Forward Transconductance	V_{DS} = −10 V, I_D = −3.1 A		−	−11	−	S
DYNAMIC CHARACTERISTICS							
C_{iss}	Input Capacitance	V_{DS} = −10 V, V_{GS} = 0 V, f = 1 MHz		−	540	720	pF
C_{oss}	Output Capacitance			−	120	160	pF
C_{rss}	Reverse Transfer Capacitance			−	100	150	pF
SWITCHING CHARACTERISTICS							
$t_{d(on)}$	Turn−On Delay Time	V_{DD} = −10 V, I_D = −1 A, V_{GS} = −4.5 V, R_{GEN} = 6 Ω		−	13	24	ns
t_r	Rise Time			−	11	20	ns
$t_{d(off)}$	Turn−Off Delay Time			−	37	59	ns
t_f	Fall Time			−	36	58	ns
$Q_{g(TOT)}$	Total Gate Charge	V_{DD} = −10 V, I_D = −3.1 A, V_{GS} = −4.5 V		−	7	10	nC
Q_{gs}	Gate to Source Gate Charge			−	1.1	−	nC
Q_{gd}	Gate to Drain “Miller” Charge			−	2.4	−	nC
DRAIN−SOURCE DIODE CHARACTERISTICS							
I_S	Maximum Continuous Drain−Source Diode Forward Current			−	−	−1.1	A
V_{SD}	Source to Drain Diode Forward Voltage	V_{GS} = 0 V, I_S = −1.1 A (Note 3)		−	−0.8	−1.2	V
t_{rr}	Reverse Recovery Time	I_F = −3.1 A, di/dt = 100 A/μs		−	25	−	ns
Q_{rr}	Reverse Recovery Charge			−	9	−	nC
SCHOTTKY DIODE CHARACTERISTICS							
V_R	Reverse Voltage	I_R = 1 mA	T_J = 25°C	20	−	−	V
I_R	Reverse Leakage	V_R = 20 V	T_J = 25°C	−	30	300	μA
			T_J = 125°C	−	10	45	mA
V_F	Forward Voltage	I_F = 500 mA	T_J = 25°C	−	0.32	0.37	V
			T_J = 125°C	−	0.21	0.26	
		I_F = 1 A	T_J = 25°C	−	0.37	0.435	
			T_J = 125°C	−	0.28	0.33	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

3. Pulse Test: Pulse Width < 300 μs, Duty Cycle < 2.0%

DISCONTINUED
THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN
PLEASE CONTACT YOUR onsemi REPRESENTATIVE FOR INFORMATION

TYPICAL CHARACTERISTICS

(T_J = 25°C unless otherwise noted)

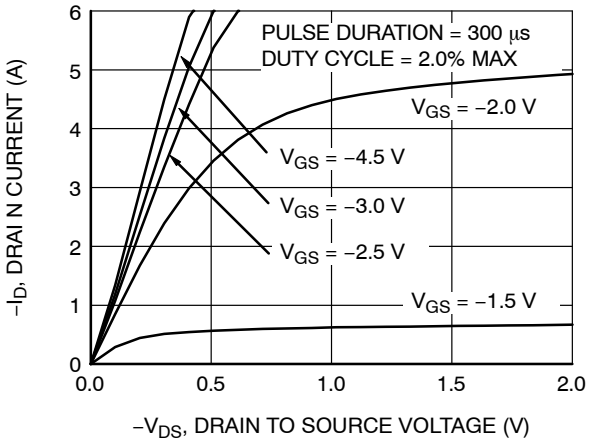


Figure 1. On Region Characteristics

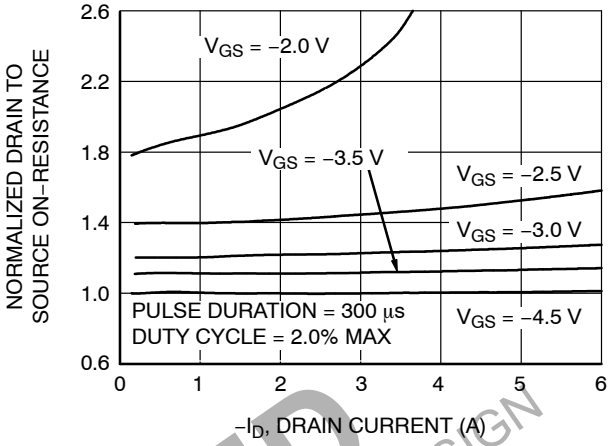


Figure 2. Normalized On−Resistance vs. Drain Current and Gate Voltage

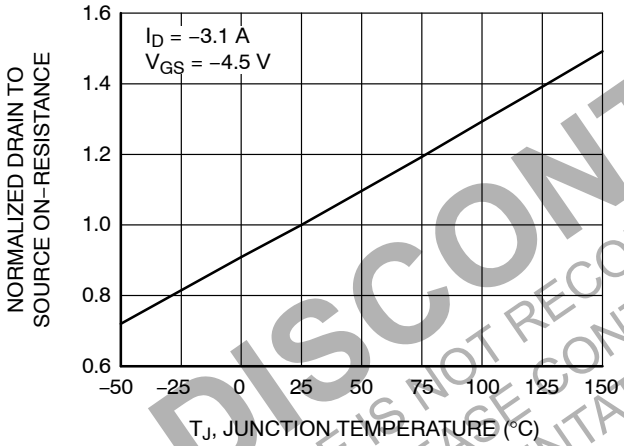


Figure 3. Normalized On−Resistance vs. Junction Temperature

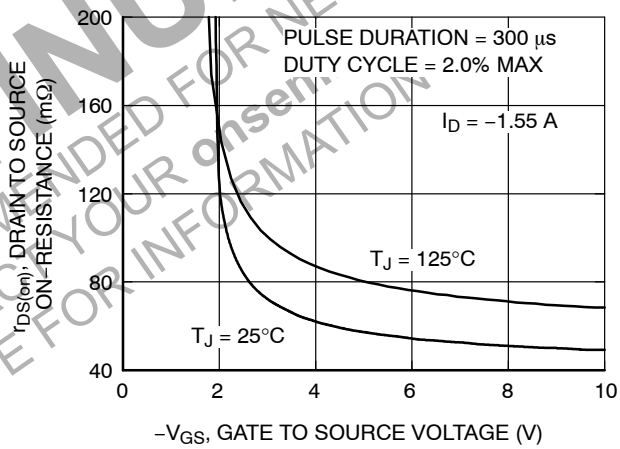


Figure 4. On−Resistance vs. Gate to Source Voltage

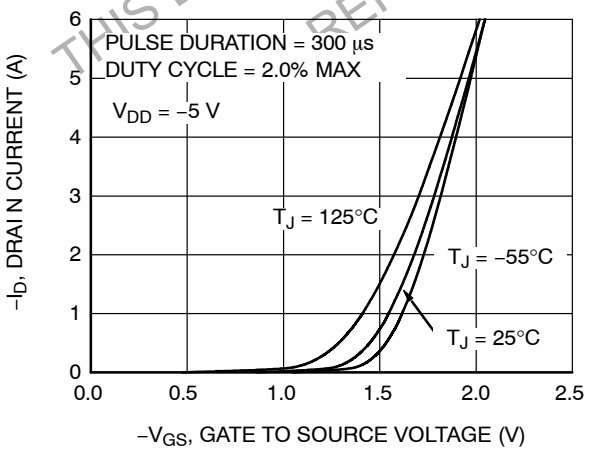


Figure 5. Transfer Characteristics

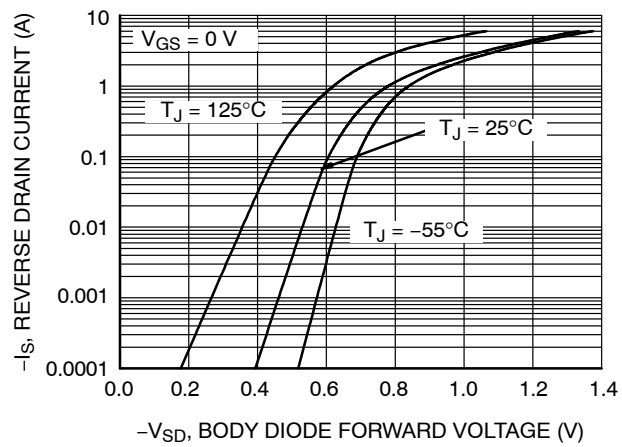


Figure 6. Source to Drain Diode Forward Voltage vs. Source Current

DISCONTINUED
THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN
PLEASE CONTACT YOUR onsemi REPRESENTATIVE FOR INFORMATION

TYPICAL CHARACTERISTICS

(T_J = 25°C unless otherwise noted) (continued)

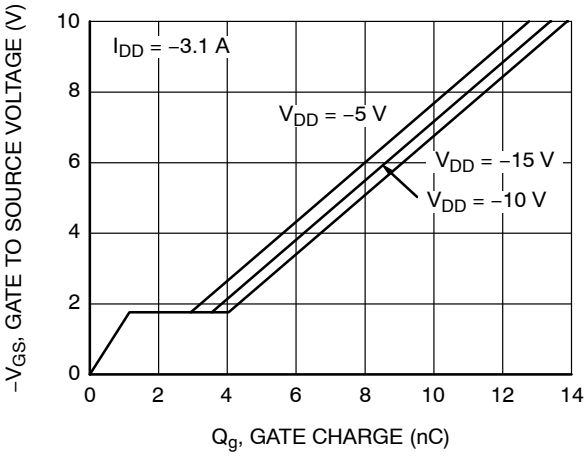


Figure 7. Gate Charge Characteristics

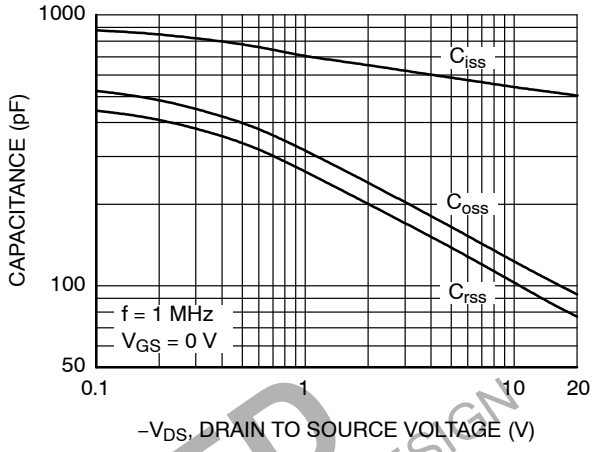


Figure 8. Capacitance Characteristics

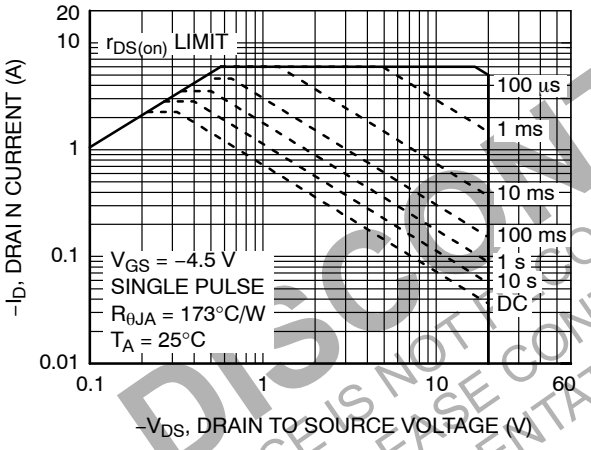


Figure 9. Forward Bias Safe Operating Area

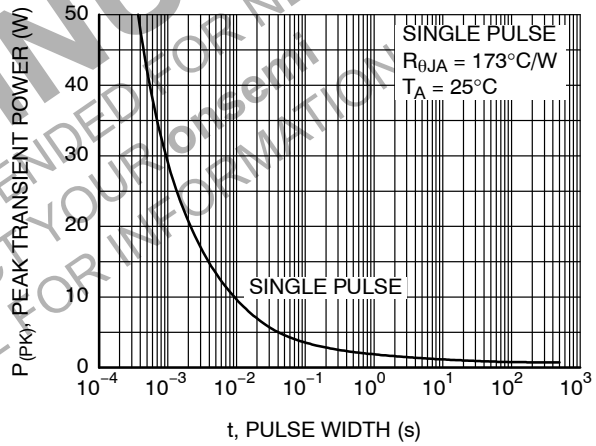


Figure 10. Single Pulse Maximum Power Dissipation

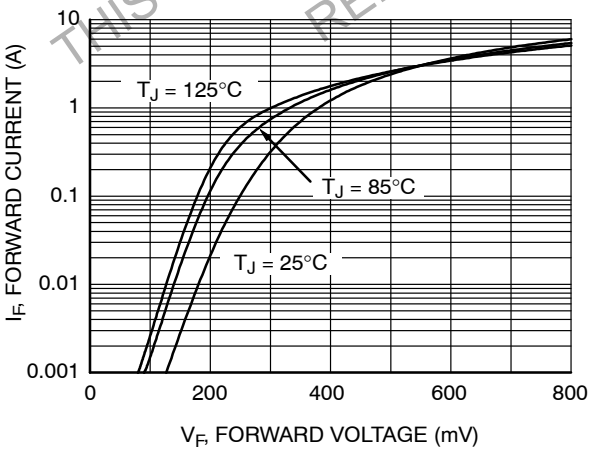


Figure 11. Schottky Diode Forward Voltage

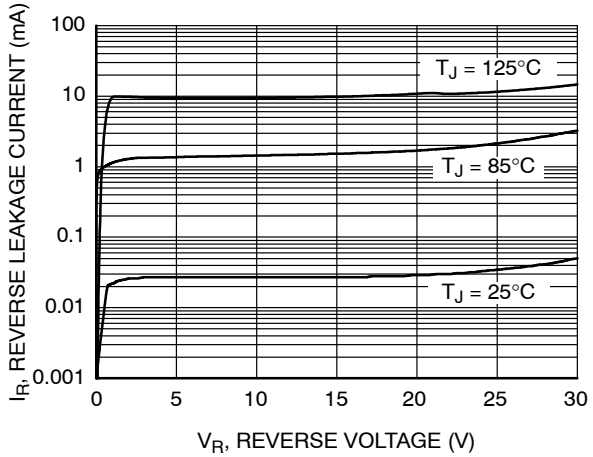


Figure 12. Schottky Diode Reverse Current

DISCONTINUED
THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN
PLEASE CONTACT YOUR onsemi REPRESENTATIVE FOR INFORMATION

TYPICAL CHARACTERISTICS

(T_J = 25°C unless otherwise noted) (continued)

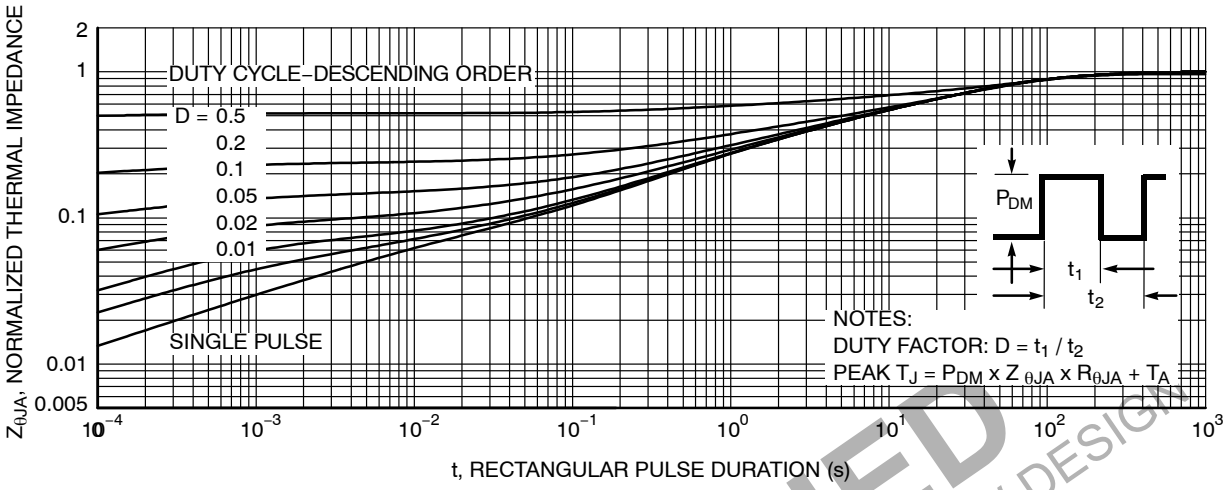


Figure 13. Transient Thermal Response Curve

PACKAGE MARKING AND ORDERING INFORMATION

Device	Device Marking	Package Type	Reel Size	Tape Width	Shipping†
FDFMA2P029Z	P29	WDFN6 2x2, 0.65P MicroFET (Pb−Free)	7”	8 mm	3000 / Tape & Reel
FDFMA2P029Z−F106	P29	WDFN6 2x2, 0.65P MicroFET (Pb−Free)	7”	8 mm	3000 / Tape & Reel


†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


DISCONTINUED
THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN
PLEASE CONTACT YOUR onsemi
REPRESENTATIVE FOR INFORMATION

POWERTRENCH is registered trademark of Semiconductor Components Industries, LLC dba “**onsemi**” or its affiliates and/or subsidiaries in the United States and/or other countries.
MicroFET is trademark of Semiconductor Components Industries, LLC dba “**onsemi**” or its affiliates and/or subsidiaries in the United States and/or other countries.


WDFN6 2x2, 0.65P
CASE 511DA
ISSUE O


DATE 31 JUL 2016

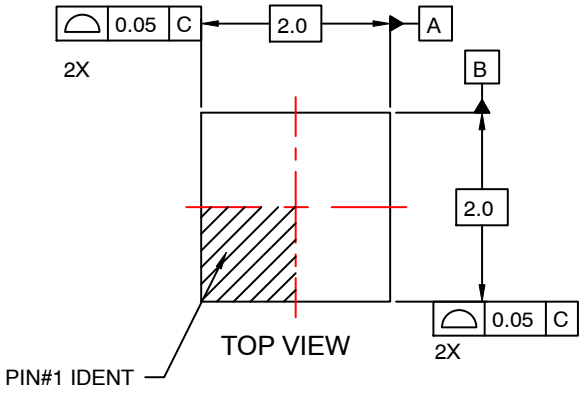

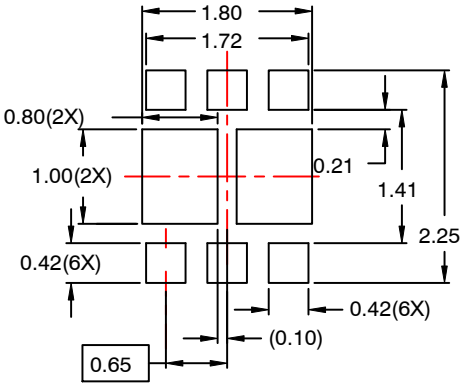

RECOMMENDED
LAND PATTERN

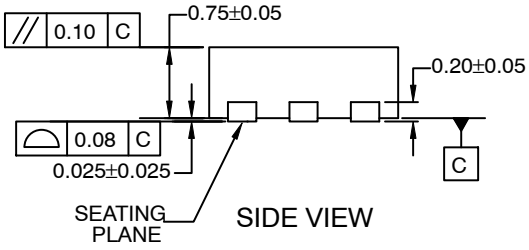

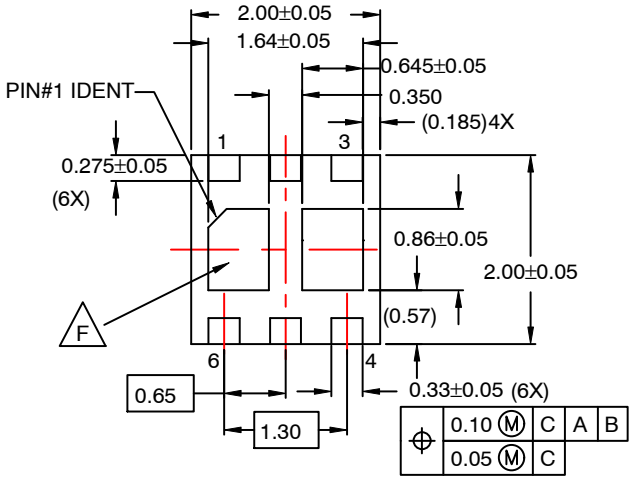

NOTES:

A. CONFORM TO JADEC REGISTRATIONS MO−229, VARIATION VCCC, EXCEPT WHERE NOTED.

B. DIMENSIONS ARE IN MILLIMETERS.

C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 2009.

D. LAND PATTERN RECOMMENDATION IS EXISTING INDUSTRY LAND PATTERN.

F. NON−JEDEC DUAL DAP

DOCUMENT NUMBER:	**98AON13615G**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**WDFN6 2X2, 0.65P**		**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

onsemi, , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.