FAIRCHILD SEMICONDUCTOR®

October 2006

FGPF70N30
300V, 70A PDP IGBT

Features


- High Current Capability
- Low saturation voltage: V_{CE}(sat) =1.4V @ I_C = 40A
- High Input Impedance
- Fast switching
- RoHS Complaint

Application

. PDP System

General Description


Employing Unified IGBT Technology, Fairchild's PDP IGBTs provides low conduction and switching loss. FGPF70N30 offers the optimum solution for PDP applications where low-condution loss is essential.



TO-220F

1

1.Gate 2.Collector 3.Emitter



www.DataSheet4U.com

Absolute Maximum Ratings

Symbol	Description		FGPF70N30	Units
V_{CES}	Collector-Emitter Voltage		300	V
V_{GES}	Gate-Emitter Voltage		±30	V
$I_{C\ pulse(1)}$	Pulsed Collector Current	@ T_C = 25°C	160	A
P_D	Maximum Power Dissipation	@ T_C = 25°C	52	W
	Maximum Power Dissipation	@ T_C = 100°C	20.8	W
T_J	Operating Junction Temperature		-55 to +150	°C
T_{stg}	Storage Temperature Range		-55 to +150	°C
T_L	Maximum Lead Temp. for soldering Purposes, 1/8" from case for 5 seconds		300	°C

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Units
$R_{\theta JC}$(IGBT)	Thermal Resistance, Junction-to-Case	--	2.4	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	--	62.5	°C/W

Notes:

(1)Repetitive test , pluse width = 100usec , Duty = 0.1

* Ic_pluse limited by max Tj

©2006 Fairchild Semiconductor Corporation

Package Marking and Ordering Information

Device Marking	Device	Package	Packaging Type	Qty per Tube	Max Qty per Box
FGPF70N30	FGPF70N30TU	TO-220F	Rail / Tube	50ea	-

Electrical Characteristics $T_C = 25^oC$ unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
Off Characteristics						
BV_{CES}	Collector-Emitter Breakdown Voltage	V_{GE} = 0V, I_C = 250uA	300	--	--	V
$\Delta B_{VCES}/\Delta T_J$	Temperature Coefficient of Breakdown Voltage	V_{GE} = 0V, I_C = 250uA	--	0.6	--	$V/^oC$
I_{CES}	Collector Cut-Off Current	$V_{CE} = V_{CES}$, V_{GE} = 0V	--	--	100	uA
I_{GES}	G-E Leakage Current	$V_{GE} = V_{GES}$, V_{CE} = 0V	--	--	± 250	nA
On Characteristics						
$V_{GE(th)}$	G-E Threshold Voltage	I_C = 250uA, $V_{CE} = V_{GE}$	2.5	4.0	5	V
$V_{CE(sat)}$	Collector to Emitter Saturation Voltage	I_C =20A, V_{GE} = 15V	--	1.2	1.5	V
		I_C =40A, V_{GE} = 15V	--	1.4	--	V
		I_C = 70A, V_{GE} = 15V, $T_C = 25^oC$	--	1.8	--	V
		I_C = 70A, V_{GE} = 15V, $T_C = 125^oC$	--	1.9	--	V
Dynamic Characteristics						
C_{ies}	Input Capacitance	V_{CE} = 30V, V_{GE} = 0V, f = 1MHz	--	1300	--	pF
C_{oes}	Output Capacitance		--	180	--	pF
C_{res}	Reverse Transfer Capacitance		--	60	--	pF
Switching Characteristics						
$t_{d(on)}$	Turn-On Delay Time	V_{CC} = 200 V, I_C = 40A, R_G = 15Ω, V_{GE} = 15V, Resistive Load, $T_C = 25^oC$	--	17	--	ns
t_r	Rise Time		--	83	--	ns
$t_{d(off)}$	Turn-Off Delay Time		--	103	--	ns
t_f	Fall Time		--	160	300	ns
$t_{d(on)}$	Turn-On Delay Time	V_{CC} = 200 V, I_C = 40A, R_G = 15Ω, V_{GE} = 15V, Resistive Load, $T_C = 125^oC$	--	18	--	ns
t_r	Rise Time		--	83	--	ns
$t_{d(off)}$	Turn-Off Delay Time		--	104	--	ns
t_f	Fall Time		--	250	--	ns
Q_g	Total Gate Charge	V_{CE} = 200 V, I_C = 40A, V_{GE} = 15V	--	71	--	nC
Q_{ge}	Gate-Emitter Charge		--	10	--	nC
Q_{gc}	Gate-Collector Charge		--	34	--	nC

Typical Performance CharacteristicsTypical Saturation VoltageCharacteristics

Figure 1. Typical Output Characteristics

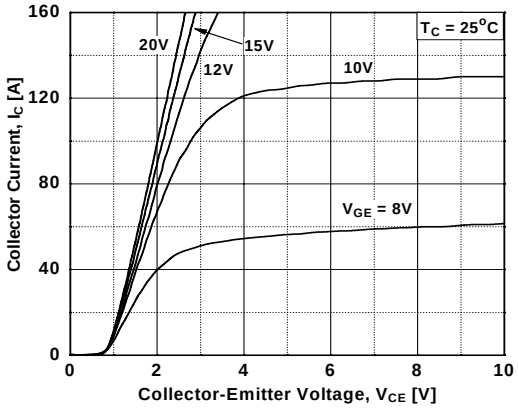


Figure 2. Typical Output Characteristics

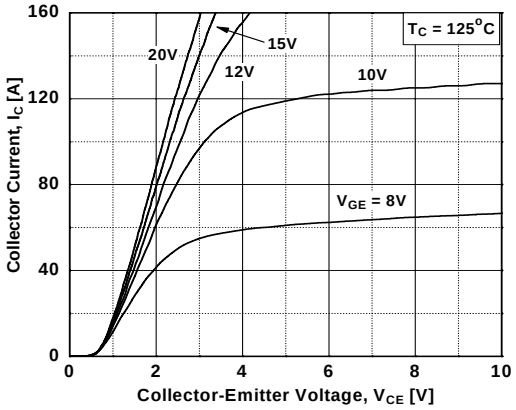


Figure 3.Typical Saturation Voltage Characteristics

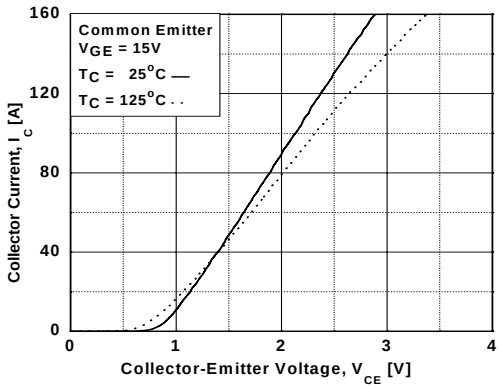


Figure 4. Transfer Characteristics

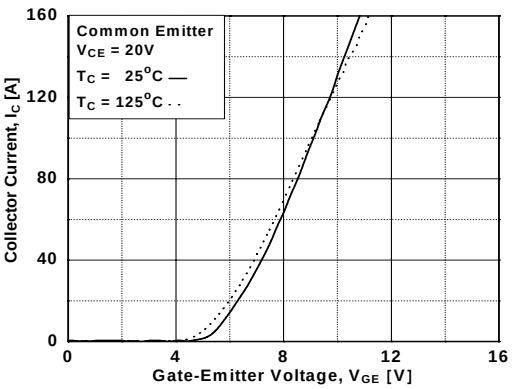


Figure 5. Saturation Voltage vs. Case Temperature at Variant Current Level


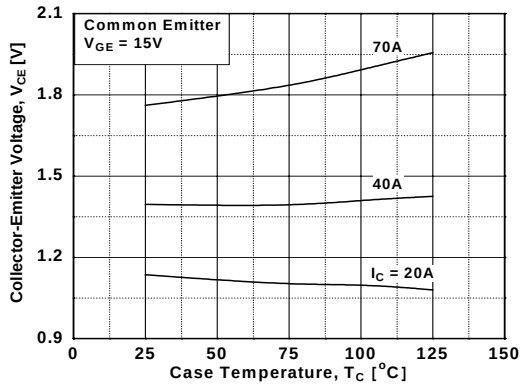


Figure 6. Saturation Voltage vs.V_{GE}

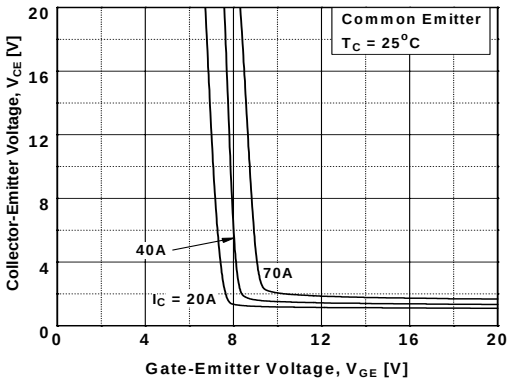

Typical Performance Characteristics (Continued)

Figure 7. Saturation Voltage vs. V_{GE}

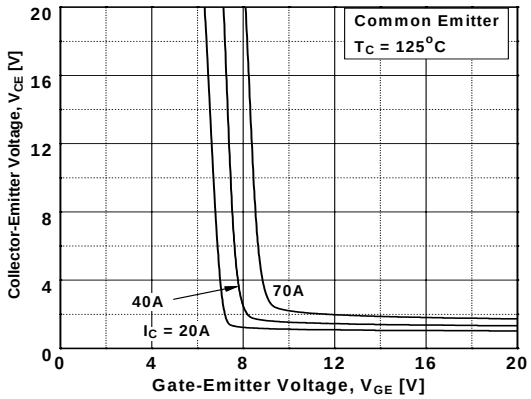


Figure 8. Capacitance Characteristics

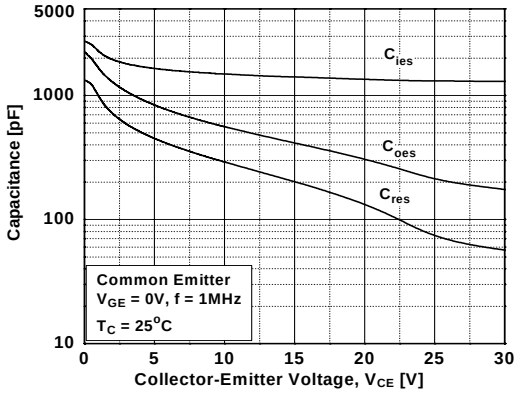


Figure 9. Gate Charge Characteristics

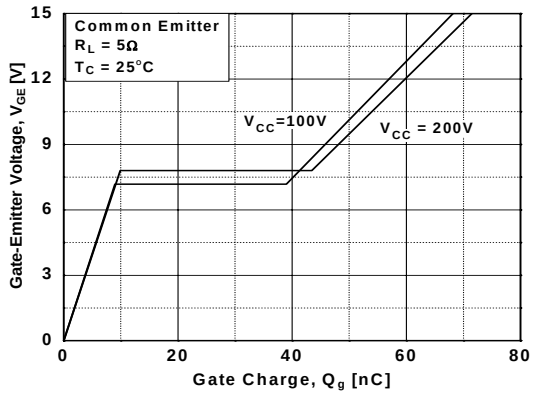


Figure 10. SOA Characteristics

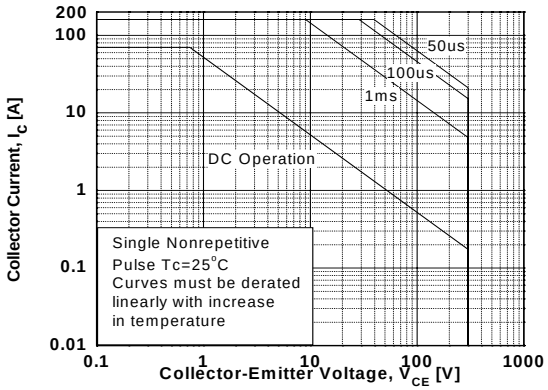


Figure 11. Turn-On Characteristics vs. Gate Resistance


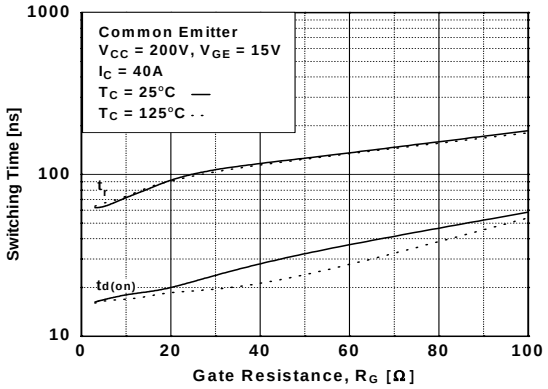


Figure 12. Turn Off Characteristics vs. Gate Resistance

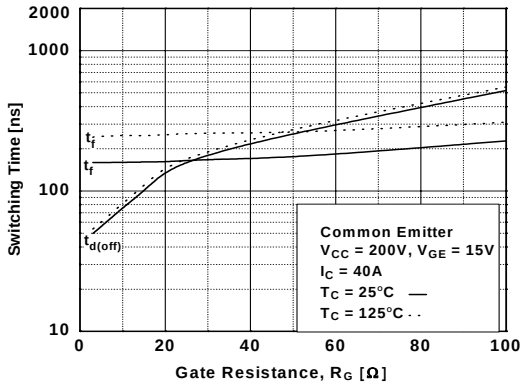

Typical Performance Characteristics (Continued)

Figure 13. Turn-On Characteristics vs. Collector Current

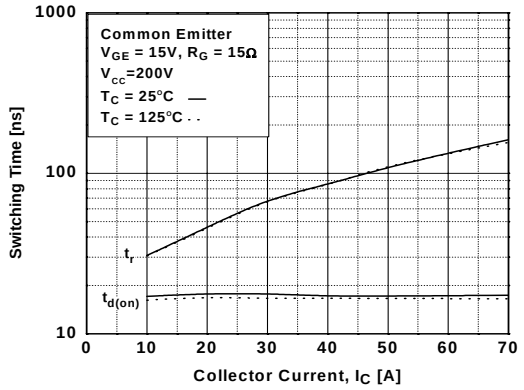


Figure 14. Turn-Off Characteristics vs. Collector Current

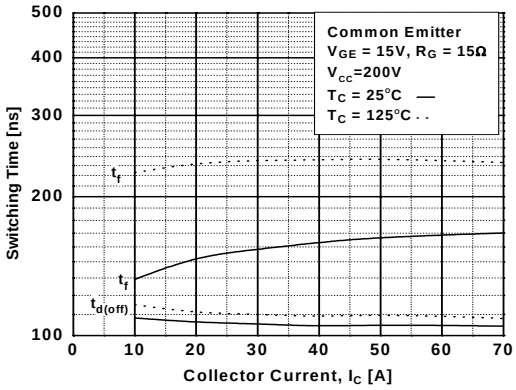


Figure 15. Switching Loss vs Gate Resistance

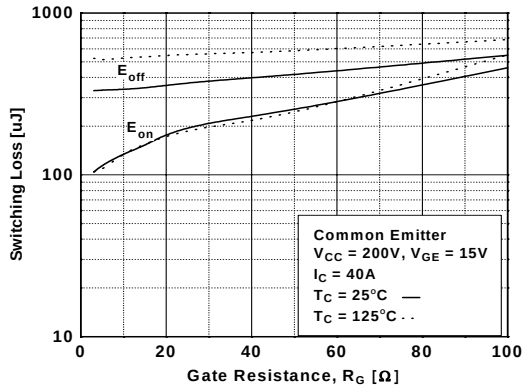


Figure 16. Switching Loss VS Collector Current



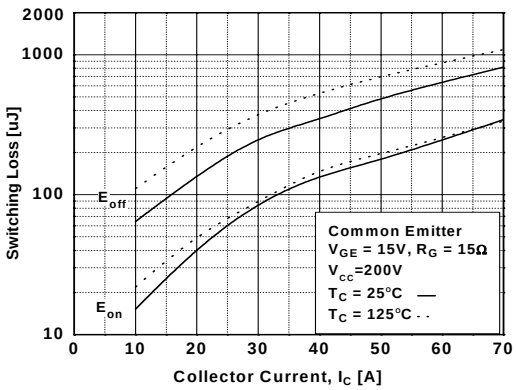


Figure 17. Transient Thermal Impedance of IGBT

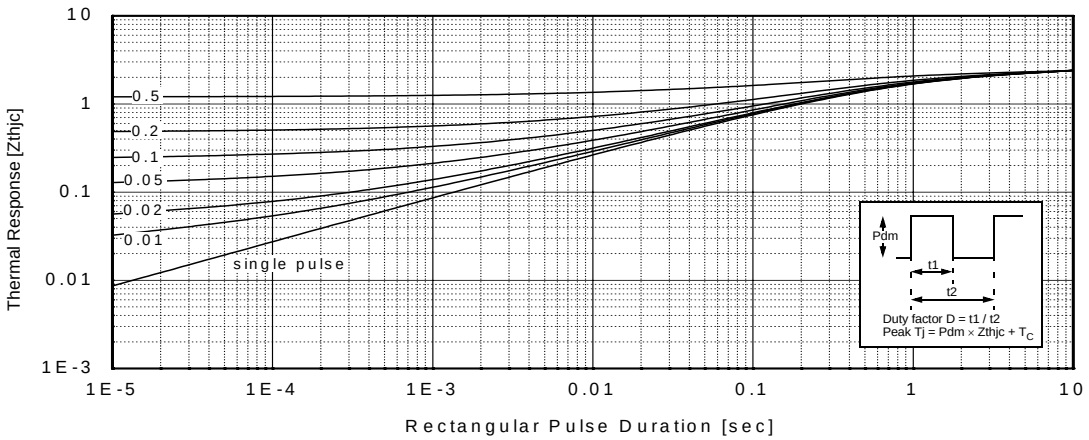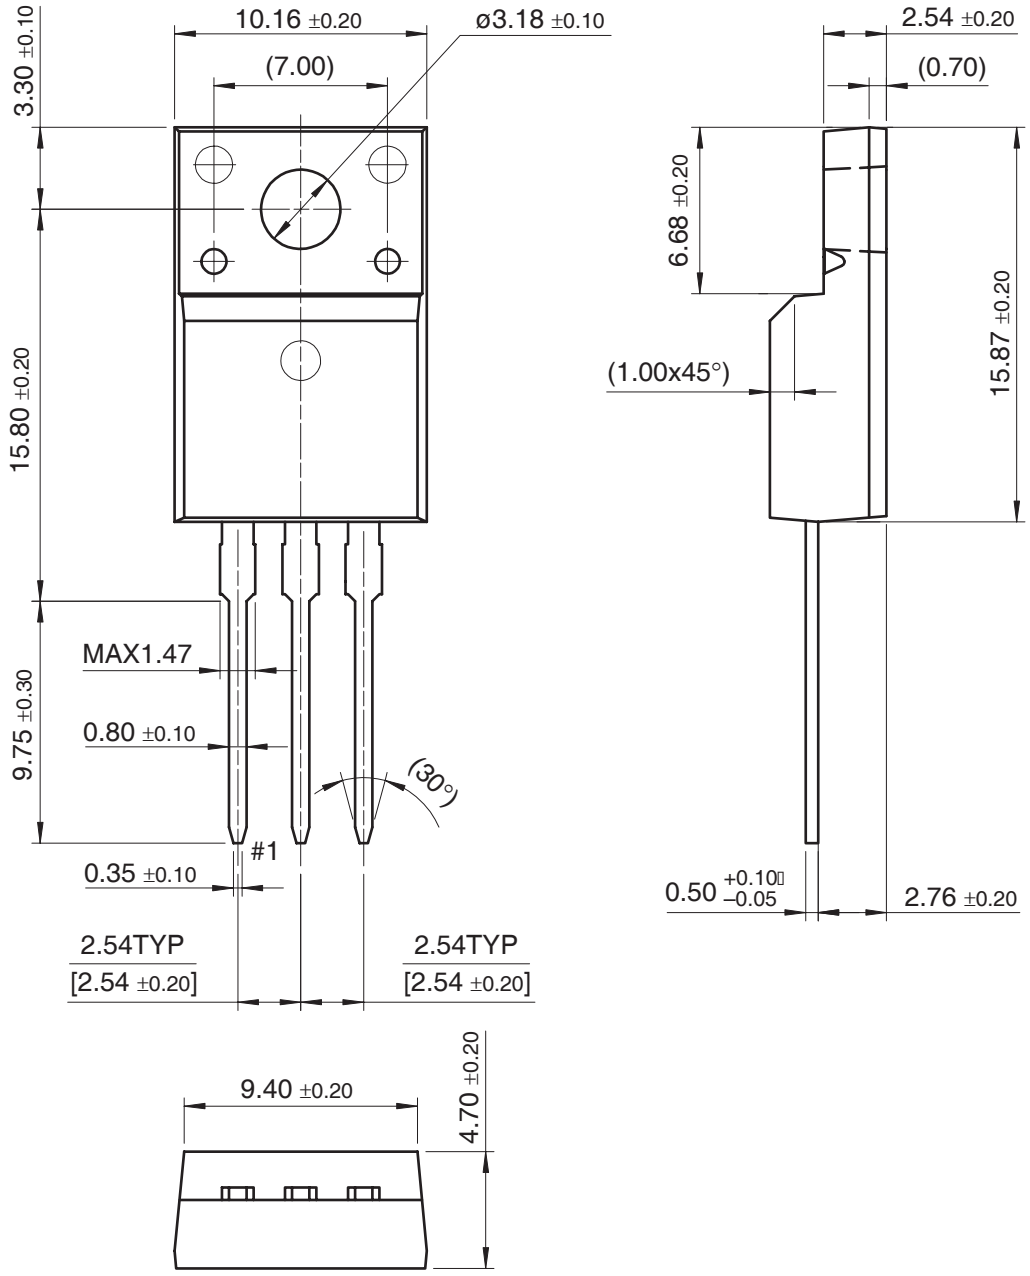

TO-220F


10.16 ±0.20
ø3.18 ±0.10
(7.00)
3.30 ±0.10
15.80 ±0.20
9.75 ±0.30
MAX1.47
0.80 ±0.10
(30°)
#1
0.35 ±0.10
2.54TYP
[2.54 ±0.20]
2.54TYP
[2.54 ±0.20]
2.54 ±0.20
(0.70)
6.68 ±0.20
15.87 ±0.20
(1.00x45°)
0.50 +0.10 −0.05
2.76 ±0.20
9.40 ±0.20
4.70 ±0.20

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FACT Quiet Series™	OCX™	SILENT SWITCHER®	UniFET™
ActiveArray™	GlobalOptoisolator™	OCXPro™	SMART START™	UltraFET®
Bottomless™	GTO™	OPTOLOGIC®	SPM™	VCX™
Build it Now™	HiSeC™	OPTOPLANAR™	Stealth™	Wire™
CoolFET™	I^2C™	PACMAN™	SuperFET™	
CROSSVOLT™	*i-Lo*™	POP™	SuperSOT™-3	
DOME™	ImpliedDisconnect™	Power247™	SuperSOT™-6	
EcoSPARK™	IntelliMAX™	PowerEdge™	SuperSOT™-8	
E^2CMOS™	ISOPLANAR™	PowerSaver™	SyncFET™	
EnSigna™	LittleFET™	PowerTrench®	TCM™	
FACT™	MICROCOUPLER™	QFET®	TinyBoost™	
FAST®	MicroFET™	QS™	TinyBuck™	
FASTr™	MicroPak™	QT Optoelectronics™	TinyPWM™	
FPS™	MICROWIRE™	Quiet Series™	TinyPower™	
FRFET™	MSX™	RapidConfigure™	TinyLogic®	
	MSXPro™	RapidConnect™	TINYOPTO™	
Across the board. Around the world.™		µSerDes™	TruTranslation™	
The Power Franchise®		ScalarPump™	UHC™	
Programmable Active Droop™				

DISCLAIMER
FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY
FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:
1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS
Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

Rev. I20

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.