

Low Loss DuoPack : IGBT in **TrenchStop®** and Fieldstop technology with soft, fast recovery anti-parallel Emitter Controlled HE diode





- Automotive AEC Q101 qualified
- Designed for DC/AC converters for Automotive Application
- Very low $V_{CE(sat)}$ 1.5 V (typ.)
- Maximum Junction Temperature 175 °C
- Short circuit withstand time 5µs
- TrenchStop® and Fieldstop technology for 600 V applications offers :
  - very tight parameter distribution
  - high ruggedness, temperature stable behavior
  - very high switching speed
- Positive temperature coefficient in $V_{CE(sat)}$
- Low EMI
- Low Gate Charge
- Green Package
- Very soft, fast recovery anti-parallel Emitter Controlled HE diode

Type	V_{CE}	I_C	$V_{CE(sat),Tj=25°C}$	$T_{j,max}$	Marking	Package
IKW20N60TA	600V	20A	1.5V	175°C	K20T60A	PG-TO247-3

Maximum Ratings

Parameter		Symbol	Value	Unit
Collector-emitter voltage, $T_j \geq 25°C$		V_{CE}	600	V
DC collector current, limited by T_{jmax}	$T_C = 25°C$	I_C	40	A
	$T_C = 100°C$		20	
Pulsed collector current, t_p limited by T_{jmax}		I_{Cpuls}	60	
Turn off safe operating area, $V_{CE} \leq 600V$, $T_j \leq 175°C$, $t_p \leq 1µs$		-	60	
Diode forward current, limited by T_{jmax}	$T_C = 25°C$	I_F	40	
	$T_C = 100°C$		20	
Diode pulsed current, t_p limited by T_{jmax}		I_{Fpuls}	60	
Gate-emitter voltage		V_{GE}	±20	V
Short circuit withstand time[1)] $V_{GE} = 15V$, $V_{CC} \leq 400V$, $T_j \leq 150°C$		t_{SC}	5	µs
Power dissipation $T_C = 25°C$		P_{tot}	166	W
Operating junction temperature		T_j	-40...+175	°C
Storage temperature		T_{stg}	-55...+150	
Soldering temperature (wavesoldering only allowed at leads, 1.6mm (0.063 in.) from case for 10s)		T_{sold}	260	

[1)] Allowed number of short circuits: <1000; time between short circuits: >1s.

Thermal Resistance

Parameter	Symbol	Conditions	Max. Value	Unit
Characteristic				
IGBT thermal resistance, junction – case	R_{thJC}		0.9	K/W
Diode thermal resistance, junction – case	R_{thJCD}		1.5	
Thermal resistance, junction – ambient	R_{thJA}		40	

Electrical Characteristic, at T_j = 25 °C, unless otherwise specified

Parameter	Symbol	Conditions	Value			Unit
			min.	Typ.	max.	
Static Characteristic						
Collector-emitter breakdown voltage	$V_{(BR)CES}$	V_{GE}=0V, I_C=0.2mA	600	-	-	V
Collector-emitter saturation voltage	$V_{CE(sat)}$	V_{GE} = 15V, I_C=20A				
		T_j=25°C	-	1.5	2.05	
		T_j=175°C	-	1.9	-	
Diode forward voltage	V_F	V_{GE}=0V, I_F=20A				
		T_j=25°C	-	1.65	2.05	
		T_j=175°C	-	1.6	-	
Gate-emitter threshold voltage	$V_{GE(th)}$	I_C=290µA, V_{CE}=V_{GE}	4.1	4.9	5.7	
Zero gate voltage collector current	I_{CES}	V_{CE}=600V, V_{GE}=0V				µA
		T_j=25°C	-	-	40	
		T_j=175°C	-	-	1500	
Gate-emitter leakage current	I_{GES}	V_{CE}=0V, V_{GE}=20V	-	-	100	nA
Transconductance	g_{fs}	V_{CE}=20V, I_C=20A	-	11	-	S
Integrated gate resistor	R_{Gint}			-		Ω

Dynamic Characteristic

Input capacitance	C_{iss}	V_{CE}=25V,	-	1100	-	pF
Output capacitance	C_{oss}	V_{GE}=0V,	-	71	-	
Reverse transfer capacitance	C_{rss}	f=1MHz	-	32	-	
Gate charge	Q_{Gate}	V_{CC}=480V, I_C=20A	-	120	-	nC
		V_{GE}=15V				
Internal emitter inductance	L_E	TO-247-3-21	-	13	-	nH
measured 5mm (0.197 in.) from case		TO-220-3-1		7		
Short circuit collector current Allowed number of short circuits: <1000; time between short circuits: >1s.	$I_{C(SC)}$	V_{GE}=15V, t_{SC}≤5µs V_{CC} = 400V, T_j ≤ 150°C	-	183.3	-	A

Switching Characteristic, Inductive Load, at T_j=25 °C

Parameter	Symbol	Conditions	Value			Unit
			min.	Typ.	max.	
IGBT Characteristic						
Turn-on delay time	$t_{d(on)}$	T_j=25°C, V_{CC}=400V, I_C=20A, V_{GE}=0/15V, R_G=12Ω, L_σ=131nH, C_σ=31pF L_σ, C_σ from Fig. E Energy losses include "tail" and diode reverse recovery.	-	18	-	ns
Rise time	t_r		-	14	-	
Turn-off delay time	$t_{d(off)}$		-	199	-	
Fall time	t_f		-	42	-	
Turn-on energy	E_{on}		-	0.31	-	mJ
Turn-off energy	E_{off}		-	0.46	-	
Total switching energy	E_{ts}		-	0.77	-	
Anti-Parallel Diode Characteristic						
Diode reverse recovery time	t_{rr}	T_j=25°C, V_R=400V, I_F=20A, di_F/dt=880A/µs	-	41	-	ns
Diode reverse recovery charge	Q_{rr}		-	0.31	-	µC
Diode peak reverse recovery current	I_{rrm}		-	13.3	-	A
Diode peak rate of fall of reverse recovery current during t_b	di_{rr}/dt		-	711	-	A/µs

Switching Characteristic, Inductive Load, at T_j=175 °C

Parameter	Symbol	Conditions	Value			Unit
			min.	Typ.	max.	
IGBT Characteristic						
Turn-on delay time	$t_{d(on)}$	T_j=175°C, V_{CC}=400V, I_C=20A, V_{GE}=0/15V, R_G=12Ω, L_σ=131nH, C_σ=31pF L_σ, C_σ from Fig. E Energy losses include "tail" and diode reverse recovery.	-	18	-	ns
Rise time	t_r		-	18	-	
Turn-off delay time	$t_{d(off)}$		-	223	-	
Fall time	t_f		-	76	-	
Turn-on energy	E_{on}		-	0.51	-	mJ
Turn-off energy	E_{off}		-	0.64	-	
Total switching energy	E_{ts}		-	1.15	-	
Anti-Parallel Diode Characteristic						
Diode reverse recovery time	t_{rr}	T_j=175°C V_R=400V, I_F=20A, di_F/dt=880A/µs	-	176	-	ns
Diode reverse recovery charge	Q_{rr}		-	1.46	-	µC
Diode peak reverse recovery current	I_{rrm}		-	18.9	-	A
Diode peak rate of fall of reverse recovery current during t_b	di_{rr}/dt		-	467	-	A/µs

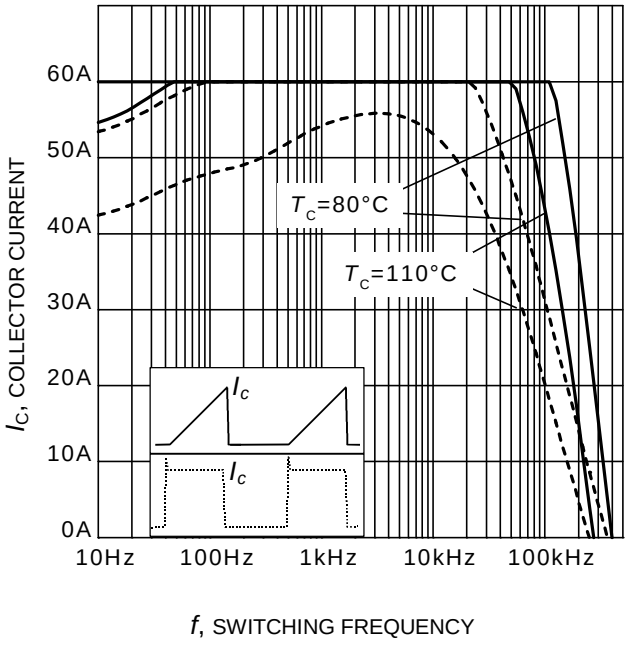


Figure 1. Collector current as a function of switching frequency
($T_j \leq 175°C$, $D = 0.5$, $V_{CE} = 400V$, $V_{GE} = 0/15V$, $R_G = 12\Omega$)

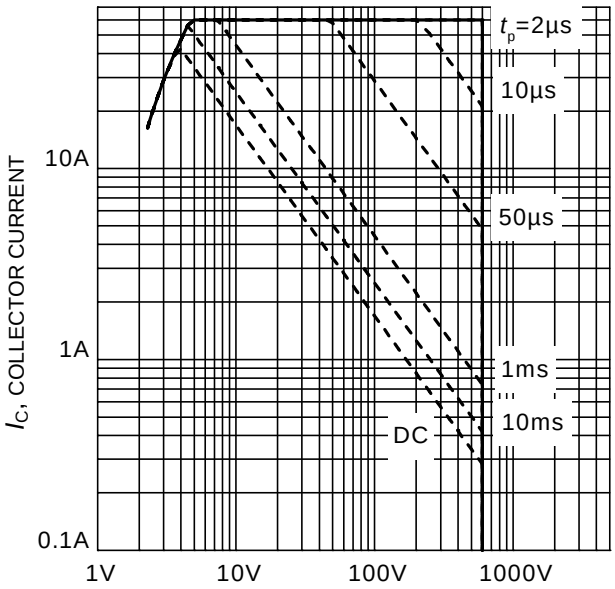


Figure 2. Safe operating area
($D = 0$, $T_C = 25°C$, $T_j \leq 175°C$; V_{GE}=0/15V)

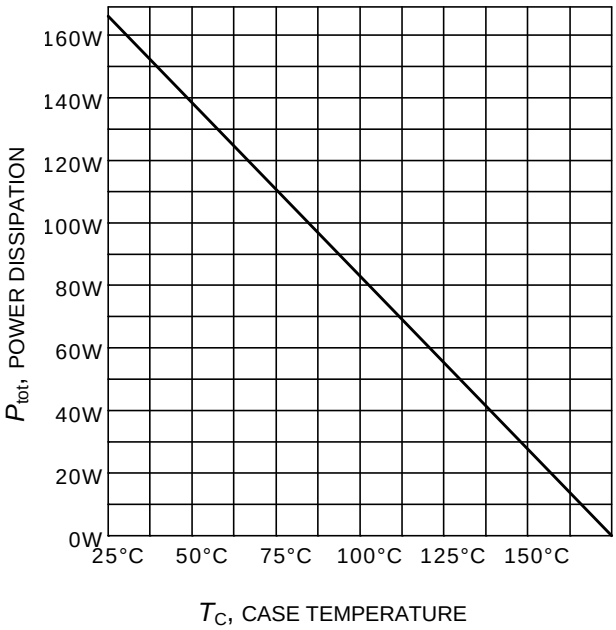


Figure 3. Power dissipation as a function of case temperature
($T_j \leq 175°C$)

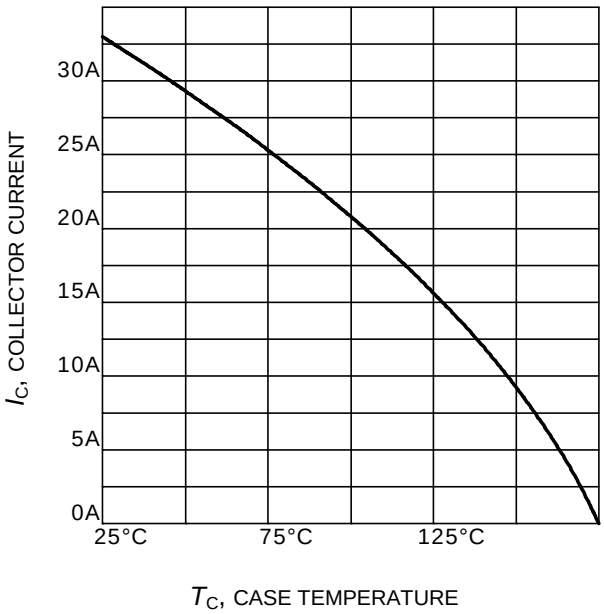


Figure 4. Collector current as a function of case temperature
($V_{GE} \geq 15V$, $T_j \leq 175°C$)

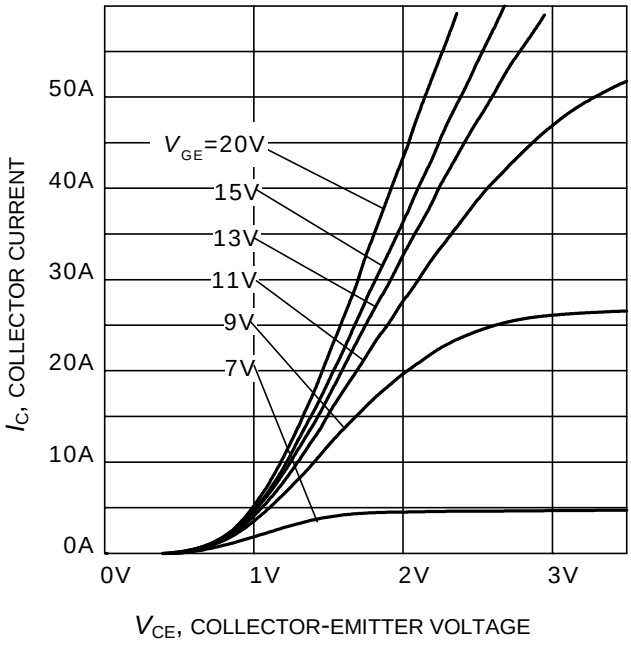


Figure 5. Typical output characteristic
(T_j = 25°C)

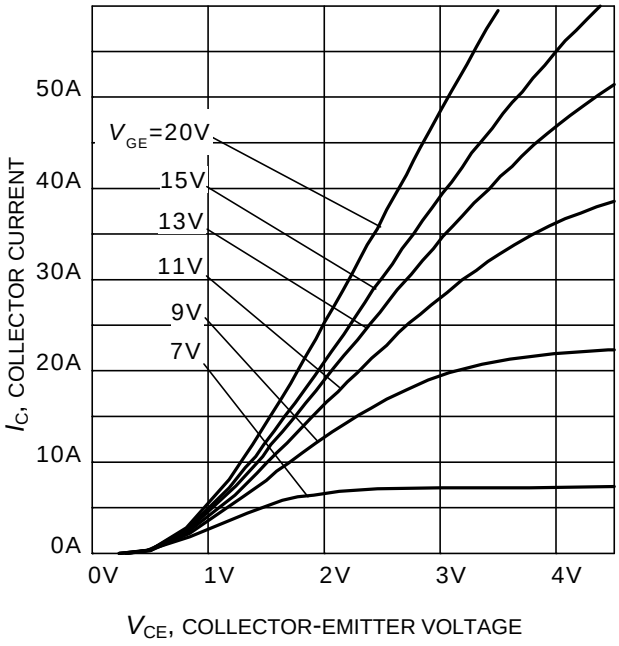


Figure 6. Typical output characteristic
(T_j = 175°C)

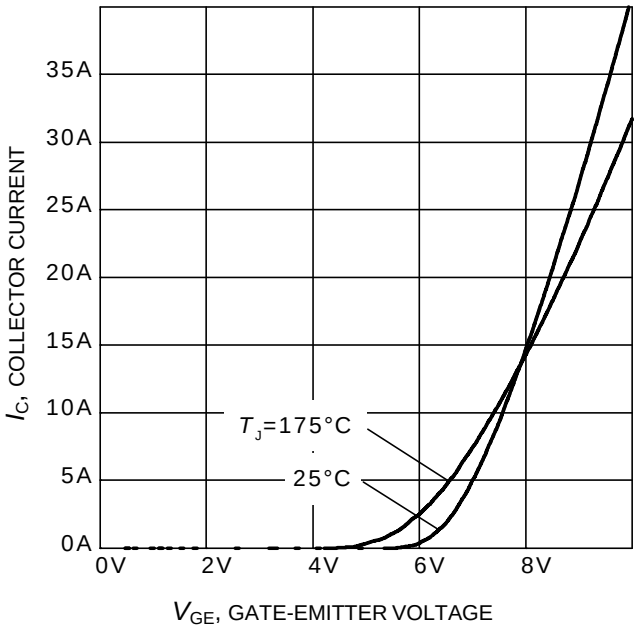


Figure 7. Typical transfer characteristic
(V_{CE}=10V)

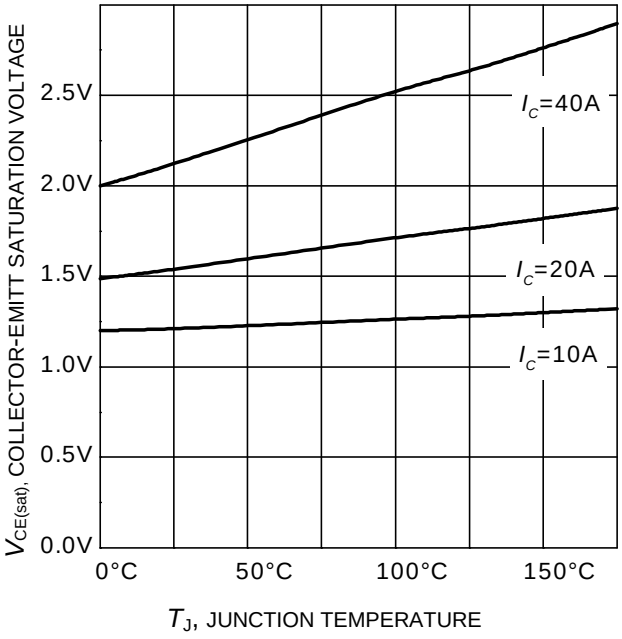


Figure 8. Typical collector-emitter saturation voltage as a function of junction temperature
(V_{GE} = 15V)

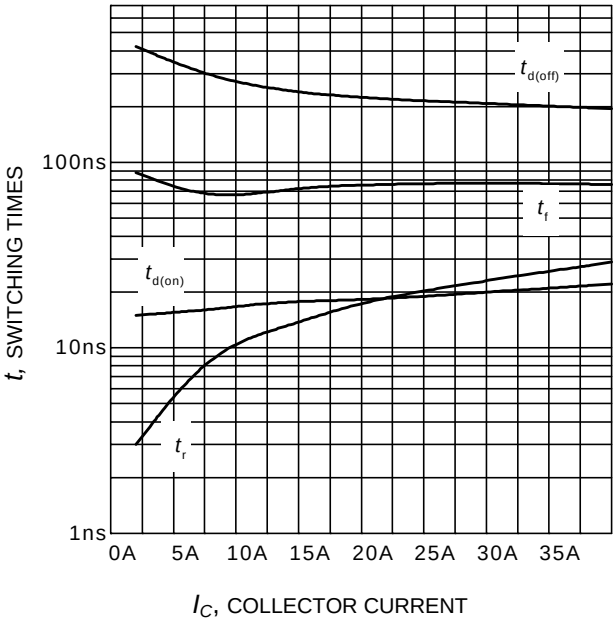


Figure 9. Typical switching times as a function of collector current
(inductive load, T_J=175°C,
V_{CE} = 400V, V_{GE} = 0/15V, R_G = 12Ω,
Dynamic test circuit in Figure E)

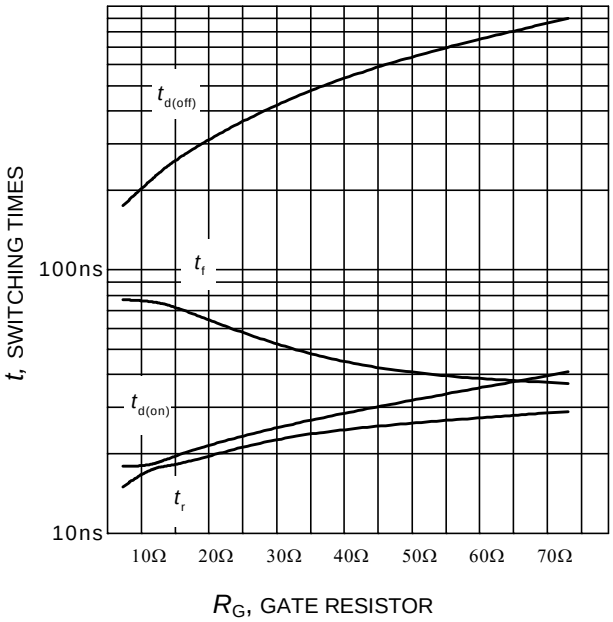


Figure 10. Typical switching times as a function of gate resistor
(inductive load, T_J = 175°C,
V_{CE}= 400V, V_{GE} = 0/15V, I_C = 20A,
Dynamic test circuit in Figure E)

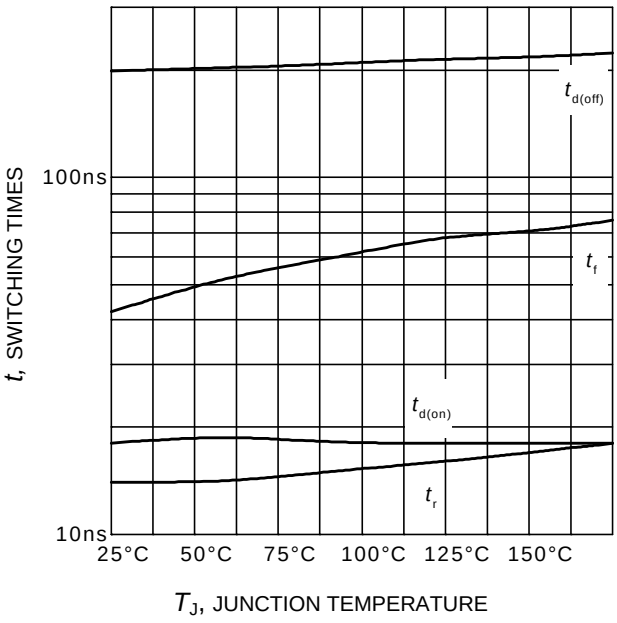


Figure 11. Typical switching times as a function of junction temperature
(inductive load, V_{CE} = 400V,
V_{GE} = 0/15V, I_C = 20A, R_G=12Ω,
Dynamic test circuit in Figure E)

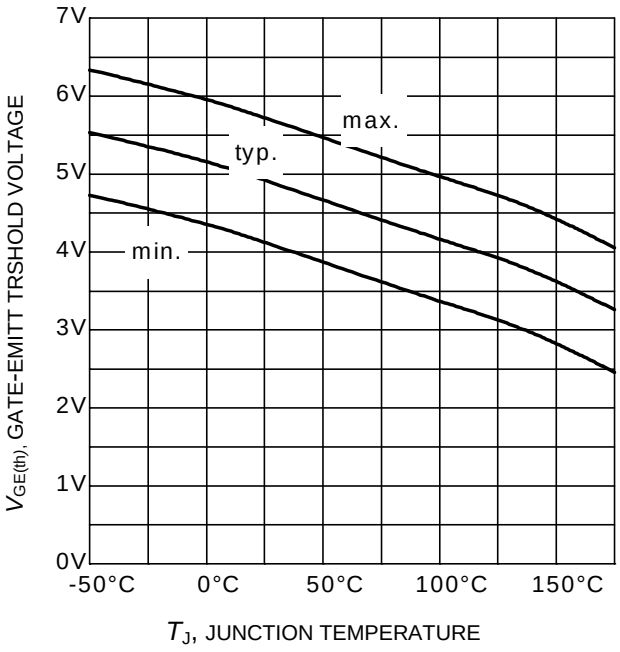


Figure 12. Gate-emitter threshold voltage as a function of junction temperature
(I_C = 0.29mA)

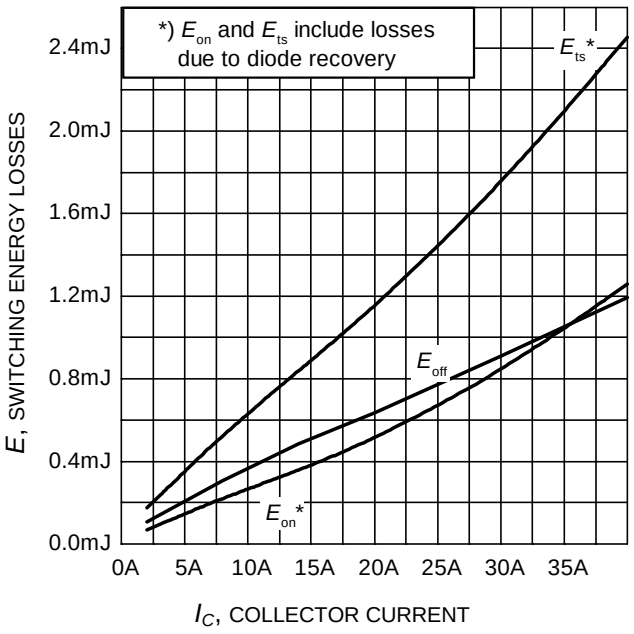


Figure 13. Typical switching energy losses as a function of collector current
(inductive load, T_J = 175°C, V_{CE} = 400V, V_{GE} = 0/15V, R_G = 12Ω, Dynamic test circuit in Figure E)

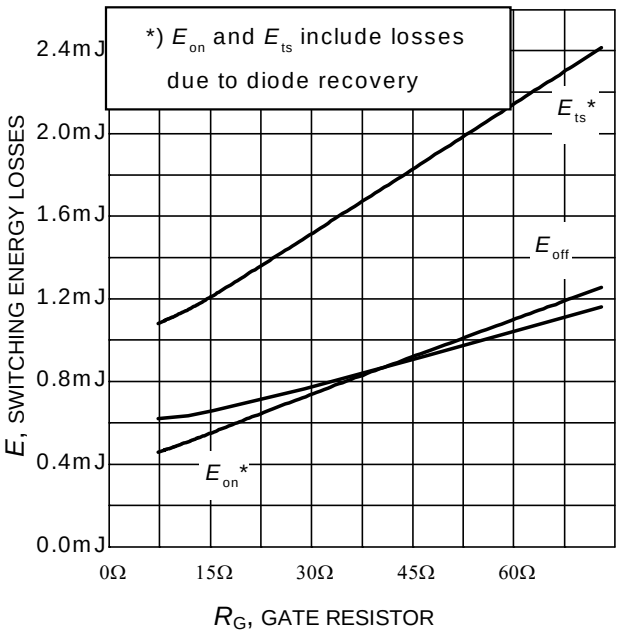


Figure 14. Typical switching energy losses as a function of gate resistor
(inductive load, T_J = 175°C, V_{CE} = 400V, V_{GE} = 0/15V, I_C = 20A, Dynamic test circuit in Figure E)

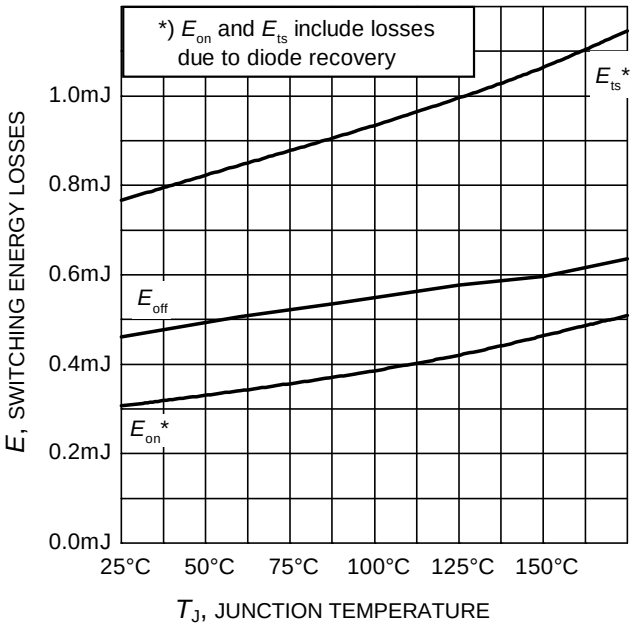


Figure 15. Typical switching energy losses as a function of junction temperature
(inductive load, V_{CE} = 400V, V_{GE} = 0/15V, I_C = 20A, R_G = 12Ω, Dynamic test circuit in Figure E)

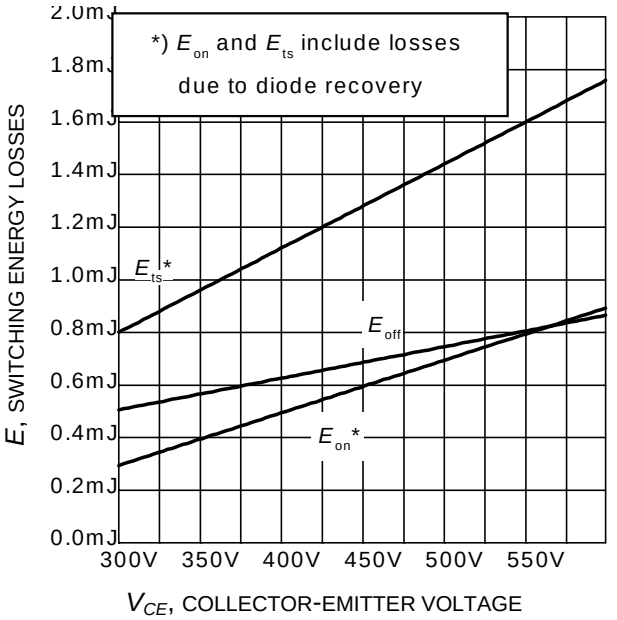


Figure 16. Typical switching energy losses as a function of collector emitter voltage
(inductive load, T_J = 175°C, V_{GE} = 0/15V, I_C = 20A, R_G = 12Ω, Dynamic test circuit in Figure E)

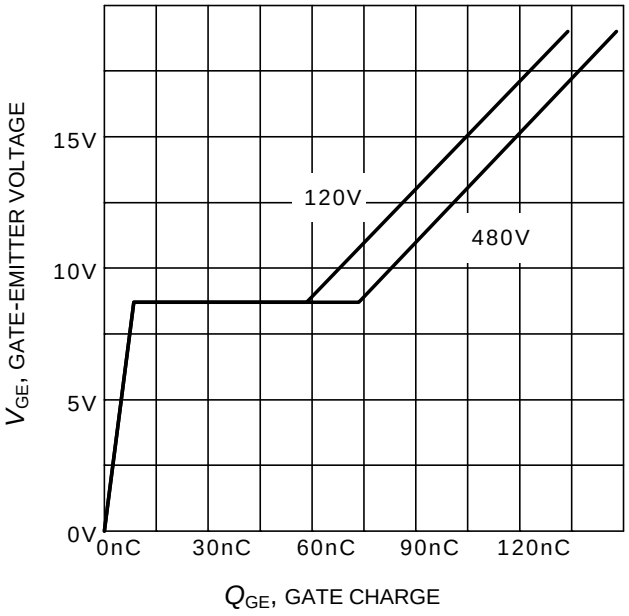


Figure 17. Typical gate charge
(I_C=20 A)

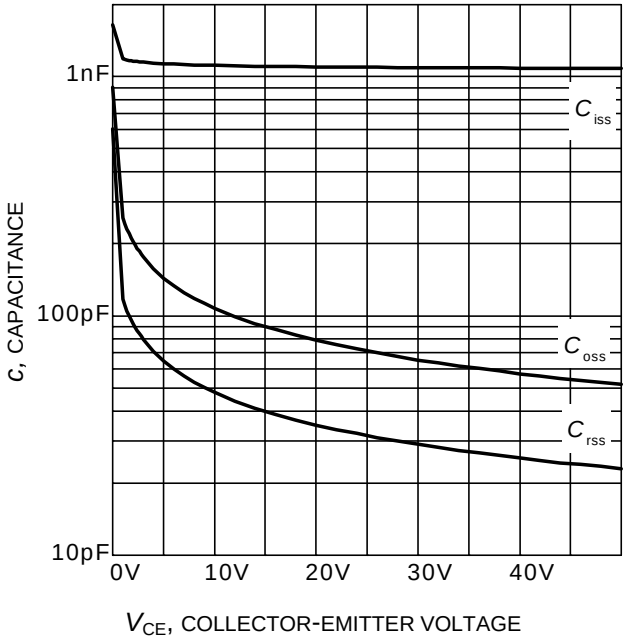


Figure 18. Typical capacitance as a function of collector-emitter voltage
(V_{GE}=0V, f = 1 MHz)

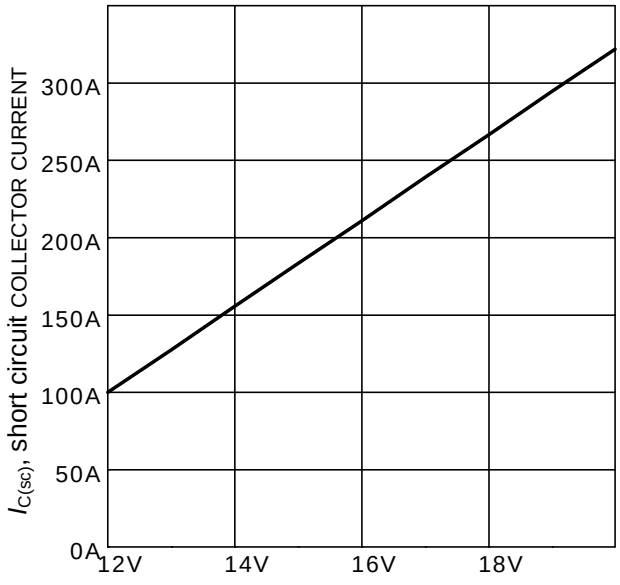


Figure 19. Typical short circuit collector current as a function of gate-emitter voltage
($V_{CE} \le$ 400V, $T_j \le$ 150°C)

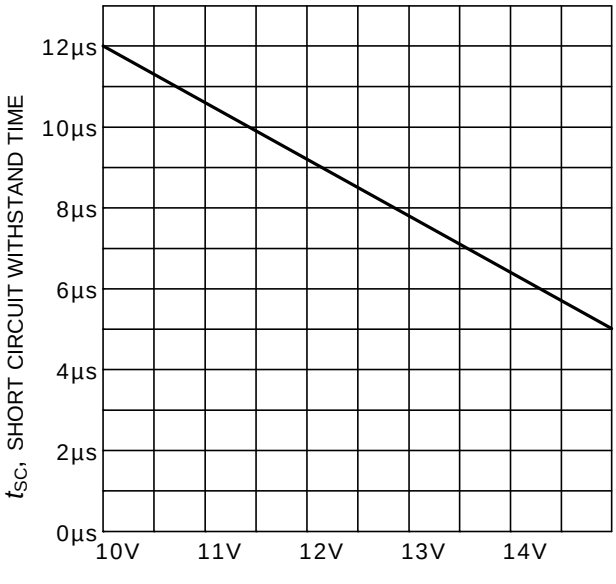


Figure 20. Short circuit withstand time as a function of gate-emitter voltage
(V_{CE}=400V, start at T_J=25°C, T_{Jmax}<150°C)

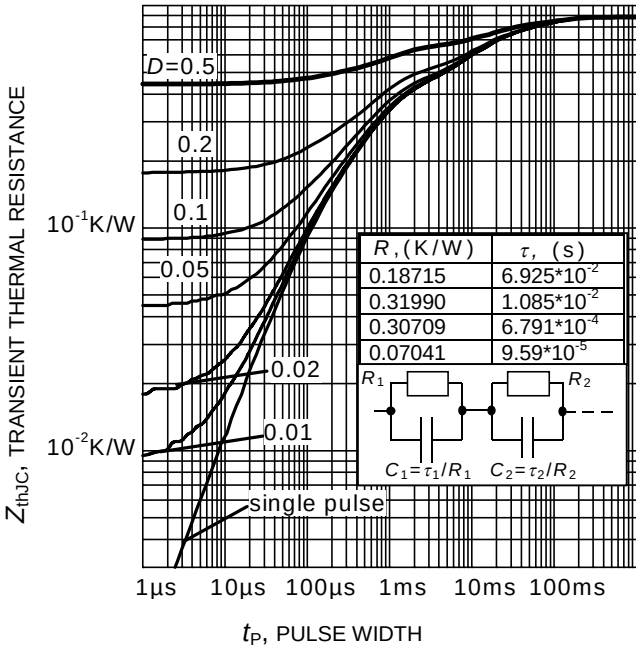


Figure 21. IGBT transient thermal resistance
($D = t_p / T$)

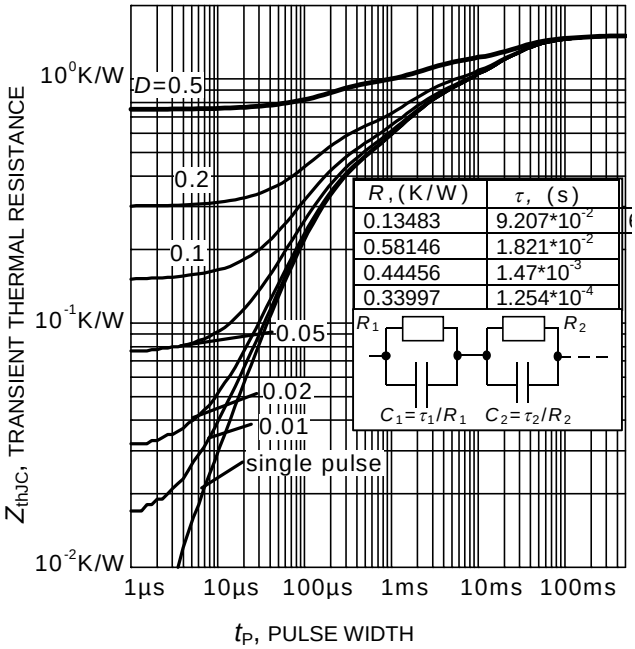


Figure 22. Diode transient thermal impedance as a function of pulse width
($D=t_P/T$)

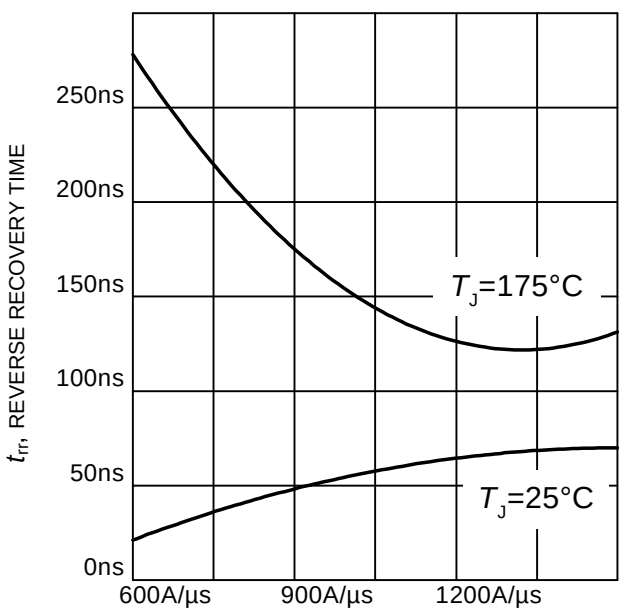


Figure 23. Typical reverse recovery time as a function of diode current slope
(V_R=400V, I_F=20A,
Dynamic test circuit in Figure E)

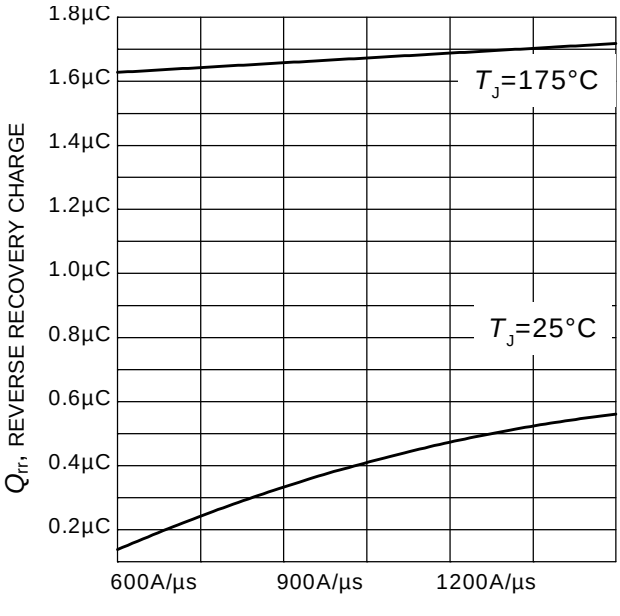


Figure 24. Typical reverse recovery charge as a function of diode current slope
(V_R = 400V, I_F = 20A,
Dynamic test circuit in Figure E)

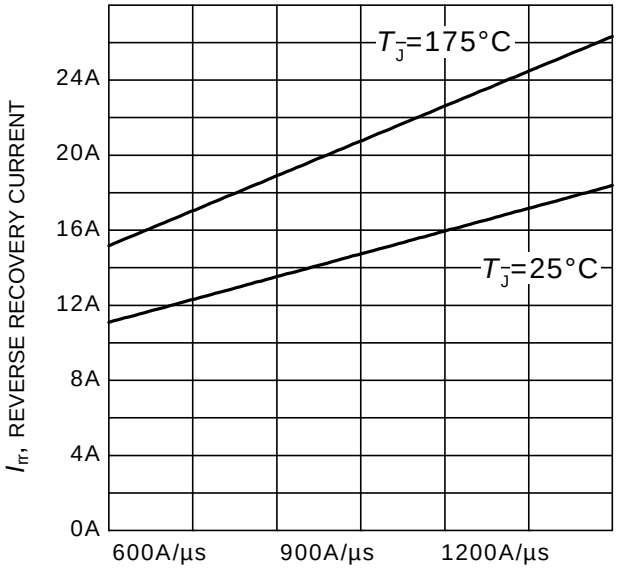


Figure 25. Typical reverse recovery current as a function of diode current slope
(V_R = 400V, I_F = 20A,
Dynamic test circuit in Figure E)

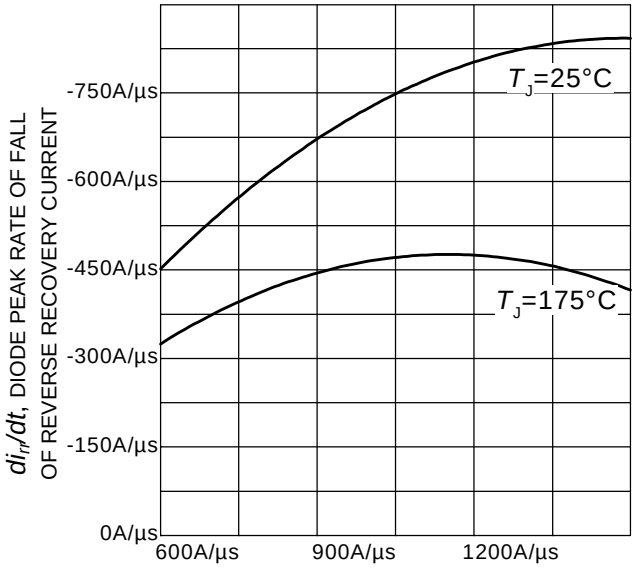


Figure 26. Typical diode peak rate of fall of reverse recovery current as a function of diode current slope
(V_R=400V, I_F=20A,
Dynamic test circuit in Figure E)

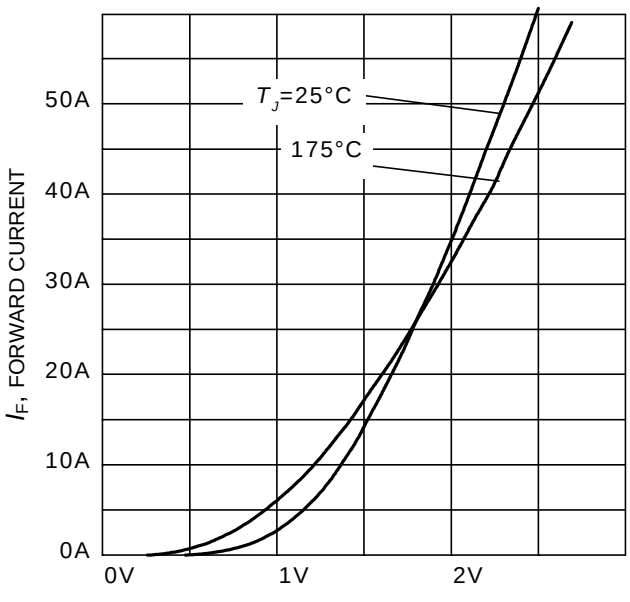


Figure 27. Typical diode forward current as a function of forward voltage


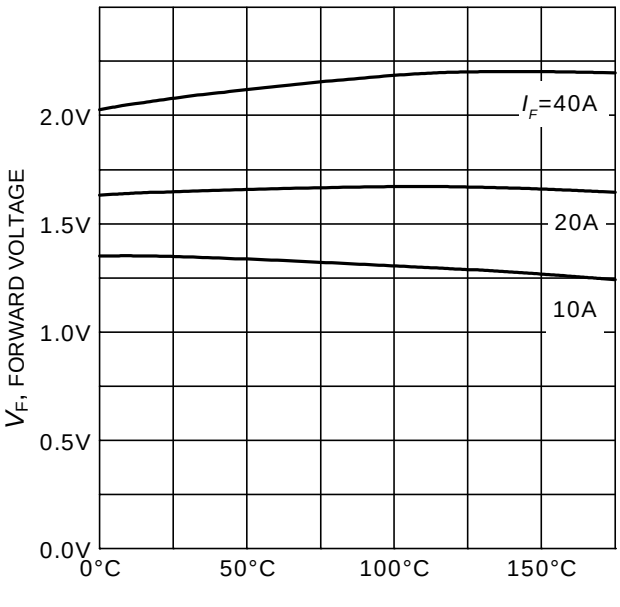


Figure 28. Typical diode forward voltage as a function of junction temperature

PG-TO247-3

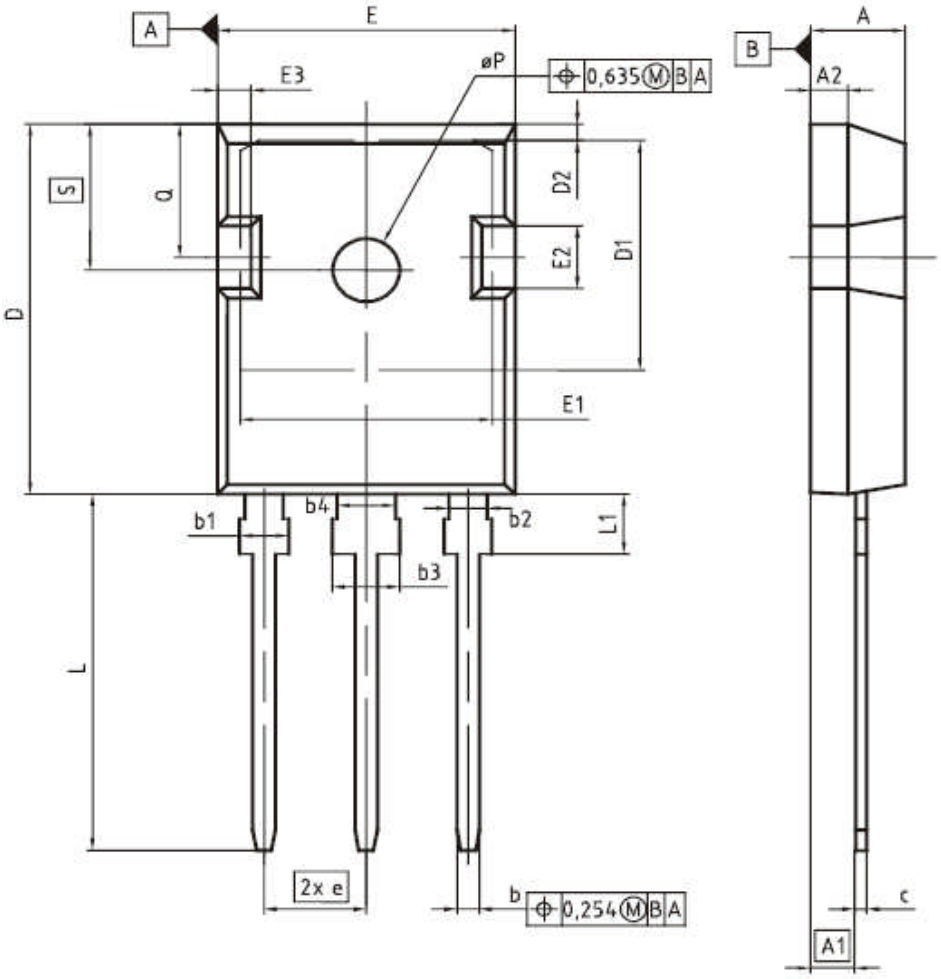

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4,83	5,21	0,190	0,205
A1	2,27	2,54	0,089	0,100
A2	1,85	2,16	0,073	0,085
b	1,07	1,33	0,042	0,052
b1	1,90	2,41	0,075	0,095
b2	1,90	2,16	0,075	0,085
b3	2,87	3,38	0,113	0,133
b4	2,87	3,13	0,113	0,123
c	0,55	0,68	0,022	0,027
D	20,80	21,10	0,819	0,831
D1	16,25	17,65	0,640	0,695
D2	0,95	1,35	0,037	0,053
E	15,70	16,13	0,618	0,635
E1	13,10	14,15	0,516	0,557
E2	3,68	5,10	0,145	0,201
E3	1,00	2,60	0,039	0,102
e	5,44 (BSC)		0,214 (BSC)	
N	3		3	
L	19,80	20,32	0,780	0,800
L1	4,10	4,47	0,161	0,176
øP	3,50	3,70	0,138	0,146
Q	5,49	6,00	0,216	0,236
S	6,04	6,30	0,238	0,248

DOCUMENT NO.	Z8B00003327
SCALE	0 5 5 7,5mm
EUROPEAN PROJECTION	
ISSUE DATE	09-07-2010
REVISION	05

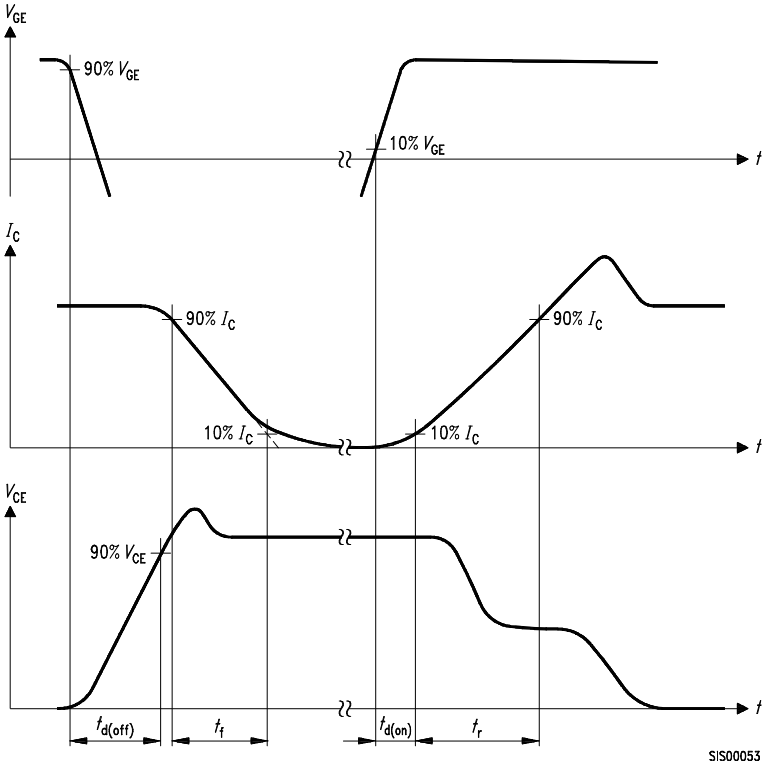


Figure A. Definition of switching times

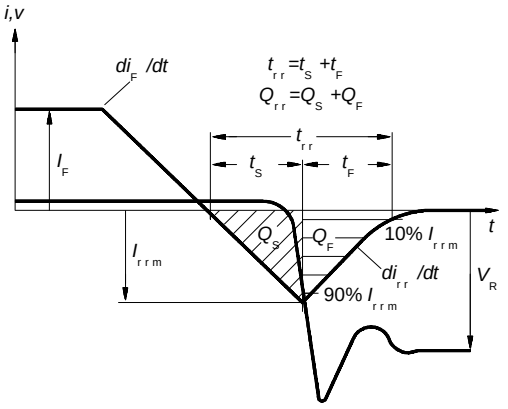


Figure C. Definition of diodes switching characteristics

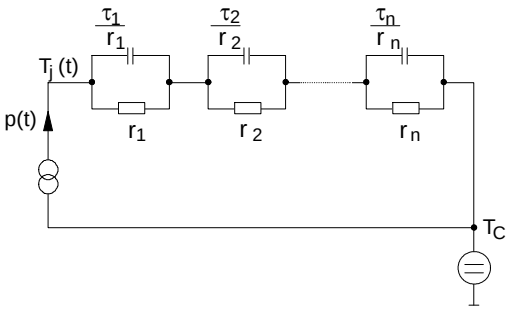


Figure D. Thermal equivalent circuit

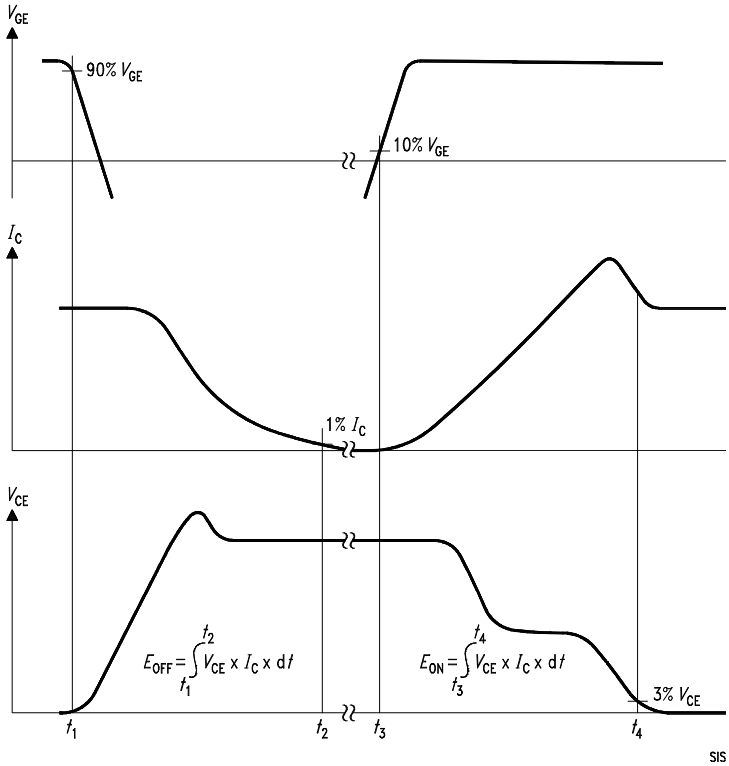


Figure B. Definition of switching losses

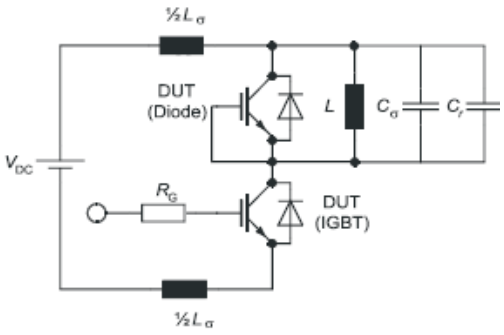


Figure E. Dynamic test circuit
Parasitic inductance L_σ,
Parasitic capacitor C_σ,
Relief capacitor C_r
(only for ZVT switching)

Revision History

IKW20N60TA

Revision: 2013-08-27, Rev. 2.2

Previous Revision		
Revision	Date	Subjects (major changes since last revision)
1.1	2010-03-04	Preliminary datasheet
2.1	2010-05-26	Release of final datasheet
2.2		Update minor changes

Published by
Infineon Technologies AG
81726 München, Germany

© 2013 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non−infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.