
PD- 95895

International
IOR Rectifier

IRG4PSC71UDPbF

INSULATED GATE BIPOLAR TRANSISTOR WITH ULTRAFAST SOFT RECOVERY DIODE


UltraFast CoPack IGBT



V_{CES} = 600V

$V_{CE(on)\ typ.}$ = 1.67V

@V_{GE} = 15V, I_C = 60A



SUPER - 247

Features

- Generation 4 IGBT design provides tighter parameter distribution and higher efficiency (minimum switching and conduction losses) than prior generations
- IGBT co-packaged with HEXFRED ultrafast, ultrasoft recovery anti-parallel diodes for use in bridge configurations
- Industry-benchmark Super-247 package with higher power handling capability compared to same footprint TO-247
- Creepage distance increased to 5.35mm
- Lead-Free

Benefits

- Generation 4 IGBT's offer highest efficiencies available
- Maximum power density, twice the power handling of TO-247, less space than TO-264
- IGBTs optimized for specific application conditions
- HEXFRED diodes optimized for performance with IGBTs
- Cost and space saving in designs that require multiple, paralleled IGBTs

Absolute Maximum Ratings

	Parameter	Max.	Units
V_{CES}	Collector-to-Emitter Voltage	600	V
I_C @ T_C = 25°C	Continuous Collector Current	85⑤	A
I_C @ T_C = 100°C	Continuous Collector Current	60	
I_{CM}	Pulsed Collector Current ①	200	
I_{LM}	Clamped Inductive Load Current ②	200	
I_F @ T_C = 100°C	Diode Continuous Forward Current	60	
I_{FM}	Diode Maximum Forward Current	350	
V_{GE}	Gate-to-Emitter Voltage	± 20	V
P_D @ T_C = 25°C	Maximum Power Dissipation	350	W
P_D @ T_C = 100°C	Maximum Power Dissipation	140	
T_J T_{STG}	Operating Junction and Storage Temperature Range	-55 to +150	°C
	Soldering Temperature, for 10 sec.	300 (0.063 in. (1.6mm) from case)	

Thermal Resistance\ Mechanical

	Parameter	Min.	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case - IGBT	—	—	0.36	°C/W
$R_{\theta JC}$	Junction-to-Case - Diode	—	—	0.69	
$R_{\theta CS}$	Case-to-Sink, flat, greased surface	—	0.24	—	
$R_{\theta JA}$	Junction-to-Ambient, typical socket mount	—	—	38	
	Recommended Clip Force	20.0(2.0)	—	—	N (kgf)
	Weight	—	6 (0.21)	—	g (oz)

Electrical Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)CES}$	Collector-to-Emitter Breakdown Voltage③	600	—	—	V	V_{GE} = 0V, I_C = 250µA
$\Delta V_{(BR)CES}/\Delta T_J$	Temperature Coeff. of Breakdown Voltage	—	0.39	—	V/°C	V_{GE} = 0V, I_C = 10mA
$V_{CE(on)}$	Collector-to-Emitter Saturation Voltage	—	1.67	2.0	V	I_C = 60A V_{GE} = 15V
		—	1.95	—		I_C = 100A See Fig. 2, 5
		—	1.71	—		I_C = 60A, T_J = 150°C
$V_{GE(th)}$	Gate Threshold Voltage	3.0	—	6.0		V_{CE} = V_{GE}, I_C = 250µA
$\Delta V_{GE(th)}/\Delta T_J$	Temperature Coeff. of Threshold Voltage	—	-13	—	mV/°C	V_{CE} = V_{GE}, I_C = 1.5mA
g_{fe}	Forward Transconductance ④	47	70	—	S	V_{CE} = 50V, I_C = 60A
I_{CES}	Zero Gate Voltage Collector Current	—	—	500	µA	V_{GE} = 0V, V_{CE} = 600V
		—	—	13	mA	V_{GE} = 0V, V_{CE} = 600V, T_J = 150°C
V_{FM}	Diode Forward Voltage Drop	—	1.4	1.7	V	I_C = 60A See Fig. 13
		—	1.3	—		I_C = 60A, T_J = 150°C
I_{GES}	Gate-to-Emitter Leakage Current	—	—	±100	nA	V_{GE} = ±20V

Switching Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
Q_g	Total Gate Charge (turn-on)	—	340	520	nC	I_C = 60A
Qge	Gate - Emitter Charge (turn-on)	—	44	66		V_{CC} = 400V See Fig. 8
Q_{gc}	Gate - Collector Charge (turn-on)	—	160	240		V_{GE} = 15V
$t_{d(on)}$	Turn-On Delay Time	—	90	—	ns	T_J = 25°C
t_r	Rise Time	—	94	—		I_C = 60A, V_{CC} = 480V
$t_{d(off)}$	Turn-Off Delay Time	—	245	368		V_{GE} = 15V, R_G = 5.0Ω
t_f	Fall Time	—	110	167		Energy losses include "tail" and
E_{on}	Turn-On Switching Loss	—	3.26	—	mJ	diode reverse recovery.
E_{off}	Turn-Off Switching Loss	—	2.27	—		See Fig. 9, 10, 11, 18
E_{ts}	Total Switching Loss	—	5.53	7.2		
$t_{d(on)}$	Turn-On Delay Time	—	91	—	ns	T_J = 150°C, See Fig. 9, 10, 11, 18
t_r	Rise Time	—	88	—		I_C = 60A, V_{CC} = 480V
$t_{d(off)}$	Turn-Off Delay Time	—	353	—		V_{GE} = 15V, R_G = 5.0Ω
t_f	Fall Time	—	150	—		Energy losses include "tail" and
E_{ts}	Total Switching Loss	—	7.1	—	mJ	diode reverse recovery.
L_E	Internal Emitter Inductance	—	13	—	nH	Measured 5mm from package
C_{ies}	Input Capacitance	—	7500	—	pF	V_{GE} = 0V
C_{oes}	Output Capacitance	—	720	—		V_{CC} = 30V See Fig. 7
C_{res}	Reverse Transfer Capacitance	—	93	—		f = 1.0MHz
t_{rr}	Diode Reverse Recovery Time	—	82	120	ns	T_J = 25°C See Fig.
		—	140	210		T_J = 125°C 14 I_F = 60A
I_{rr}	Diode Peak Reverse Recovery Current	—	8.2	12	A	T_J = 25°C See Fig.
		—	13	20		T_J = 125°C 15 V_R = 200V
Q_{rr}	Diode Reverse Recovery Charge	—	364	546	nC	T_J = 25°C See Fig.
		—	1084	1625		T_J = 125°C 16 di/dt = 200A/µs
$di_{(rec)M}/dt$	Diode Peak Rate of Fall of Recovery	—	328	—	A/µs	T_J = 25°C See Fig.
During t_b		—	266	—		T_J = 125°C 17

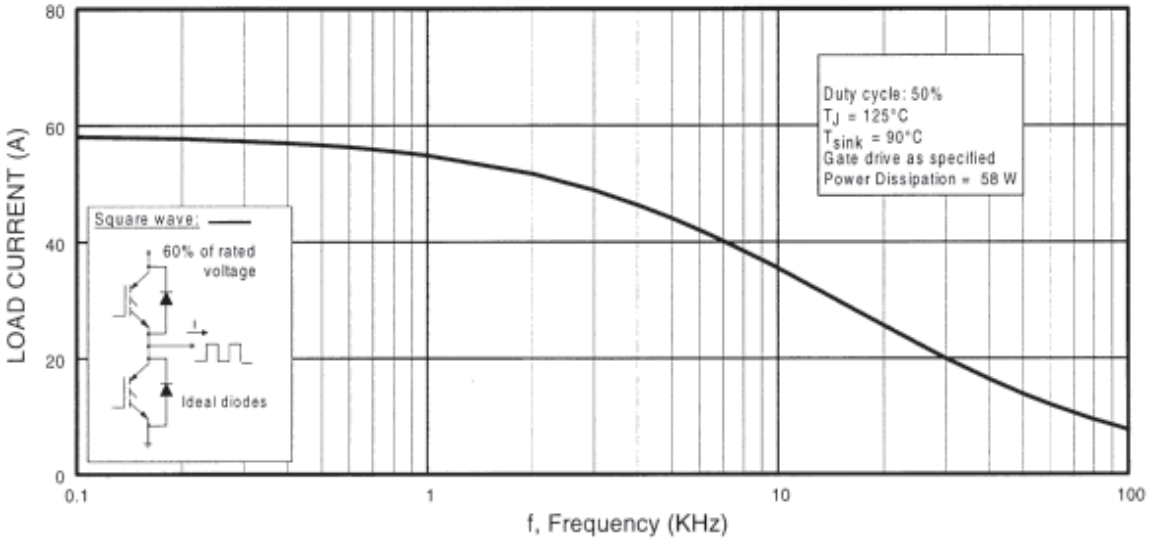


Fig. 1 - Typical Load Current vs. Frequency
(Load Current = I_{RMS} of fundamental)

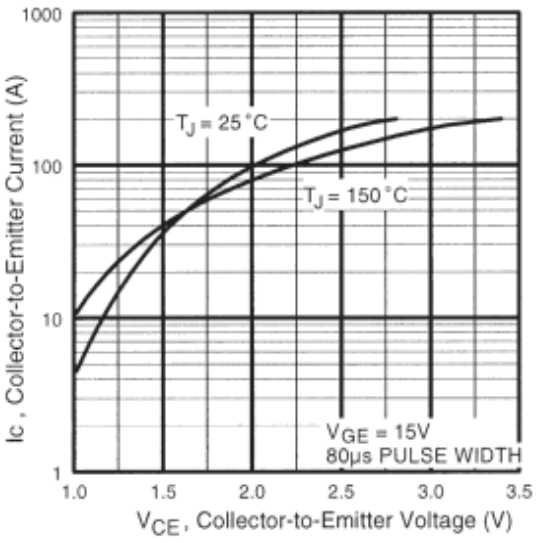


Fig. 2 - Typical Output Characteristics

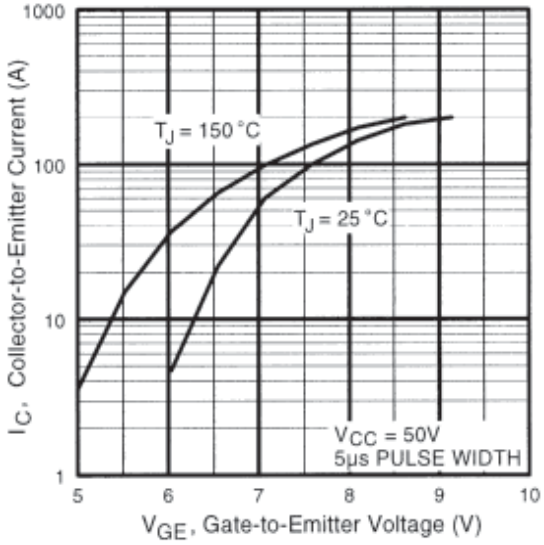


Fig. 3 - Typical Transfer Characteristics

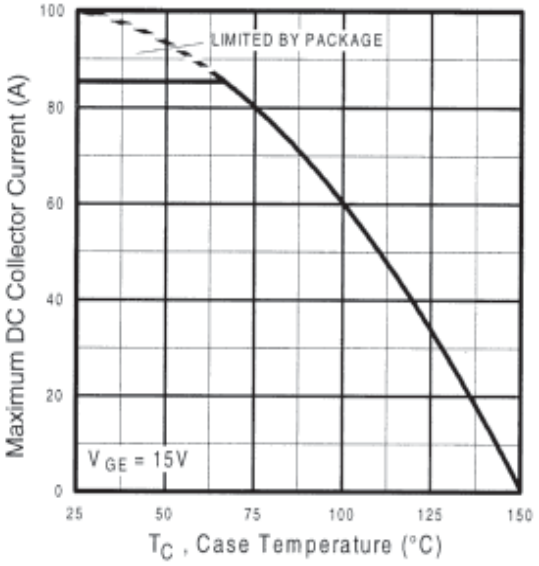


Fig. 4 - Maximum Collector Current vs. Case Temperature

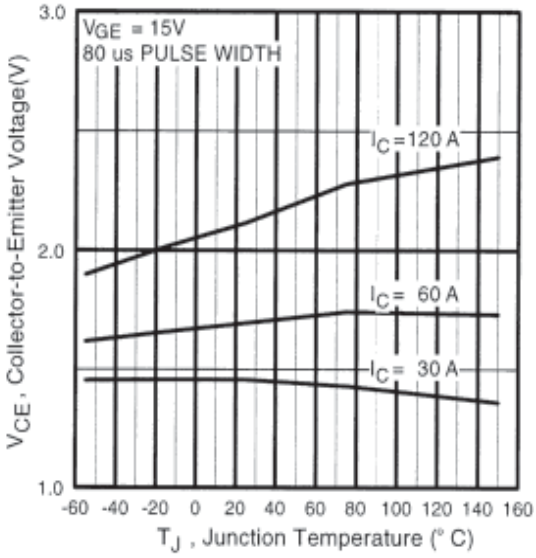


Fig. 5 - Typical Collector-to-Emitter Voltage vs. Junction Temperature

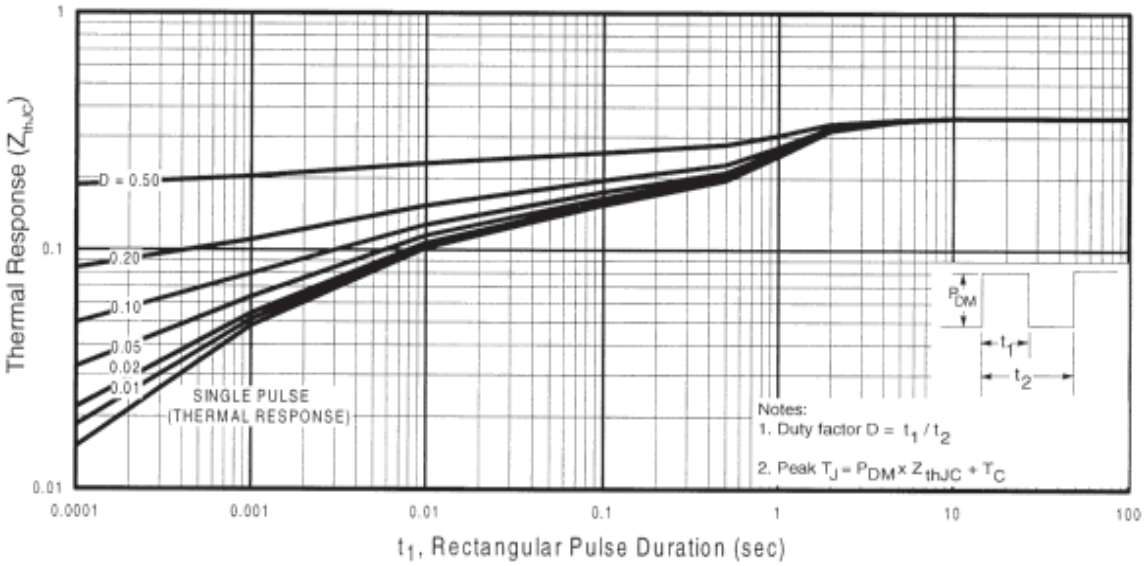


Fig. 6 - Maximum IGBT Effective Transient Thermal Impedance, Junction-to-Case

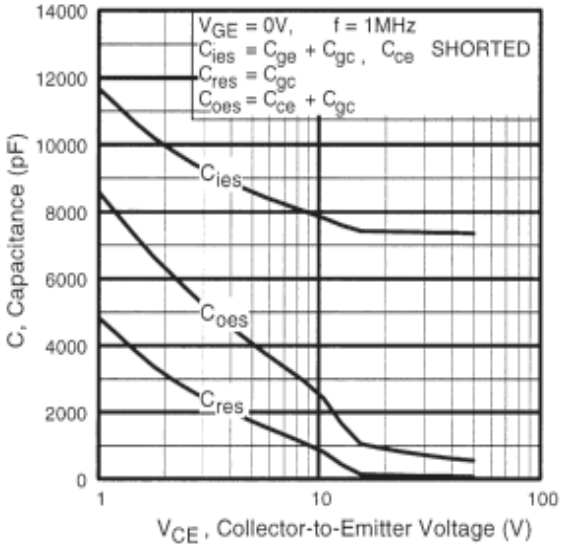


Fig. 7 - Typical Capacitance vs. Collector-to-Emitter Voltage

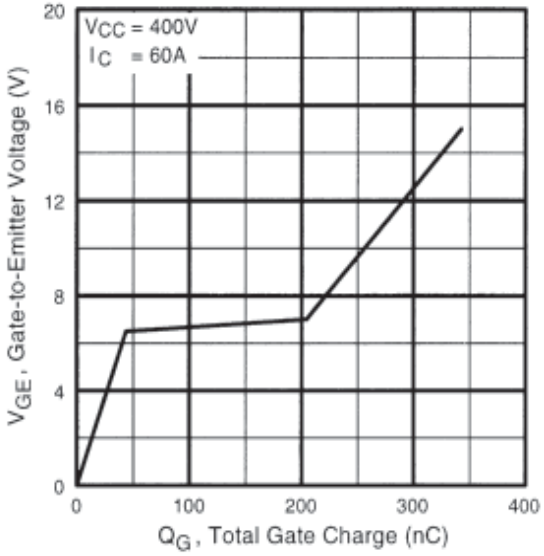


Fig. 8 - Typical Gate Charge vs. Gate-to-Emitter Voltage

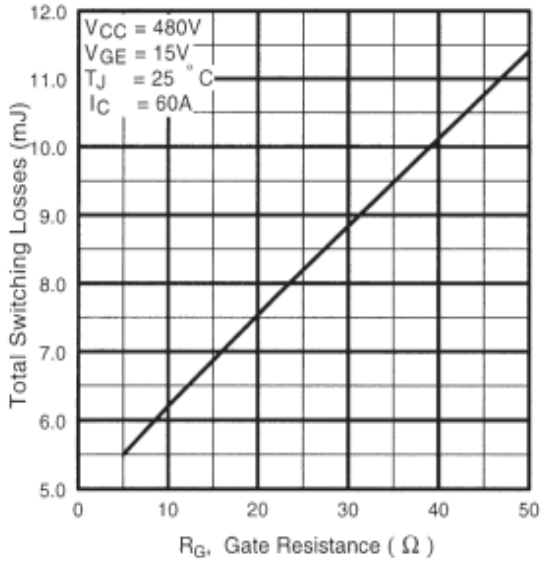


Fig. 9 - Typical Switching Losses vs. Gate Resistance

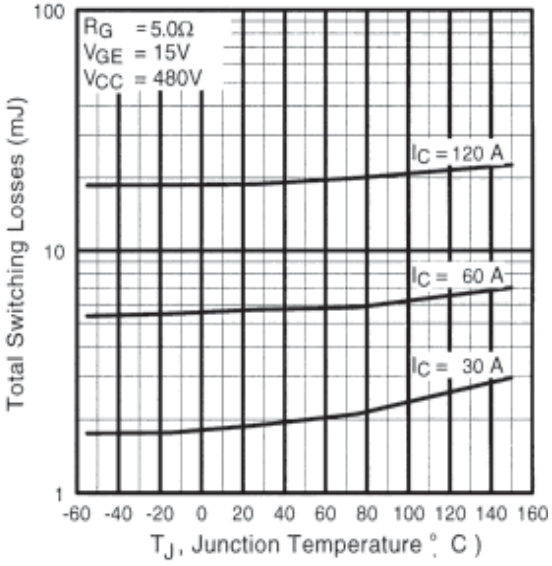


Fig. 10 - Typical Switching Losses vs. Junction Temperature

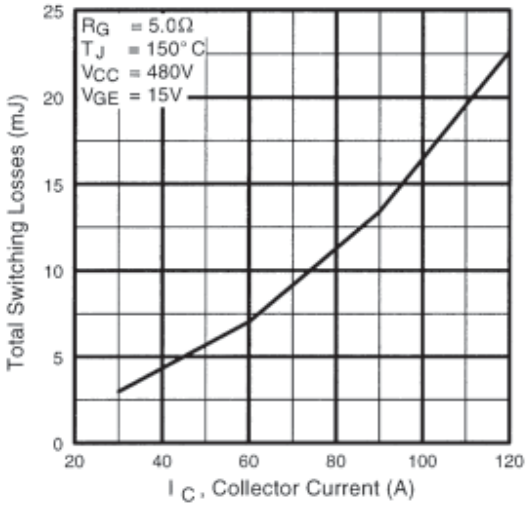


Fig. 11 - Typical Switching Losses vs. Collector-to-Emitter Current

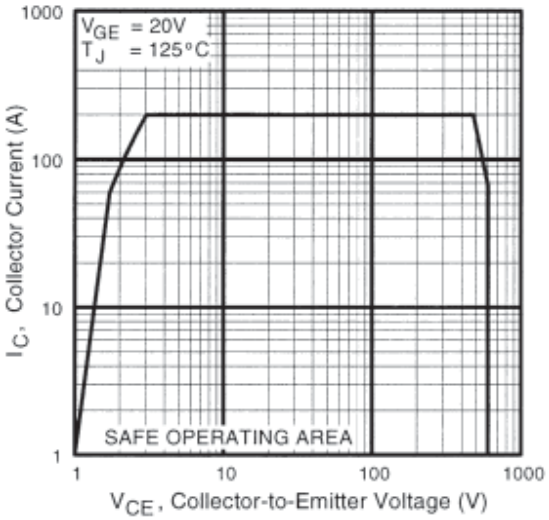


Fig. 12 - Turn-Off SOA

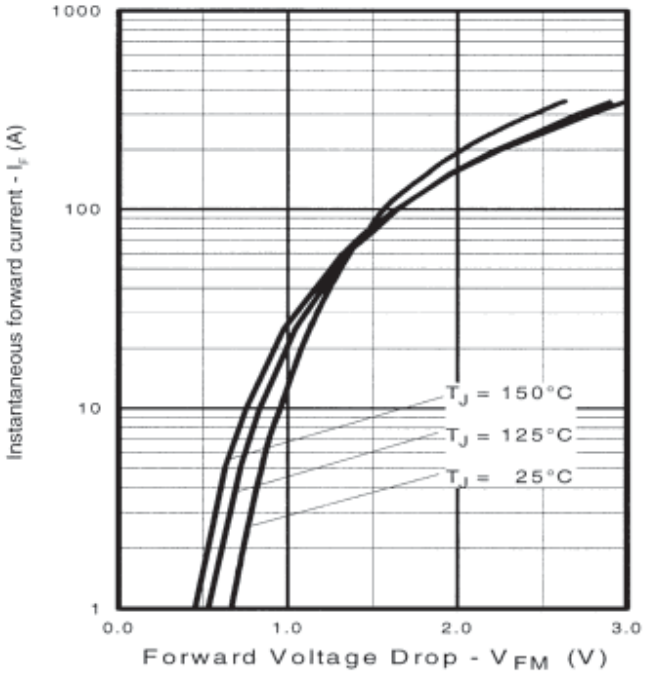


Fig. 13 - Maximum Forward Voltage Drop vs. Instantaneous Forward Current

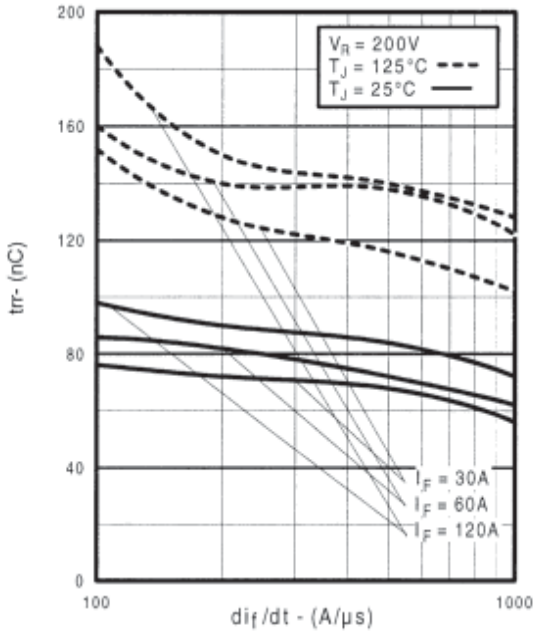


Fig. 14 - Typical Reverse Recovery vs. di_f/dt

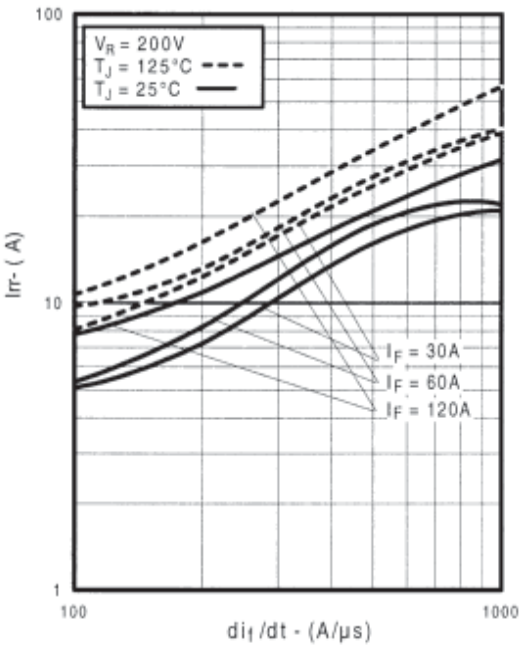


Fig. 15 - Typical Recovery Current vs. di_f/dt

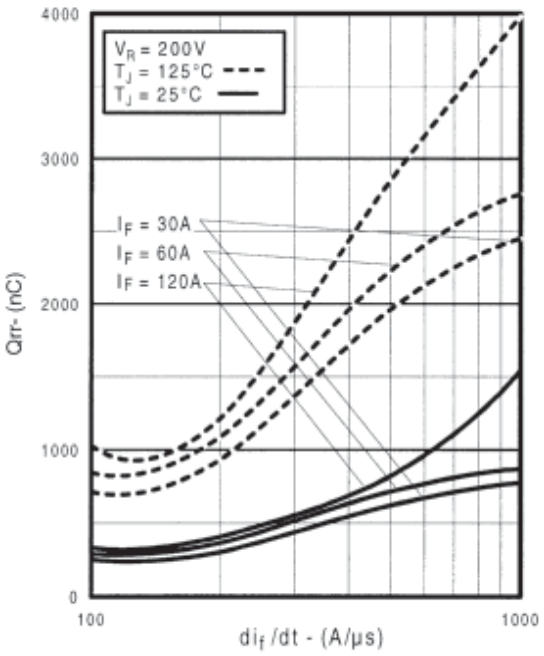


Fig. 16 - Typical Stored Charge vs. di_f/dt

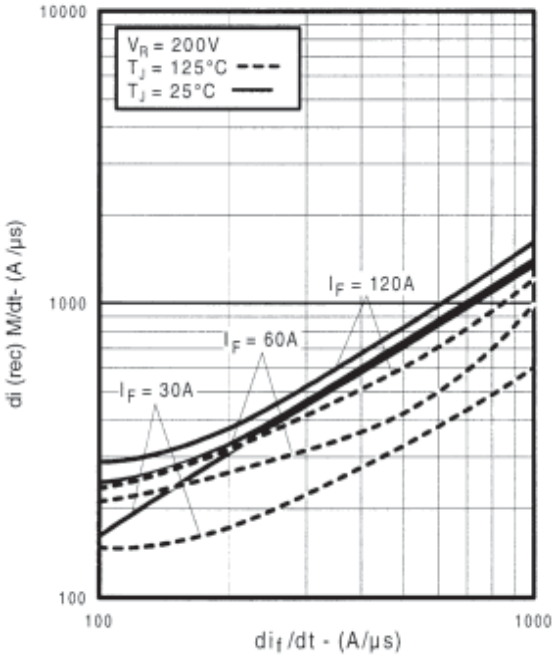


Fig. 17 - Typical $di_{(rec)M}/dt$ vs. di_f/dt

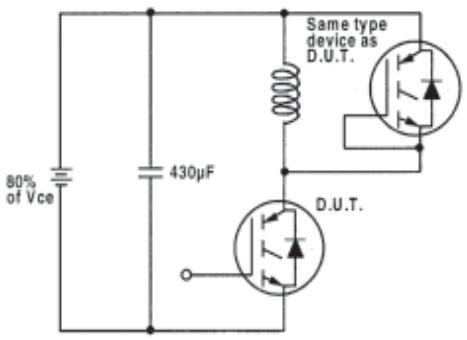


Fig. 18a - Test Circuit for Measurement of I_{LM}, E_{on}, $E_{off(diode)}$, t_{rr}, Q_{rr}, I_{rr}, $t_{d(on)}$, t_r, $t_{d(off)}$, t_f

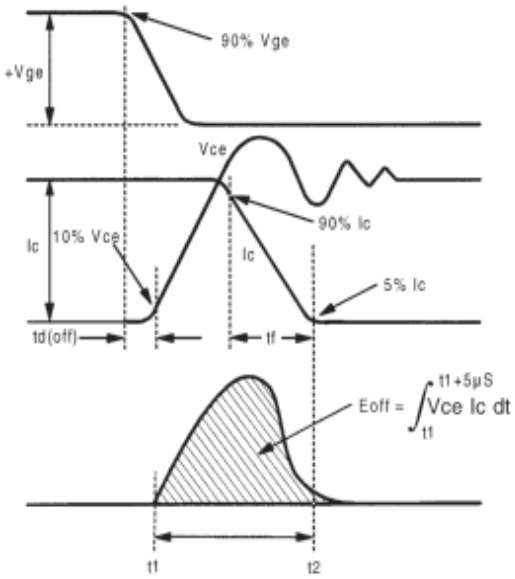


Fig. 18b - Test Waveforms for Circuit of Fig. 18a, Defining E_{off}, $t_{d(off)}$, t_f

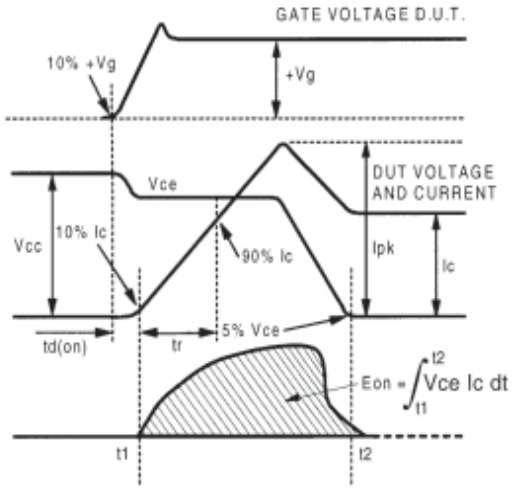


Fig. 18c - Test Waveforms for Circuit of Fig. 18a, Defining E_{on}, $t_{d(on)}$, t_r

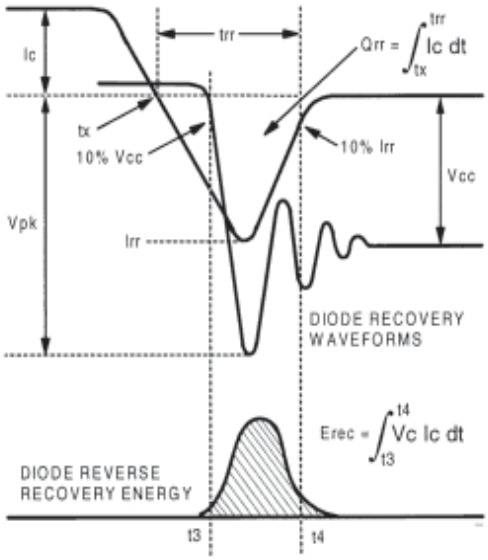


Fig. 18d - Test Waveforms for Circuit of Fig. 18a, Defining E_{rec}, t_{rr}, Q_{rr}, I_{rr}

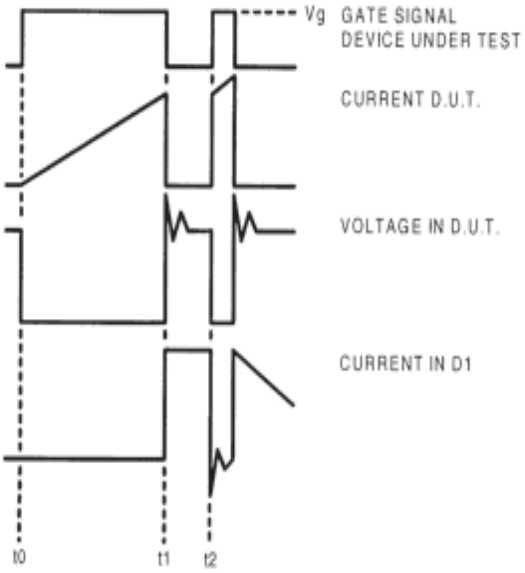


Figure 18e. Macro Waveforms for Figure 18a's Test Circuit

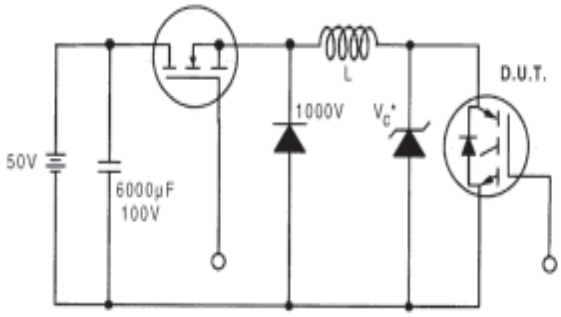


Figure 19. Clamped Inductive Load Test Circuit

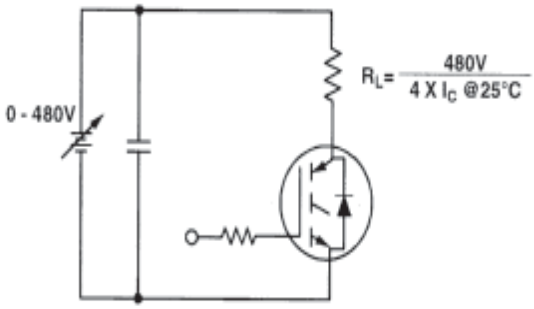


Figure 20. Pulsed Collector Current Test Circuit

Notes:

① Repetitive rating: V_{GE}=20V; pulse width limited by maximum junction temperature (figure 20)

② V_{CC}=80%(V_{CES}), V_{GE}=20V, L=10µH, R_G= 5.0Ω (figure 19)


③ Pulse width ≤ 80µs; duty factor ≤ 0.1%

④ Pulse width 5.0µs, single shot

⑤ Current limited by the package, (Die current = 100A)

International
IOR Rectifier

Case Outline and Dimensions — Super-247

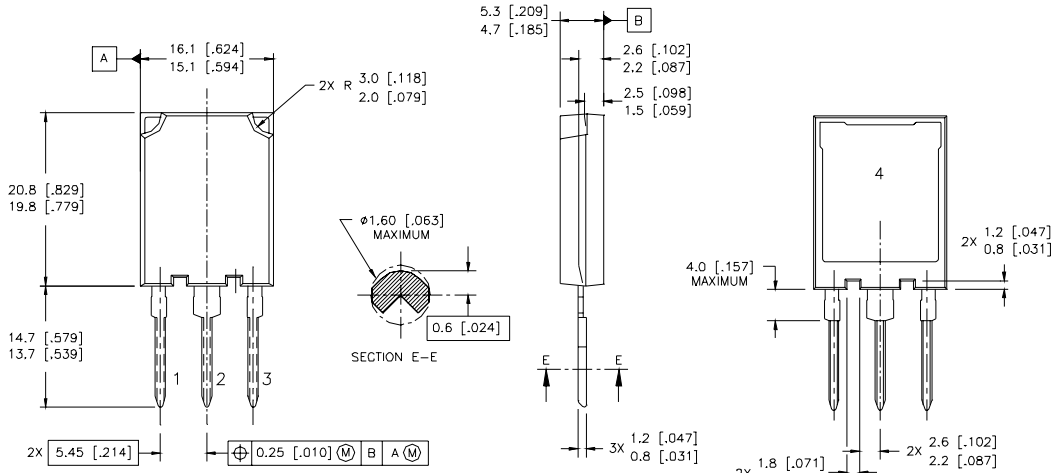


NOTES:
1. DIMENSIONS & TOLERANCING PER ASME Y14.5M–1994
2. CONTROLLING DIMENSION: MILLIMETER
3. DIMENSIONS ARE SHOWN IN MILLIMETRES [INCHES]

LEAD ASSIGNMENTS

MOSFET	IGBT
1 – GATE	1 – GATE
2 – DRAIN	2 – COLLECTOR
3 – SOURCE	3 – EMITTER
4 – DRAIN	4 – COLLECTOR

Super-247 (TO-274AA) Part Marking Information

EXAMPLE: THIS IS AN IRFPS37N50A WITH
ASSEMBLY LOT CODE 1789
ASSEMBLED ON WW 19, 1997
IN THE ASSEMBLY LINE "C"

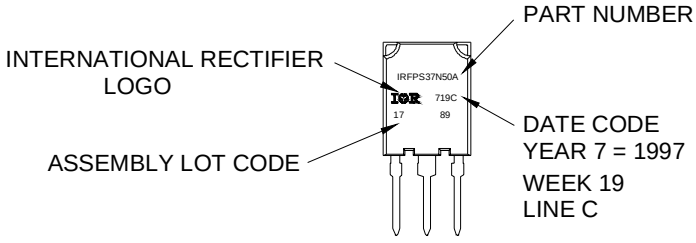

Note: "P" in assembly line position
indicates "Lead-Free"

Data and specifications subject to change without notice.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903
Visit us at www.irf.com for sales contact information. 09/04

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.