
IXYS

Preliminary Technical Information


High Voltage, High Gain BIMOSFET™ Monolithic Bipolar MOS Transistor

IXBH32N300
IXBT32N300


V_{CES} = 3000V
I_{C110} = 32A
$V_{CE(sat)} \leq$ 3.2V



TO-247 (IXBH)



TO-268 (IXBT)



Symbol	Test Conditions	Maximum Ratings	
V_{CES}	T_C = 25°C to 150°C	3000	V
V_{CGR}	T_J = 25°C to 150°C, R_{GE} = 1MΩ	3000	V
V_{GES}	Continuous	± 20	V
V_{GEM}	Transient	± 30	V
I_{C25}	T_C = 25°C	80	A
I_{C110}	T_C = 110°C	32	A
I_{CM}	T_C = 25°C, 1ms	280	A
SSOA (RBSOA)	V_{GE} = 15V, T_{VJ} = 125°C, R_G = 10Ω Clamped Inductive Load	I_{CM} = 80 $V_{CES} \leq$ 2400	A V
P_C	T_C = 25°C	400	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_L	1.6mm (0.062 in.) from Case for 10s	300	°C
T_{SOLD}	Plastic Body for 10 seconds	260	°C
M_d	Mounting Torque (TO-247)	1.13/10	Nm/lb.in.
Weight	TO-247	6	g
	TO-268	4	g

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{CES}	I_C = 250μA, V_{GE} = 0V	3000			V
$V_{GE(th)}$	I_C = 250μA, V_{CE} = V_{GE}	2.5		5.0	V
I_{CES}	V_{CE} = 0.8 • V_{CES}, V_{GE} = 0V			50	μA
	T_J = 125°C			2	mA
I_{GES}	V_{CE} = 0V, V_{GE} = ± 20V			±100	nA
$V_{CE(sat)}$	I_C = 32A, V_{GE} = 15V, Note 1		2.8	3.2	V
	T_J = 125°C		3.5		V

G = Gate C = Collector
E = Emitter TAB = Collector

Features

- High Blocking Voltage
- International Standard Packages
- Low Conduction Losses

Advantages

- Low Gate Drive Requirement
- High Power Density

Applications:

- Switched-Mode and Resonant-Mode Power Supplies
- Uninterruptible Power Supplies (UPS)
- Laser Generators
- Capacitor Discharge Circuits
- AC Switches

© 2009 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	I_C = 32A, V_{CE} = 10V, Note 1	16	26		S
C_{ies}	V_{CE} = 25V, V_{GE} = 0V, f = 1MHz		3140		pF
C_{oes}			124		pF
C_{res}			40		pF
Q_g	I_C = 32A, V_{GE} = 15V, V_{CE} = 1000V		142		nC
Q_{ge}			20		nC
Q_{gc}			57		nC
$t_{d(on)}$	**Resistive Switching Times, T_J = 25°C**		50		ns
t_r	I_C = 32A, V_{GE} = 15V		185		ns
$t_{d(off)}$	V_{CE} = 1250V, R_G = 2Ω		160		ns
t_f			720		ns
$t_{d(on)}$	**Resistive Switching Times, T_J = 125°C**		58		ns
t_r	I_C = 32A, V_{GE} = 15V		515		ns
$t_{d(off)}$	V_{CE} = 1250V, R_G = 2Ω		165		ns
t_f			630		ns
R_{thJC}				0.31	°C/W
R_{thCS}	(TO-247)		0.21		°C/W

Reverse Diode


Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
V_F	I_F = 32A, V_{GE} = 0V			2.1	V
t_{rr}	I_F = 16A, V_{GE} = 0V, -di_F/dt = 100A/µs		1.5		µs
I_{RM}	V_R = 100V, V_{GE} = 0V		33		A

Note 1: Pulse Test, t ≤ 300µs, Duty Cycle, d ≤ 2%.

PRELIMINARY TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from data gathered during objective characterizations of preliminary engineering lots; but also may yet contain some information supplied during a pre-production design evaluation. IXYS reserves the right to change limits, test conditions, and dimensions without notice.


TO-247 (IXBH) Outline



Terminals: 1 - Gate 2 - Drain
3 - Source Tab - Drain

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.7	5.3	.185	.209
A_1	2.2	2.54	.087	.102
A_2	2.2	2.6	.059	.098
b	1.0	1.4	.040	.055
b_1	1.65	2.13	.065	.084
b_2	2.87	3.12	.113	.123
C	.4	.8	.016	.031
D	20.80	21.46	.819	.845
E	15.75	16.26	.610	.640
e	5.20	5.72	0.205	0.225
L	19.81	20.32	.780	.800
L1		4.50		.177
ØP	3.55	3.65	.140	.144
Q	5.89	6.40	0.232	0.252
R	4.32	5.49	.170	.216
S	6.15 BSC		242 BSC	

TO-268 (IXBT) Outline

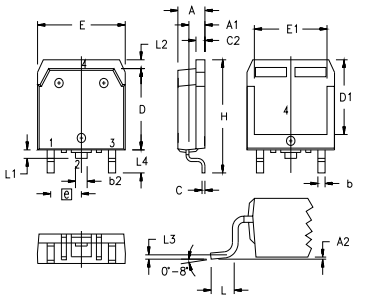

SYM	INCHES MIN	MAX	MILLIMETERS MIN	MAX
A	.193	.201	4.90	5.10
A1	.106	.114	2.70	2.90
A2	.001	.010	0.02	0.25
b	.045	.057	1.15	1.45
b2	.075	.083	1.90	2.10
C	.016	.026	0.40	0.65
C2	.057	.063	1.45	1.60
D	.543	.551	13.80	14.00
D1	.488	.500	12.40	12.70
E	.624	.632	15.85	16.05
E1	.524	.535	13.30	13.60
e	.215 BSC		5.45 BSC	
H	.736	.752	18.70	19.10
L	.094	.106	2.40	2.70
L1	.047	.055	1.20	1.40
L2	.039	.045	1.00	1.15
L3	.010 BSC		0.25 BSC	
L4	.150	.161	3.80	4.10

IXYS Reserves the Right to Change Limits, Test Conditions and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,850,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ 25ºC

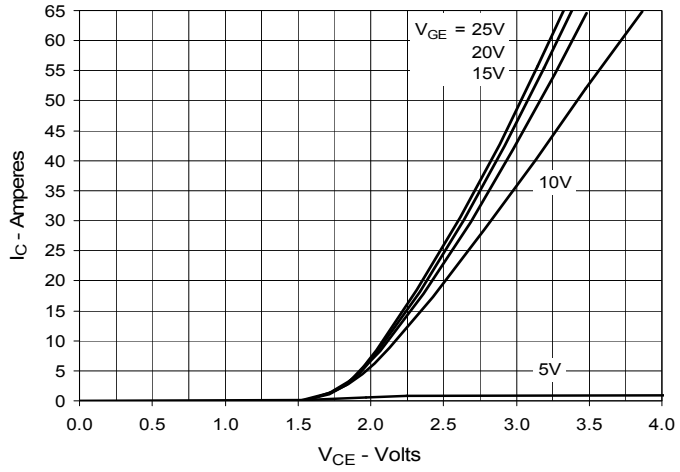


Fig. 2. Extended Output Characteristics @ 25ºC

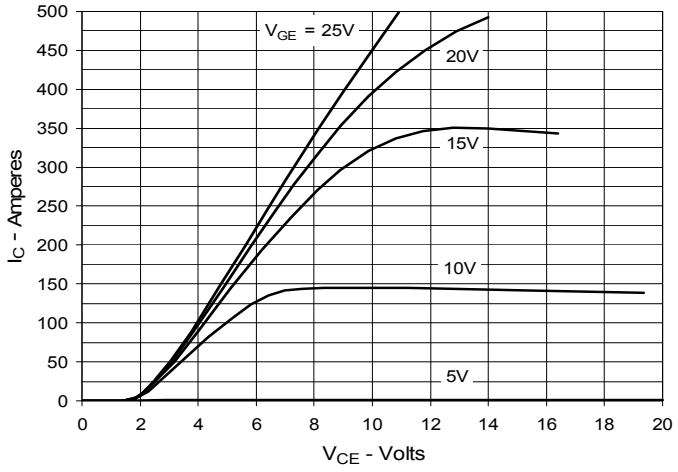


Fig. 3. Output Characteristics @ 125ºC

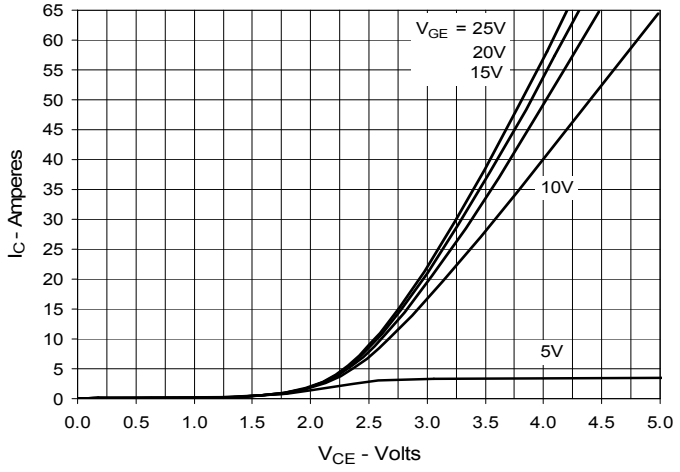


Fig. 4. Dependence of $V_{CE(sat)}$ on Junction Temperature

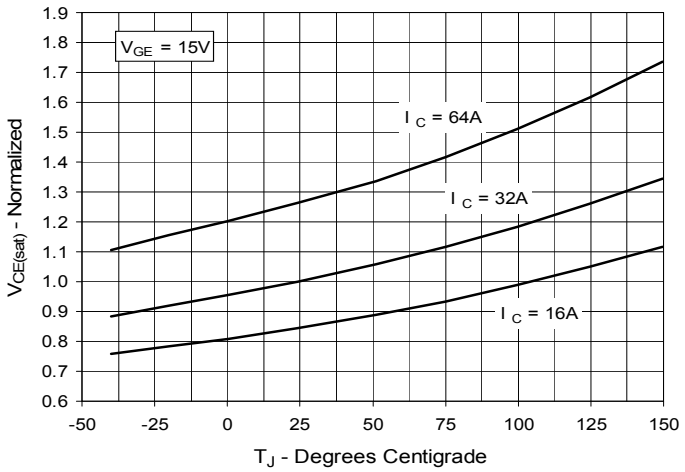


Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage


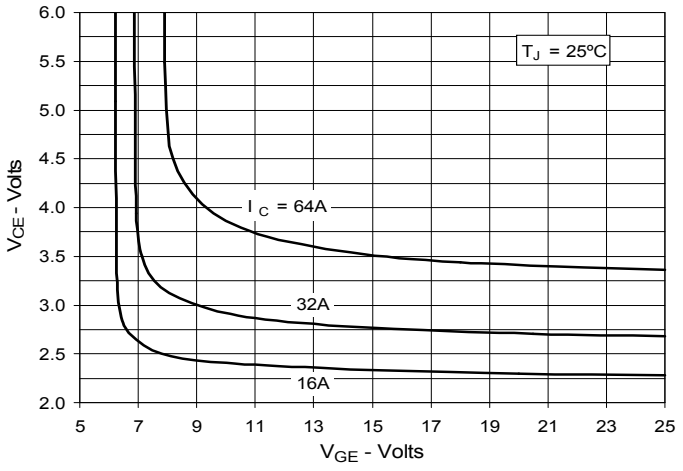


Fig. 6. Input Admittance

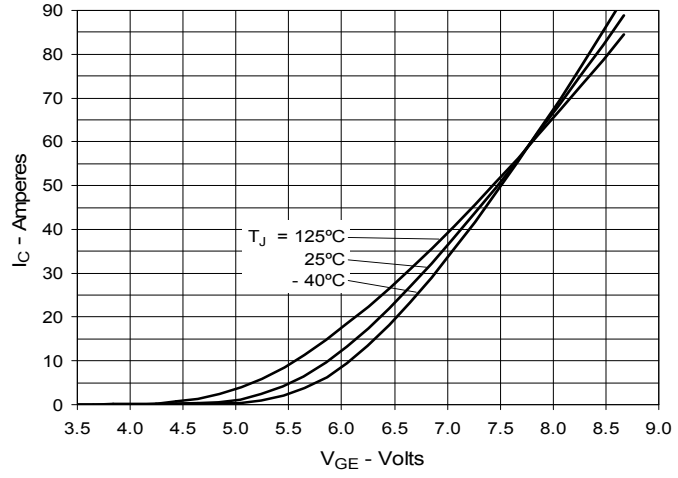

© 2009 IXYS CORPORATION, All Rights Reserved

Fig. 7. Transconductance

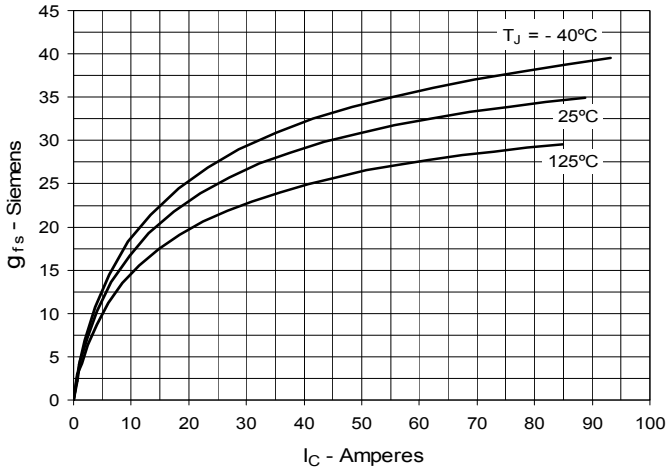


Fig. 8. Forward Voltage Drop of Intrinsic Diode

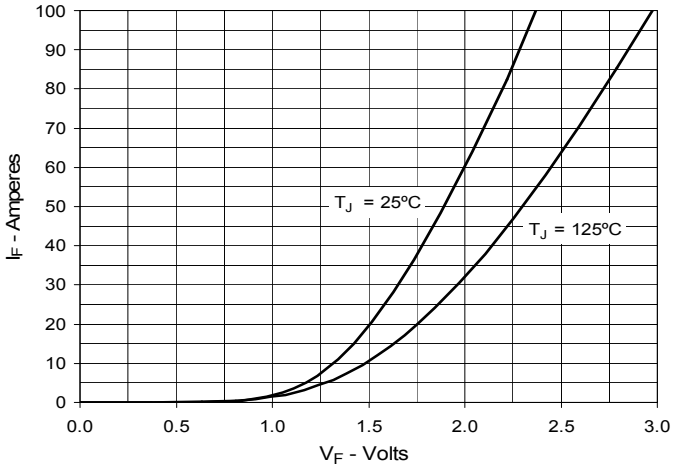


Fig. 9. Gate Charge

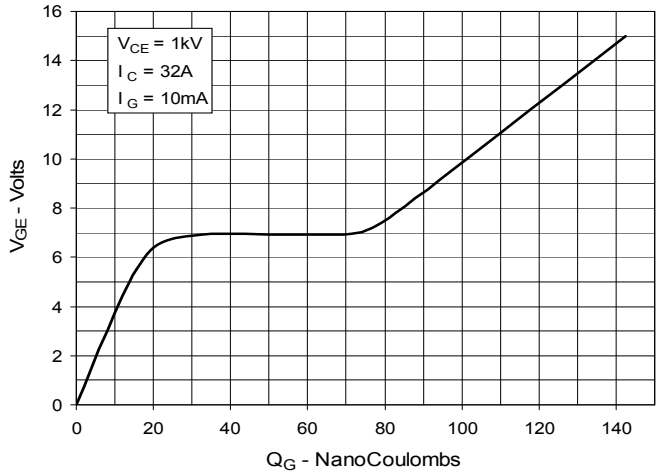


Fig. 10. Capacitance

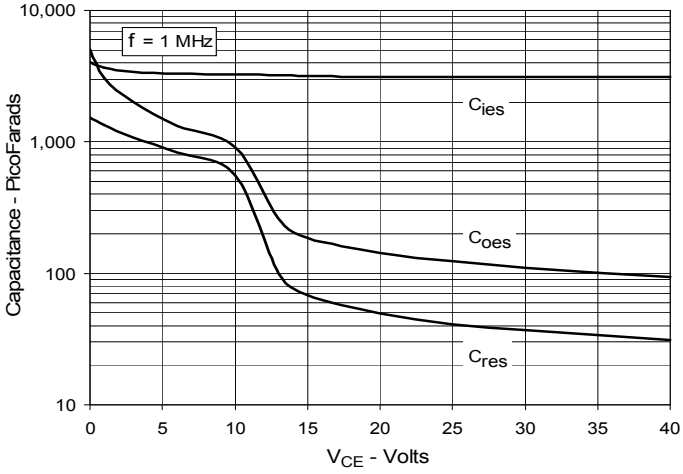


Fig. 11. Reverse-Bias Safe Operating Area


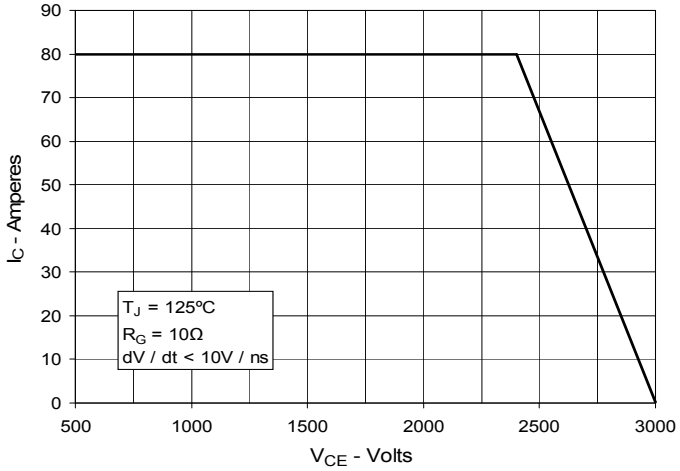


Fig. 12. Maximum Transient Thermal Impedance

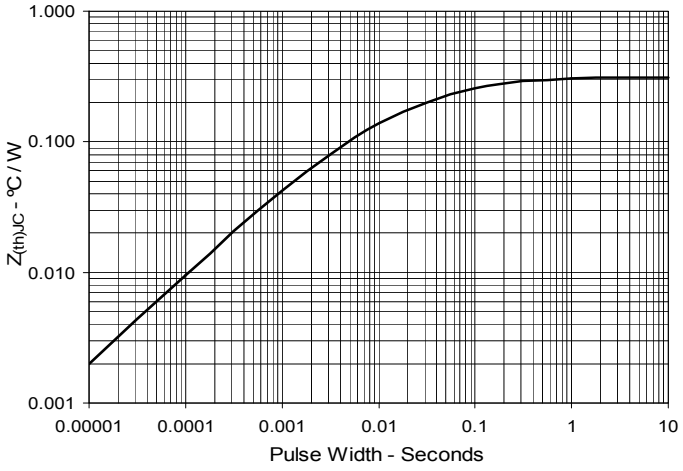

IXYS Reserves the Right to Change Limits, Test Conditions and Dimensions.

Fig. 13. Resistive Turn-on Rise Time vs. Junction Temperature

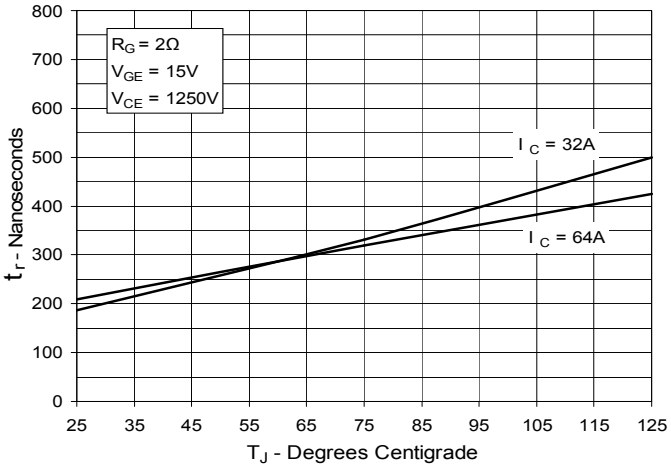


Fig. 14. Resistive Turn-on Rise Time vs. Drain Current

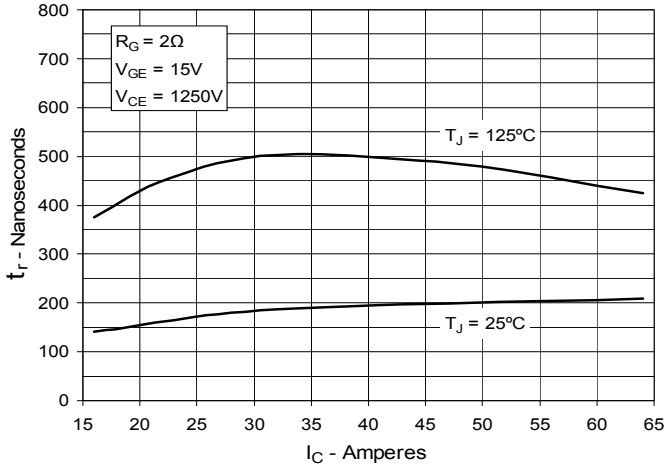


Fig. 15. Resistive Turn-on Switching Times vs. Gate Resistance

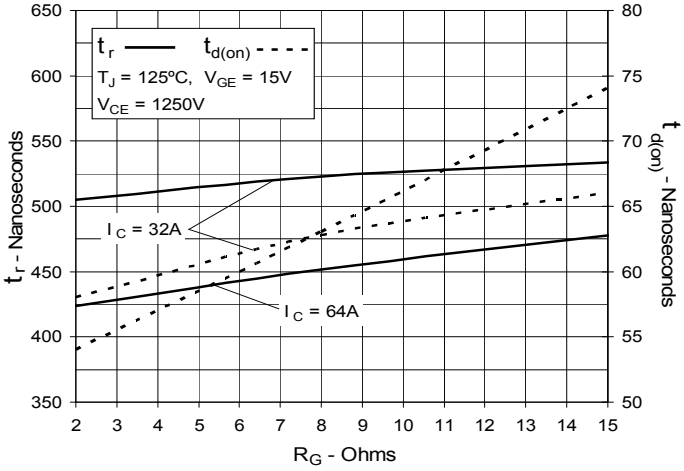


Fig. 16. Resistive Turn-off Switching Times vs. Junction Temperature

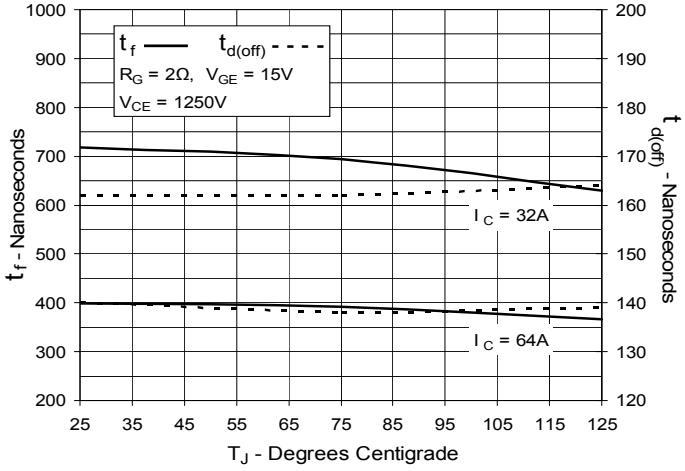


Fig. 17. Resistive Turn-off Switching Times vs. Drain Current


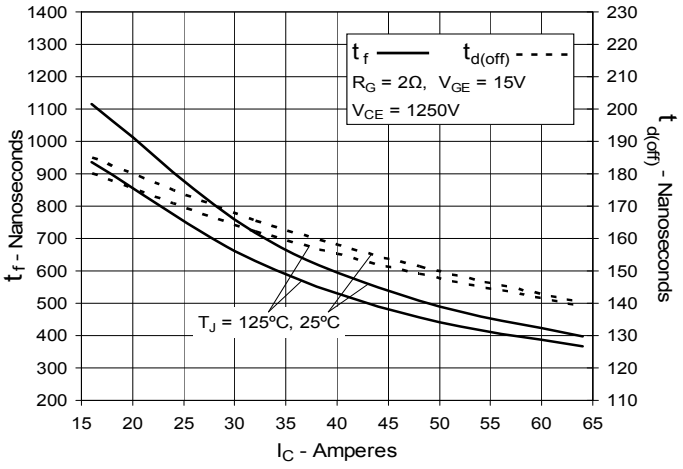


Fig. 18. Resistive Turn-off Switching Times vs. Gate Resistance



© 2009 IXYS CORPORATION, All Rights Reserved

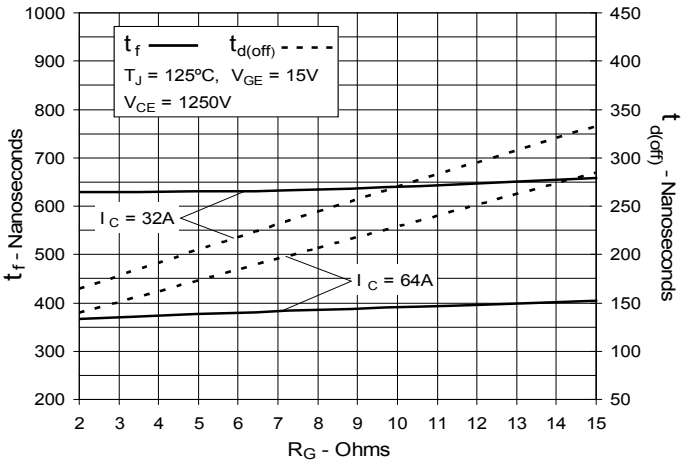

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.