
Final datasheet

Low loss DuoPack : IGBT in TRENCHSTOP™ and Fieldstop technology with soft, fast recovery antiparallel emitter controlled diode

Features

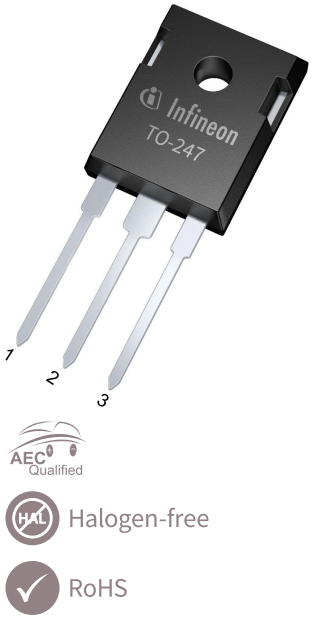

- V_{CE} = 600 V
- I_C = 75 A
- Designed for DC/AC converters for automotive application
- Very low V_{CEsat} = 1.5 V (typ.)
- Maximum junction temperature T_{vjmax} = 175°C
- Dynamically stress tested
- Short circuit withstand time 5 µs
- 100% short circuit tested
- 100% of the parts are dynamically tested
- Positive temperature coefficient in $V_{CE(sat)}$
- Low EMI
- Low gate charge Q_G
- Very soft, fast recovery antiparallel emitter controlled HE diode
- Very tight parameter distribution
- High ruggedness, temperature stable behavior
- Very high switching speed

AEC Qualified

Halogen-free

RoHS


Potential applications

- Main Inverter
- Climate E-compressors
- PTC heater
- Motor drives

Product validation

- Qualified for automotive applications. Product Validation according to AEC-Q101

Description



Type	Package	Marking
AIKW75N60CT	PG-TO247-3-U06	AK75DCT

Table of contents

Description . . . 1
Features . . . 1
Potential applications . . . 1
Product validation . . . 1
Table of contents . . . 2
1 Package . . . 3
2 IGBT . . . 3
3 Diode . . . 5
4 Characteristics diagrams . . . 7
5 Package outlines . . . 14
6 Testing conditions . . . 15
Revision history . . . 16
Disclaimer . . . 17

1 Package

Table 1 Characteristic values

Parameter	Symbol	Note or test condition	Values			Unit
			Min.	Typ.	Max.	
Internal emitter inductance measured 5 mm (0.197 in.) from case	L_E			13		nH
Storage temperature	T_{stg}		-55		150	°C
Soldering temperature	T_{sold}	wave soldering 1.6 mm (0.063 in.) from case for 10 s			260	°C
Mounting torque	M	M3 screw, Maximum of mounting processes: 3			0.6	Nm
Thermal resistance, junction-ambient	$R_{th(j-a)}$				40	K/W
IGBT thermal resistance, junction-case[1)]	$R_{th(j-c)}$			0.22	0.35	K/W
Diode thermal resistance, junction-case[1)]	$R_{th(j-c)}$			0.36	0.6	K/W

1) Defined by simulation, not subject to production test

2 IGBT

Table 2 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Collector-emitter voltage	V_{CE}	$T_{vj} \geq 25$ °C		600	V
DC collector current, limited by T_{vjmax}	I_C		$T_c = 25$ °C	80[1)]	A
			$T_c = 100$ °C	75	
Pulsed collector current, t_p limited by T_{vjmax}	I_{Cpulse}			225	A
Turn-off safe operating area		$V_{CE} \leq 600$ V, $t_p \leq 1$ µs, $T_{vj} \leq 175$ °C		225	A
Gate-emitter voltage	V_{GE}			±20	V
Short-circuit withstand time	t_{SC}	$V_{GE} = 15$ V, Allowed number of short circuits < 1000, Time between short circuits ≥ 1.0 s	$V_{CC} \leq 400$ V, $T_{vj} = 150$ °C	5	µs
Power dissipation	P_{tot}	$T_{vj} = 175$ °C	$T_c = 25$ °C	428	W
			$T_c = 100$ °C	214	

1) Limited by bondwire

Table 3 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Collector-emitter breakdown voltage	V_{BRCES}	I_C = 0.2 mA, V_{GE} = 0 V		600			V
Collector-emitter saturation voltage	V_{CEsat}	I_C = 75 A, V_{GE} = 15 V	T_{vj} = 25 °C		1.5	2	V
			T_{vj} = 175 °C		1.9		
Gate-emitter threshold voltage	V_{GEth}	I_C = 1.2 mA, V_{CE} = V_{GE}		4.1	4.9	5.7	V
Zero gate-voltage collector current	I_{CES}	V_{CE} = 600 V, V_{GE} = 0 V	T_{vj} = 25 °C			40	µA
			T_{vj} = 175 °C		1750		
Gate-emitter leakage current	I_{GES}	V_{CE} = 0 V, V_{GE} = 20 V				100	nA
Transconductance	g_{fs}	I_C = 75 A, V_{CE} = 20 V			41		S
Short-circuit collector current	I_{SC}	V_{CC} ≤ 400 V, V_{GE} = 15 V, t_{SC} ≤ 5 µs, Allowed number of short circuits < 1000, Time between short circuits ≥ 1.0 s, T_{vj} = 150 °C			690		A
Input capacitance	C_{ies}	V_{CE} = 25 V, V_{GE} = 0 V, f = 1000 kHz			4620		pF
Output capacitance	C_{oes}	V_{CE} = 25 V, V_{GE} = 0 V, f = 1000 kHz			288		pF
Reverse transfer capacitance	C_{res}	V_{CE} = 25 V, V_{GE} = 0 V, f = 1000 kHz			137		pF
Gate charge	Q_G	V_{CC} = 480 V, I_C = 75 A, V_{GE} = 0/15 V			470		nC
Turn-on delay time	$t_{d(on)}$	V_{CC} = 400 V, V_{GE} = 0/15 V, R_G = 5 Ω, L_σ = 100 nH, C_σ = 39 pF	T_{vj} = 25 °C, I_C = 75 A		33		ns
			T_{vj} = 175 °C, I_C = 75 A		32		
Rise time (inductive load)	t_r	V_{CC} = 400 V, V_{GE} = 0/15 V, R_G = 5 Ω, L_σ = 100 nH, C_σ = 39 pF	T_{vj} = 25 °C, I_C = 75 A		36		ns
			T_{vj} = 175 °C, I_C = 75 A		37		
Turn-off delay time	$t_{d(off)}$	V_{CC} = 400 V, V_{GE} = 0/15 V, R_G = 5 Ω, L_σ = 100 nH, C_σ = 39 pF	T_{vj} = 25 °C, I_C = 75 A		330		ns
			T_{vj} = 175 °C, I_C = 75 A		363		
Fall time (inductive load)	t_f	V_{CC} = 400 V, V_{GE} = 0/15 V, R_G = 5 Ω, L_σ = 100 nH, C_σ = 39 pF	T_{vj} = 25 °C, I_C = 75 A		35		ns
			T_{vj} = 175 °C, I_C = 75 A		38		

(table continues...)

Table 3 (continued) Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Turn-on energy[1)]	E_{on}	V_{CC} = 400 V, V_{GE} = 0/15 V, R_G = 5 Ω, L_σ = 100 nH, C_σ = 39 pF	T_{vj} = 25 °C, I_C = 75 A		2		mJ
			T_{vj} = 175 °C, I_C = 75 A		2.9		
Turn-off energy	E_{off}	V_{CC} = 400 V, V_{GE} = 0/15 V, R_G = 5 Ω, L_σ = 100 nH, C_σ = 39 pF	T_{vj} = 25 °C, I_C = 75 A		2.5		mJ
			T_{vj} = 175 °C, I_C = 75 A		2.9		
Total switching energy	E_{ts}	V_{CC} = 400 V, V_{GE} = 0/15 V, R_G = 5 Ω, L_σ = 100 nH, C_σ = 39 pF	T_{vj} = 25 °C, I_C = 75 A		4.5		mJ
			T_{vj} = 175 °C, I_C = 75 A		5.8		
Operating junction temperature	T_{vj}			-40		175	°C

1) Includes IGBT losses caused by the reverse recovery current

3 Diode

Table 4 Maximum rated values

Parameter	Symbol	Note or test condition		Values	Unit
Diode forward current, limited by T_{vjmax}	I_F		T_c = 25 °C	80[1)]	A
			T_c = 100 °C	75	
Diode pulsed current, t_p limited by T_{vjmax}	I_{Fpulse}			225	A
Power dissipation	P_{tot}	T_{vj} = 175 °C	T_c = 25 °C	250	W
			T_c = 100 °C	125	

1) Limited by bondwire

Table 5 Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Diode forward voltage	V_F	I_F = 75 A	T_{vj} = 25 °C		1.65	2.05	V
			T_{vj} = 175 °C		1.6		

(table continues...)

Table 5 (continued) Characteristic values


Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Diode reverse recovery time	t_{rr}	V_R = 400 V	T_{vj} = 25 °C, I_F = 75 A, $-di_F/dt$ = 1460 A/µs		121		ns
			T_{vj} = 175 °C, I_F = 75 A, $-di_F/dt$ = 1460 A/µs		182		
Diode reverse recovery charge	Q_{rr}	V_R = 400 V	T_{vj} = 25 °C, I_F = 75 A, $-di_F/dt$ = 1460 A/µs		2.4		µC
			T_{vj} = 175 °C, I_F = 75 A, $-di_F/dt$ = 1460 A/µs		5.8		
Diode peak reverse recovery current	I_{rrm}	V_R = 400 V	T_{vj} = 25 °C, I_F = 75 A, $-di_F/dt$ = 1460 A/µs		39		A
			T_{vj} = 175 °C, I_F = 75 A, $-di_F/dt$ = 1460 A/µs		56		
Diode peak rate of fall of reverse recovery current	di_{rr}/dt	V_R = 400 V	T_{vj} = 25 °C, I_F = 75 A, $-di_F/dt$ = 1460 A/µs		-920		A/µs
			T_{vj} = 175 °C, I_F = 75 A, $-di_F/dt$ = 1460 A/µs		-1000		
Operating junction temperature	T_{vj}			-40		175	°C

4 Characteristics diagrams

Power dissipation as a function of case temperature

$P_{tot} = f(T_c)$


$T_{vj} \leq 175$ °C

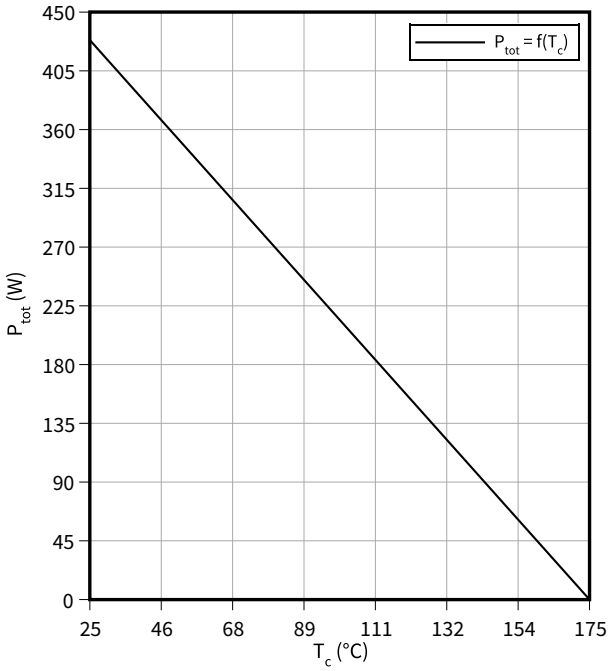

Collector current as a function of case temperature

$I_C = f(T_c)$


$T_{vj} \leq 175$ °C, $V_{GE} \geq 15$ V

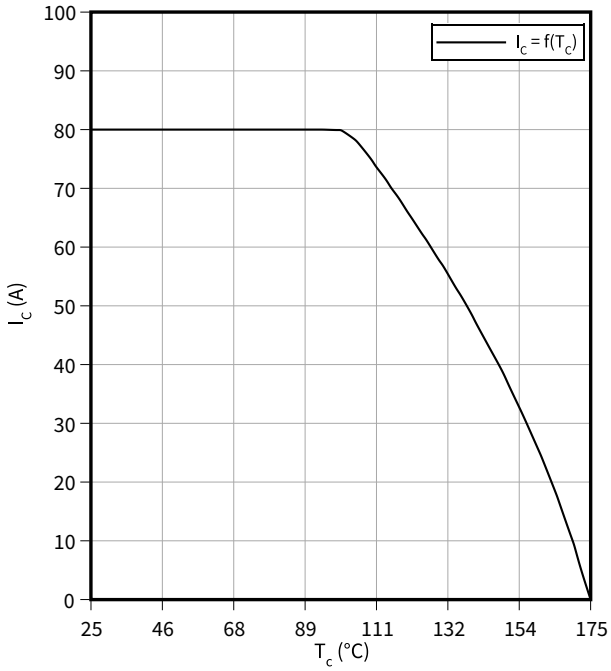

Typical output characteristic

$I_C = f(V_{CE})$


$T_{vj} = 25$ °C

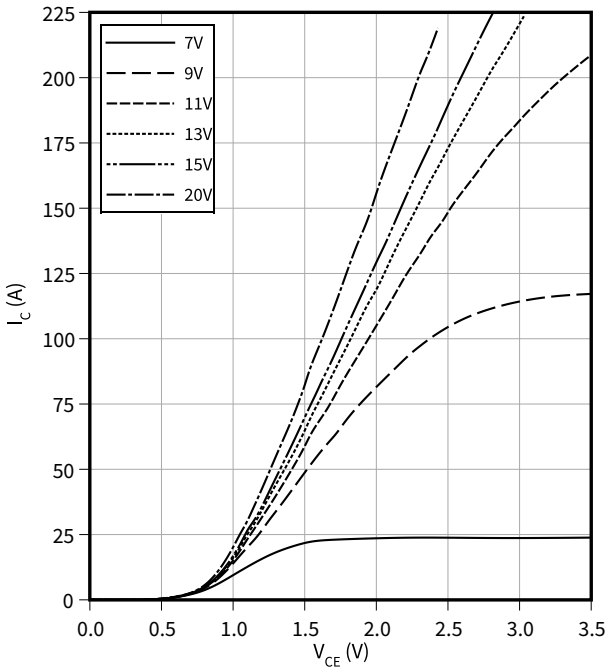

Typical output characteristic


$I_C = f(V_{CE})$

$T_{vj} = 175$ °C

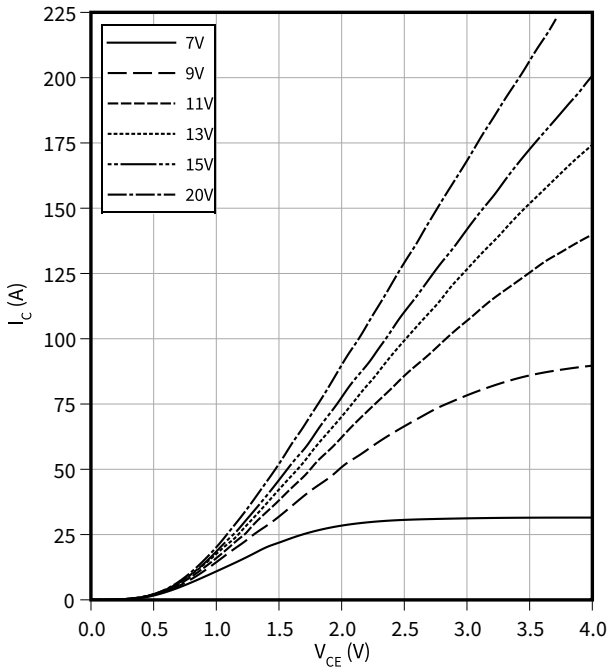


Typical transfer characteristic

$I_C = f(V_{GE})$
$V_{CE} = 20$ V

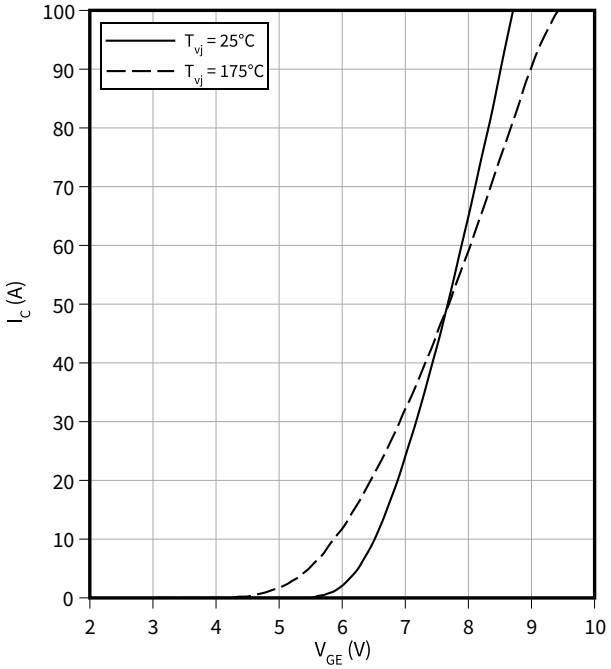


Typical collector-emitter saturation voltage as a function of junction temperature

$V_{CEsat} = f(T_{vj})$
$V_{GE} = 15$ V

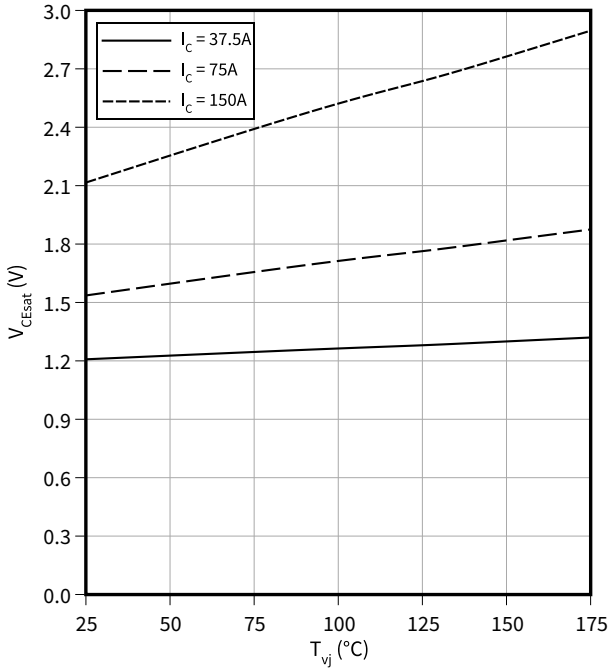


Gate-emitter threshold voltage as a function of junction temperature

$V_{GEth} = f(T_{vj})$
$I_C = 1.2$ mA

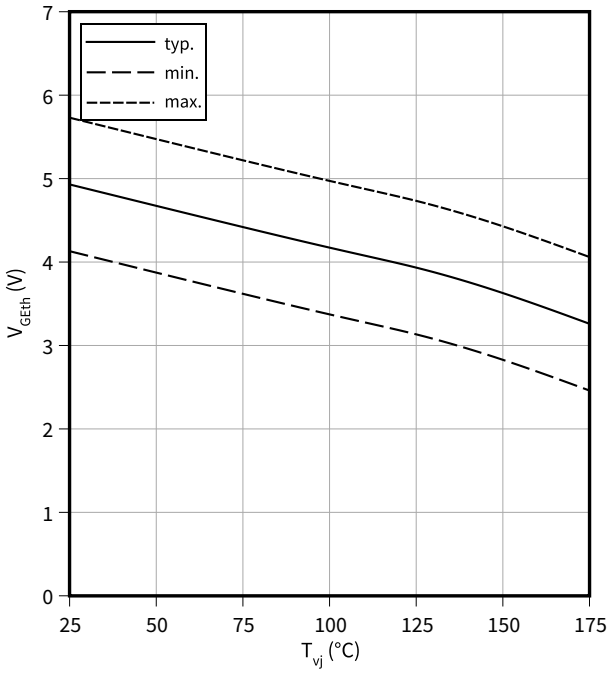

Typical switching times as a function of collector current


$t = f(I_C)$
$V_{CE} = 400$ V, $T_{vj} = 175$ °C, $V_{GE} = 0/15$ V, $R_G = 5\ \Omega$

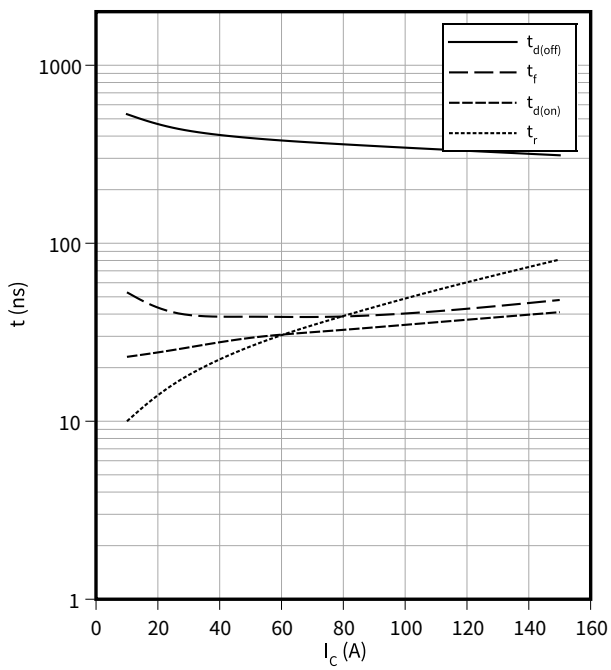

Typical switching times as a function of gate resistor

$t = f(R_G)$


$I_C = 75\ A$, $V_{CE} = 400\ V$, $T_{vj} = 175\ °C$, $V_{GE} = 0/15\ V$

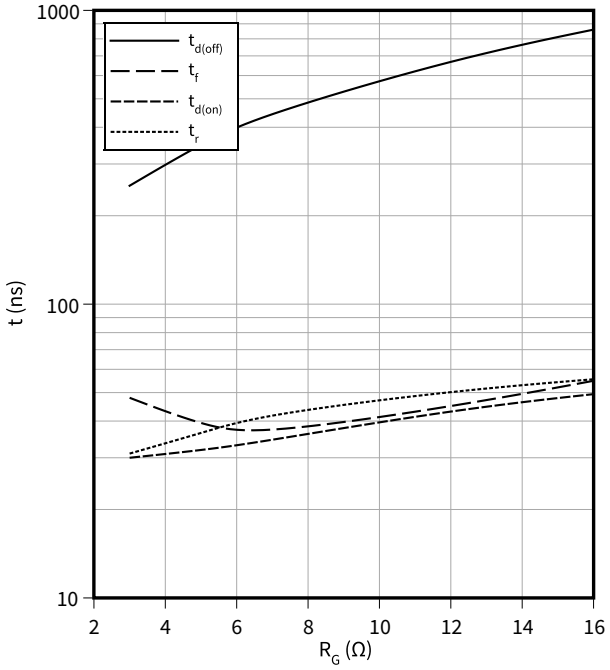

Typical switching times as a function of junction temperature

$t = f(T_{vj})$


$I_C = 75\ A$, $V_{CE} = 400\ V$, $V_{GE} = 0/15\ V$, $R_G = 5\ Ω$

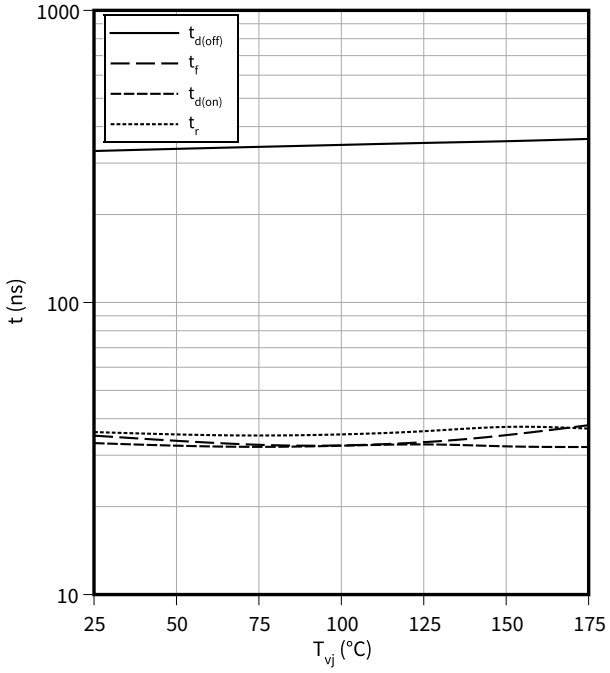

Typical switching energy losses as a function of collector current

$E = f(I_C)$


$V_{CE} = 400\ V$, $T_{vj} = 175\ °C$, $V_{GE} = 0/15\ V$, $R_G = 5\ Ω$

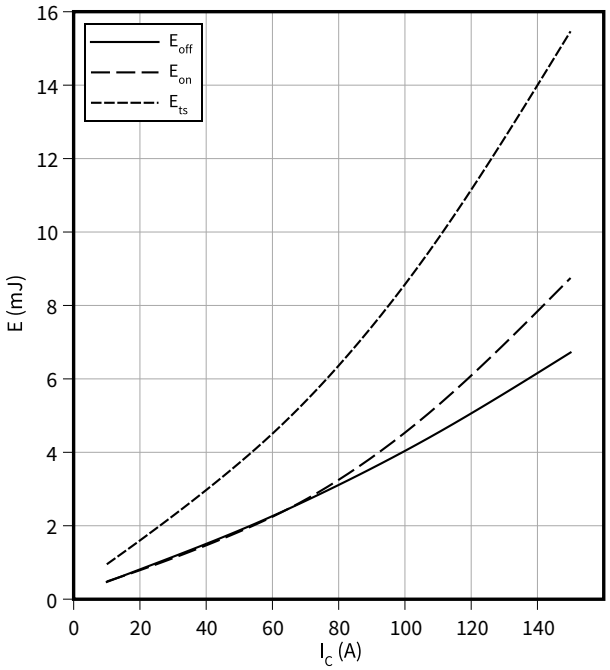

Typical switching energy losses as a function of gate resistor

$E = f(R_G)$


$I_C = 75\ A$, $V_{CE} = 400\ V$, $T_{vj} = 175\ °C$, $V_{GE} = 0/15\ V$

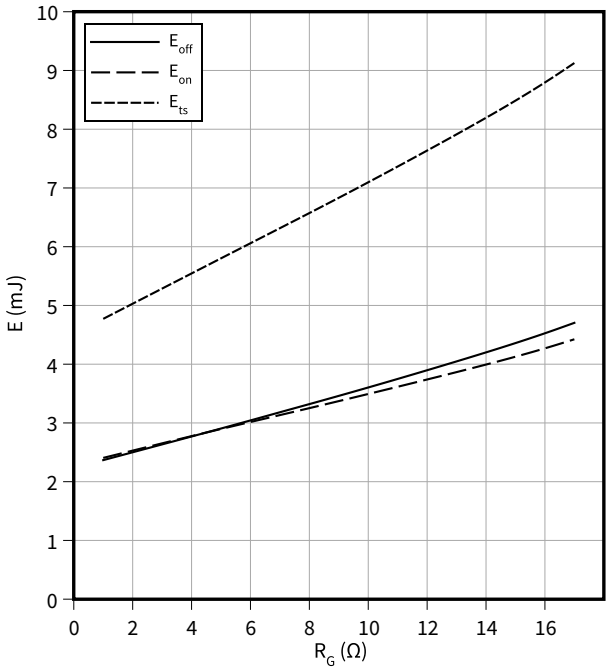

Typical switching energy losses as a function of junction temperature

$E = f(T_{vj})$


$I_C = 75\ A$, $V_{CE} = 400\ V$, $V_{GE} = 0/15\ V$, $R_G = 5\ \Omega$

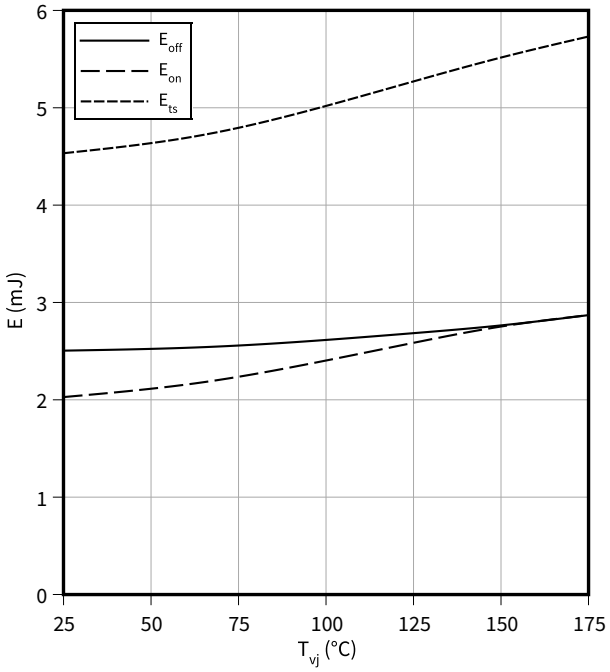

Typical switching energy losses as a function of collector emitter voltage

$E = f(V_{CE})$


$I_C = 75\ A$, $T_{vj} = 175\ °C$, $V_{GE} = 0/15\ V$, $R_G = 5\ \Omega$

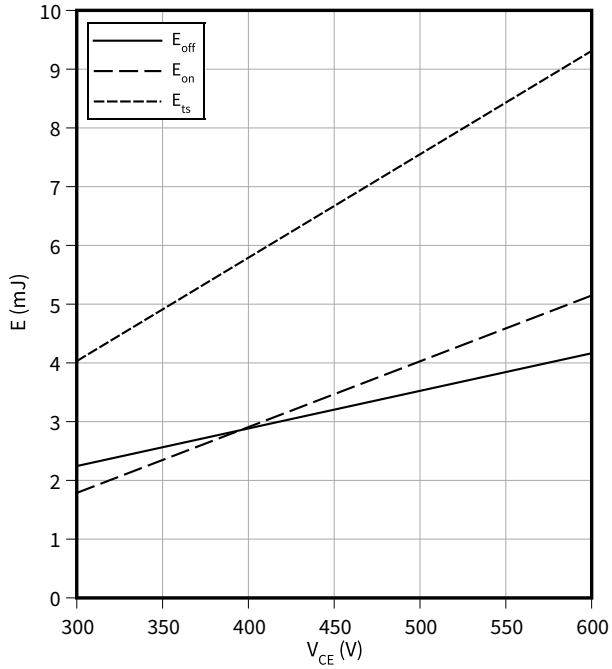

Typical gate charge

$V_{GE} = f(Q_G)$


$I_C = 75\ A$

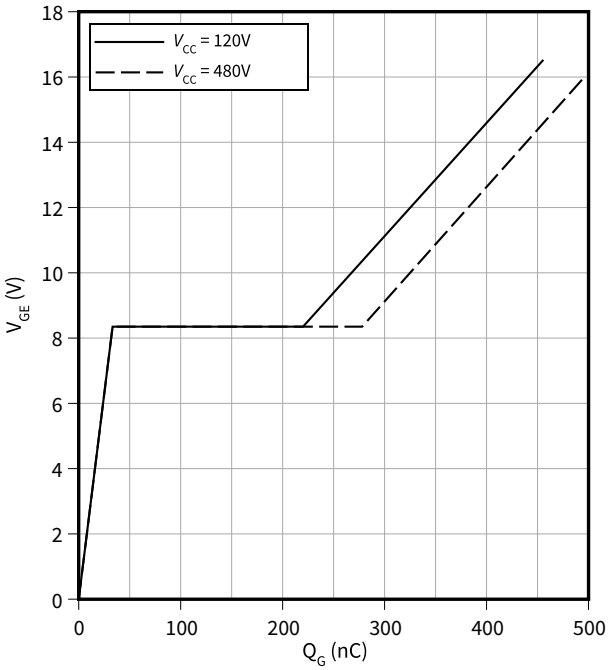

Typical capacitance as a function of collector-emitter voltage


$C = f(V_{CE})$

$f = 1000\ kHz$, $V_{GE} = 0\ V$

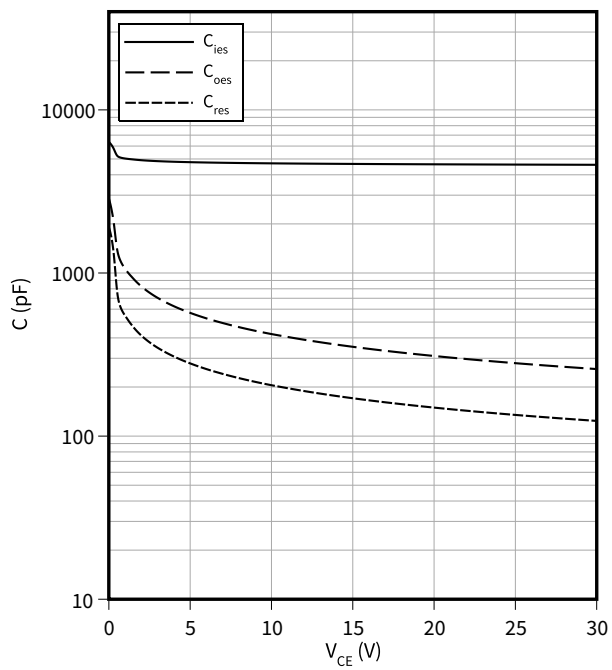


Typical short circuit collector current as a function of gate-emitter voltage

$I_{C(SC)} = f(V_{GE})$
$V_{CE} = 400$ V, $T_{vj} = 150$ °C

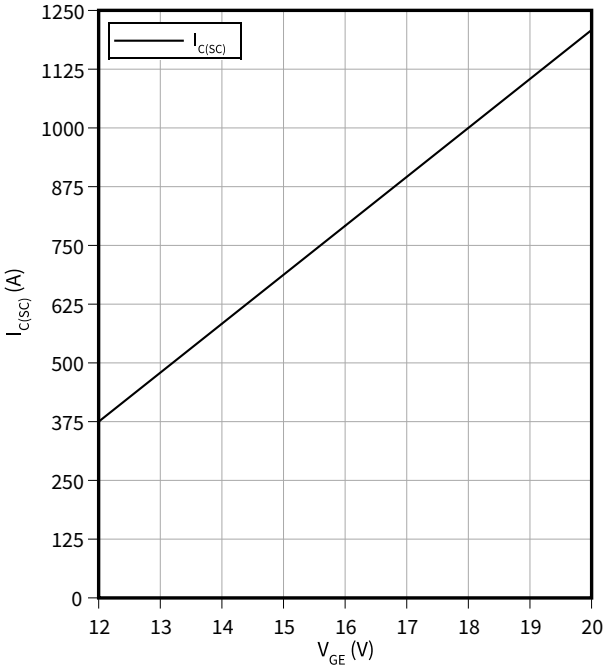


Short circuit withstand time as a function of gate-emitter voltage

$t_{SC} = f(V_{GE})$
$T_{vj} = 150$ °C, $V_{CC} \leq 400$ V

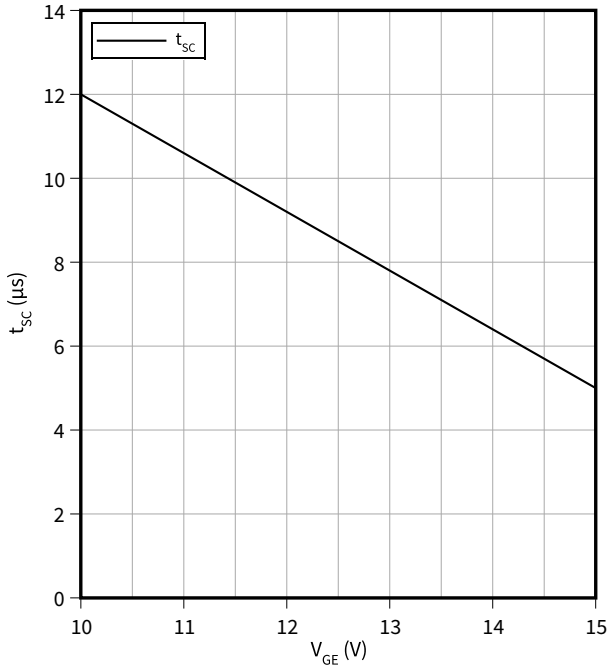


IGBT typical transient thermal impedance as a function of pulse width

$Z_{th(j-c)} = f(t_p)$
$D = t_p/T$

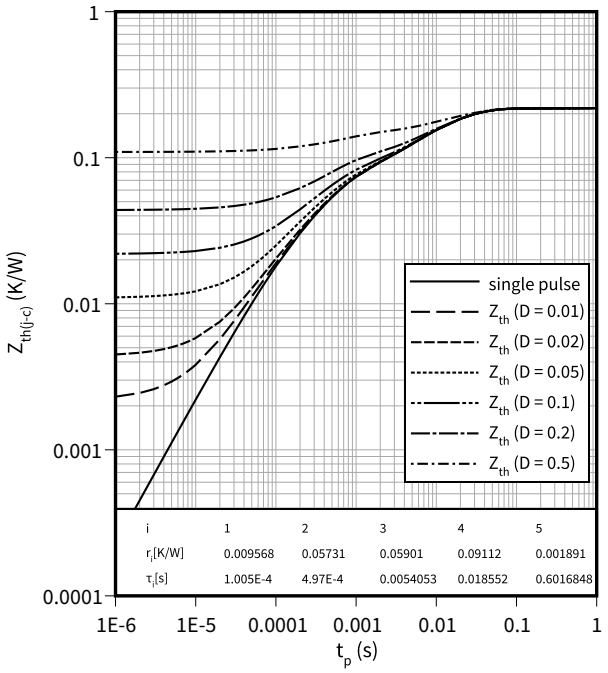


Diode typical transient thermal impedance as a function of pulse width

$Z_{th(j-c)} = f(t_p)$
$D = t_p/T$

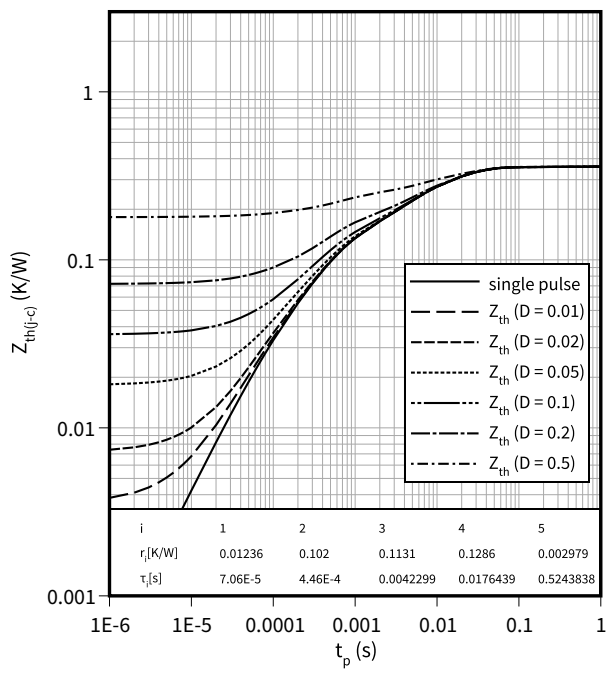


Typical diode forward current as a function of forward voltage

$I_F = f(V_F)$

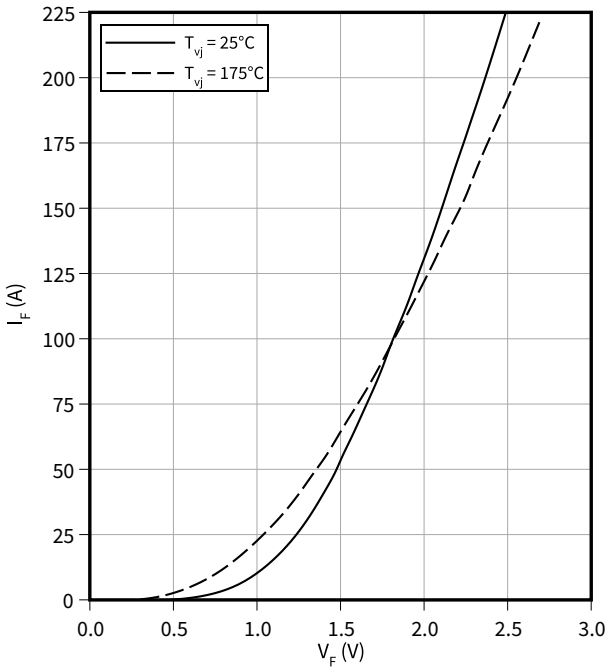

Typical diode forward voltage as a function of junction temperature


$V_F = f(T_{vj})$

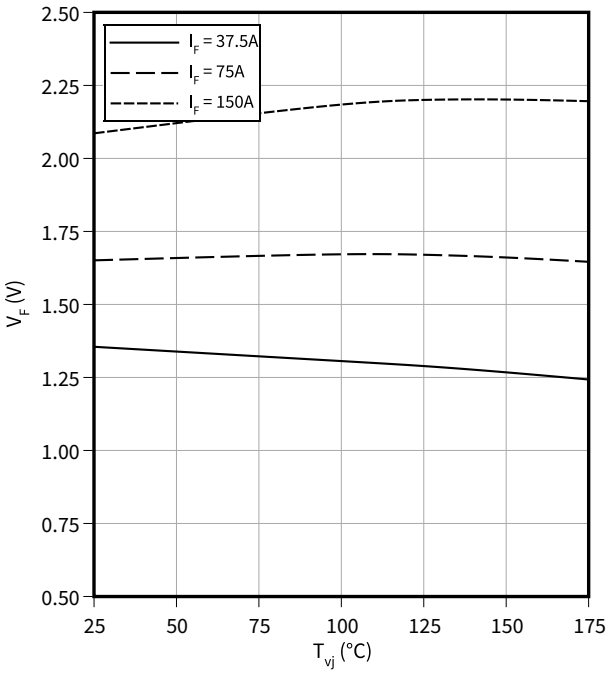

Typical reverse recovery time as a function of diode current slope

$t_{rr} = f(di_F/dt)$


$V_R = 400$ V

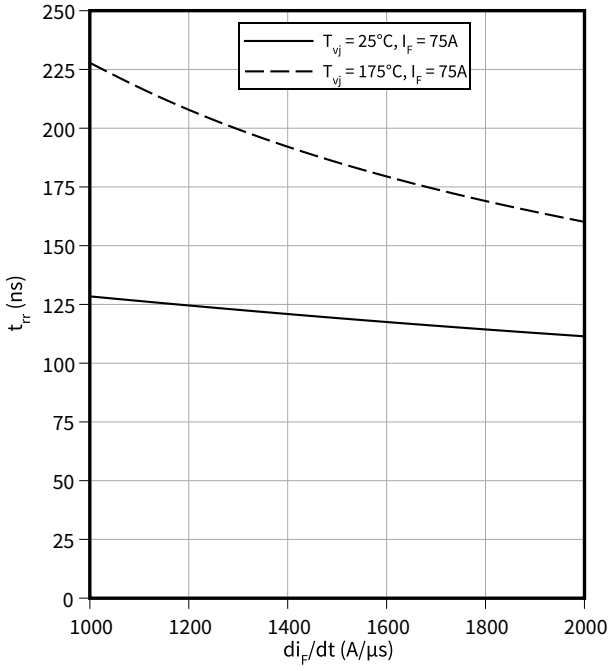

Typical reverse recovery charge as a function of diode current slope

$Q_{rr} = f(di_F/dt)$


$V_R = 400$ V

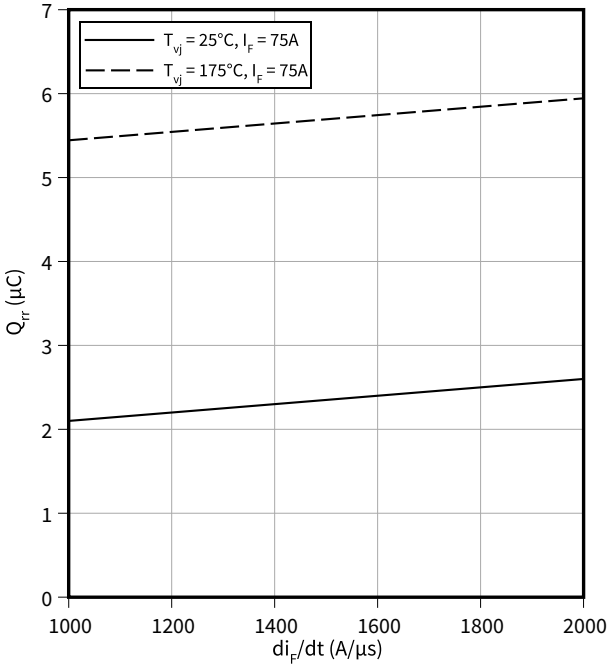

Typical reverse recovery current as a function of diode current slope

$I_{rrm} = f(di_F/dt)$


$V_R = 400\ V$

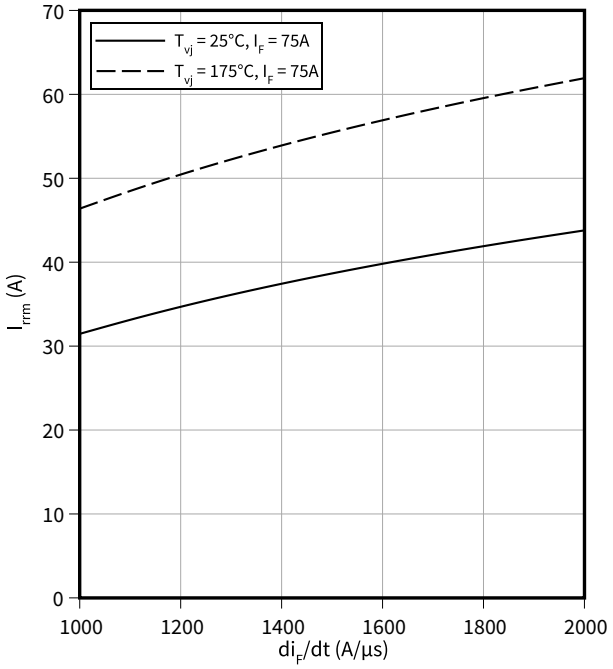


Typical diode peak rate of fall of reverse recovery current as a function of diode current slope

$dI_{rr}/dt = f(di_F/dt)$

$V_R = 400\ V$

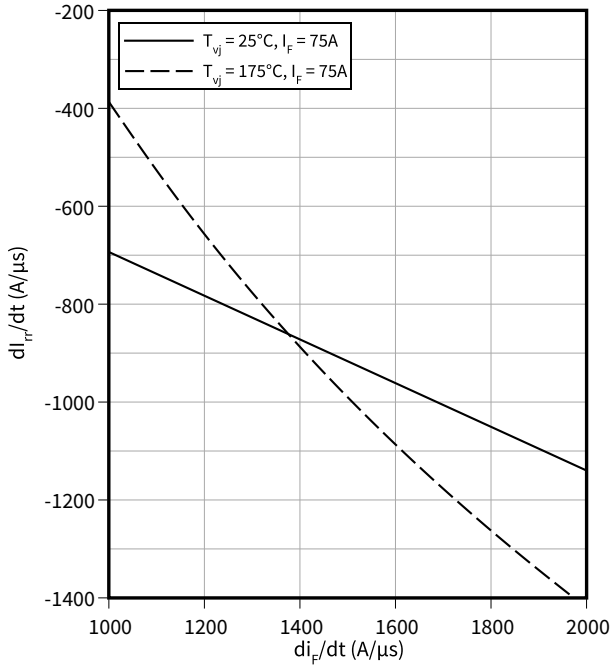

5 Package outlines

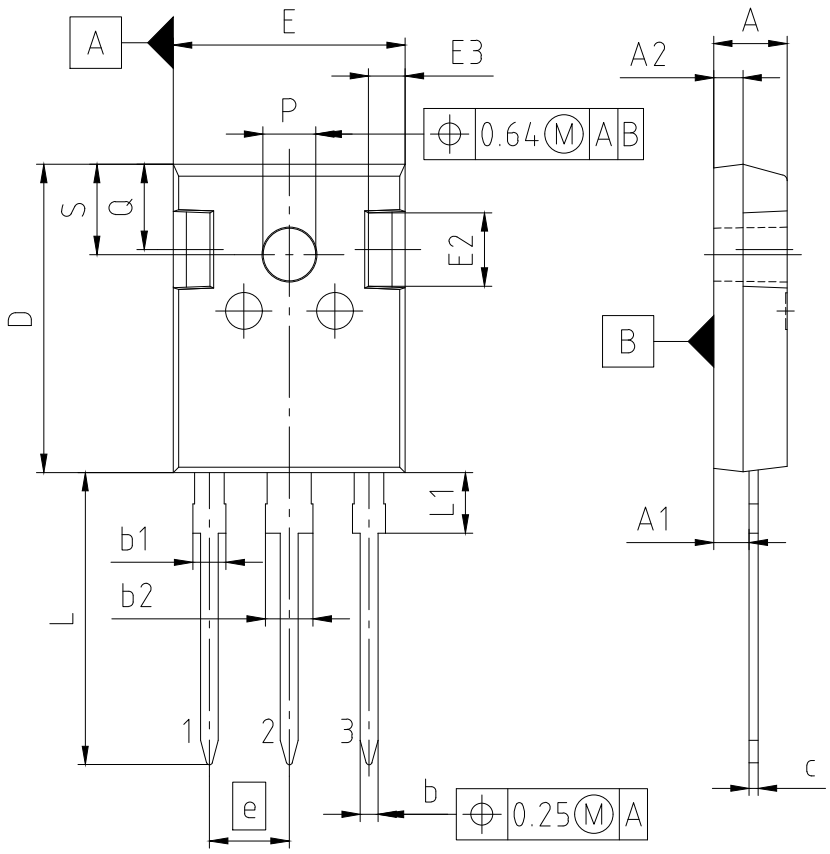

PACKAGE - GROUP NUMBER:	PG-TO247-3-U06	
DIMENSIONS	**MILLIMETERS**	
	MIN.	MAX.
A	4.83	5.21
A1	2.27	2.54
A2	1.85	2.16
b	1.07	1.33
b1	1.90	2.41
b2	2.87	3.38
c	0.55	0.68
D	20.80	21.10
D1	16.25	17.65
D2	0.95	1.35
E	15.70	16.13
E1	13.10	14.15
E2	3.68	5.10
E3	1.00	2.60
e	5.44	
N	3	
L	19.80	20.32
L1	3.95	4.47
øP	3.50	3.70
Q	5.49	6.00
S	6.04	6.30

NOTE:
DIMENSIONS DO NOT INCLUDE MOLDFLASH; PROTRUSION OR GATE BURRS

Figure 1

6 Testing conditions

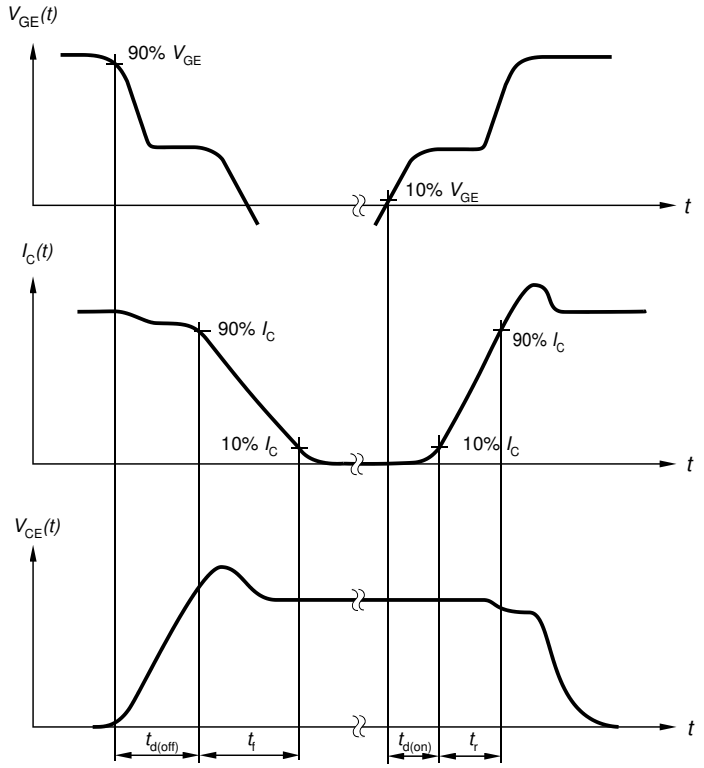


Figure A. **Definition of switching times**

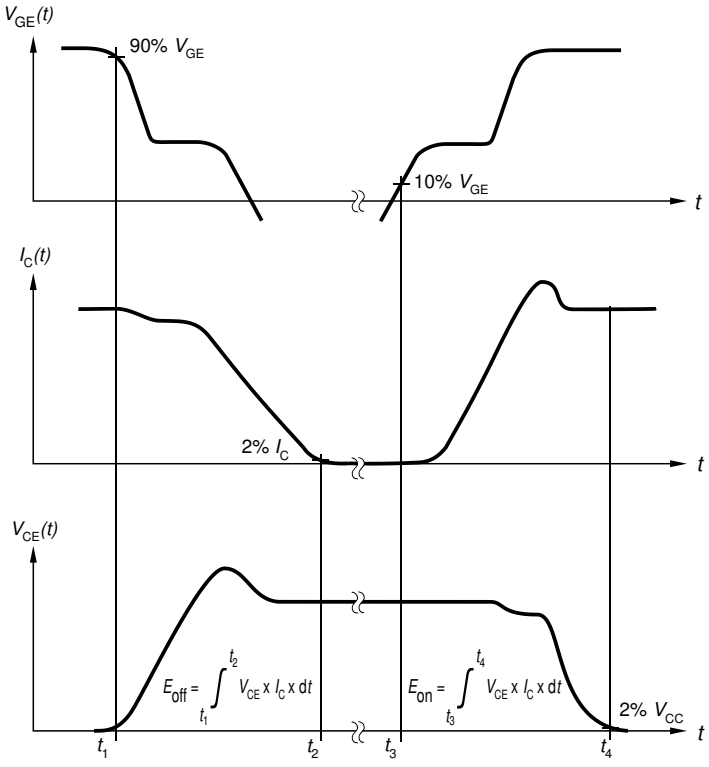


Figure B. **Definition of switching losses**

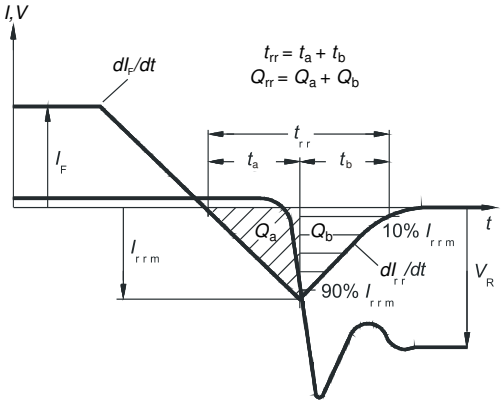


Figure C. **Definition of diode switching characteristics**

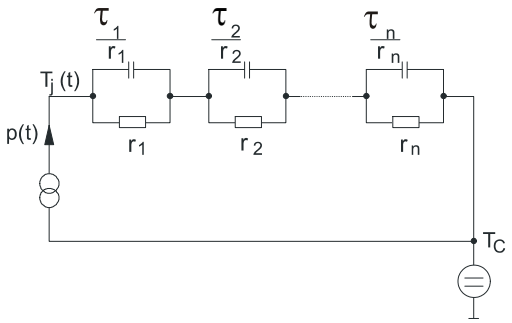


Figure D. **Thermal equivalent circuit**

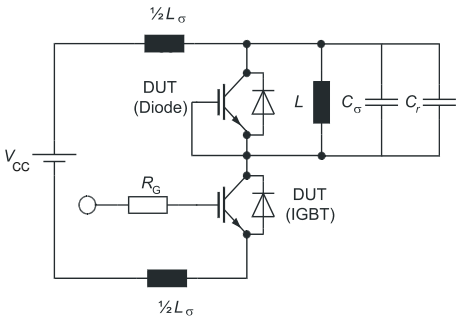


Figure E. **Dynamic test circuit**
Parasitic inductance L_σ,
parasitic capacitor C_σ,
relief capacitor C_r,
(only for ZVT switching)

Figure 2

Revision history

Document revision	Date of release	Description of changes
V2.1	2017-02-09	Data sheet created
n/a	2020-11-30	Datasheet migrated to a new system with a new layout and new revision number schema: target or preliminary datasheet = 0.xy; final datasheet = 1.xy
1.10	2025-01-13	Package drawing, transient thermal impedance plots and qualification labels updated according to the latest guidelines

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2025-01-13

Published by

Infineon Technologies AG

81726 Munich, Germany

© 2025 Infineon Technologies AG

All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference
IFX-AAL080-002

Important notice

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Warnings

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.