ULTRA LOW NOISE, MEDIUM CURRENT

E-PHEMT Transistor

SAV-581+

0.045-6GHz

THE BIG DEAL

- Low Noise Figure, 0.5 dB
- Gain, 17 dB at 2 GHz
- High Output IP3, +30 dBm
- Output Power at 1dB comp., +20 dBm
- Medium Current, 30mA
- Wide bandwidth
- External biasing and matching required
- May be used as replacement [a,b] for Avago ATF-58143



Generic photo used for illustration purposes only

CASE STYLE: MMM1362

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


APPLICATIONS


- Cellular
- ISM
- GSM
- WCDMA
- WiMax
- WLAN
- UNII and HIPERLAN

GENERAL DESCRIPTION

SAV-581+ is an ultra-low noise, high IP3 transistor device, manufactured using E-PHEMT* technology enabling it to work with a single positive supply voltage. It has outstanding Noise Figure, particularly below 2.5 GHz, and when combining this noise figure with high IP3 performance in a single device it makes it an ideal amplifier for demanding base station applications. We offer these units assembled into a complete module, 50Ω in/out, noise matched and fully specified. For more information please see our TAMP family of models on our web site.

SIMPLIFIED SCHEMATIC AND PIN DESCRIPTION



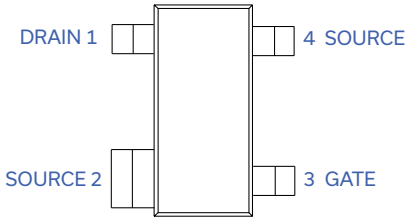

SOT-343 (SC-70) PACKAGE

Function	Pin Number	Description
Source	2 & 4	Source terminal, normally connected to ground
Gate	3	Gate used for RF Input
Drain	1	Drain used for RF output

* Enhancement mode Pseudomorphic High Electron Mobility Transistor.

a. Suitability for model replacement within a particular system must be determined by and is solely the responsibility of the customer based on, among other things, electrical performance criteria, stimulus conditions, application, compatibility with other components and environmental conditions and stresses.
b. The Avago ATF-54143 part number is used for identification and comparison purposes only

REV. F
ECO-010314
SAV-581+
211025

ELECTRICAL SPECIFICATIONS AT T_{AMB}=25°C, FREQUENCY 0.045 TO 6 GHZ

Symbol	Parameter	Condition		Min.	Typ.	Max.	Units
DC Specifications							
V_{GS}	Operational Gate Voltage	V_{DS}=3V, I_{DS}=30 mA		0.28	0.39	0.5	V
V_{TH}	Threshold Voltage	V_{DS}=3V, I_{DS}=4 mA		0.18	0.26	0.38	V
I_{DSS}	Saturated Drain Current	V_{DS}=3V, V_{GS}=0 V			1.0	5.0	µA
G_M	Transconductance	V_{DS}=3V, Gm=Δ I_{DS}/ΔV_{GS} ΔV_{GS}=V_{GS1}-V_{GS2} V_{GS1}=V_{GS} at I_{DS}=30 mA V_{GS2}=V_{GS1}+0.05V		— — 230 — —	— — 327 — —	— — 560 — —	mS
I_{GSS}	Gate leakage Current	V_{GD}=V_{GS}=-3V				200	µA
RF Specifications, Z0=50 Ohms (Figure 1)							
NF[1]	Noise Figure	V_{DS}=3V, I_{DS}=30 mA	f=0.9 GHz		0.4	—	dB
			f=2.0 GHz		0.5	0.9	
			f=3.9 GHz		0.8	—	
			f=5.8 GHz		1.5	—	
		V_{DS}=4V, I_{DS}=30 mA	f=0.9 GHz		0.4	—	
			f=2.0 GHz		0.5	—	
Gain	Gain	V_{DS}=3V, I_{DS}=30 mA	f=0.9 GHz	—	22.3	—	dB
			f=2.0 GHz	15.0	17.0	18.5	
			f=3.9 GHz	—	12.0	—	
			f=5.8 GHz	—	8.3	—	
		V_{DS}=4V, I_{DS}=30 mA	f=0.9 GHz	—	22.3	—	
			f=2.0 GHz	—	17.0	—	
OIP3	Output IP3	V_{DS}=3V, I_{DS}=30 mA	f=0.9 GHz	—	28.6		dBm
			f=2.0 GHz	27.0	30.6		
			f=3.9 GHz	—	35.2		
			f=5.8 GHz	—	39.3		
		V_{DS}=4V, I_{DS}=30 mA	f=0.9 GHz	—	27.8		
			f=2.0 GHz	—	30.3		
P1dB[2]	Power output at 1 dB Compression	V_{DS}=3V, I_{DS}=30 mA	f=0.9 GHz		18.5		dBm
			f=2.0 GHz		19.0		
			f=3.9 GHz		19.2		
			f=5.8 GHz		18.1		
		V_{DS}=4V, I_{DS}=30 mA	f=0.9 GHz		19.5		
			f=2.0 GHz		20.5		

MAXIMUM RATINGS[3]

Symbol	Parameter	Max.	Units
V_{DS}[4]	Drain-Source Voltage	5	V
V_{GS}[4]	Gate-Source Voltage	-5 to 0.7	V
V_{GD}[4]	Gate-Drain Voltage	-5 to 0.7	V
I_{DS}[4]	Drain Current	100	mA
I_{GS}	Gate Current	2	mA
P_{DISS}	Total Dissipated Power	500	mW
P_{IN}[5]	RF Input Power	17	dBm
T_{CH}	Channel Temperature	150	°C
T_{OP}	Operating Temperature	-40 to 85	°C
T_{STD}	Storage Temperature	-65 to 150	°C
ΘJC	Thermal Resistance	160	°C/W

Notes:
(1) Includes test board loss (tested on Mini-Circuits TB-471+ test board)
(2) During Compression, IDS was allowed to increase.
(3) Operation of this device above any one of these parameters may cause permanent damage.
(4) Assumes DC quiescent conditions.
(5) I_{GS} is limited to 2 mA during test.

CHARACTERIZATION TEST CIRCUIT

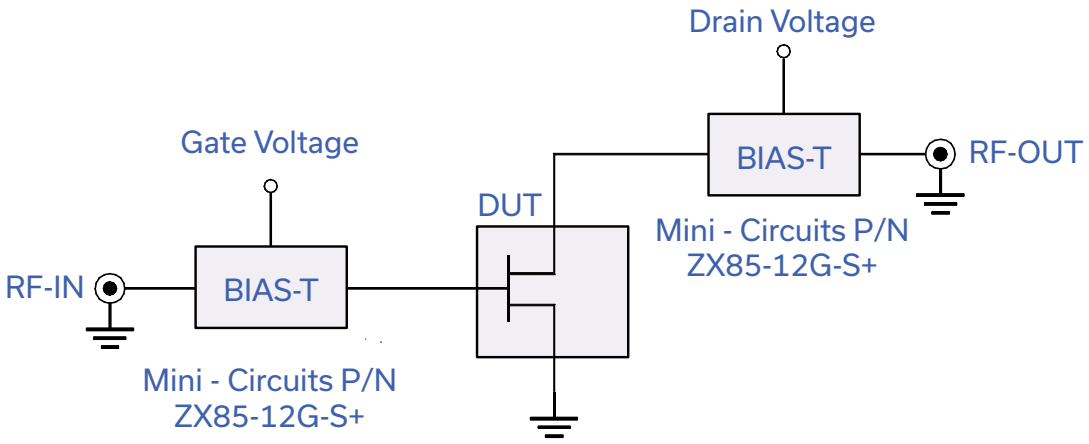


Fig 1. Block Diagram of Test Circuit used for characterization. (DUT soldered on Mini-Circuits Test Board TB-471+)

Gain, Output power at 1dB compression (P1 dB) and output IP3 (OIP3) are measured using R&S Network Analyzer ZVA-24.
Noise Figure measured using Agilent Noise Figure meter N8975A and Noise Source N4000A.

Conditions:
1. Drain voltage (with reference to source, VDS)= 3 or 4V as shown.
2. Gate Voltage (with reference to source, VGS) is set to obtain desired Drain-Source current (IDS) as shown in graphs or specification table.
3. Gain: Pin= -25dBm
4. Output IP3 (OIP3): Two tones, spaced 1 MHz apart, 0 dBm/tone at output.
5. No external matching components used.

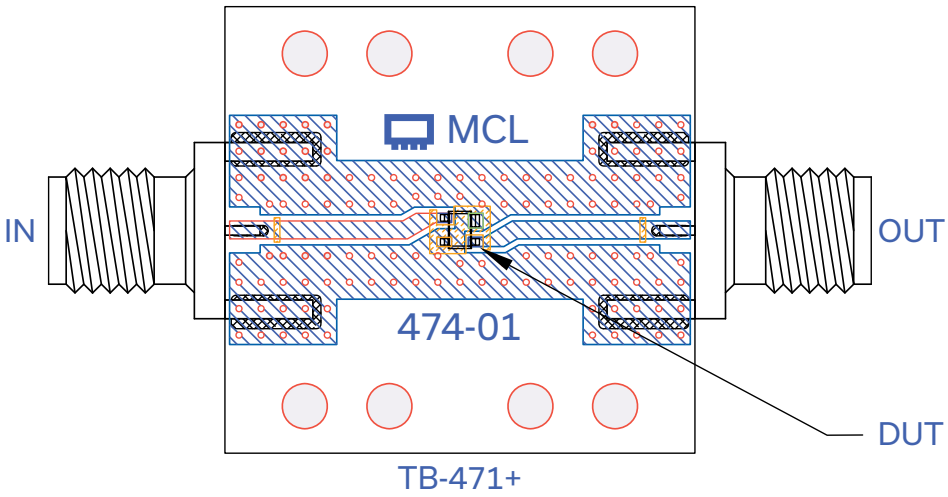



Fig 2. Test Board used for characterization, Mini-Circuits P/N TB-471+ (Material: Rogers 4350, Thickness: 0.02")

E-PHEMT Transistor


SAV-581+

TYPICAL PERFORMANCE CURVES


I-V (VGS=0.1V PER STEP) (2)

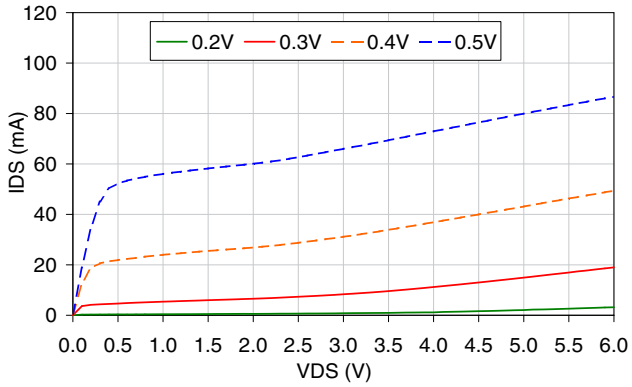


NOISE FIGURE vs IDS @ 2 GHz (1)

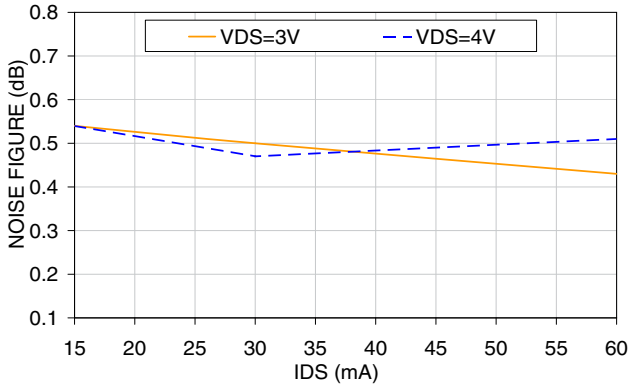


F Min vs IDS @ 0.9 GHz (3)

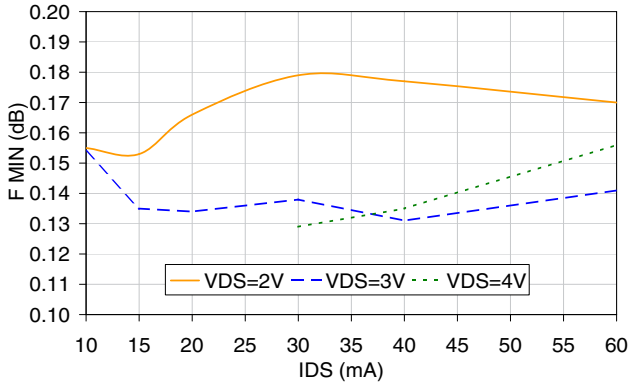


NOISE FIGURE vs IDS @ 0.9 GHz (1)

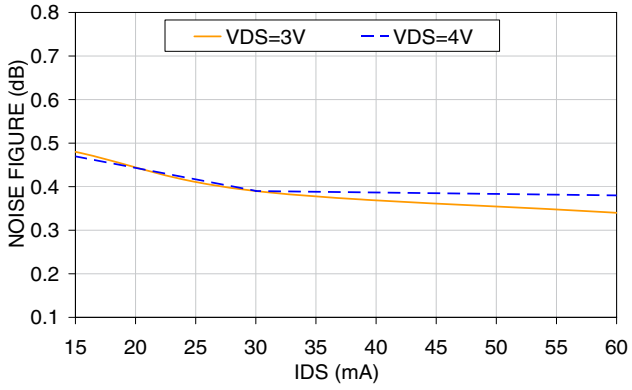

F Min vs IDS @ 2 GHz (3)

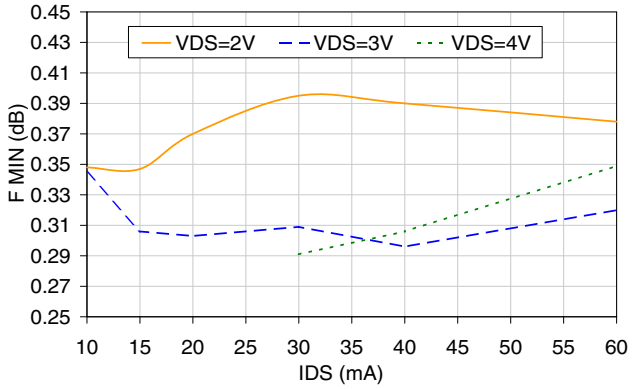


GAIN vs IDS @ 2 GHz (1)

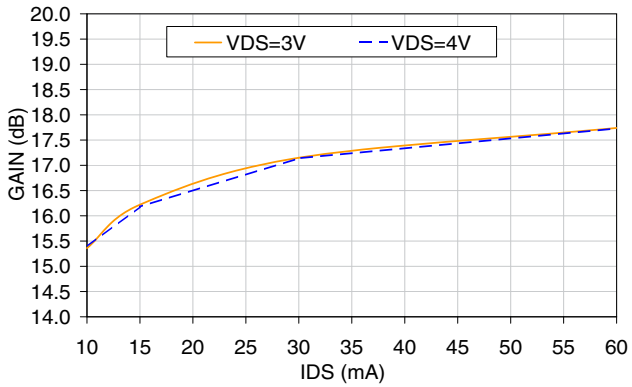


(1) Includes test board loss, set-up and conditions per Figure 1.
(2) Measured using HP4155B semiconductor parameter analyzer.
(3) F Min is minimum Noise Figure.
(4) Drain current was allowed to increase during compression measurement.

TYPICAL PERFORMANCE CURVES


GAIN vs IDS @ 0.9 GHz (1)

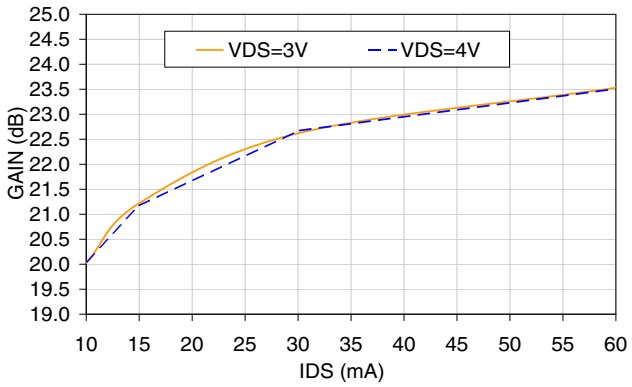


OIP3 vs IDS @ 2GHz (1)

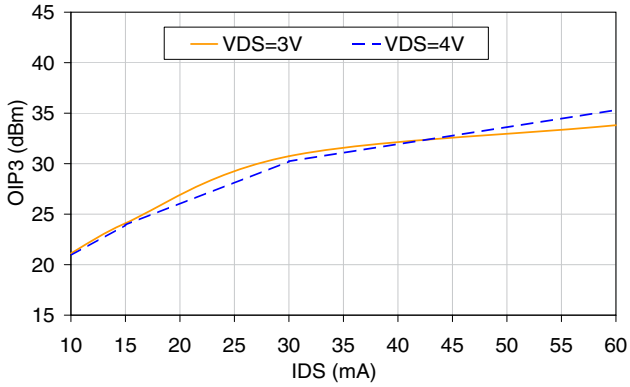


OIP3 vs IDS @ 0.9 GHz (1)

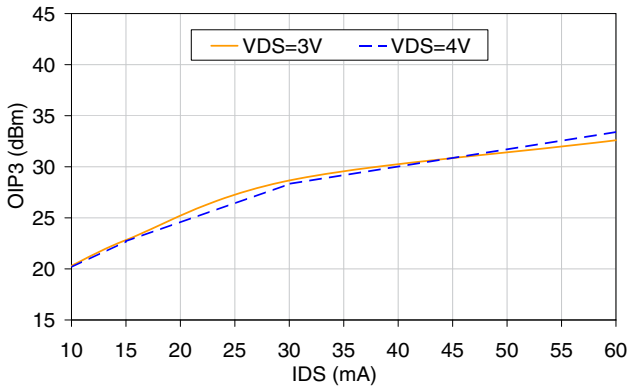


P1dB vs IDS @ 2 GHz (1,4)

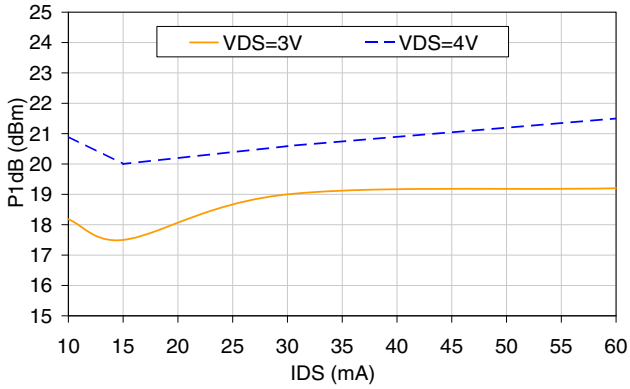

P1dB vs IDS @ 0.9 GHz (1,4)

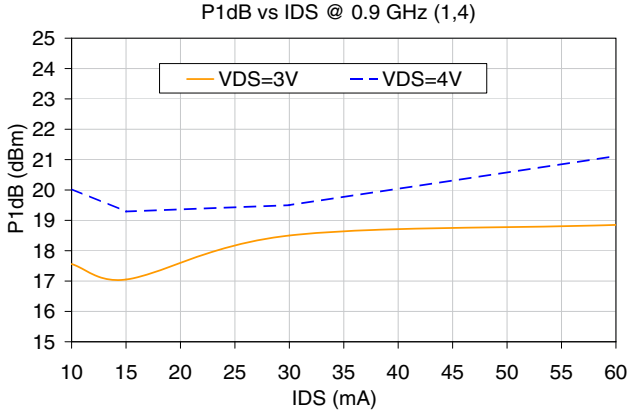


NF vs FREQUENCY & TEMPERATURE (1)
@ VDS=3V, IDS=30mA

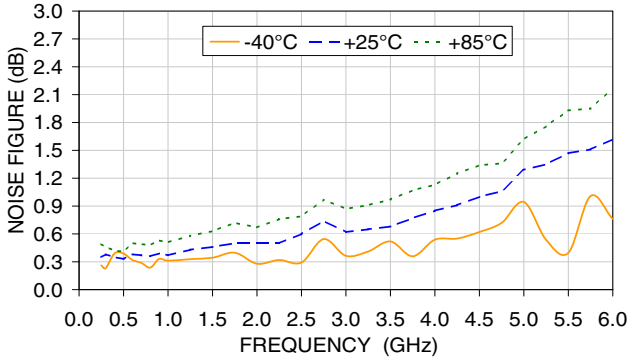


(1) Includes test board loss, set-up and conditions per Figure 1.
(2) Measured using HP4155B semiconductor parameter analyzer.
(3) F Min is minimum Noise Figure.
(4) Drain current was allowed to increase during compression measurement.

TYPICAL PERFORMANCE CURVES


GAIN vs FREQUENCY & TEMPERATURE (1)
@ VDS=3V, IDS=30mA

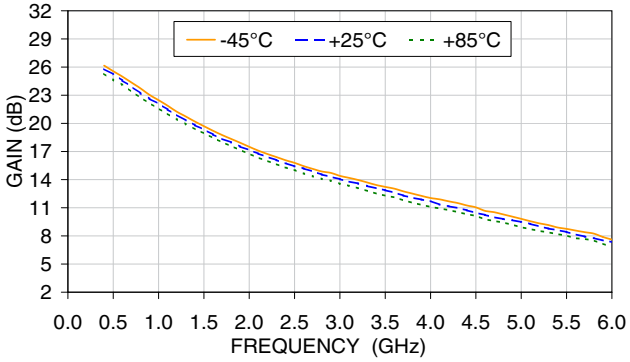


OIP3 vs FREQUENCY & TEMPERATURE (1)
@ VDS=3V, IDS=30mA

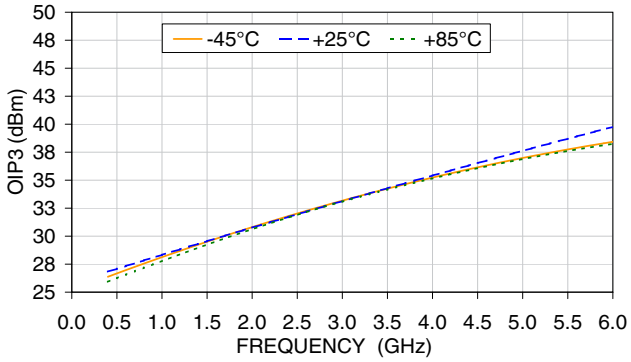


P1dB vs FREQUENCY & TEMPERATURE (1,4)
@ VDS=3V, IDS=30mA

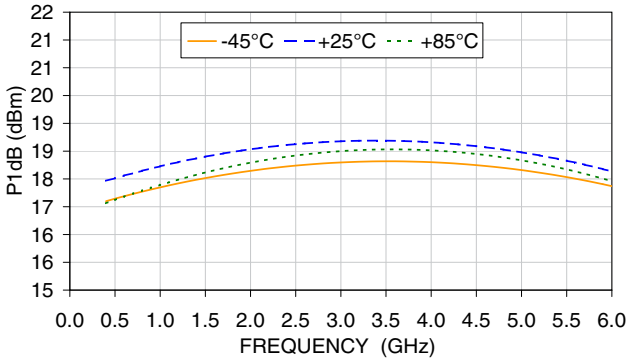


NF vs FREQUENCY & TEMPERATURE (1)
@ VDS=4V, IDS=30mA

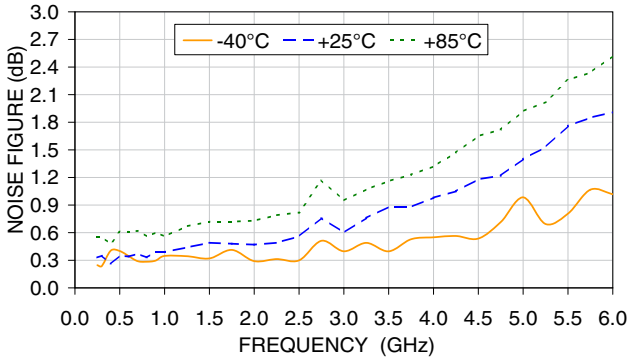

GAIN vs FREQUENCY & TEMPERATURE (1)
@ VDS=4V, IDS=30mA

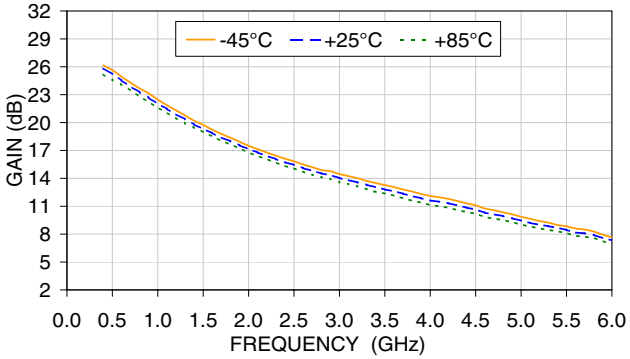



OIP3 vs FREQUENCY & TEMPERATURE (1)
@ VDS=4V, IDS=30mA

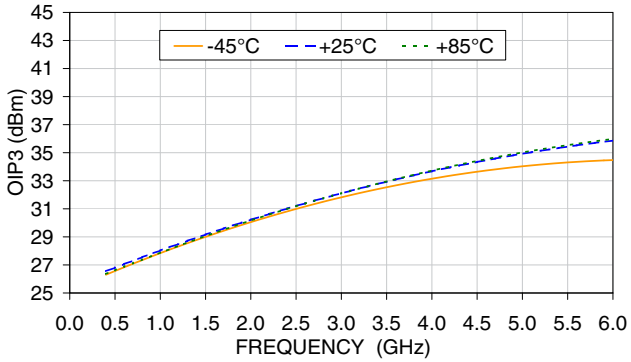

(1) Includes test board loss, set-up and conditions per Figure 1.
(2) Measured using HP4155B semiconductor parameter analyzer.
(3) F Min is minimum Noise Figure.
(4) Drain current was allowed to increase during compression measurement.

TYPICAL PERFORMANCE CURVES

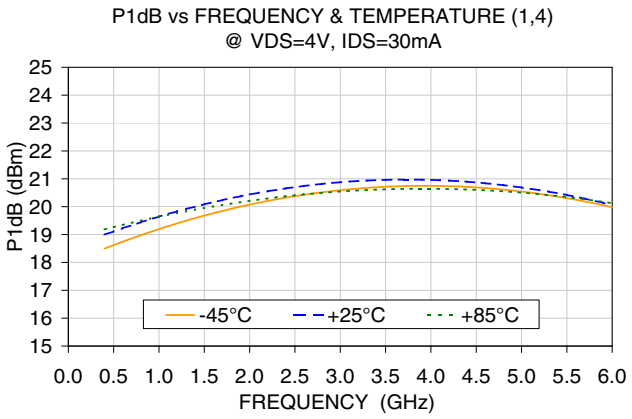

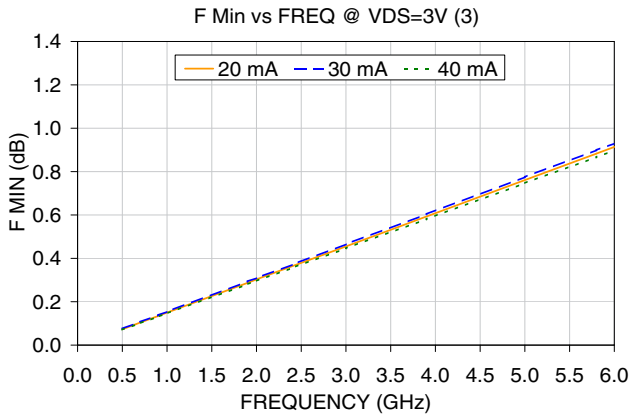

(1) Includes test board loss, set-up and conditions per Figure 1.
(2) Measured using HP4155B semiconductor parameter analyzer.
(3) F Min is minimum Noise Figure.
(4) Drain current was allowed to increase during compression measurement.

REFERENCE PLANE LOCATION FOR S AND NOISE PARAMETERS

(see data in pages 8-11) (Refer to Application Note AN-60-040)

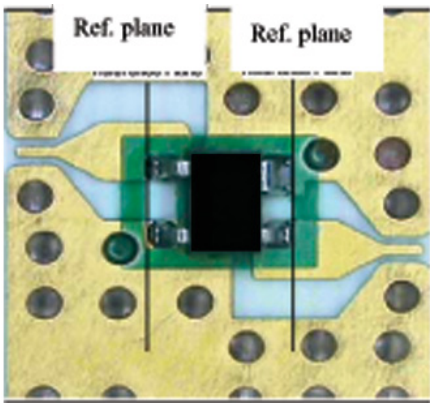


Fig 3. Reference Plane Location

Noise parameters were measured over 0.5 to 6 GHz by Modelithics® using a solid state tuner-based noise parameter (NP) test system available from Maury Microwave. F Min, optimimum source reflection coefficient and noise resistance values are calculated values based on a set of measurements made at approximately 16 different impedances. Some data smoothing was applied to arrive at the presented data set.

S-parameters were measured by Modelithics® on an Anritsu Lightning vector network analyzer over 0.1 to 18GHz using 350um pitch RF probes from GGB industries combined with customized thru-reflect-line (TRL) calibration standards. The reference plane is at the device package leads, as shown in the picture.


E-PHEMT Transistor

SAV-581+

TYPICAL S-PARAMETERS, V_{DS}=3V AND I_{DS}=30 MA (FIG. 3)

Freq. (GHz)	S11		S21			S12		S22		MSG/MAG (dB)
	Mag.	Ang.	Mag.	Mag (dB)	Ang.	Mag.	Ang.	Mag.	Ang.	
0.1	1.00	-16.12	22.99	27.23	169.9	0.009	80.2	0.58	-11.8	33.9
0.5	0.88	-71.50	18.31	25.25	134.0	0.037	53.6	0.47	-50.9	27.0
0.9	0.77	-109.23	13.52	22.62	110.7	0.05	40.2	0.35	-77.5	24.3
1.0	0.75	-117.04	12.59	22.00	106.1	0.052	37.3	0.33	-83.3	23.8
1.5	0.69	-146.73	9.21	19.28	87.9	0.06	29.0	0.25	-106.3	21.8
1.9	0.67	-164.32	7.50	17.50	76.3	0.065	25.0	0.21	-122.4	20.6
2.0	0.67	-168.10	7.16	17.10	73.7	0.066	24.1	0.20	-126.2	20.3
2.5	0.66	174.78	5.83	15.31	61.6	0.073	20.2	0.17	-144.2	19.1
3.0	0.66	160.26	4.91	13.81	50.6	0.078	16.4	0.16	-161.5	18.0
4.0	0.67	135.52	3.71	11.38	30.1	0.091	9.3	0.15	165.0	16.1
5.0	0.69	114.29	2.96	9.43	10.9	0.103	0.6	0.17	136.7	13.2
6.0	0.72	95.32	2.44	7.75	-7.4	0.116	-8.9	0.21	113.4	11.6
7.0	0.75	78.30	2.05	6.23	-25.2	0.127	-19.5	0.26	94.1	10.4
8.0	0.78	62.75	1.74	4.82	-42.2	0.137	-30.0	0.32	77.6	9.5
9.0	0.82	48.10	1.48	3.43	-58.7	0.144	-41.3	0.38	62.4	8.9
10.0	0.85	33.92	1.27	2.08	-74.9	0.148	-52.9	0.45	48.2	8.6
11.0	0.88	20.72	1.09	0.77	-90.5	0.151	-64.4	0.51	35.1	8.6
12.0	0.90	8.48	0.95	-0.46	-105.3	0.152	-75.7	0.57	22.9	8.0
13.0	0.91	-3.35	0.84	-1.55	-119.8	0.153	-87.1	0.62	11.9	7.4
14.0	0.92	-14.29	0.74	-2.58	-133.5	0.153	-97.7	0.66	1.4	6.9
15.0	0.94	-22.84	0.64	-3.85	-144.6	0.148	-106.4	0.70	-7.5	6.4
16.0	0.95	-30.29	0.55	-5.26	-154.6	0.138	-114.2	0.75	-15.6	6.0
17.0	0.95	-38.87	0.48	-6.36	-165.6	0.133	-122.5	0.78	-24.3	5.6
18.0	0.95	-48.16	0.43	-7.26	-177.3	0.131	-131.4	0.79	-33.1	5.2

MAXIMUM STABLE GAIN (MSG)/MAXIMUM AVAILABLE GAIN (MAG) vs. FREQUENCY

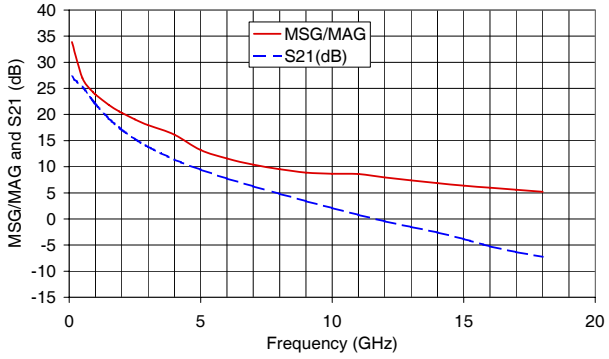

TYPICAL NOISE PARAMETERS, V_{DS}=3V AND I_{DS}=30 MA (FIG. 3)

Freq. (GHz)	F Min. (dB)	GOpt (Magnitude)	GOpt (Angle)	Rn/50	Ga Associated Gain (dB)
0.5	0.076	0.33	41.65	0.06	28.7
0.7	0.107	0.34	50.02	0.05	26.4
0.9	0.138	0.35	58.35	0.05	24.4
1.0	0.154	0.35	62.50	0.04	23.5
1.9	0.294	0.38	99.47	0.03	18.2
2.0	0.309	0.38	103.54	0.03	17.8
2.4	0.371	0.40	119.71	0.03	16.3
3.0	0.465	0.42	143.69	0.04	14.7
3.9	0.604	0.45	179.08	0.05	12.9
5.0	0.775	0.49	-138.64	0.09	11.6
5.8	0.899	0.51	-108.56	0.13	10.8
6.0	0.930	0.52	-101.13	0.14	10.6

Notes:
F Min.: Minimum Noise Figure
GOpt: Optimum Source Reflection Coefficient
Rn: Equivalent noise resistance


E-PHEMT Transistor

SAV-581+

TYPICAL S-PARAMETERS, V_{DS}=4V AND I_{DS}=30 MA (FIG. 3)

Freq. (GHz)	S11		S21			S12		S22		MSG/MAG (dB)
	Mag.	Ang.	Mag.	Mag (dB)	Ang.	Mag.	Ang.	Mag.	Ang.	
0.1	1.00	-15.90	23.03	27.25	169.8	0.01	82.5	0.60	-12.0	33.8
0.5	0.88	-70.97	18.35	25.27	134.2	0.036	56.5	0.48	-49.1	27.1
0.9	0.77	-108.70	13.57	22.65	110.9	0.05	40.3	0.36	-74.0	24.4
1.0	0.75	-116.55	12.65	22.04	106.3	0.051	37.7	0.34	-79.4	23.9
1.5	0.69	-146.18	9.26	19.33	88.0	0.059	29.3	0.25	-100.9	21.9
1.9	0.67	-163.86	7.54	17.55	76.4	0.064	25.0	0.21	-115.8	20.7
2.0	0.67	-167.69	7.20	17.15	73.8	0.065	24.0	0.20	-119.3	20.4
2.5	0.66	175.19	5.87	15.37	61.7	0.071	20.5	0.17	-136.4	19.2
3.0	0.65	160.62	4.94	13.87	50.7	0.077	17.0	0.15	-153.2	18.1
4.0	0.66	135.88	3.73	11.44	30.2	0.089	9.6	0.14	172.5	16.2
5.0	0.68	114.61	2.99	9.50	11.0	0.101	1.2	0.15	142.0	13.3
6.0	0.71	95.65	2.46	7.83	-7.4	0.114	-8.1	0.19	117.1	11.7
7.0	0.75	78.58	2.07	6.33	-25.2	0.126	-18.3	0.24	97.0	10.5
8.0	0.78	63.09	1.76	4.92	-42.3	0.135	-28.8	0.30	80.0	9.7
9.0	0.82	48.41	1.50	3.54	-58.9	0.143	-40.2	0.36	64.5	9.1
10.0	0.85	34.23	1.29	2.20	-75.3	0.148	-51.7	0.44	50.0	9.0
11.0	0.88	20.98	1.11	0.88	-90.9	0.15	-63.2	0.50	36.7	8.7
12.0	0.90	8.74	0.96	-0.34	-105.9	0.152	-74.7	0.56	24.5	8.0
13.0	0.91	-3.13	0.85	-1.45	-120.5	0.154	-86.0	0.61	13.3	7.4
14.0	0.93	-14.07	0.75	-2.49	-134.3	0.154	-96.9	0.65	2.7	6.9
15.0	0.94	-22.62	0.65	-3.79	-145.6	0.148	-105.4	0.70	-6.4	6.4
16.0	0.95	-30.07	0.55	-5.21	-155.7	0.139	-113.4	0.74	-14.6	6.0
17.0	0.95	-38.63	0.48	-6.34	-166.7	0.133	-121.7	0.78	-23.4	5.6
18.0	0.95	-47.84	0.43	-7.26	-178.4	0.131	-131.1	0.79	-32.3	5.2

MAXIMUM STABLE GAIN (MSG)/MAXIMUM AVAILABLE GAIN (MAG) vs. FREQUENCY

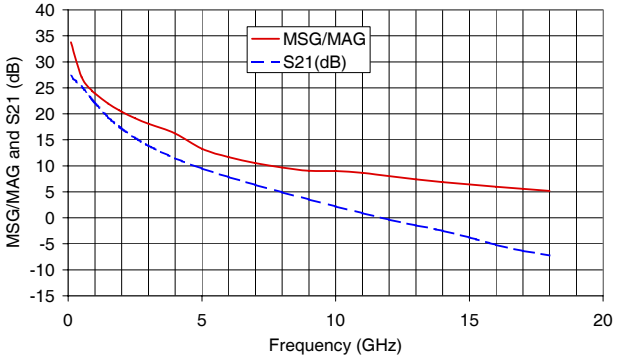

TYPICAL NOISE PARAMETERS, VDS=4V AND IDS=30 MA (FIG. 3)


Freq. (GHz)	F Min. (dB)	GOpt (Magnitude)	GOpt (Angle)	Rn/50	Ga Associated Gain (dB)
0.5	0.070	0.37	25.83	0.06	27.6
0.7	0.099	0.37	35.87	0.05	25.4
0.9	0.129	0.38	45.79	0.05	23.6
1.0	0.143	0.38	50.71	0.05	22.8
1.9	0.276	0.41	93.56	0.03	17.8
2.0	0.291	0.41	98.16	0.03	17.5
2.4	0.349	0.42	116.28	0.03	16.1
3.0	0.438	0.43	142.54	0.04	14.6
3.9	0.570	0.46	179.85	0.05	13.0
5.0	0.732	0.48	-137.93	0.09	11.7
5.8	0.850	0.50	-109.57	0.13	10.8
6.0	0.879	0.50	-102.79	0.15	10.5

Notes:
F Min.: Minimum Noise Figure
GOpt: Optimum Source Reflection Coefficient
Rn: Equivalent noise resistance

E-PHEMT Transistor

SAV-581+

RECOMMENDED APPLICATION CIRCUIT

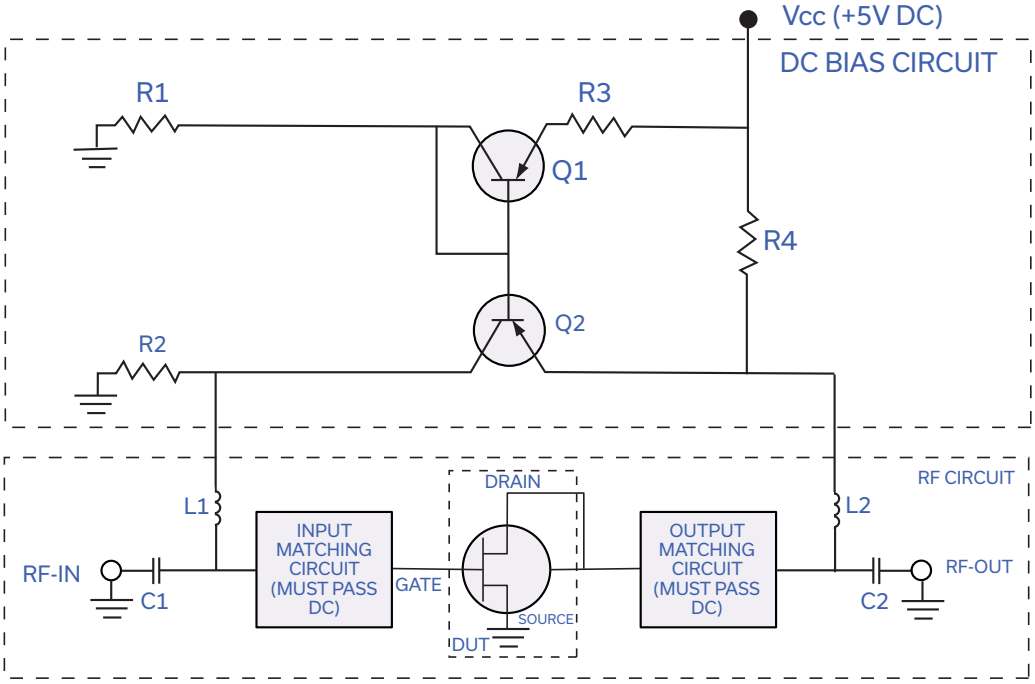


VDS, V (nom) IDS, mA (nom)	3 30mA	4 30mA
R1	4320Ω	4320Ω
R2	4320Ω	4320Ω
R3	3570Ω	1210Ω
R4	68.1Ω	33.2Ω
Q1	MMBT3906*	MMBT3906*
Q2	MMBT3906*	MMBT3906*
C1	0.01µF	0.01µF
C2	0.01µF	0.01µF
L1**	840nH	840nH
L2**	840nH	840nH

*Fairchild Semiconductor™ part number
**Piconics™ part number CC45T47K240G5

OPTIMIZED AMPLIFIER CIRCUITS

For band specific, drop-in modules, and as an alternative to designing circuits, please refer to Mini-Circuits TAMP and RAMP series models which are based upon SAV/TAV E-PHEMT's and include all DC blocking, bias, matching and stabilization circuitry, without need for any external components.

PRODUCT MARKING



E-PHEMT Transistor

SAV-581+

ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASH BOARD. TO ACCESS CLICK HERE

Performance Data	Data Table Swept Graphs Performance data, graphs, s-parameter data set (.zip file)
Case Style	MMM1362 Plastic molded SOT-343 (SC-70) style package, lead finish: matte tin
Tape & Reel **Standard quantities available on reel**	F90 Standard quantities availabe on reel: 7" reels with 20, 50, 100, 200, 500, 1K, 2K, or 3K devices.
Suggested Layout for PCB Design	PL-300
Evaluation Board	TB-471+
Environmental Ratings	ENV08T2

ESD RATING


Human Body Model (HBM): Class 1A (250 V to < 500 V) in accordance with ANSI/ESD STM 5.1 - 2001

Machine Model (MM): Class M1 (40 V) in accordance with ANSI/ESD STM 5.2 - 1999

MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDECJ-STD-020D

MSL TEST FLOW CHART

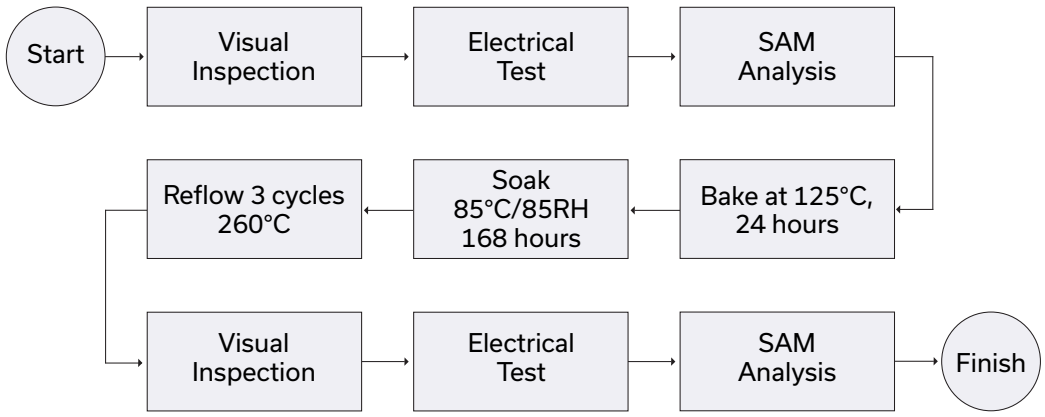

NOTES

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.