
EPC2302 – Enhancement Mode Power Transistor

V_{DS} , 100 V
$R_{DS(on)}$, 1.8 mΩ max



EFFICIENT POWER CONVERSION

RoHS Halogen-Free

Revised April 29, 2026

General Description

The EPC2302 is a 1.8 mΩ max $R_{DS(on)}$, 100 V eGaN® power transistor in a low inductance 3 x 5 mm QFN package with exposed top for excellent thermal management. It is tailored to high frequency DC-DC applications to/from 40 V–60 V and 48 V BLDC motor drives.

The thermal resistance to case top is ~0.2 °C/W, resulting in excellent thermal behavior and easy cooling. The device features an enhanced PQFN "Thermal-Max" package. The exposed top enhances top-side thermal management and the side-wettable flanks guarantee that the complete side-pad surface is wetted with solder during the reflow soldering process, which protects the copper and allows soldering to occur on this external flank area for easy optical inspection.

Compared to a Si MOSFET, the footprint of 15 mm^2 is less than half of the size of the best-in-class Si MOSFET with similar $R_{DS(on)}$ and voltage rating, Q_G and Q_{GD} are significantly smaller and Q_{RR} is 0. This results in lower switching losses and lower gate driver losses. Moreover, EPC2302 is very fast and can operate with deadtime less than 10 ns for higher efficiency and Q_{RR} = 0 is a big advantage for reliability and EMI. In summary, EPC2302 allows the highest power density due to enhanced efficiency, smaller size, and higher switching frequency for smaller inductor and fewer capacitors.

The EPC2302 enables designers to improve efficiency and save space. The excellent thermal behavior enables easier and lower cost cooling. The ultra-low capacitance and zero reverse recovery of the eGaN® FET enables efficient operation in many topologies. Performance is further enhanced due to the small, low inductance footprint.


Application notes:

- Easy-to-use and reliable gate, Gate Drive ON = 5 V typical, OFF = 0 V (negative voltage not needed)
- Top of FET is electrically connected to source

Questions: Ask a GaN Expert

Maximum Ratings			
PARAMETER		VALUE	UNIT
V_{DS}	Drain-to-Source Voltage (Continuous)	100	V
$V_{DS(tr)}$	Drain-to-Source Voltage (Repetitive Transient)(1)	120	
I_D	Continuous ($T_J \leq 125°C$)	133	A
	Pulsed (25°C, T_{PULSE} = 300 µs)	408	
V_{GS}	Gate-to-Source Voltage	6	V
	Gate-to-Source Voltage	-4	
T_J	Operating Temperature	–40 to 150	°C
T_{STG}	Storage Temperature	–55 to 175	

(1) Pulsed repetitively, duty cycle factor (DC_{Factor}) ≤ 1%;
See Figure 13 and Reliability Report Phase 16, Section 3.2.6

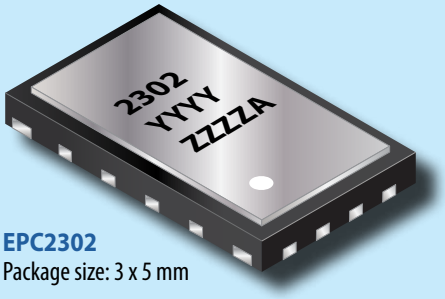

EPC2302
Package size: 3 x 5 mm

Features

- 100 V
- 1.4 mΩ typical, 1.8 mΩ max $R_{DS(on)}$
- 3 x 5 mm QFN package
- Exposed top for top-side thermal management
- Moisture rating MSL1
- Enhanced thermal-max package

Applications

- AC-DC chargers, SMPS, adaptors, power supplies
- High frequency DC-DC conversion input (buck, boost, buck-boost and LLC)
- Motor drives
- High power density DC-DC modules
- Synchronous rectification
- Solar MPPT

Benefits

- Ultra high efficiency
- No reverse recovery
- Ultra low Q_G
- Small footprint
- Excellent thermal

Scan QR code or click link below for more information including reliability reports, device models, demo boards!

https://l.ead.me/EPC2302

Thermal Characteristics			
PARAMETER		TYP	UNIT
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case (Case TOP)	0.2	°C/W
$R_{\theta JB}$	Thermal Resistance, Junction-to-Board (Case BOTTOM)	1.5	
$R_{\theta JA_JEDEC}$	Thermal Resistance, Junction-to-Ambient (using JEDEC 51-2 PCB)	45	
$R_{\theta JA_EVB}$	Thermal Resistance, Junction-to-Ambient (using EPC90142 EVB)	21	

Static Characteristics (T_J = 25°C unless otherwise stated)						
PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
BV_{DSS}	Drain-to-Source Voltage	V_{GS} = 0 V, I_D = 0.15 mA	100			V
I_{DSS}	Drain-Source Leakage	V_{DS} = 80 V, V_{GS} = 0 V		1	100	µA
I_{GSS}	Gate-to-Source Forward Leakage	V_{GS} = 5 V		0.01	4	mA
	Gate-to-Source Forward Leakage#	V_{GS} = 5 V, T_J = 125°C		0.4	9	
	Gate-to-Source Reverse Leakage	V_{GS} = -4 V		0.01	0.2	
$V_{GS(TH)}$	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = 14 mA	0.8	1.3	2.5	V
$R_{DS(on)}$	Drain-Source On Resistance	V_{GS} = 5 V, I_D = 50 A		1.4	1.8	mΩ
V_{SD}	Source-to-Drain Forward Voltage#	I_S = 0.5 A, V_{GS} = 0 V		1.5		V

Defined by design. Not subject to production test.

Dynamic Characteristics# (T_J = 25°C unless otherwise stated)						
PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
C_{ISS}	Input Capacitance	V_{DS} = 50 V, V_{GS} = 0 V		3200	4800	pF
C_{RSS}	Reverse Transfer Capacitance			7		
C_{OSS}	Output Capacitance			1000	1200	
$C_{OSS(ER)}$	Effective Output Capacitance, Energy Related (Note 1)	V_{DS} = 0 to 50 V, V_{GS} = 0 V		1300		
$C_{OSS(TR)}$	Effective Output Capacitance, Time Related (Note 2)			1700		
R_G	Gate Resistance			0.5		Ω
Q_G	Total Gate Charge	V_{DS} = 50 V, V_{GS} = 5 V, I_D = 50 A		23	29	nC
Q_{GS}	Gate-to-Source Charge	V_{DS} = 50 V, I_D = 50 A		8.9		
Q_{GD}	Gate-to-Drain Charge			2.3		
$Q_{G(TH)}$	Gate Charge at Threshold			6.3		
Q_{OSS}	Output Charge	V_{DS} = 50 V, V_{GS} = 0 V		85	94	
Q_{RR}	Source-Drain Recovery Charge			0		

Defined by design. Not subject to production test.
All measurements were done with substrate connected to source.
Note 1: $C_{OSS(ER)}$ is a fixed capacitance that gives the same stored energy as C_{OSS} while V_{DS} is rising from 0 to 50% BV_{DSS}.
Note 2: $C_{OSS(TR)}$ is a fixed capacitance that gives the same charging time as C_{OSS} while V_{DS} is rising from 0 to 50% BV_{DSS}.

Figure 1: Typical Output Characteristics at 25°C

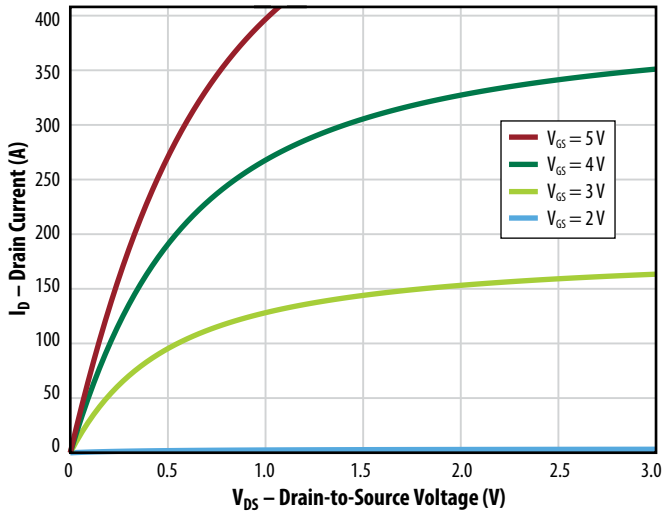


Figure 2: Typical Transfer Characteristics

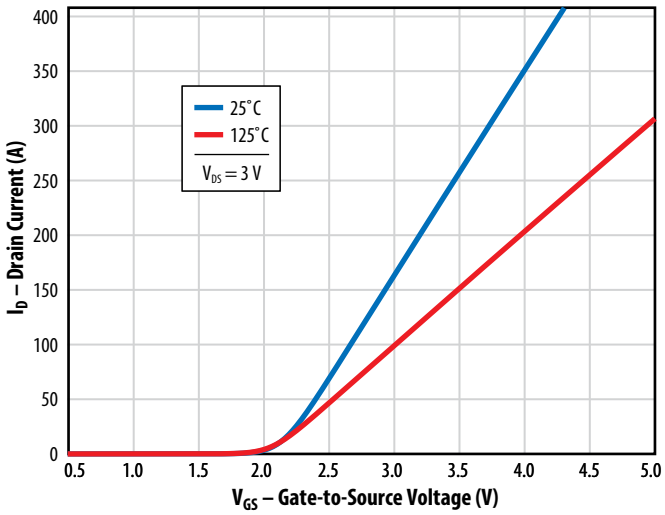


Figure 3: Typical $R_{DS(on)}$ vs. V_{GS} for Various Drain Currents

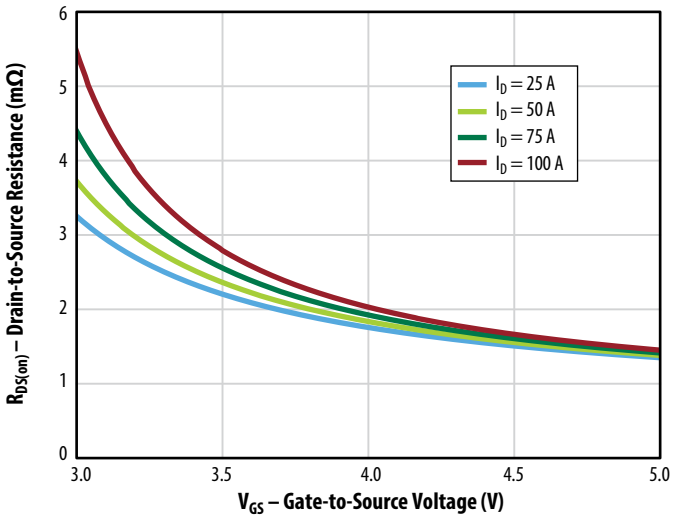


Figure 4: Typical $R_{DS(on)}$ vs. V_{GS} for Various Temperatures

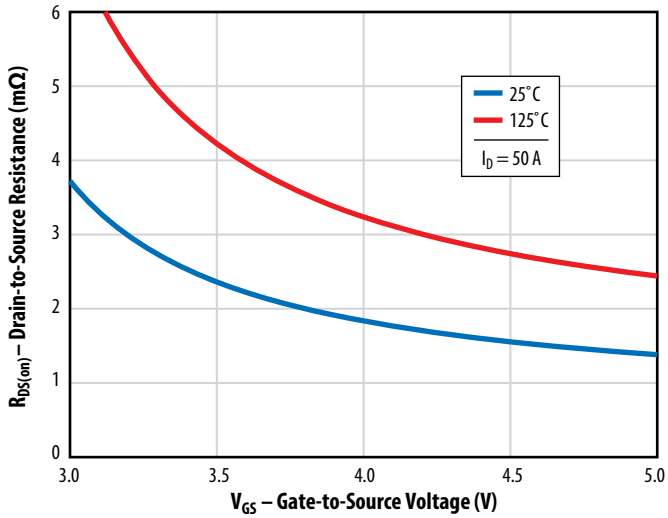


Figure 5a: Typical Capacitance (Linear Scale)

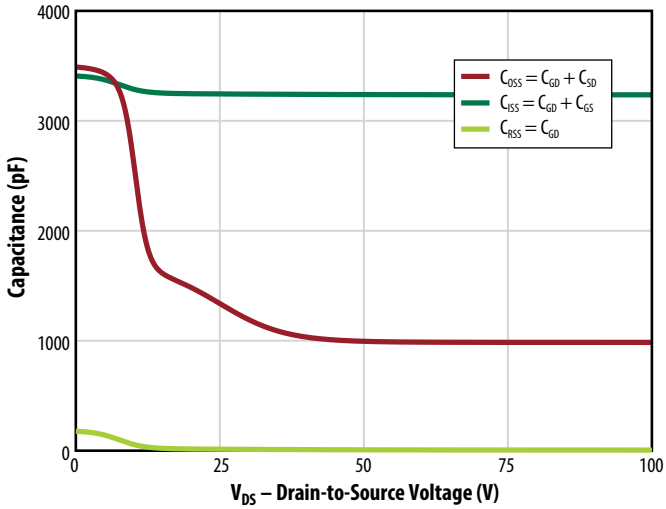


Figure 5b: Typical Capacitance (Log Scale)

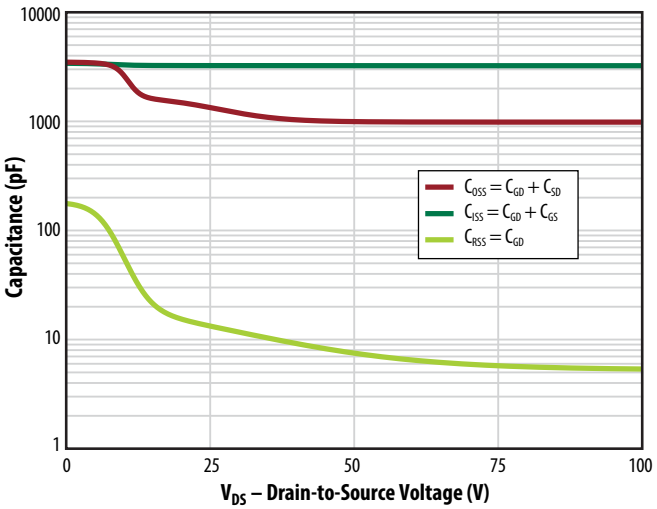


Figure 6: Typical Output Charge and C_{OSS} Stored Energy

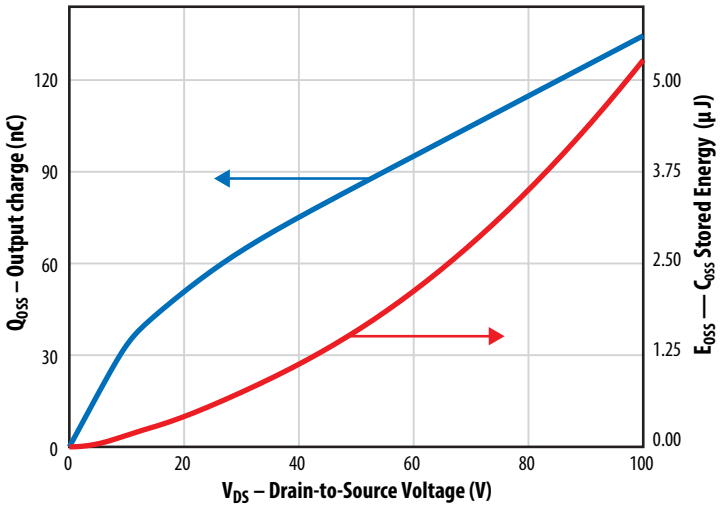


Figure 7: Typical Gate Charge


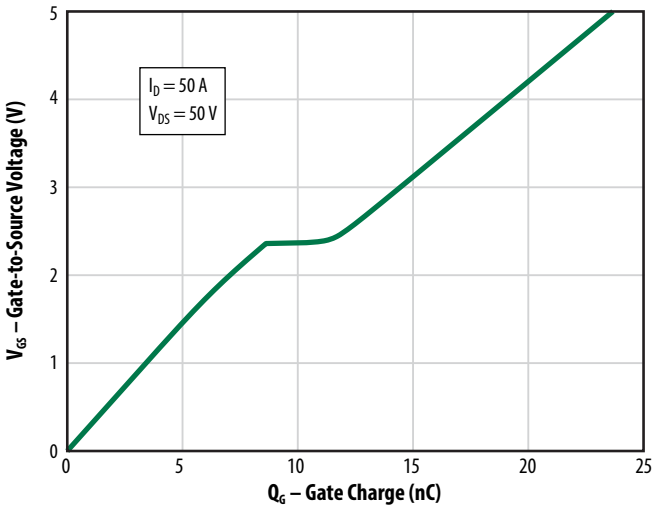


Figure 8: Typical Reverse Drain-Source Characteristics

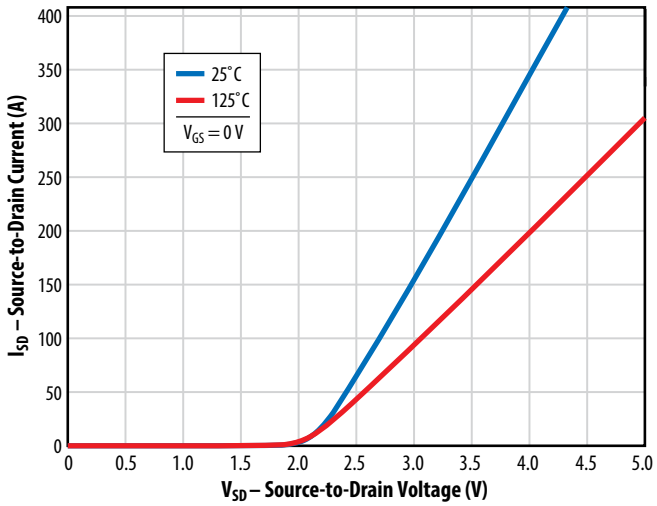

Note: Negative gate drive voltage increases the reverse drain-source voltage. EPC recommends 0 V for OFF.

Figure 9: Typical Normalized On-State Resistance vs. Temp.

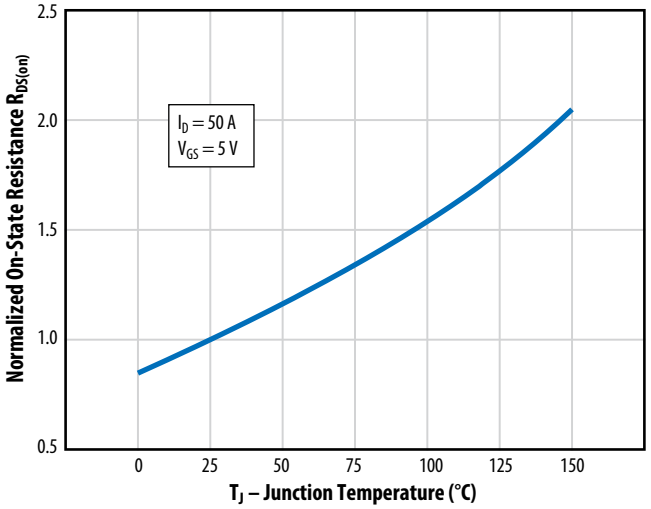


Figure 10: Typical Normalized Threshold Voltage vs. Temp.


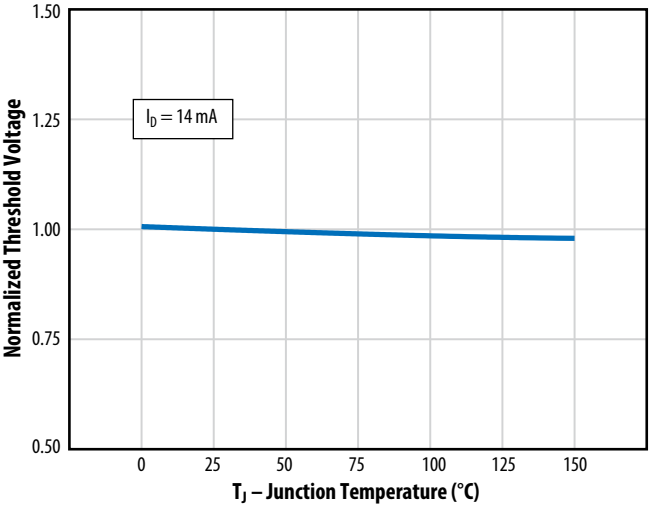


Figure 11: Safe Operating Area

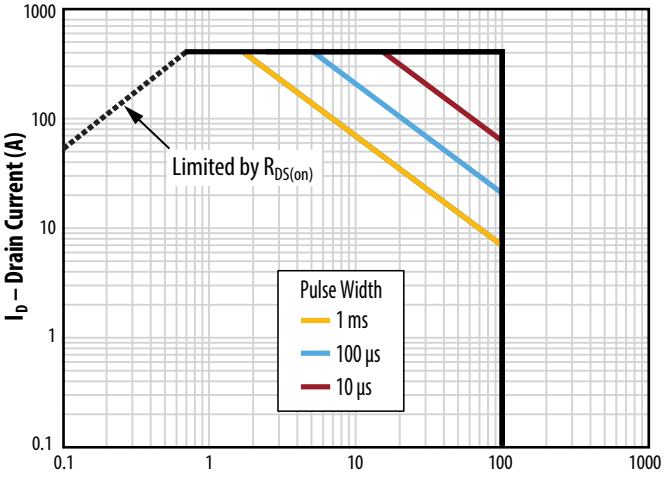

T_J = Max Rated, T_C = +25°C, Single Pulse

Figure 12: Typical Transient Thermal Response Curves


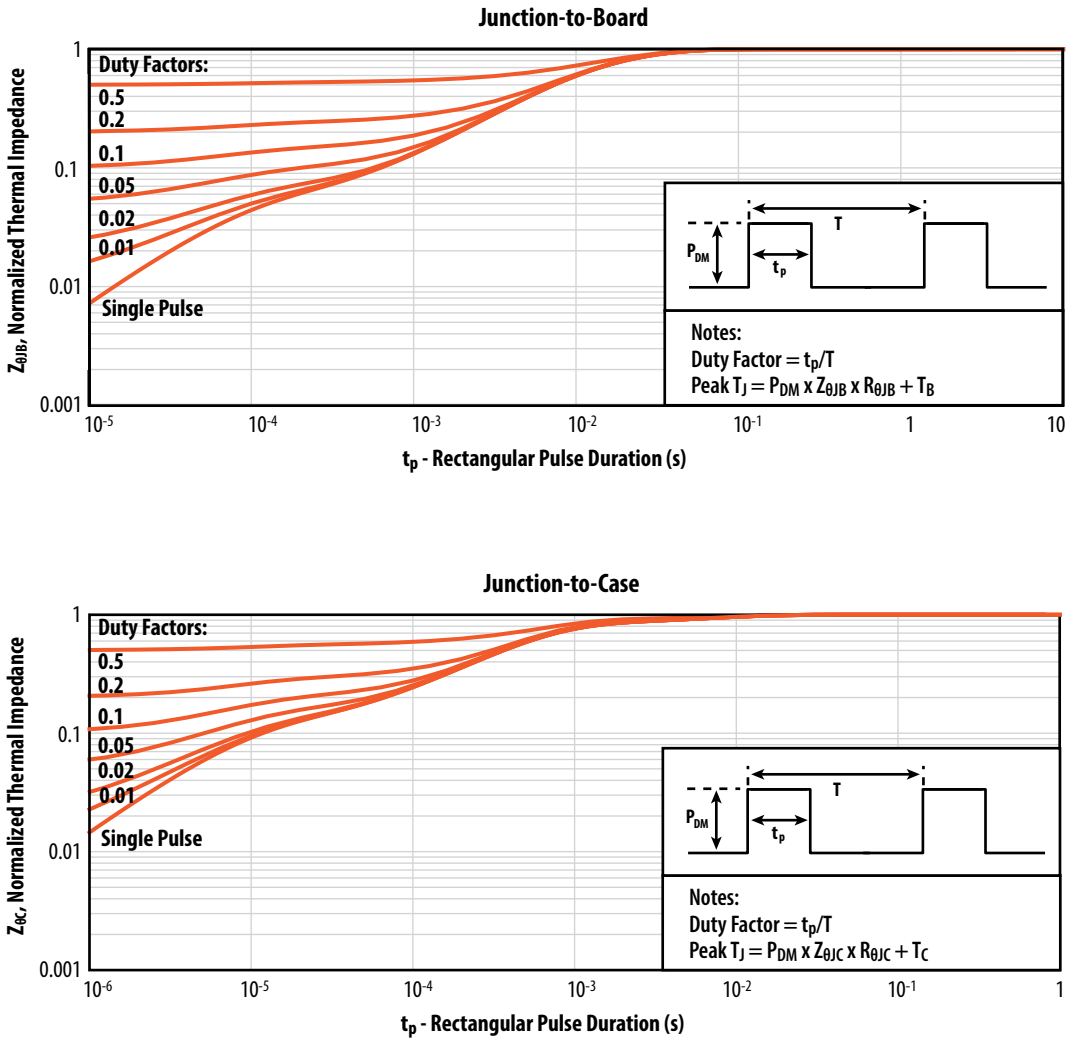


Figure 13: Duty Cycle Factor (DC_{Factor}) Illustration for Repetitive Overvoltage Specification

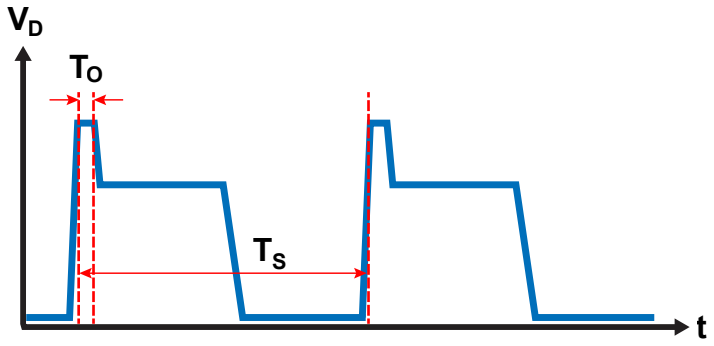

1% is the ratio between T_O (overvoltage duration) and T_S (one switching period).

LAYOUT CONSIDERATIONS

GaN transistors generally behave like power MOSFETs, but at much higher switching speeds and power densities, therefore layout considerations are very important, and care must be taken to minimize layout parasitic inductances. The recommended design utilizes the first inner layer as a power loop return path. This return path is located directly beneath the top layer's power loop allowing for the smallest physical loop size. This method is also commonly referred to as flux cancellation. Variations of this concept can be implemented by placing the bus capacitors either next to the high side device, next to the low side device, or between the low and high side devices, but in all cases the loop is closed using the first inner layer right beneath the devices.

A similar concept is also used for the gate loop, with the return gate loop located directly under the turn ON and OFF gate resistors.

Furthermore, to minimize the common source inductance between power and gate loops, the power and gate loops are laid out perpendicular to each other, and a via next to the source pad closest to the gate pad is used as Kelvin connection for the gate driver return path.

The **EPC90133 – 100 V, 40 A Half-Bridge Development Board Featuring EPC2302** implements our recommended vertical inner layout.

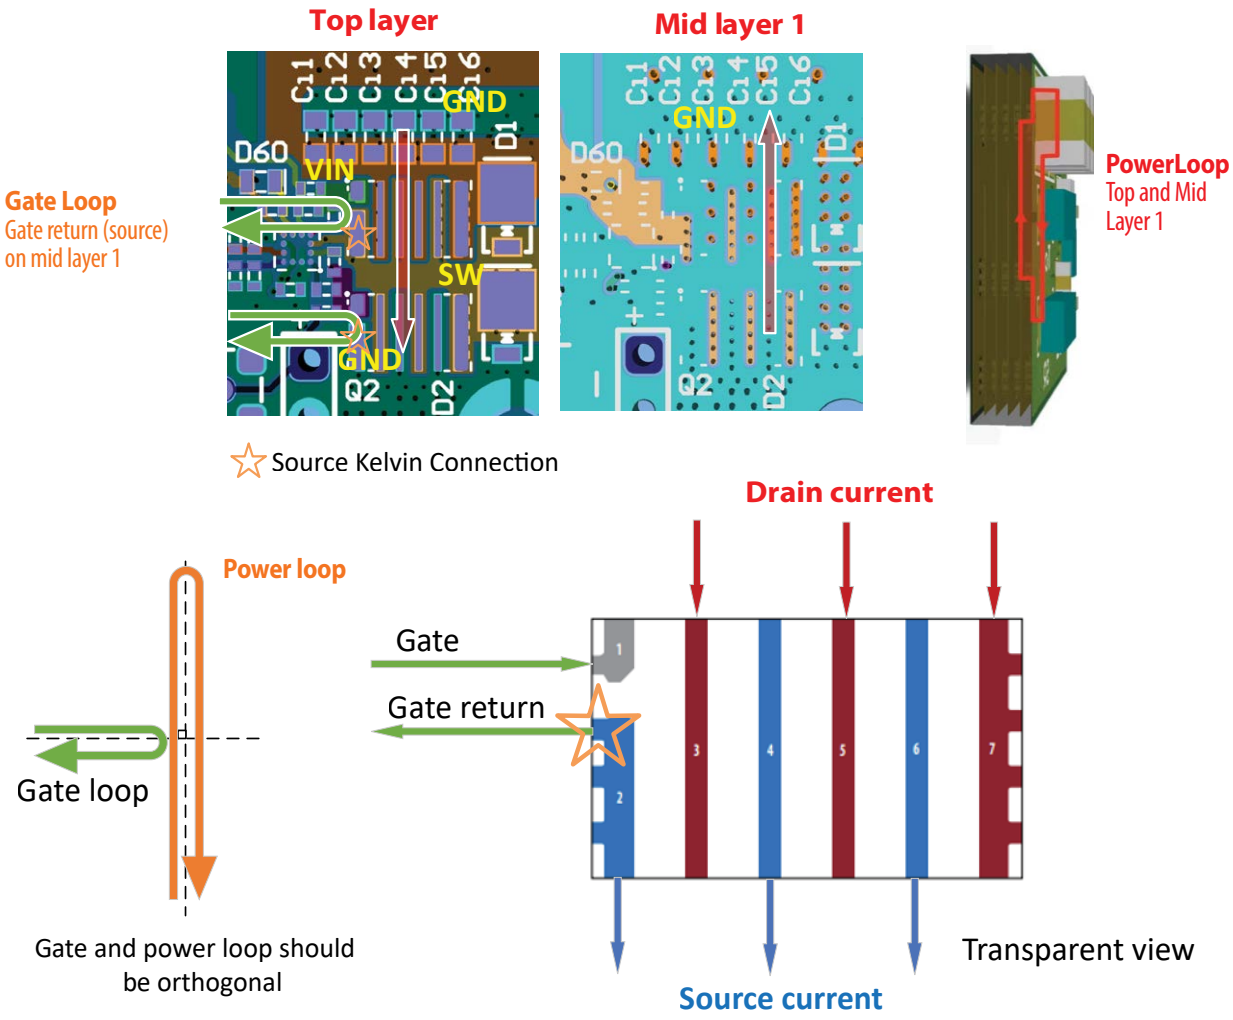


Figure 13: Inner Vertical Layout for Power and Gate Loops from EPC90133

Detailed recommendations on layout can be found on EPC's website: **Optimizing PCB Layout with eGaN FETs.pdf**

TYPICAL THERMAL CONCEPT

The EPC2302 can take advantage of dual sided cooling to maximize its heat dissipation capabilities in high power density designs. ***Note that the top of EPC FETs are connected to source potential, so for half-bridge topologies the Thermal Interface Material (TIM) needs to provide electrical isolation to the heatsink.***

Recommended best practice thermal solutions are covered in detail in **How2AppNote012 - How to Get More Power Out of an eGaN Converter.pdf**.

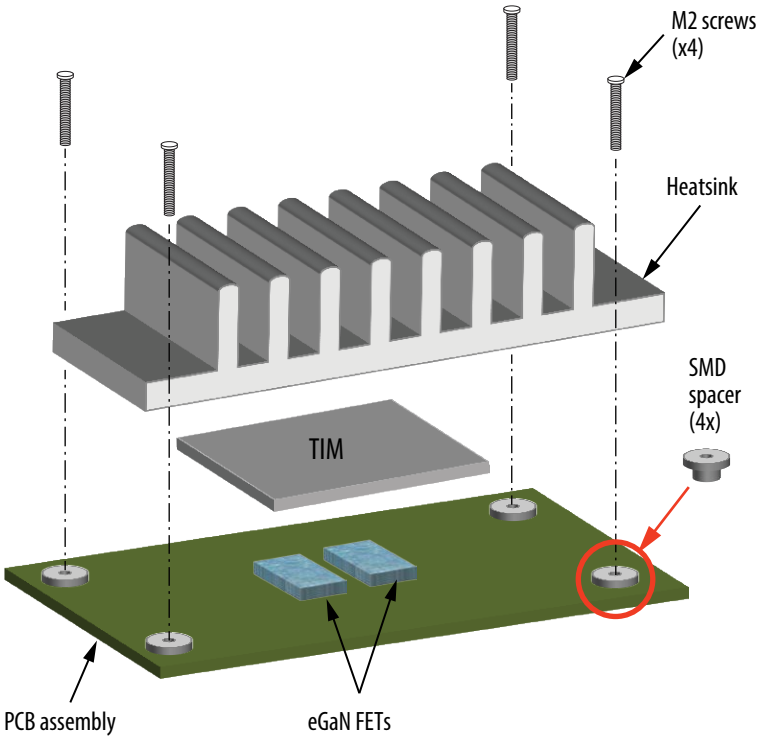


Figure 15: Exploded view of heatsink assembly using screws

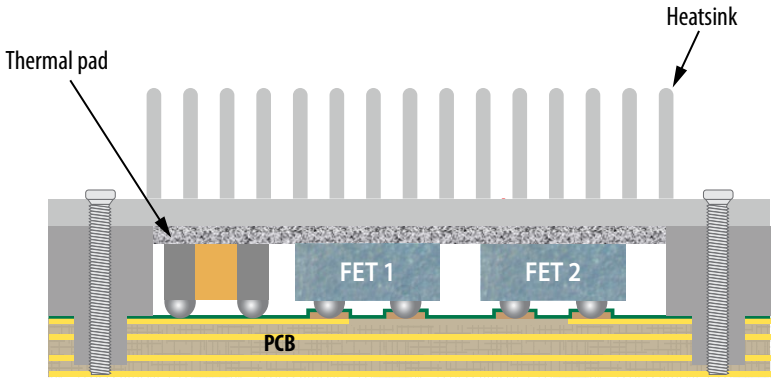



Figure 16: A cross-section image of dual sided thermal solution


Note: Connecting the heatsink to ground is recommended and can significantly improve radiated EMI


The thermal design can be optimized by using the ***GaN FET Thermal Calculator*** on EPC's website.


TAPE AND REEL

(units in mm)

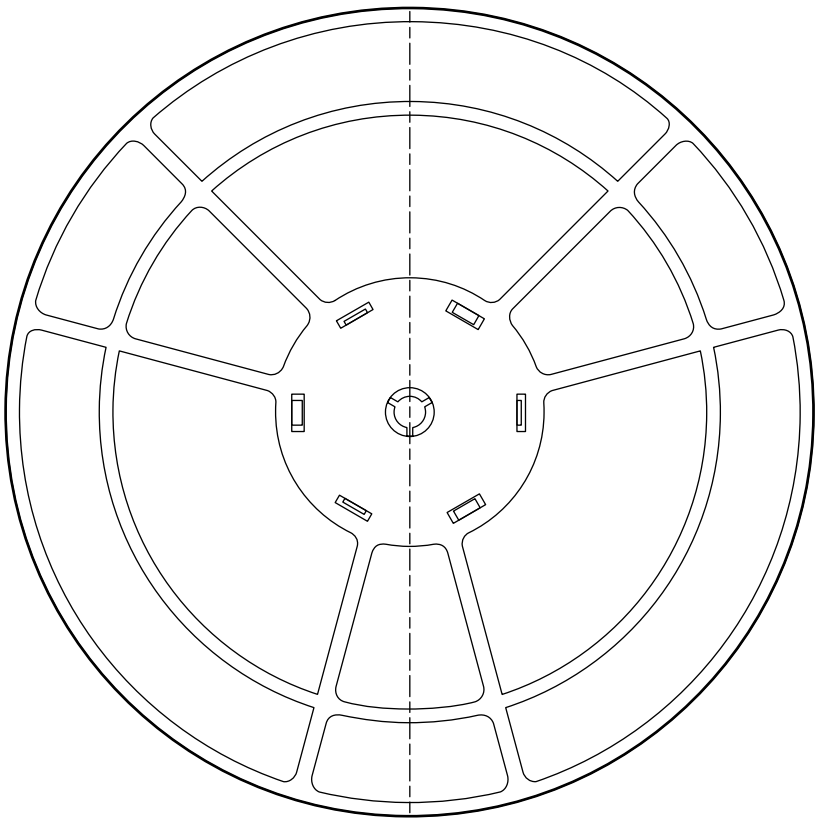


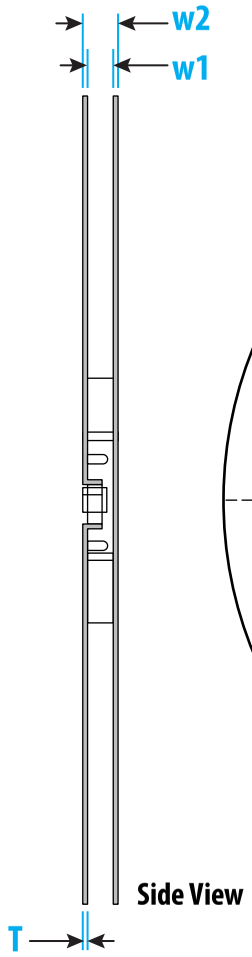

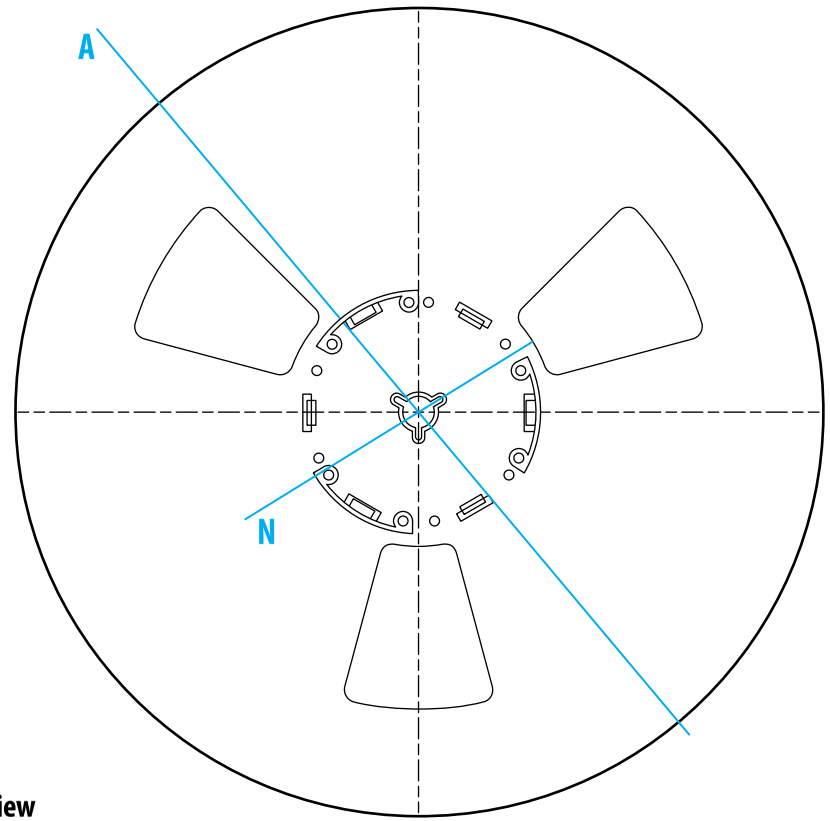




Top View Detail




Bottom View Detail




Type	A	N	C	D	w1	w2	T
8MM	Ø330±2	Ø100±2	Ø13.1±0.2	5.6±0.5	8.4+1.5	14.4	2.1±0.5
12MM	Ø330±2	Ø100±2	Ø13.1±0.2	5.6±0.5	12.4+1.5	18.4	2.1±0.5
16MM	Ø330±2	Ø100±2	Ø13.1±0.2	5.6±0.5	16.4+1.5	22.4	2.1±0.5
24MM	Ø330±2	Ø100±2	Ø13.1±0.2	5.6±0.5	24.4+1.5	30.4	2.1±0.5

QFN Markings (label date code 2424 onward)

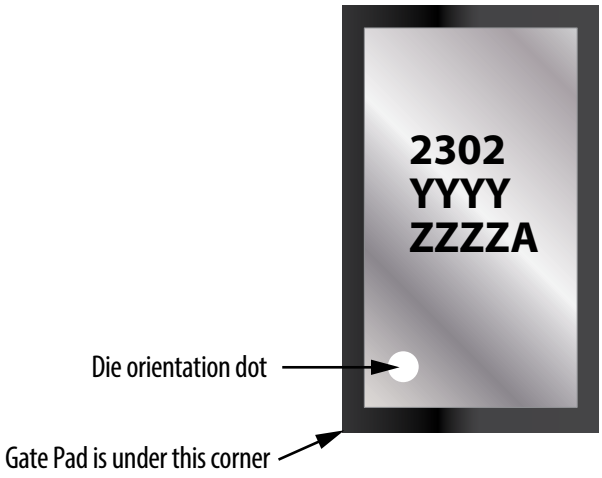



Part Number	Laser Markings		
	Part # Marking Line 1	Lot_Date Code Marking Line 2	Lot_Date Code Marking Line 3
EPC2302	2302	YYYY	ZZZZA

Marking prior to label date code 2424

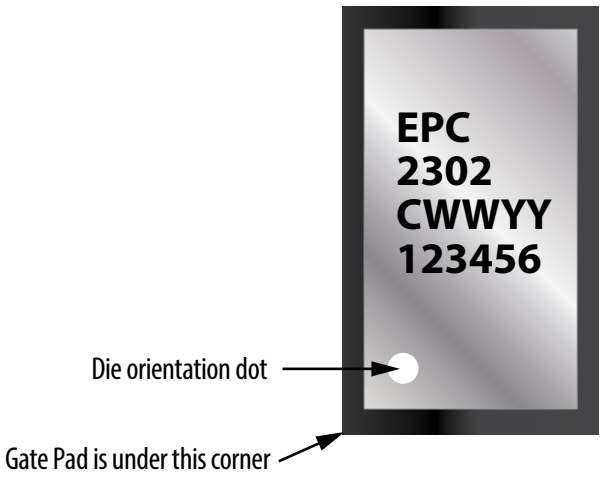


Part Number	Laser Markings			
	Company Name Marking Line 1	Part # Marking Line 2	Site_Date Code Marking Line 3	Lot_Code Marking Line 4
EPC2302	EPC	2302	CWWYY	123456

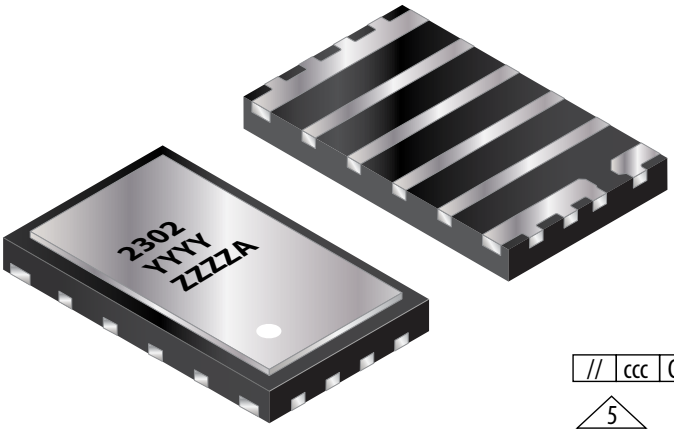

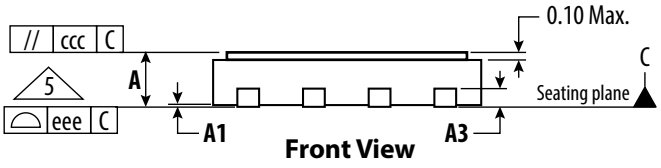

Front View

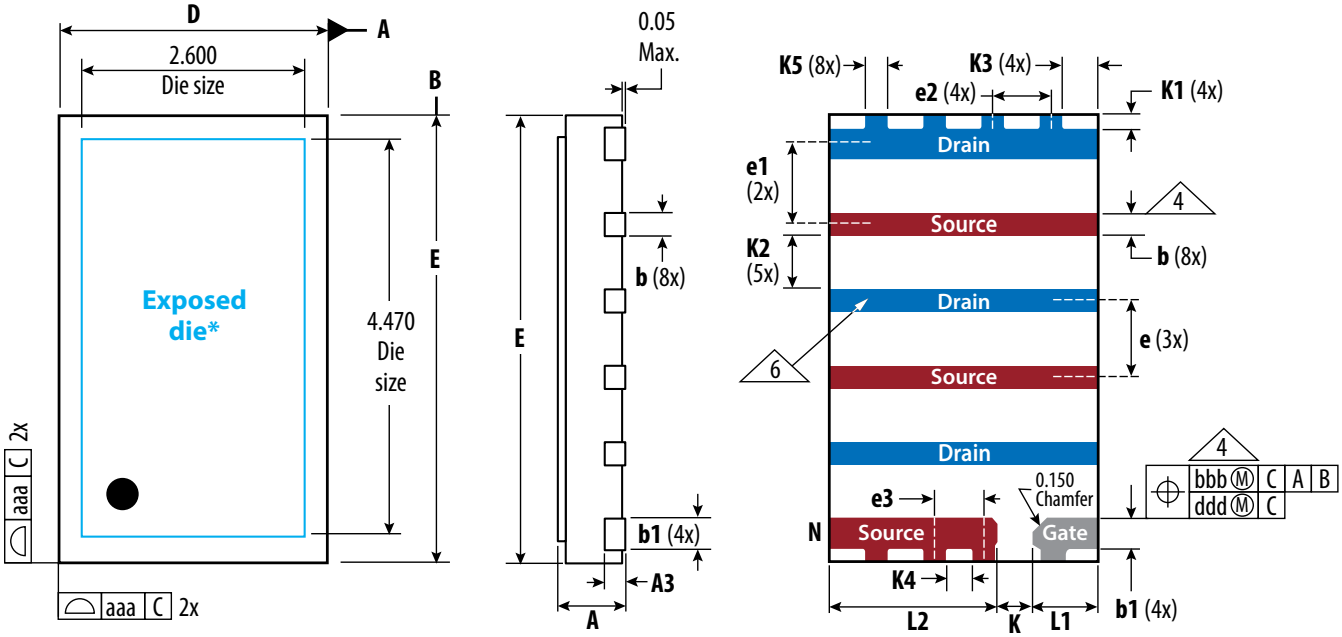

Top View Side View Bottom View

*The exposed die is the silicon substrate that is internally connected to the source.
It is not recommended to use it as an electrical connection


SYMBOL	Dimension (mm)			
	MIN	Nominal	MAX	Note
A	0.60	0.65	0.70	
A1	0.00	0.02	0.05	
A3			0.25	
b	0.20	0.25	0.30	4
b1	0.30	0.35	0.40	4
D	2.90	3.00	3.10	
E	4.90	5.00	5.10	
e	0.85 BSC			
e1	0.90 BSC			
e2	0.65 BSC			
e3	0.55 BSC			
L1	0.625	0.725	0.825	
L2	1.775	1.875	1.975	

SYMBOL	Dimension (mm)			
	MIN	Nominal	MAX	Note
K	0.40 Ref			
K1	0.15 Ref			
K2	0.60 Ref			
K3	0.40 Ref			
K4	0.30 Ref			
K5	0.25 Ref			
aaa	0.05			
bbb	0.10			
ccc	0.10			
ddd	0.05			
eee	0.08			
N	7			3

Notes:

1. Dimensioning and tolerancing conform to ASME Y14.5-2009
2. All dimensions are in millimeters
3. **N** is the total number of terminals
4. Dimension **b** applies to the metalized terminal and a radius on the other end of it, dimension **b** should not be measured in that radius area.
5. Coplanarity applies to the terminals and all the other bottom surface metallization.
6. Pin plating is 100% Sn (tin) with a nominal thickness of 17.8 µm.


TRANSPARENT VIEW

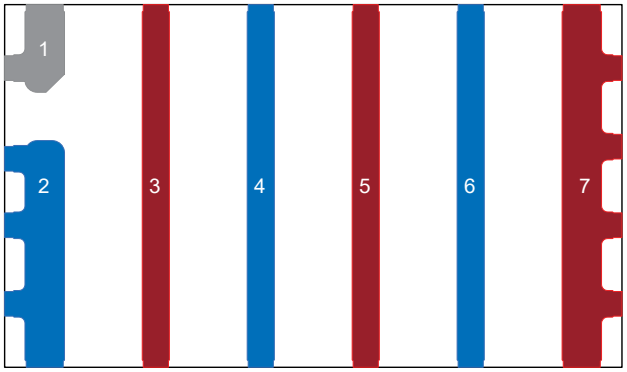

PIN	Description
1	Gate
2	Source
3	Drain
4	Source
5	Drain
6	Source
7	Drain

RECOMMENDED LAND PATTERN

(units in mm)

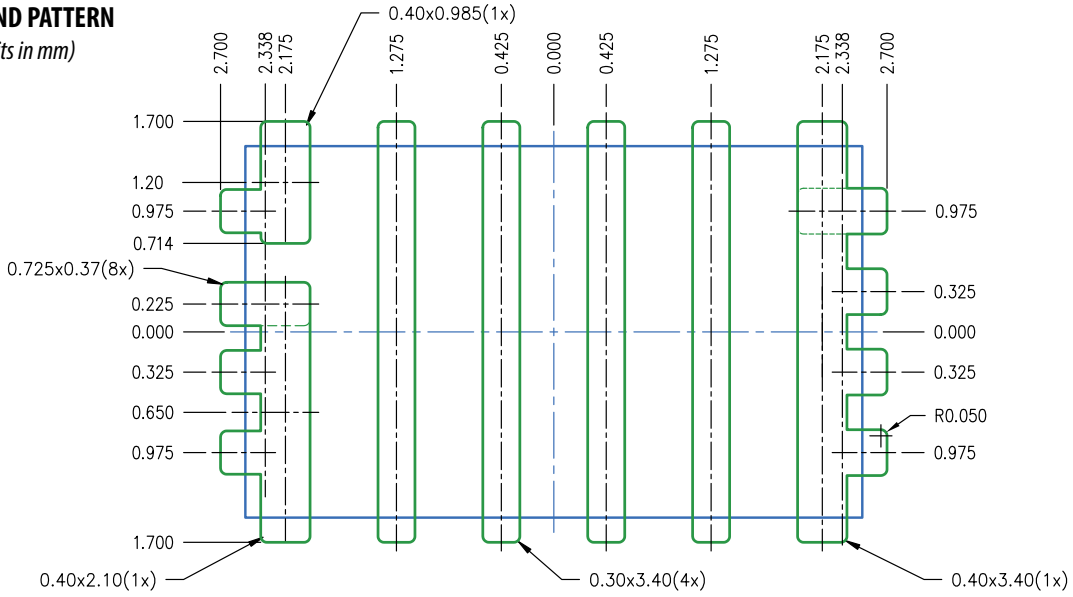

Legend:

Part outline


Mask Opening

Radius = 0.05

Land pattern is solder mask defined.

RECOMMENDED STENCIL DRAWING

(units in mm)

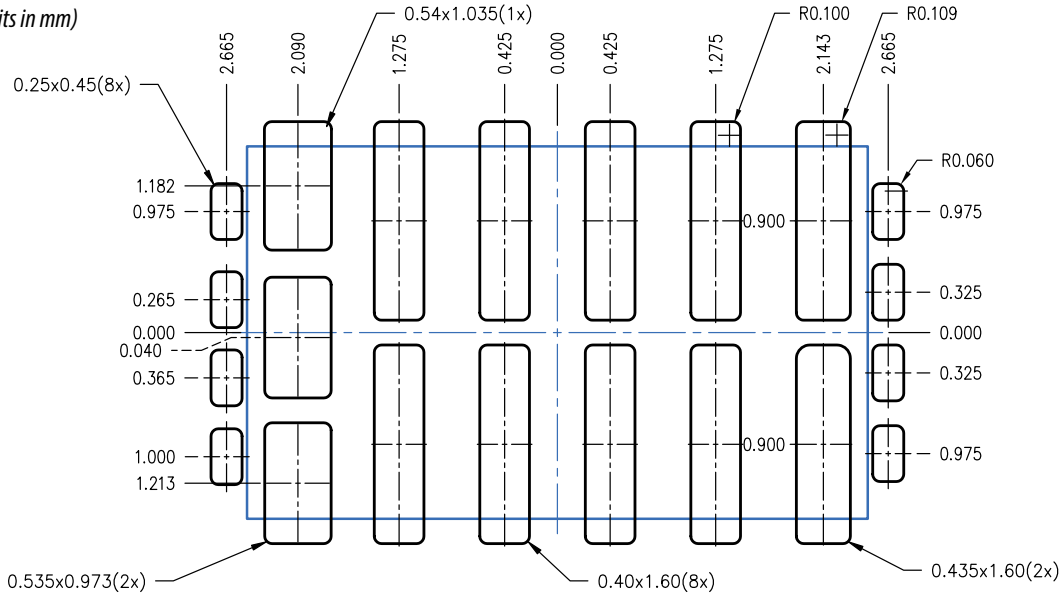

Legend:

Part outline

Stencil opening


Recommended stencil should be 4 mil (100 µm) thick, must be laser cut, openings per drawing. Intended for use with SAC305 Type 4 solder, reference 88.5% metals content.

The corner has a radius of R60.


EPC has tested this stencil design and not found any scooping issues.

RECOMMENDED COPPER DRAWING

(units in mm)

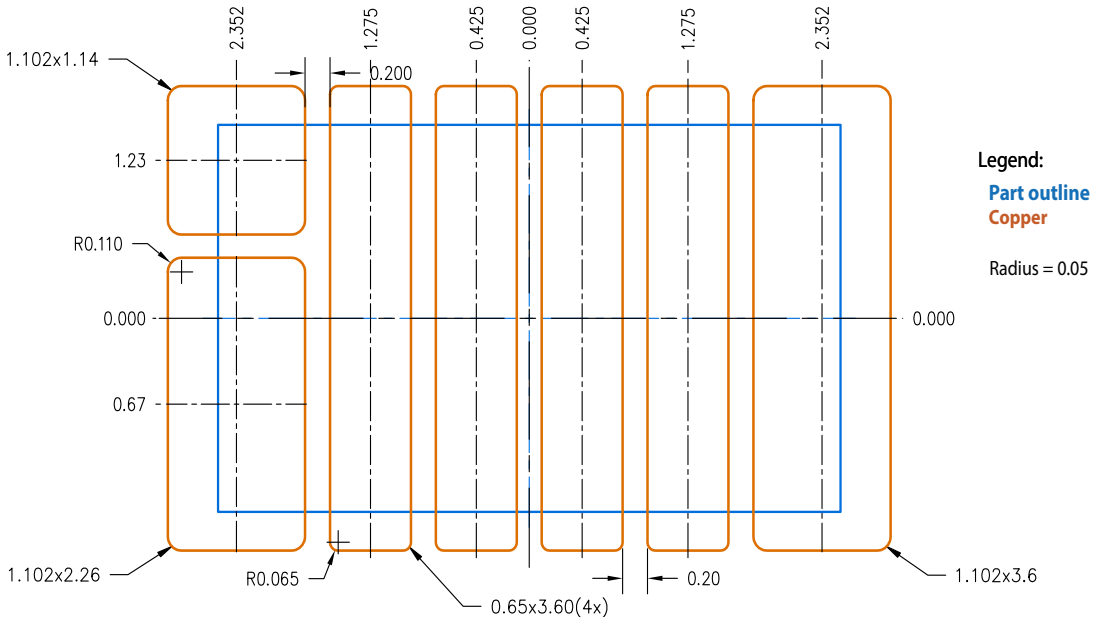

3D COMPOSITE

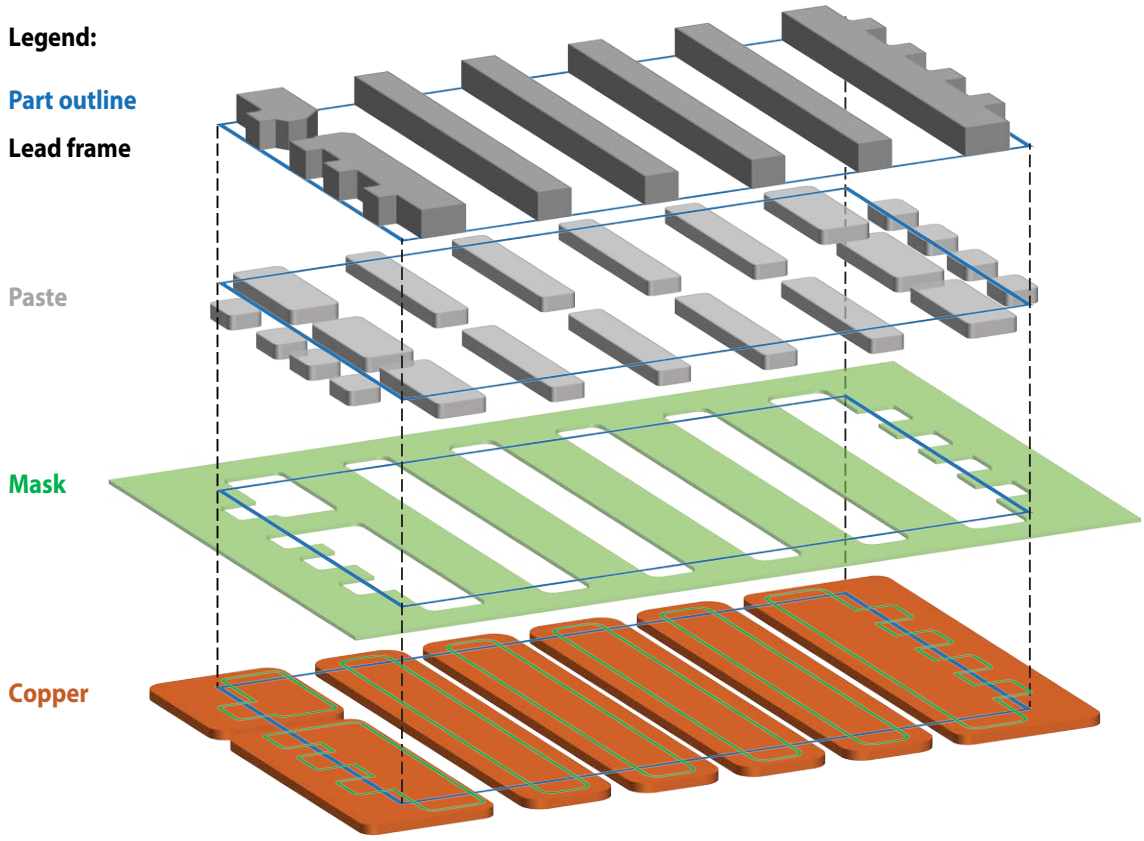

ADDITIONAL RESOURCES AVAILABLE

Solder mask defined pads are recommended for best reliability.

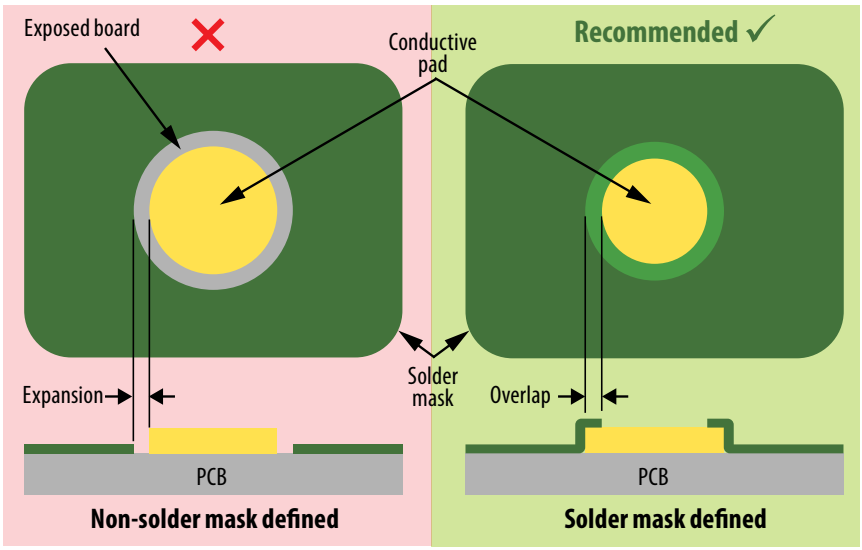


Figure 17: Solder mask defined versus non-solder mask defined pad

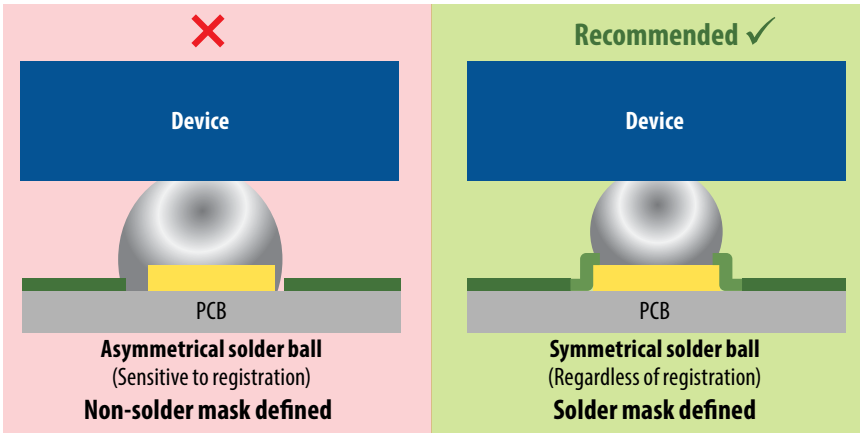


Figure 18: Effect of solder mask design on the solder ball symmetry

- Assembly resources – https://epc-co.com/epc/Portals/0/epc/documents/product-training/Appnote_GaNassembly.pdf
- Library of Altium footprints for production FETs and ICs – https://epc-co.com/epc/documents/altium-files/EPC%20Altium%20Library.zip (for preliminary device Altium footprints, contact EPC)

Efficient Power Conversion Corporation (EPC) reserves the right to make changes without further notice to any products herein to improve reliability, function or design. EPC does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

eGaN® is a registered trademark of Efficient Power Conversion Corporation.

EPC Patent Listing: https://epc-co.com/epc/about-epc/patents

Information subject to change without notice.

Change Log

STATUS	VERSION	DATE	REMARK
1.1	MSL2 changed to MSL1	29 April 2026	Production release
1.0	Production datasheet	20 November 2025	Production release

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.