MIC94030/94031

TinyFET® P-Channel MOSFET

General Description

The MIC94030 and MIC94031 are 4-terminal silicon gate P-channel MOSFETs that provide low on-resistance in a very small package.

Designed for high-side switch applications where space is critical, the MIC94030/1 exhibits an on-resistance of typically 0.75Ω at 4.5V gate-to-source voltage. The MIC94030/1 also operates with only 2.7V gate-to-source voltage.

The MIC94030 is the basic 4-lead P-channel MOSFET. The MIC94031 is a variation that includes an internal gate pull-up resistor that can reduce the system parts count in many applications.

The 4-terminal SOT-143 package permits a substrate connection separate from the source connection. This 4-terminal configuration improves the θ_{JA} (improved heat dissipation) and makes analog switch applications practical.

The small size, low threshold, and low $R_{DS(on)}$ make the MIC94030/1 the ideal choice for PCMCIA card sleep mode or distributed power management applications.

Features

- 13.5V minimum drain-to-source breakdown
- 0.75Ω typical on-resistance
  - at 4.5V gate-to-source voltage
- 0.45Ω typical on-resistance
  - at 10V gate-to-source voltage
- Operates with 2.7V gate-to-source voltage
- Separate substrate connection for added control
- Industry's smallest surface mount package


Applications

- Distributed power management
- PCMCIA card power management
- Battery-powered computers, peripherals
- Hand-held bar-code scanners
- Portable communications equipment

Ordering Information


Part Number				Junction Temp. Range	Package
Standard	Marking	Pb-Free	Marking		
MIC94030BM4	P30	MIC94030YM4	P30	–55° to +150°C	SOT-143
MIC94031BM4	P31	MIC94031YM4	P31	–55° to +150°C	SOT-143

Pin Configuration

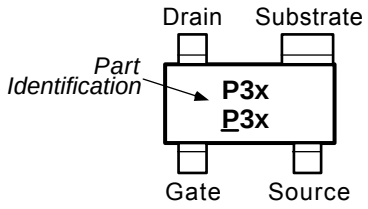


SOT-143 (M4)

Typical PCB Layout




TinyFET is a registered trademark of Micrel, Inc.

Schematic Symbol




Schematic Symbol

Functional Diagrams



MIC94030



MIC94031

Absolute Maximum Ratings[1]

Voltage and current values are negative. Signs not shown for clarity.

Drain-to-Source Voltage (pulse)..... 16V
Gate-to-Source Voltage (pulse). 16V
Continuous Drain Current
  T_A = 25°C..... 1A
  T_A = 100°C..... 0.5A
Operating Junction Temperature ..... –55°C to +150°C
Storage Temperature..... –55°C to +150°C

Total Power Dissipation
  T_A = 25°C..... 568mW
  T_A = 100°C..... 227mW
Thermal Resistance
  θ_{JA}..... 220°C/W
  θ_{JC}..... 130°C/W
Lead Temperature
  1/16" from case, 10s..... +300°C

Electrical Characteristics

Voltage and current values are negative. Signs not shown for clarity.


Symbol	Parameter	Condition (Note 1)	Min	Typ	Max	Units
V_{BDSS}	Drain-Source Breakdown Voltage	V_{GS} = 0V, I_D = 250µA	13.5			V
V_{GS}	Gate Threshold Voltage	V_{DS} = V_{GS}, I_D = 250µA	0.6	1.0	1.4	V
I_{GSS}	Gate-Body Leakage	V_{DS} = 0V, V_{GS} = 12V, **Note 2, Note 3**			1	µA
R_{GS}	Gate-Source Resistor	V_{DS} = 0V, V_{GS} = 12V, **Note 2, Note 4**	500	750	1000	kΩ
C_{ISS}	Input Capacitance	V_{GS} = 0V, V_{DS} = 12V		100		pF
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 12V, V_{GS} = 0V			25	µA
		V_{DS} = 12V, V_{GS} = 0V, T_J = 125°C		0.010	250	µA
$I_{D(ON)}$	On-State Drain Current	V_{DS} = 10V, V_{GS} = 10V, **Note 5**		6.3		A
$R_{DS(ON)}$	Drain-Source On-State Resist	V_{GS} = 10V, I_D = 100mA V_{GS} = 4.5V, I_D = 100mA V_{GS} = 2.7V, I_D = 100mA		0.45 0.75 1.20	1.00	Ω Ω Ω
g_{FS}	Forward Transconductance	V_{DS} = 10V, I_D = 200mA, **Note 5**		480		mS

Notes:


1. T_A = 25°C unless noted. Substrate connected to source for all conditions.
2. ESD gate protection diode conducts during positive gate-to-source voltage excursions.
3. MIC94030 only.
4. MIC94031 only.
5. Pulse Test: Pulse Width ≤ 80µsec, Duty Cycle ≤ 0.5%.

Typical Characteristics


On Resistance vs. Drain Current at 25°C

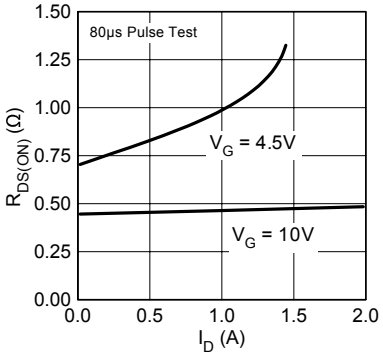


On Resistance vs. Drain Current at 125°C

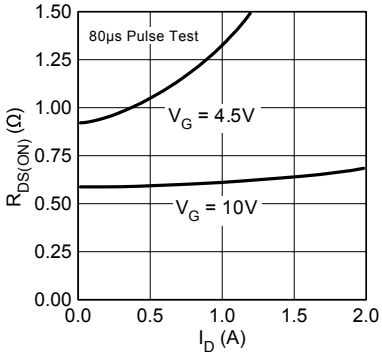


Drain Characteristics

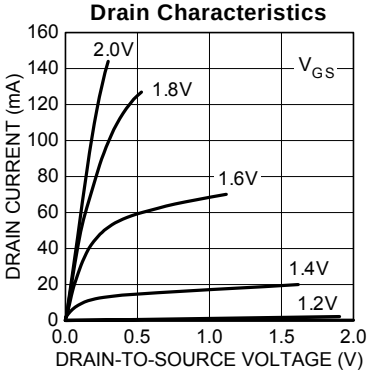

Drain Characteristics

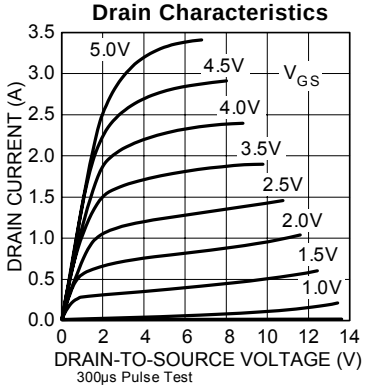

Drain Characteristics

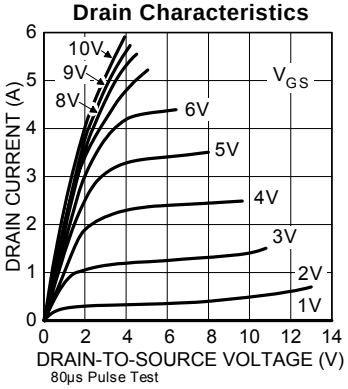

Typical Applications




Figure 1. Power Switch Application


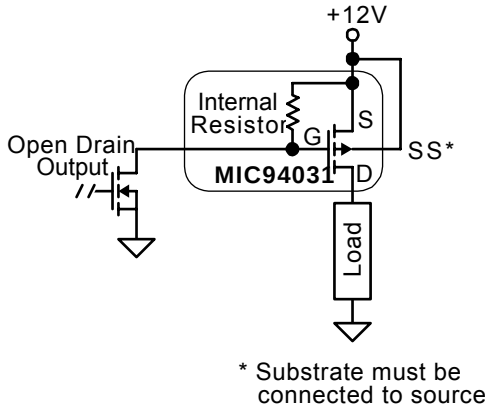



Figure 2. Power Control Application

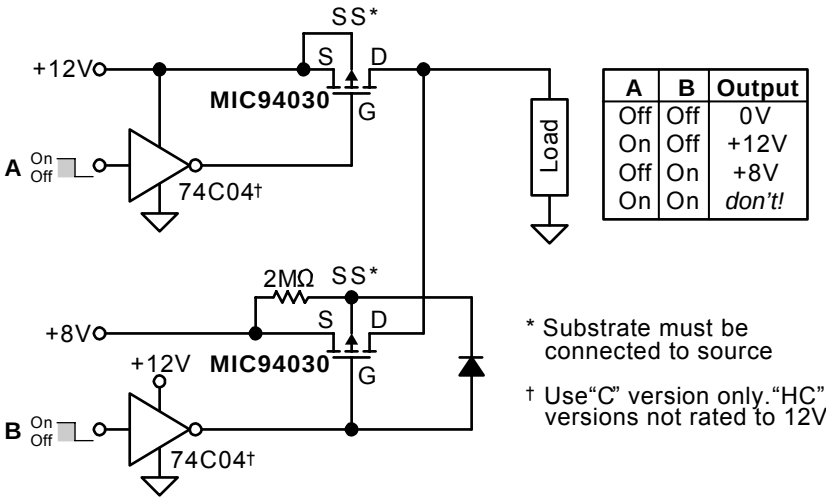

A	B	Output
Off	Off	0V
On	Off	+12V
Off	On	+8V
On	On	*don't!*

Figure 3. Analog Switch Application

Package Information

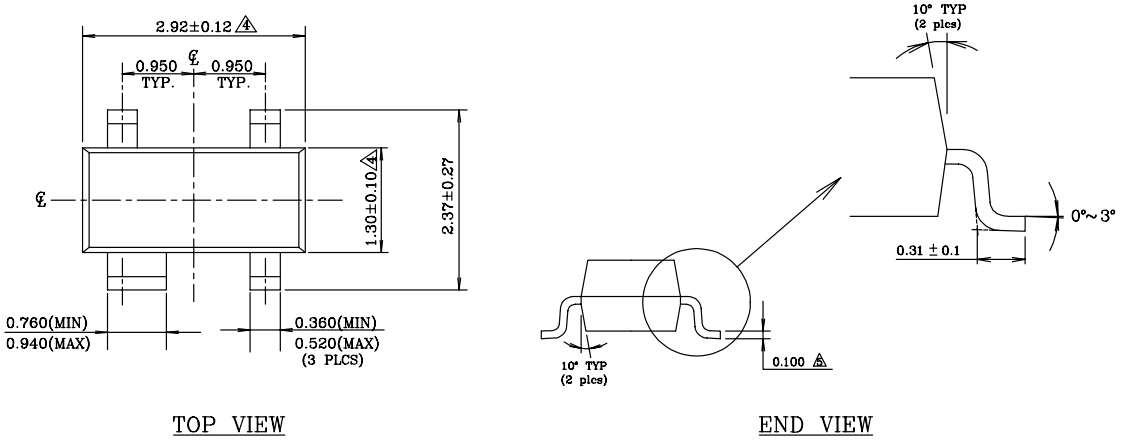

NOTE:

1. Dimensions and tolerances are as per ANSI Y14.5M, 1982.
2. Package surface to be mirror finish.
3. Die is facing up for mold & trim/form.
4. Dimension are exclusive of mold flash and gate burr.
5. Dimension are exclusive of solder plating.

SOT-143 (M4)

MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA
TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB http:/www.micrel.com

The information furnished by Micrel in this data sheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 1997 Micrel, Incorporated.

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.