NTMFD4902NF

MOSFET – Power, Dual, N-Channel with Integrated Schottky, SO8FL

30 V, High Side 18 A / Low Side 23 A

ON Semiconductor®

www.onsemi.com


Features

- Co−Packaged Power Stage Solution to Minimize Board Space
- Low Side MOSFET with Integrated Schottky
- Minimized Parasitic Inductances
- Optimized Devices to Reduce Power Losses
- These Devices are Pb−Free, Halogen Free/BFR Free and are RoHS Compliant


Applications

- DC−DC Converters
- System Voltage Rails
- Point of Load

$V_{(BR)DSS}$	$R_{DS(ON)}$ MAX	I_D MAX
Q1 Top FET 30 V	6.5 mΩ @ 10 V	18 A
	10 mΩ @ 4.5 V	
Q2 Bottom FET 30 V	4.1 mΩ @ 10 V	23 A
	6.2 mΩ @ 4.5 V	

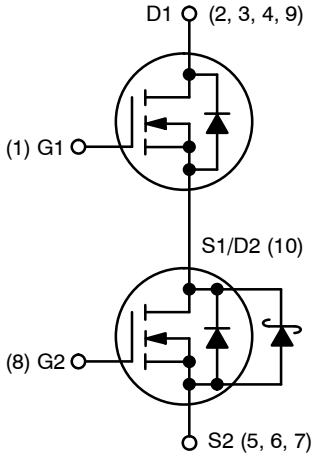


PIN CONNECTIONS



(Bottom View)

MARKING DIAGRAM



DFN8
CASE 506BX



4902NF = Specific Device Code
A = Assembly Location
Y = Year
W = Work Week
ZZ = Lot Traceability

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 5 of this data sheet.

© Semiconductor Components Industries, LLC, 2015

MAXIMUM RATINGS (T_J = 25°C unless otherwise stated)

Parameter				Symbol	Value	Unit
Drain−to−Source Voltage			Q1	V_{DSS}	30	V
Drain−to−Source Voltage			Q2			
Gate−to−Source Voltage			Q1	V_{GS}	±20	V
Gate−to−Source Voltage			Q2			
Continuous Drain Current $R_{\theta JA}$ (Note 1)	Steady State	T_A = 25°C	Q1	I_D	13.5	A
		T_A = 85°C			9.7	
		T_A = 25°C	Q2		17.5	
		T_A = 85°C			12.6	
Power Dissipation RθJA (Note 1)		T_A = 25°C	Q1	P_D	1.90	W
			Q2		1.99	
Continuous Drain Current $R_{\theta JA} \le 10$ s (Note 1)		T_A = 25°C	Q1	I_D	18.2	A
		T_A = 85°C			13.1	
		T_A = 25°C	Q2		23	
		T_A = 85°C			16.6	
Power Dissipation $R_{\theta JA} \le 10$ s (Note 1)		T_A = 25°C	Q1	P_D	3.45	W
			Q2		3.45	
Continuous Drain Current $R_{\theta JA}$ (Note 2)		T_A = 25°C	Q1	I_D	10.3	A
		T_A = 85°C			7.4	
		T_A = 25°C	Q2		13.3	
		T_A = 85°C			9.6	
Power Dissipation $R_{\theta JA}$ (Note 2)		T_A = 25 °C	Q1	P_D	1.10	W
			Q2		1.16	
Pulsed Drain Current		TA = 25°C tp = 10 μs	Q1	I_{DM}	60	A
			Q2		80	
Operating Junction and Storage Temperature			Q1	T_J, T_{STG}	−55 to +150	°C
			Q2			
Source Current (Body Diode)			Q1	I_S	3.4	A
			Q2		4.9	
Drain to Source dV/dt				dV/dt	6.0	V/ns
Single Pulse Drain−to−Source Avalanche Energy (T_J = 25C, V_{DD} = 50 V, V_{GS} = 10 V, I_L = XX A_{pk}, L = 0.1 mH, R_G = 25 Ω)		24 A	Q1	EAS	28.8	mJ
		27 A	Q2	EAS	36.5	
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)				T_L	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Surface−mounted on FR4 board using 1 sq−in pad, 2 oz Cu.
2. Surface−mounted on FR4 board using the minimum recommended pad size of 100 mm^2.

THERMAL RESISTANCE MAXIMUM RATINGS

Parameter	FET	Symbol	Value	Unit
Junction−to−Ambient − Steady State (Note 3)	Q1	$R_{\theta JA}$	65.9	°C/W
	Q2		62.8	
Junction−to−Ambient − Steady State (Note 4)	Q1	$R_{\theta JA}$	113.2	
	Q2		108	
Junction−to−Ambient − (t ≤ 10 s) (Note 3)	Q1	$R_{\theta JA}$	36.2	
	Q2		36.2	

3. Surface−mounted on FR4 board using 1 sq−in pad, 2 oz Cu.
4. Surface−mounted on FR4 board using the minimum recommended pad size of 100 mm^2.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise specified)

Parameter	FET	Symbol	Test Condition		Min	Typ	Max	Unit
OFF CHARACTERISTICS								
Drain−to−Source Breakdown Voltage	Q1	$V_{(BR)DSS}$	V_{GS} = 0 V, I_D = 250 μA		30			V
	Q2		V_{GS} = 0 V, I_D = 1.0 mA		30			
Drain−to−Source Breakdown Voltage Temperature Coefficient	Q1	$V_{(BR)DSS}$ / T_J				18		mV / °C
	Q2					15		
Zero Gate Voltage Drain Current	Q1	I_{DSS}	V_{GS} = 0 V, V_{DS} = 24 V	T_J = 25°C			1	μA
				T_J = 125°C			10	
	Q2		V_{GS} = 0 V, V_{DS} = 24 V	T_J = 25°C			500	
Gate−to−Source Leakage Current	Q1	I_{GSS}	V_{GS} = 0 V, VDS = ±20 V				±100	nA
	Q2						±100	
ON CHARACTERISTICS (Note 5)								
Gate Threshold Voltage	Q1	$V_{GS(TH)}$	V_{GS} = VDS, I_D = 250 μA		1.2		2.2	V
	Q2				1.2		2.2	
Negative Threshold Temperature Coefficient	Q1	$V_{GS(TH)}$ / T_J				4.5		mV / °C
	Q2					4.0		
Drain−to−Source On Resistance	Q1	$R_{DS(on)}$	V_{GS} = 10 V	I_D = 10 A		5.2	6.5	mΩ
			V_{GS} = 4.5 V	I_D = 10 A		8.0	10	
	Q2		V_{GS} = 10 V	I_D = 15 A		3.3	4.1	
			V_{GS} = 4.5 V	I_D = 15 A		5.0	6.2	
Forward Transconductance	Q1	g_{FS}	V_{DS} = 1.5 V, I_D = 10 A			28		S
	Q2					35		
CHARGES, CAPACITANCES & GATE RESISTANCE								
Input Capacitance	Q1	C_{ISS}	V_{GS} = 0 V, f = 1 MHz, V_{DS} = 15 V			1150		pF
	Q2					1590		
Output Capacitance	Q1	C_{OSS}				360		
	Q2					813		
Reverse Capacitance	Q1	C_{RSS}				105		
	Q2					83		

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Pulse Test: pulse width ≤ 300 μs, duty cycle ≤ 2%.
6. Switching characteristics are independent of operating junction temperatures.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise specified)

Parameter	FET	Symbol	Test Condition	Min	Typ	Max	Unit
CHARGES, CAPACITANCES & GATE RESISTANCE							
Total Gate Charge	Q1	$Q_{G(TOT)}$	V_{GS} = 4.5 V, V_{DS} = 15 V; I_D = 10 A		9.7		nC
	Q2				11.5		
Threshold Gate Charge	Q1	$Q_{G(TH)}$			1.1		
	Q2				1.4		
Gate−to−Source Charge	Q1	Q_{GS}			3.3		
	Q2				4.2		
Gate−to−Drain Charge	Q1	Q_{GD}			3.7		
	Q2				3.4		
Total Gate Charge	Q1	$Q_{G(TOT)}$	V_{GS} = 10 V, V_{DS} = 15 V; I_D = 10 A		19.1		nC
	Q2				24.9		
SWITCHING CHARACTERISTICS (Note 6)							
Turn−On Delay Time	Q1	$t_{d(ON)}$	V_{GS} = 4.5 V, V_{DS} = 15 V, I_D = 10 A, R_G = 3.0 Ω		9.0		ns
	Q2				10.5		
Rise Time	Q1	t_r			15		
	Q2				15.2		
Turn−Off Delay Time	Q1	$t_{d(OFF)}$			14		
	Q2				17.7		
Fall Time	Q1	t_f			4.0		
	Q2				4.7		
SWITCHING CHARACTERISTICS (Note 6)							
Turn−On Delay Time	Q1	$t_{d(ON)}$	V_{GS} = 10 V, V_{DS} = 15 V, I_D = 10 A, R_G = 3.0 Ω		6.0		ns
	Q2				7.0		
Rise Time	Q1	t_r			14		
	Q2				14		
Turn−Off Delay Time	Q1	$t_{d(OFF)}$			17		
	Q2				22		
Fall Time	Q1	t_f			3.0		
	Q2				3.3		
DRAIN−SOURCE DIODE CHARACTERISTICS							
Forward Voltage	Q1	V_{SD}	V_{GS} = 0 V, I_S = 3 A, T_J = 25°C		0.75	1.0	V
			V_{GS} = 0 V, I_S = 3 A, T_J = 125°C		0.62		
	Q2		V_{GS} = 0 V, I_S = 2 A, T_J = 25°C		0.37	0.70	
			V_{GS} = 0 V, I_S = 2 A, T_J = 125°C		0.31		

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Pulse Test: pulse width ≤ 300 μs, duty cycle ≤ 2%.
6. Switching characteristics are independent of operating junction temperatures.

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise specified)

Parameter	FET	Symbol	Test Condition	Min	Typ	Max	Unit
DRAIN−SOURCE DIODE CHARACTERISTICS							
Reverse Recovery Time	Q1	t_{RR}	V_{GS} = 0 V, d_{IS}/d_t = 100 A/μs, I_S = 3 A		23		ns
	Q2				24.5		
Charge Time	Q1	ta			12		
	Q2				13		
Discharge Time	Q1	tb			11		
	Q2				11.5		
Reverse Recovery Charge	Q1	Q_{RR}			12		nC
	Q2				24		
PACKAGE PARASITIC VALUES							
Source Inductance	Q1	L_S	T_A = 25°C		0.38		nH
	Q2				0.65		
Drain Inductance	Q1	L_D			0.054		nH
	Q2				0.007		
Gate Inductance	Q1	L_G			1.5		nH
	Q2				1.5		
Gate Resistance	Q1	R_G			0.8		Ω
	Q2				0.8		

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

5. Pulse Test: pulse width ≤ 300 μs, duty cycle ≤ 2%.
6. Switching characteristics are independent of operating junction temperatures.

ORDERING INFORMATION

Device	Package	Shipping†
NTMFD4902NFT1G	DFN8 (Pb−Free)	1500 / Tape & Reel
NTMFD4902NFT3G	DFN8 (Pb−Free)	5000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

TYPICAL CHARACTERISTICS – Q1

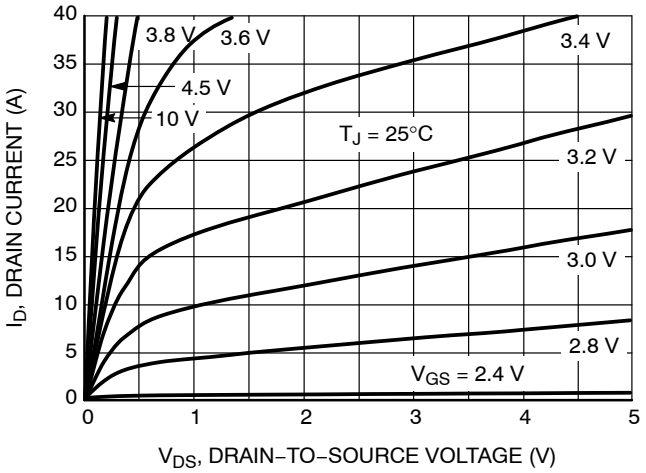


Figure 1. On−Region Characteristics

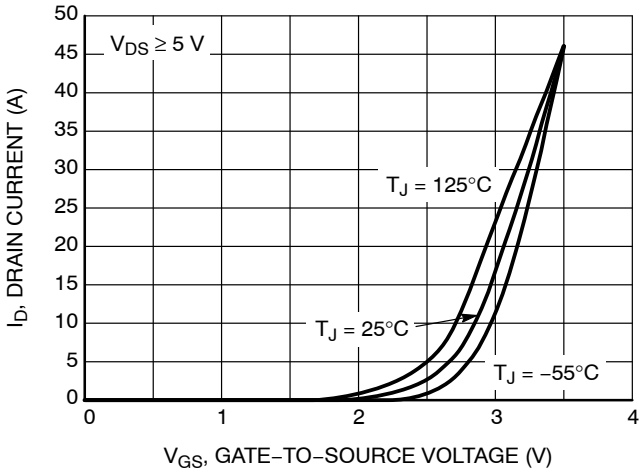


Figure 2. Transfer Characteristics

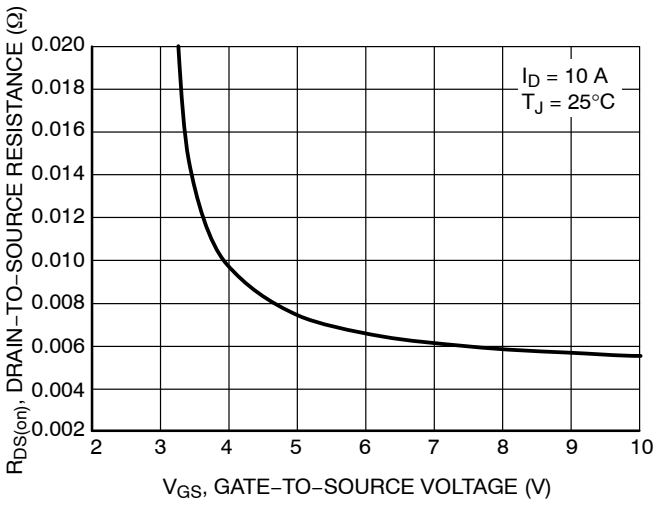


Figure 3. On−Resistance vs. Gate−to−Source Resistance

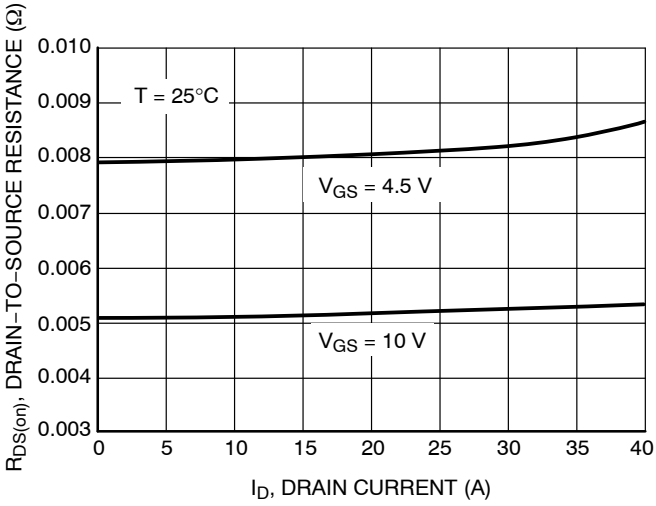


Figure 4. On−Resistance vs. Drain Current and Gate Voltage

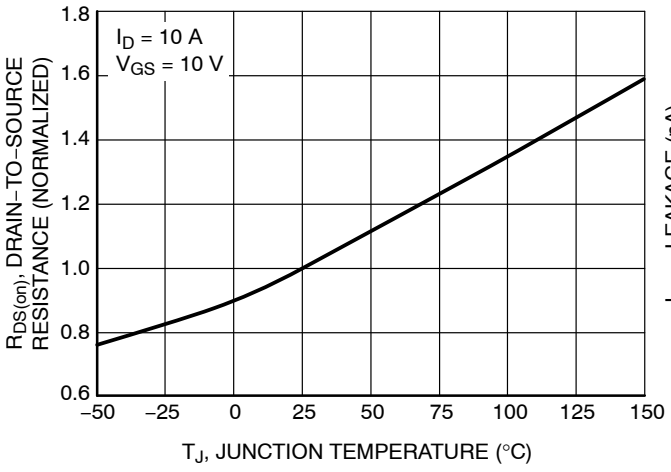


Figure 5. On−Resistance Variation with Temperature

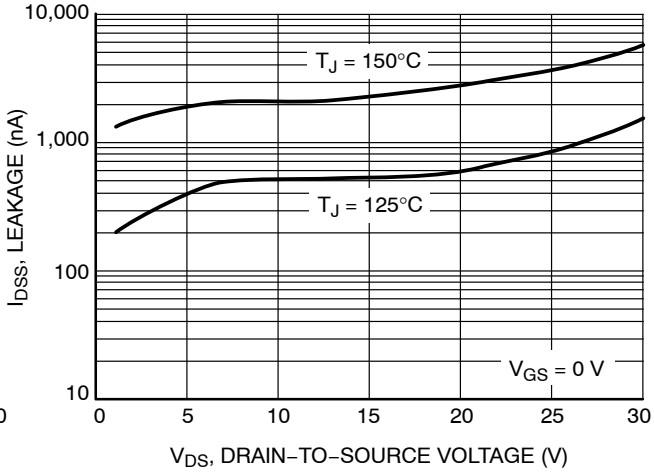


Figure 6. Drain−to−Source Leakage Current vs. Voltage

TYPICAL CHARACTERISTICS – Q1

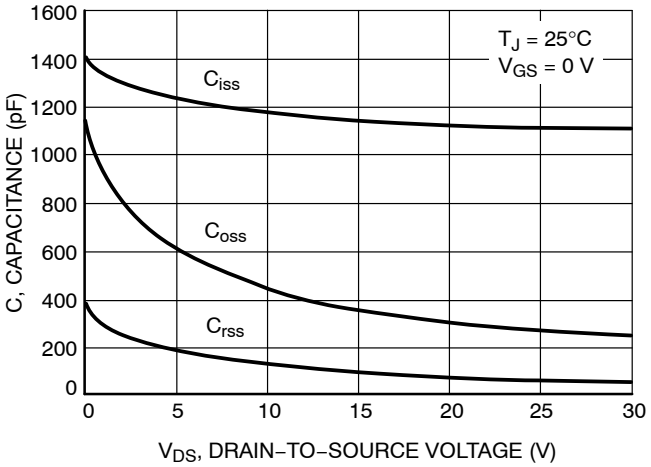


Figure 7. Capacitance Variation

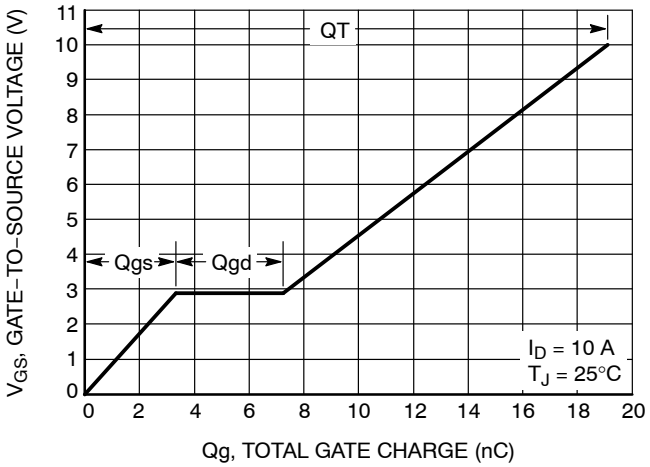


Figure 8. Gate−to−Source and Drain−to−Source Voltage vs. Total Charge

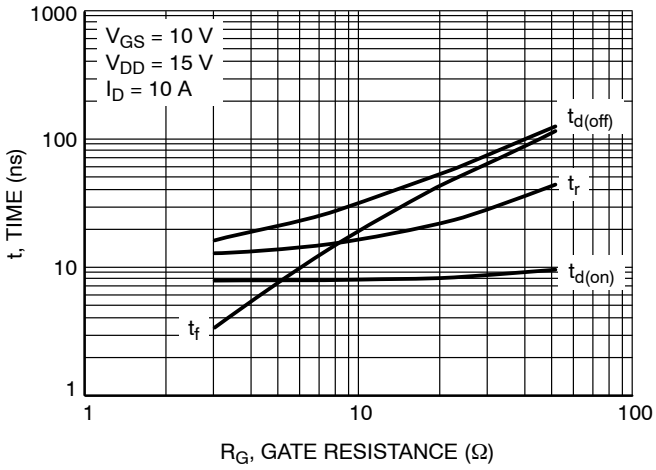


Figure 9. Resistive Switching Time Variation vs. Gate Resistance

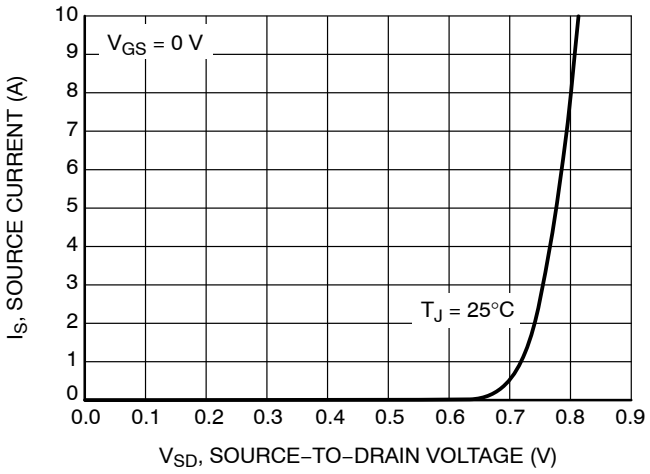


Figure 10. Diode Forward Voltage vs. Current

TYPICAL CHARACTERISTICS – Q2

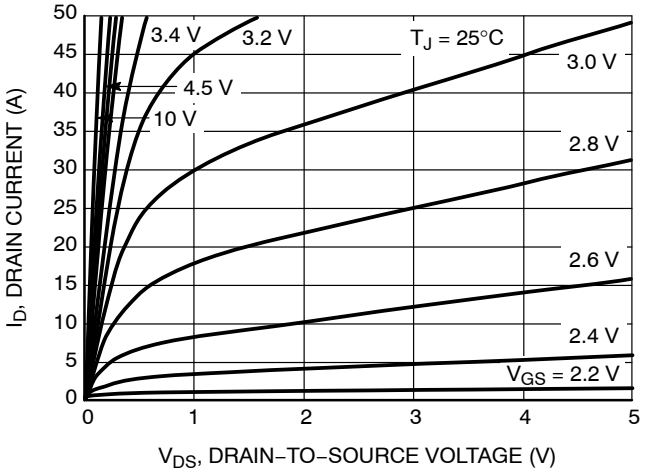


Figure 11. On−Region Characteristics

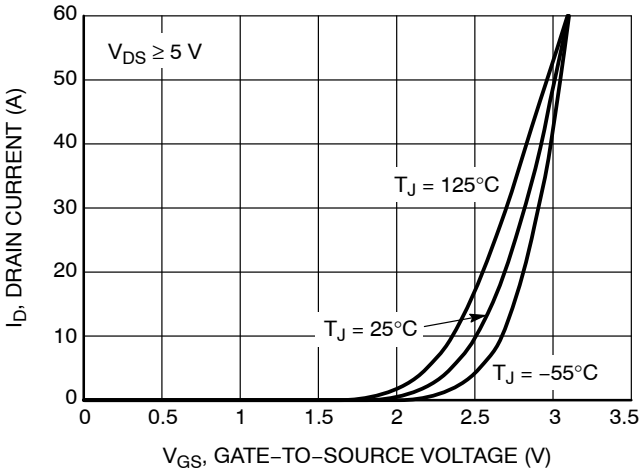


Figure 12. Transfer Characteristics

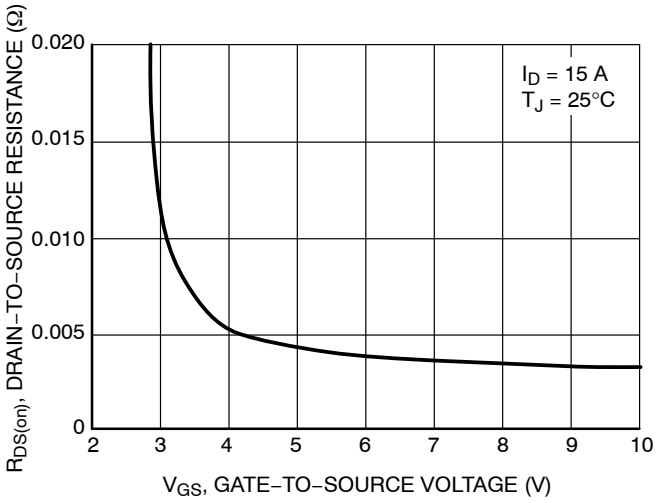


Figure 13. On−Resistance vs. Gate−to−Source Resistance

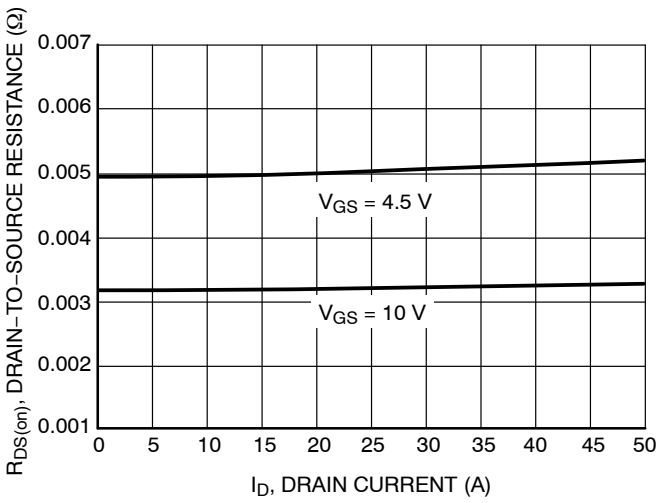


Figure 14. On−Resistance vs. Drain Current and Gate Voltage

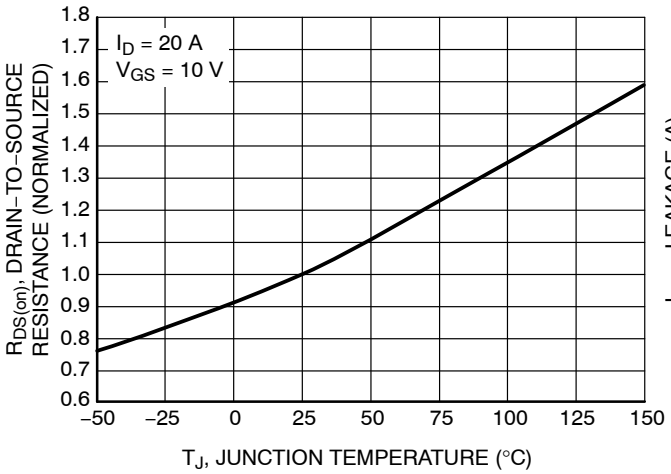


Figure 15. On−Resistance Variation with Temperature

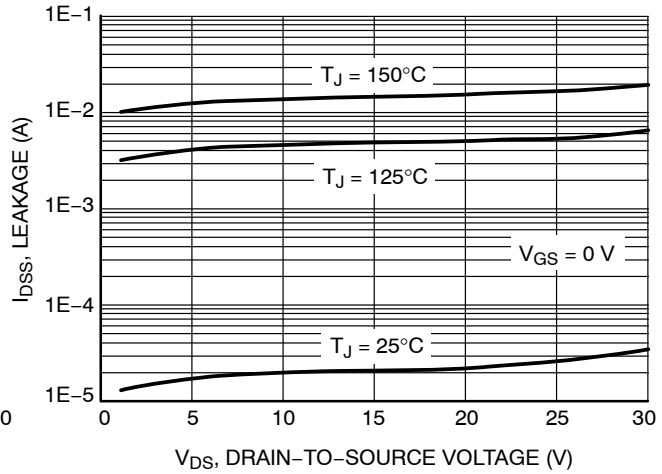


Figure 16. Drain−to−Source Leakage Current vs. Voltage

TYPICAL CHARACTERISTICS – Q2

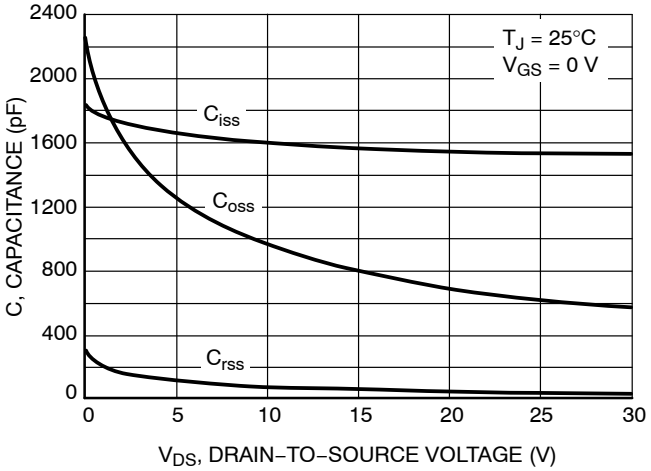


Figure 17. Capacitance Variation

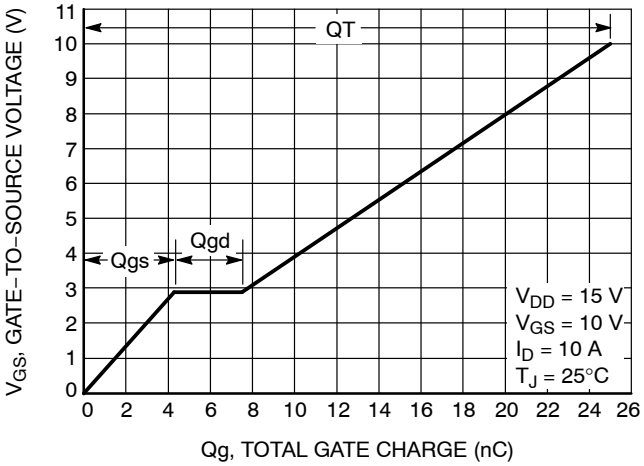


Figure 18. Gate–to–Source and Drain–to–Source Voltage vs. Total Charge

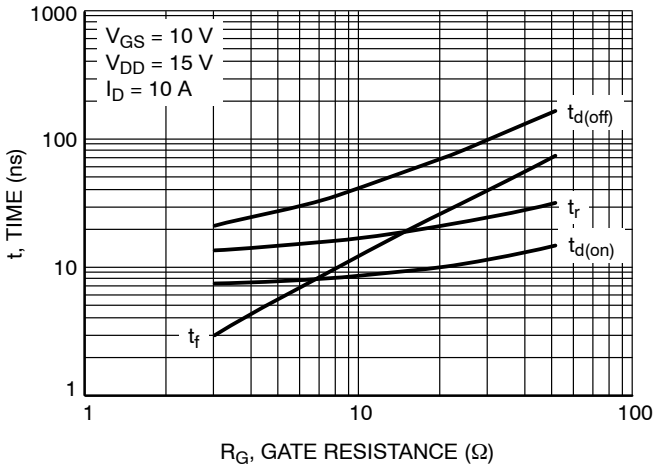


Figure 19. Resistive Switching Time Variation vs. Gate Resistance


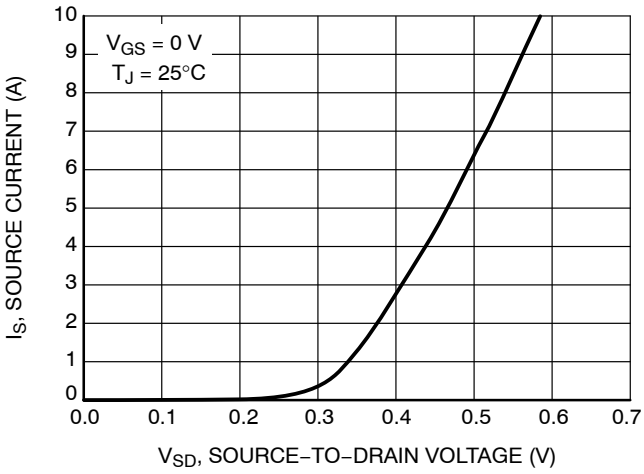


Figure 20. Diode Forward Voltage vs. Current


DFN8 5x6, 1.27P Dual Flag (SO8FL−Dual−Asymmetrical)

CASE 506BX
ISSUE D

DATE 24 JUN 2014




SCALE 2:1

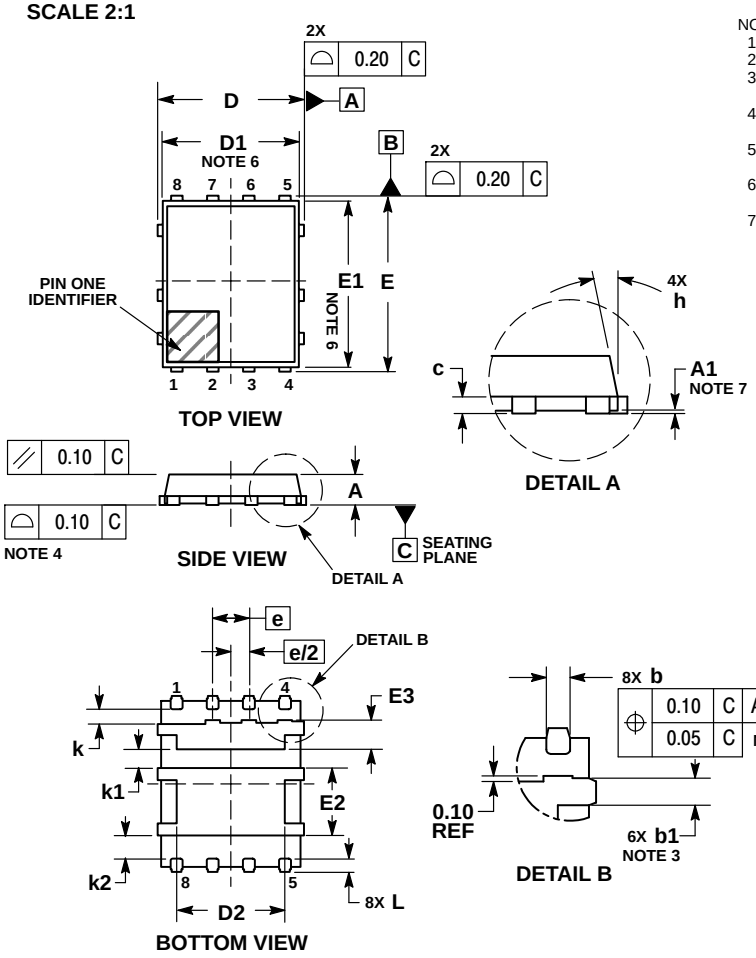

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.25 MM FROM THE TERMINAL TIP.
4. COPLANARITY APPLIES TO THE EXPOSED PADS AS WELL AS THE TERMINALS.
5. DIMENSIONS b AND L ARE MEASURED AT THE PACKAGE SURFACE
6. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.
7. SEATING PLANE IS DEFINED BY THE TERMINALS. A1 IS DEFINED AS THE DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT ON THE PACKAGE BODY.

	MILLIMETERS	
DIM	MIN	MAX
A	0.90	1.10
A1	0.00	0.05
b	0.41	0.61
b1	0.41	0.61
c	0.23	0.33
D	5.00	5.30
D1	4.50	5.10
D2	3.50	4.22
E	6.00	6.30
E1	5.50	6.10
E2	2.27	2.67
E3	0.82	1.22
e	1.27 BSC	
h	−−−	12 °
k	0.39	0.59
k1	0.56	0.76
k2	0.73	0.93
L	0.35	0.55

GENERIC MARKING DIAGRAM*




XXXXXX = Specific Device Code
A = Assembly Location
Y = Year
W = Work Week
ZZ = Lot Traceability

*This information is generic. Please refer to device data sheet for actual part marking.

STYLE 1:
PIN 1. GATE 1
2. DRAIN 1
3. DRAIN 1
4. DRAIN 1
5. SOURCE 2
6. SOURCE 2
7. SOURCE 2
8. GATE 2
9. DRAIN 1
10. SOURCE 1/DRAIN 2

RECOMMENDED SOLDERING FOOTPRINT*

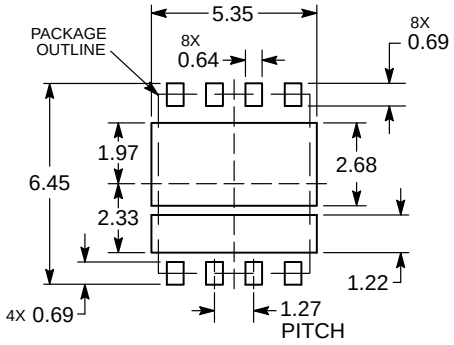

DIMENSION: MILLIMETERS

*For additional information on our Pb−Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	**98AON54291E**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	**DFN8 5X6, 1.27P DUAL FLAG (SO8FL−DUAL−ASYMMETRICAL)**	**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

onsemi, , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.