

Silicon Carbide (SiC) MOSFET – 80 mohm, 1200 V, M1, TO-247-4L

NVH4L080N120SC1

V_{DSS}	$R_{DS(ON)}$ TYP	I_D MAX
1200 V	80 mΩ	29 A

N−CHANNEL MOSFET

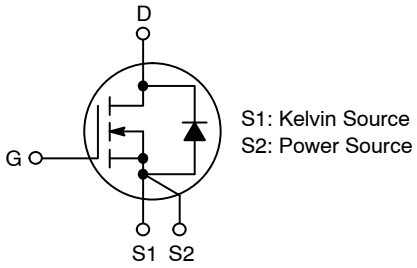



TO−247−4LD
CASE 340CJ

Description

Silicon Carbide (SiC) MOSFET uses a completely new technology that provide superior switching performance and higher reliability compared to Silicon. In addition, the low ON resistance and compact chip size ensure low capacitance and gate charge. Consequently, system benefits include highest efficiency, faster operation frequency, increased power density, reduced EMI, and reduced system size.

Features

- 1200 V @ T_J = 175°C
- Max $R_{DS(on)}$ = 110 mΩ at V_{GS} = 20 V, I_D = 20 A
- High Speed Switching with Low Capacitance
- 100% Avalanche Tested
- AEC−Q101 Qualified and PPAP Capable
- This Device is Halide Free and RoHS Compliant with exemption 7a, Pb−Free 2LI (on second level interconnection)

Applications

- Automotive Auxiliary Motor Drive
- Automotive On Board Charger
- Automotive DC−DC Converter for EV/HEV

MARKING DIAGRAM



A = Assembly Location
Y = Year
WW = Work Week
ZZ = Lot Traceability
NVH4L080N120SC1 = Specific Device Code

ORDERING INFORMATION

Device	Package	Shipping
NVH4L080N120SC1	TO−247−4L	30 Units / Tube

© Semiconductor Components Industries, LLC, 2019

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C, unless otherwise noted)

Symbol	Parameter		Ratings	Unit
V_{DSmax}	Drain−to−Source Voltage		1200	V
V_{GSmax}	Max. Gate−to−Source Voltage	@ T_C < 150°C	−15 / +25	V
V_{GSop}(DC)	Recommended operation Values of Gate − Source Voltage	@ T_C < 150°C	−5 / +20	V
V_{GSop}(AC)	Recommended operation Values of Gate − Source Voltage (f > 1 Hz)	@ T_C < 150°C	−5 / +20	V
I_D	Continuous Drain Current	V_{GS} = 20 V, T_C = 25°C	29	A
		V_{GS} = 20 V, T_C = 100°C	21	
$I_{D(Pulse)}$	Pulse Drain Current	Pulse width tp limited by Tj max	125	A
E_{AS}	Single Pulse Avalanche Energy (Note 1)		171	mJ
P_{tot}	Power Dissipation	T_C = 25°C	170	W
		T_C = 150°C	28	
T_J, T_{STG}	Operating and Storage Junction Temperature Range		−55 to +175	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. E_{AS} of 171 mJ is based on starting Tj = 25°C, L = 1 mH, I_{AS} = 18.5 A, , V_{DD} = 50 V, R_G = 25 Ω.

THERMAL CHARACTERISTICS

Symbol	Parameter	Ratings	Unit
$R_{\theta JC}$	Thermal Resistance, Junction−to−Case	0.88	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction−to−Ambient	40	

Share Feedback
Your Opinion Matters

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Symbol	Parameter	Test Conditions		Min	Typ	Max	Unit
OFF CHARACTERISTICS							
BV_{DSS}	Drain−to−Source Breakdown Voltage	I_D = 100 μA, V_{GS} = 0 V		1200	–	–	V
$\Delta BV_{DSS}/\Delta T_J$	Breakdown Voltage Temperature Coefficient	I_D = 5 mA, Referenced to 25°C		–	0.3	–	V/°C
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 1200 V, V_{GS} = 0 V	T_C = 25°C T_C = 150°C	– –	– –	100 1.0	μA mA
I_{GSS}	Gate−to−Source Leakage Current	V_{GS} = 25 V, V_{DS} = 0 V		–	–	1	μA
I_{GSSR}	Gate−to−Source Leakage Current, Reverse	V_{GS} = −15 V, V_{DS} = 0 V		–	–	−1	μA
ON CHARACTERISTICS							
$V_{GS(th)}$	Gate−to−Source Threshold Voltage	V_{GS} = V_{DS}, I_D = 5 mA		1.8	2.75	4.3	V
$R_{DS(on)}$	Static Drain−to−Source On Resistance	V_{GS} = 20 V, I_D = 20 A		–	80	110	mΩ
		V_{GS} = 20 V, I_D = 20 A, T_C = 150°C		–	127	162	
g_{FS}	Forward Transconductance	V_{DS} = 20 V, I_D = 20 A		–	11.3	–	S
		V_{DS} = 20 V, I_D = 20 A, T_C = 150°C		–	9.8	–	
DYNAMIC CHARACTERISTICS							
C_{iss}	Input Capacitance	V_{DS} = 800 V, V_{GS} = 0 V, f = 1 MHz		–	1112	1670	pF
C_{oss}	Output Capacitance			–	80	120	pF
C_{rss}	Reverse Transfer Capacitance			–	6.5	10	pF
E_{oss}	C_{oss} Stored Energy			–	32	–	μJ
SWITCHING CHARACTERISTICS							
$t_{d(on)}$	Turn-On Delay Time	V_{CC} = 800 V, I_C = 20 A, V_{GS} = −5/20 V, R_G = 4.7 Ω Inductive Load, T_C = 25°C		–	9	18	ns
t_r	Rise Time			–	4.2	10	ns
$t_{d(off)}$	Turn-Off Delay Time			–	26.8	43	ns
t_f	Fall Time			–	5.4	11	ns
E_{on}	Turn−on Switching Loss			–	314	–	μJ
E_{off}	Turn−off Switching Loss			–	32	–	μJ
E_{ts}	Total Switching Loss			–	346	–	μJ
Q_g	Total Gate Charge	V_{DD} = 600 V, I_D = 20 A V_{GS} = −5/20 V		–	56	–	nC
Q_{gs}	Gate−to−Source Charge			–	11	–	nC
Q_{gd}	Gate−to−Drain Charge			–	12	–	nC
R_G	Gate input resistance	f = 1 MHz, D−S short		–	1.7	–	Ω
DIODE CHARACTERISTICS							
V_{SD}	Source−to−Drain Diode Forward Voltage	V_{GS} = −5 V, I_{SD} = 10 A	T_C = 25°C	–	3.7	–	V
			T_C = 150°C	–	3.3	–	
E_{rec}	Reverse Recovery Energy	I_{SD} = 20 A, V_{GS} = −5 V, V_R = 600 V, dI_{SD}/dt = 1000 A/μs	T_C = 150°C	–	29	–	μJ
t_{rr}	Diode Reverse Recovery Time		T_C = 25°C	–	18	–	ns
			T_C = 150°C	–	31	–	
Q_{rr}	Diode Reverse Recovery Charge		T_C = 25°C	–	80	–	nC
			T_C = 150°C	–	212	–	
I_{rrm}	Peak Reverse Recovery Current		T_C = 25°C	–	9	–	A
			T_C = 150°C	–	14	–	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

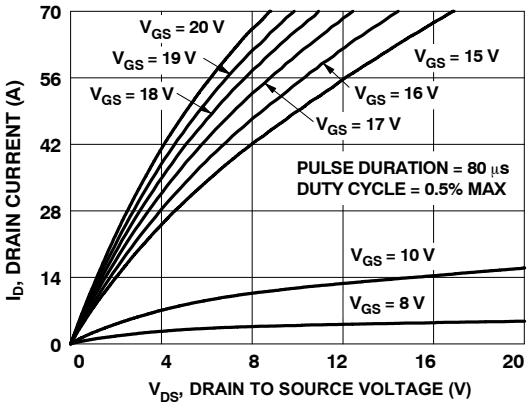


Figure 1. On Region Characteristics

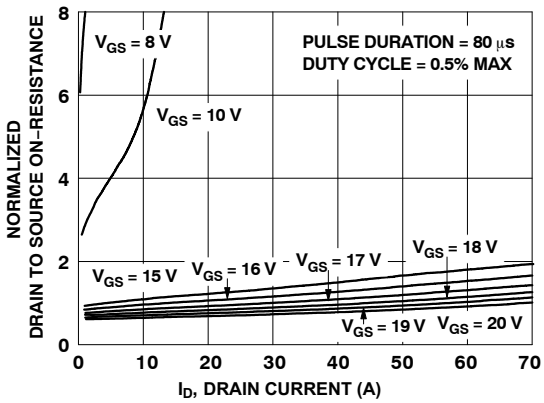


Figure 2. Normalized On−Resistance vs. Drain Current and Gate Voltage

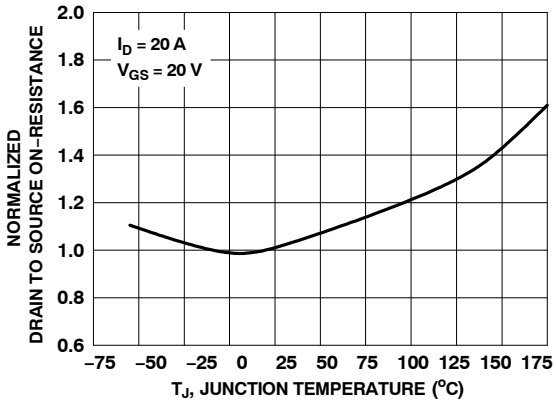


Figure 3. Normalized On Resistance vs. Junction Temperature

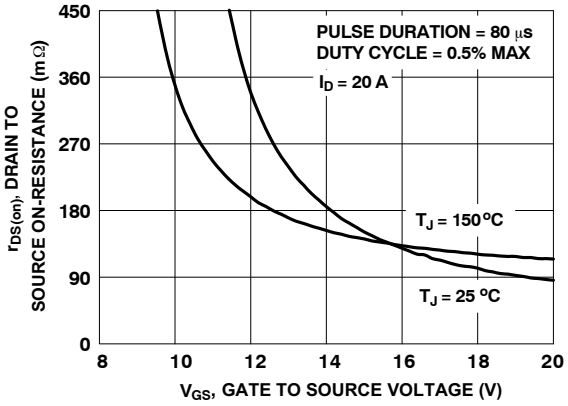


Figure 4. On−Resistance vs. Gate−to−Source Voltage

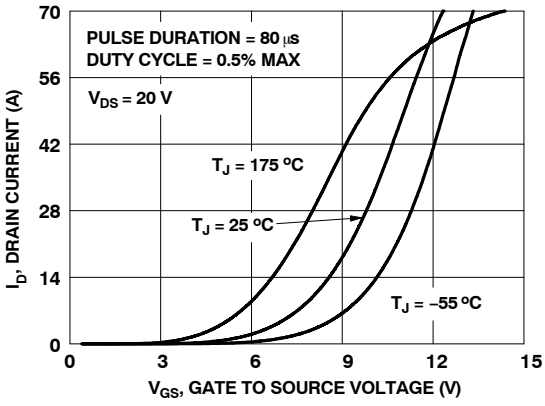


Figure 5. Transfer Characteristics

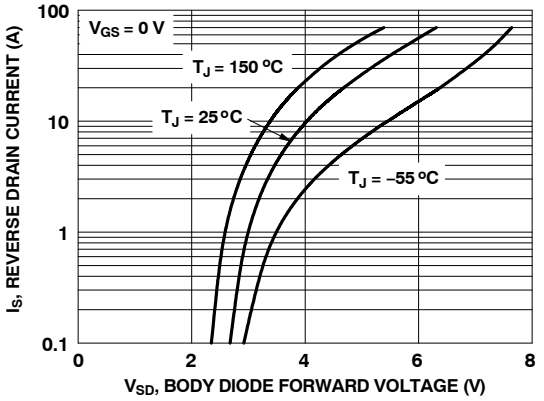


Figure 6. Source−to−Drain Diode Forward Voltage vs. Source Current

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted) (continued)

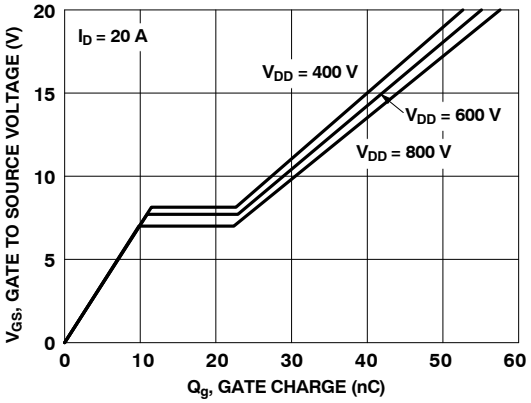


Figure 7. Gate Charge Characteristics

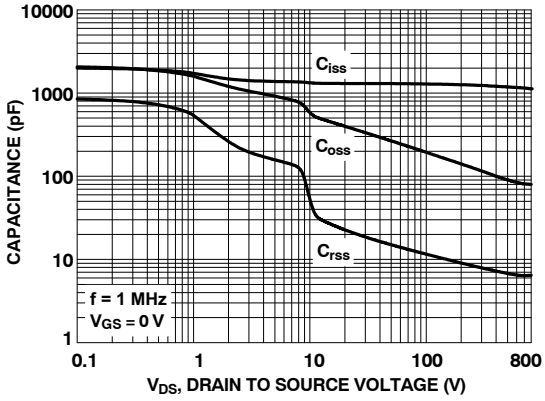


Figure 8. Capacitance vs. Drain−to−Source Voltage

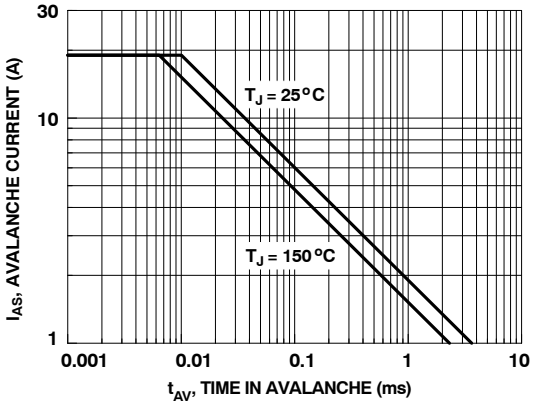


Figure 9. Unclamped Inductive Switching Capability

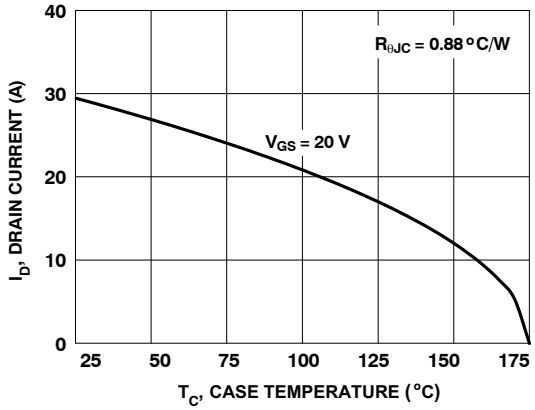


Figure 10. Maximum Continuous Drain Current vs. Case Temperature

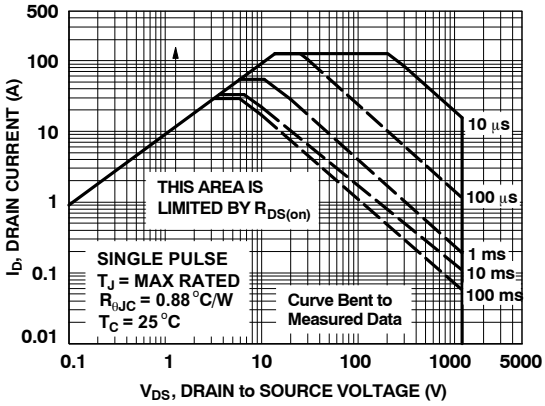


Figure 11. Forward Bias Safe Operating Area

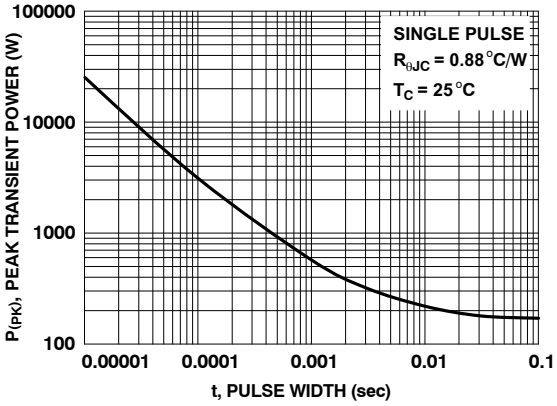


Figure 12. Single Pulse Maximum Power Dissipation

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS T_J = 25°C unless otherwise noted (continued)


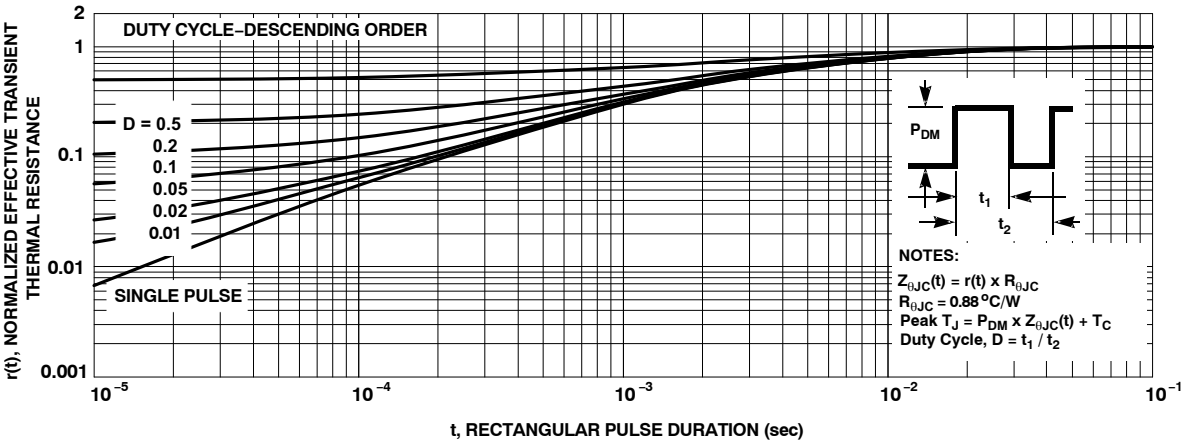


Figure 13. Junction−to−Case Transient Thermal Response Curve

Share Feedback
Your Opinion Matters

TO−247−4LD
CASE 340CJ
ISSUE A

DATE 16 SEP 2019

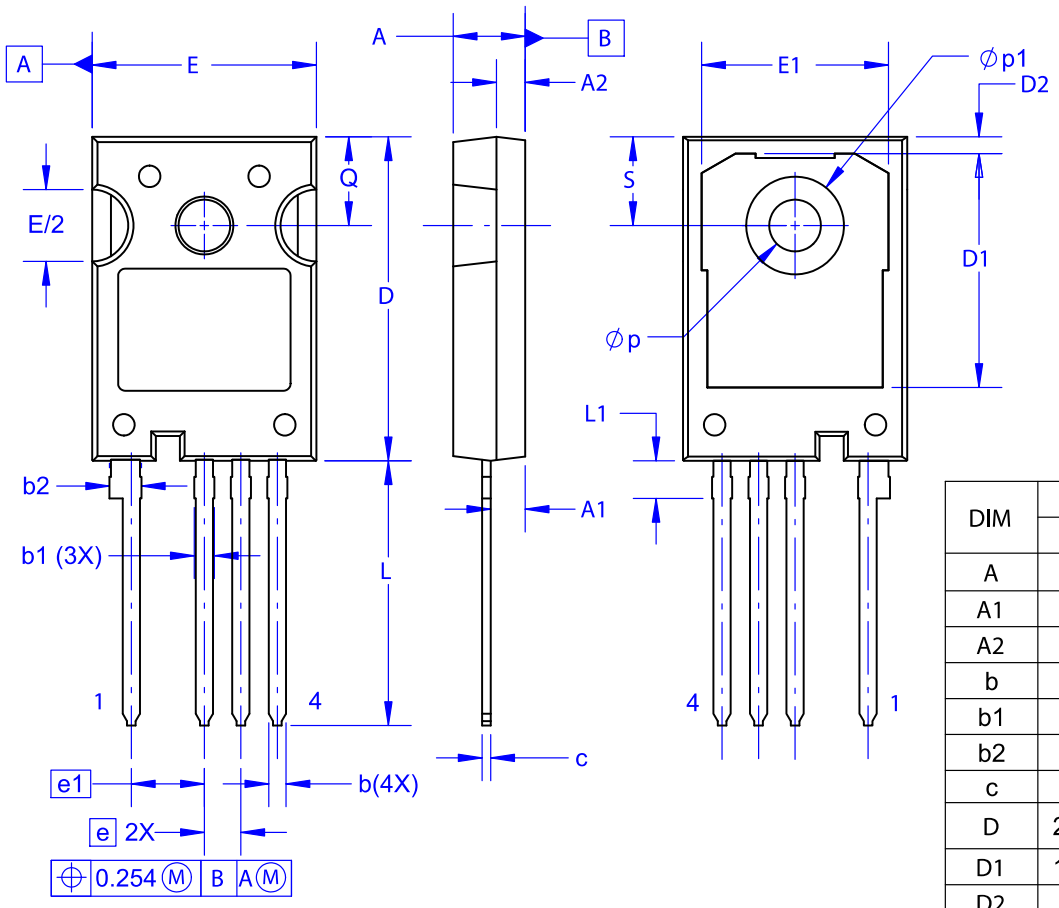

NOTES:

A. NO INDUSTRY STANDARD APPLIES TO THIS PACKAGE.
B. DIMENSIONS ARE EXCLUSIVE OF BURRS,MOLD FLASH,AND TIE BAR EXTRUSIONS.
C. ALL DIMENSIONS ARE IN MILLIMETERS.
D. DRAWING CONFORMS TO ASME Y14.5-2009.

DIM	MILLIMETERS		
	MIN	NOM	MAX
A	4.80	5.00	5.20
A1	2.10	2.40	2.70
A2	1.80	2.00	2.20
b	1.07	1.20	1.33
b1	1.20	1.40	1.60
b2	2.02	2.22	2.42
c	0.50	0.60	0.70
D	22.34	22.54	22.74
D1	16.00	16.25	16.50
D2	0.97	1.17	1.37
e	2.54 BSC		
e1	5.08 BSC		
E	15.40	15.60	15.80
E1	12.80	13.00	13.20
E/2	4.80	5.00	5.20
L	18.22	18.42	18.62
L1	2.42	2.62	2.82
p	3.40	3.60	3.80
p1	6.60	6.80	7.00
Q	5.97	6.17	6.37
S	5.97	6.17	6.37

DOCUMENT NUMBER:	**98AON13852G**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	**TO−247−4LD**	**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

onsemi, , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.