
MOSFET – Power, P-Channel Single ECH8

-30 V, -9 A, 17 mΩ

ECH8310



SOT−28FL/ECH8
CASE 318BF

Features

- 4 V Drive
- Halogen free compliance
- Protection diode in
- This Device is Pb−Free, Halogen Free and RoHS Compliant


Specifications

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C)


Symbol	Parameter	Conditions	Ratings	Unit
V_{DSS}	Drain−to−Source Voltage		−30	V
V_{GSS}	Gate−to−Source Voltage		±20	V
I_D	Drain Current (DC)		−9	A
I_{DP}	Drain Current (Pulse)	PW ≤ 10 μs, duty cycle ≤ 1%	−60	A
P_D	Allowable Power Dissipation	When mounted on ceramic substrate (900 mm^2 X 0.8 mm)	1.5	W
Tch	Channel Temperature		150	°C
Tstg	Storage Temperature		−55 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

ELECTRICAL CONNECTION



MARKING DIAGRAM



ORDERING INFORMATION

Device	Package	Shipping†
ECH8310−TL−H	SOT−28FL ECH8 (Pb−Free)	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

© Semiconductor Components Industries, LLC, 2013

ELECTRICAL CHARACTERISTICS (T_A = 25°C)

Symbol	Parameter	Conditions	Ratings			Unit
			Min	Typ	Max	
$V_{(BR)DSS}$	Drain−to−Source Breakdown Voltage	I_D = −1 mA, V_{GS} = 0 V	−30	–	–	V
I_{DSS}	Zero−Gate Voltage Drain Current	V_{DS} = −30 V, V_{GS} = 0 V	–	–	−1	μA
I_{GSS}	Gate−to−Source Leakage Current	V_{GS} = ±16 V, V_{DS} = 0 V		–	±10	μA
$V_{GS(off)}$	Cutoff Voltage	V_{DS} = −10 V, I_D = −1 mA	−1.2	–	−2.6	V
| yfs |	Forward Transfer Admittance	V_{DS} =−10 V, I_D = −4.5 A		12	–	S
$R_{DS(on)1}$	Static Drain to Source On−State Resistance	I_D = −4.5 A, V_{GS} = −10 V	9	13	17	mΩ
$R_{DS(on)2}$		I_D = −2 A, V_{GS} = −4.5 V	12	20	28	mΩ
$R_{DS(on)3}$		I_D = −2 A, V_{GS} = −4.0 V	13.5	23	32.5	mΩ
Ciss	Input Capacitance	V_{DS} = −10 V, f = 1 MHz	–	1400	–	pF
Coss	Output Capacitance		–	350	–	pF
Crss	Reverse Transfer Capacitance		–	250	–	pF
$t_{d(on)}$	Turn−ON Delay Time	See specified Test Circuit.	–	10	–	ns
t_r	Rise Time		–	45	–	ns
$t_{d(off)}$	Turn−OFF Delay Time		–	134	–	ns
t_f	Fall Time		–	87	–	ns
Qg	Total Gate Charge	V_{DS} = −15 V, V_{GS} = −10 V, I_D = −9 A	–	28	–	nC
Qgs	Gate−to−Source Charge		–	4	–	nC
Qgd	Gate−to−Drain “Miller” Charge		–	6	–	nC
V_{SD}	Diode Forward Voltage	I_S = −9 A, V_{GS} = 0 V	–	−0.8	−1.2	V

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

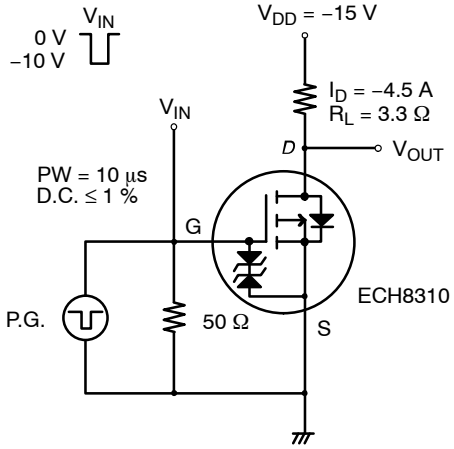


Figure 1. Switching Time Test Circuit

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS

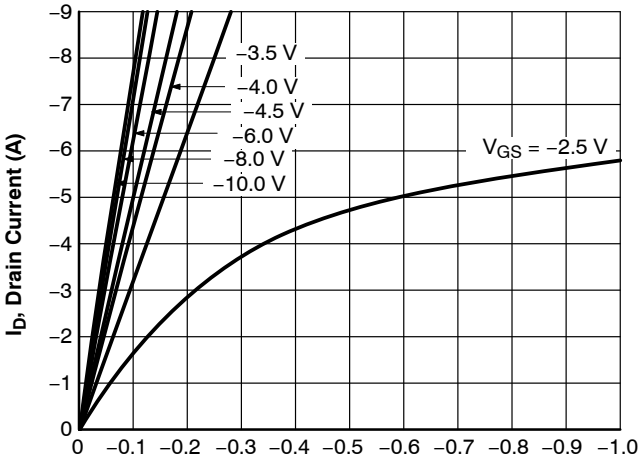


Figure 2. $I_D - V_{DS}$

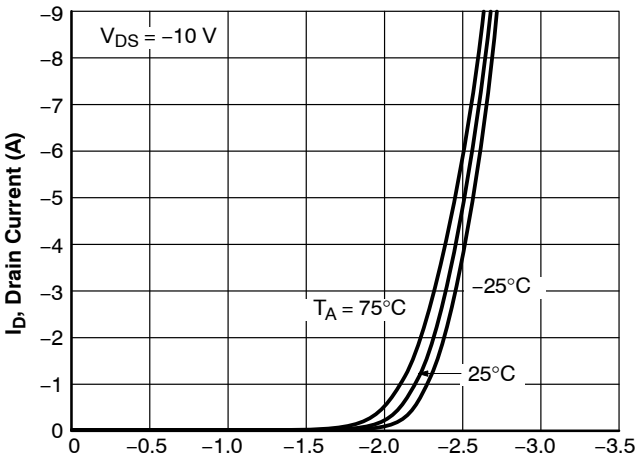


Figure 3. $I_D - V_{GS}$

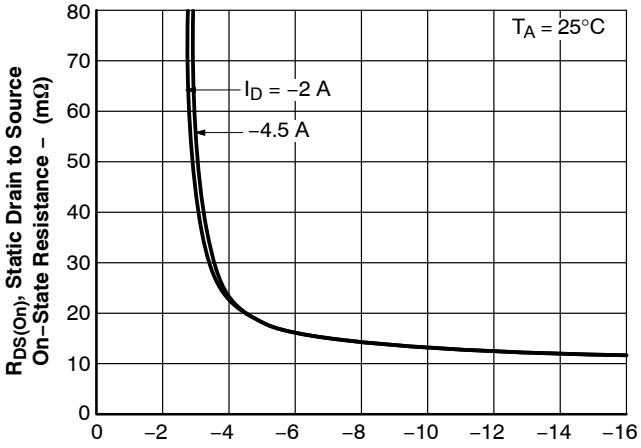


Figure 4. $R_{DS(on)} - V_{GS}$

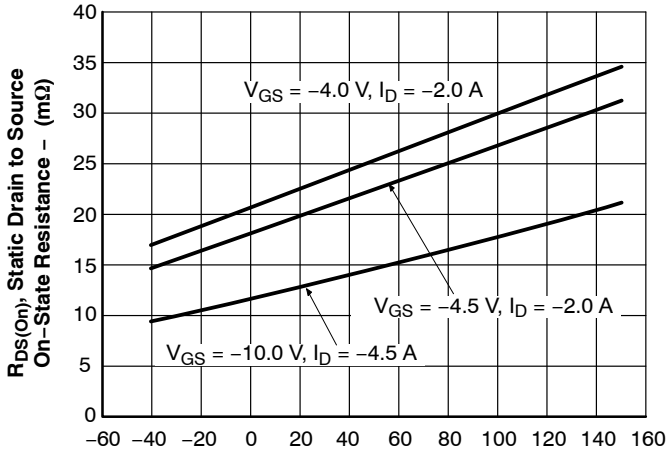


Figure 5. $R_{DS(on)} - T_A$

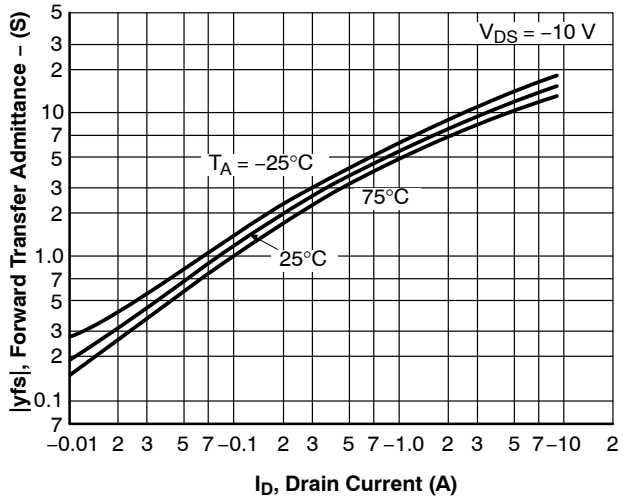


Figure 6. $|Yfs| - I_D$

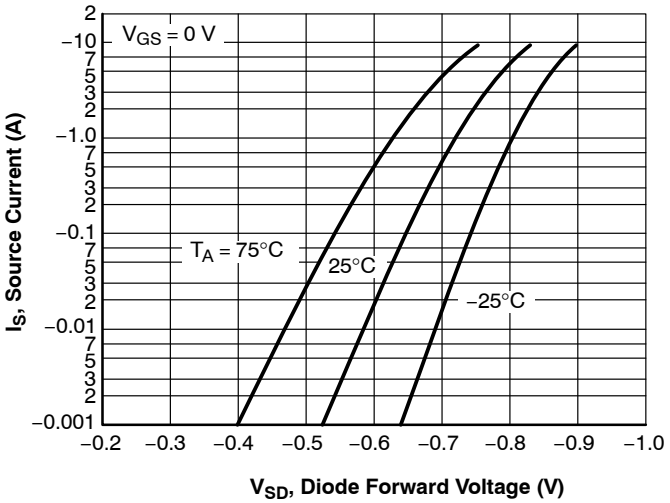


Figure 7. $I_S - V_{SD}$

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS (CONTINUED)

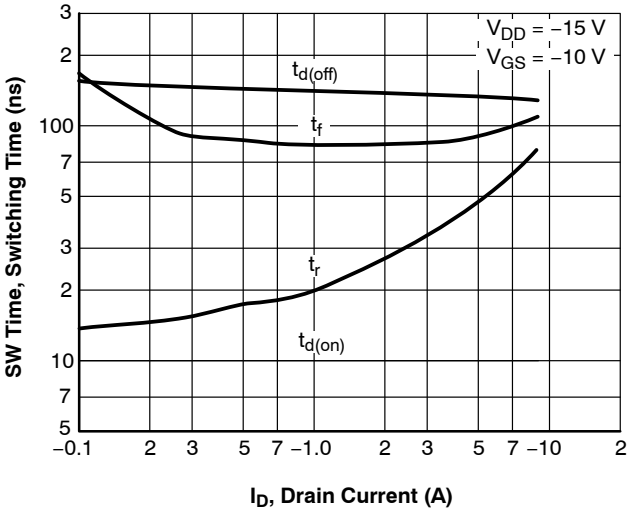


Figure 8. I_D – S/W Time

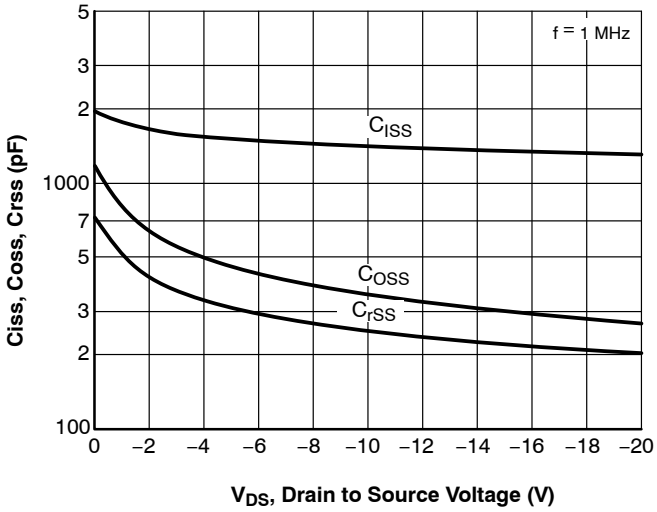


Figure 9. Ciss, Coss,Crss – V_{DS}

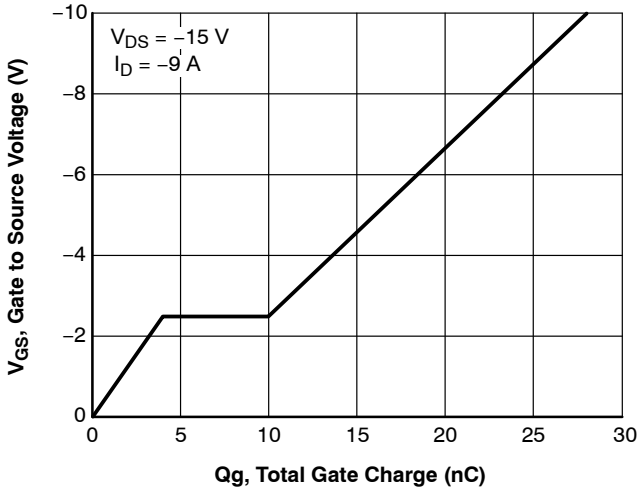


Figure 10. V_{GS} – Q_g

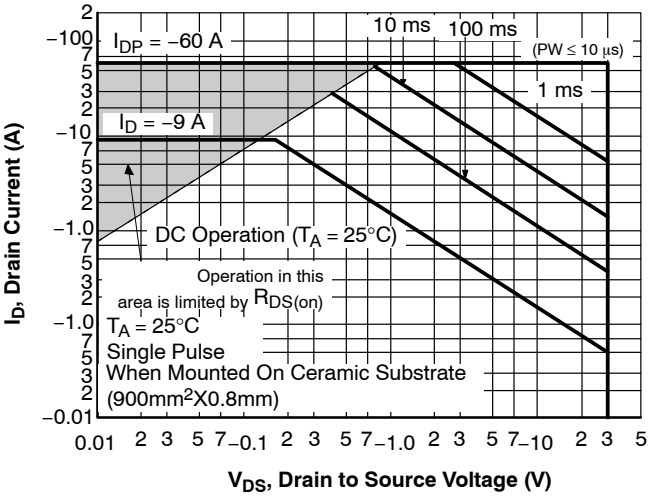


Figure 11. S O A

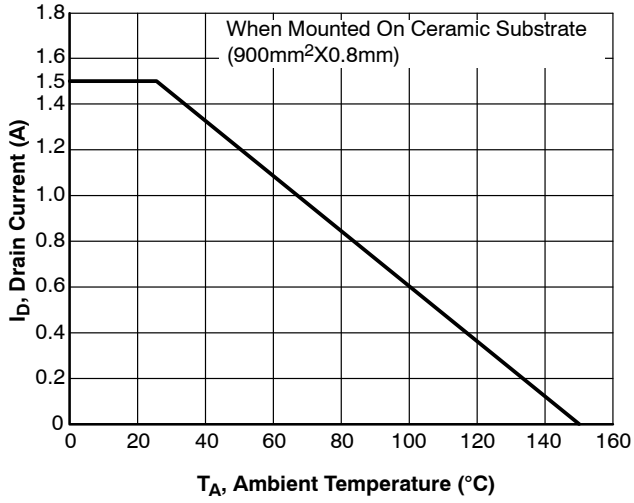



Figure 12. I_D – T_A

Note on usage : Since the ECH8310 is a MOSFET product, please avoid using this device in the vicinity of highly charged objects.

Share Feedback
Your Opinion Matters

SOT−28FL / ECH8
CASE 318BF
ISSUE O

DATE 31 MAR 2012

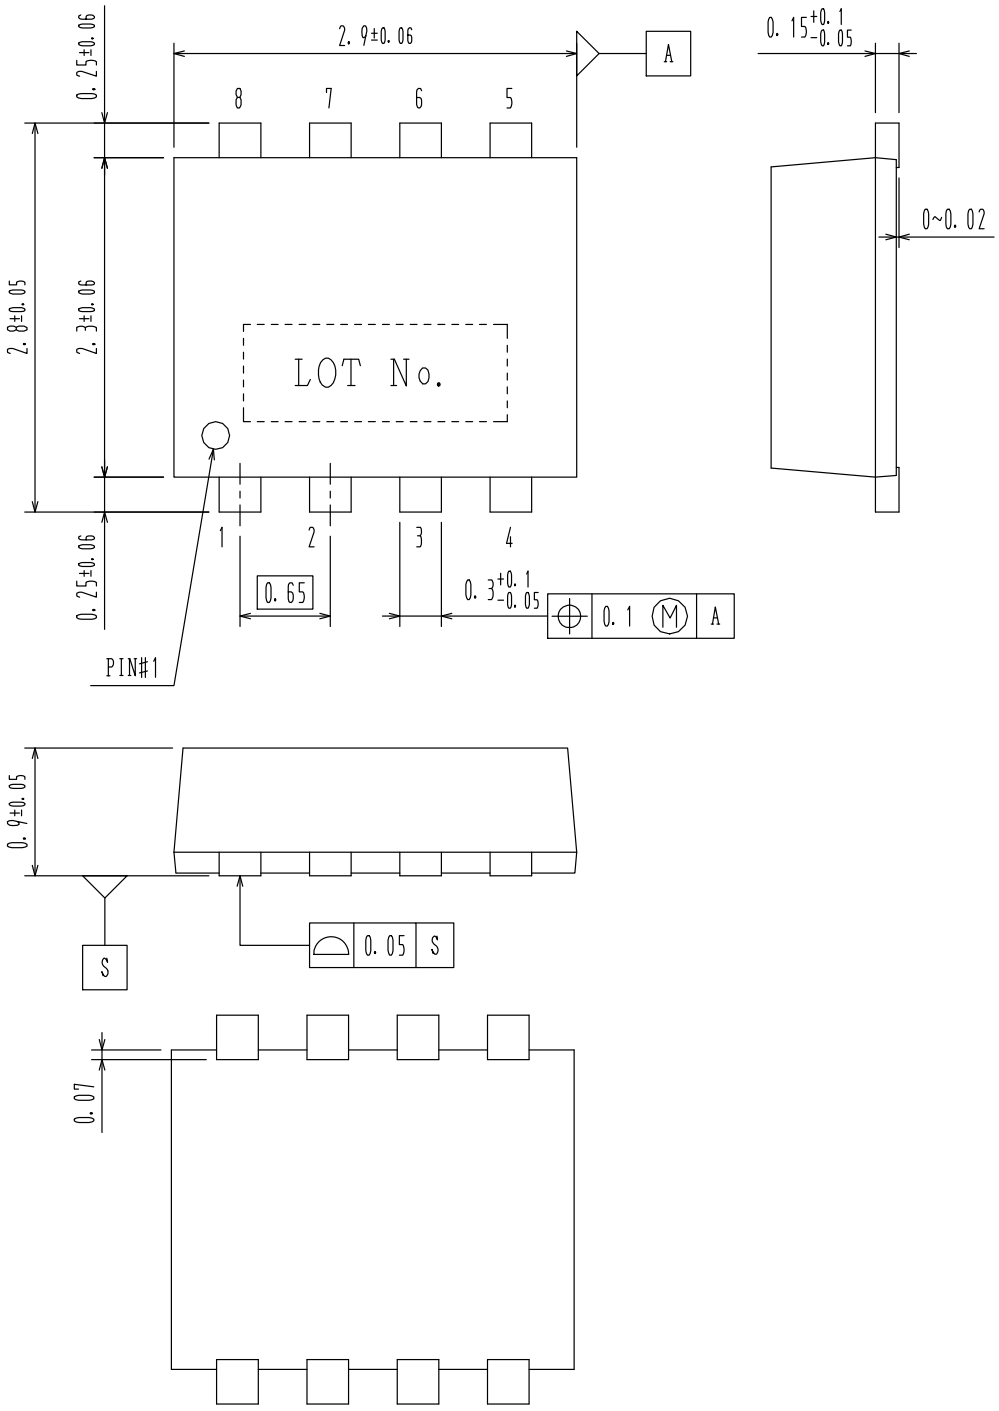

DOCUMENT NUMBER:	**98AON78700E**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**SOT−28FL / ECH8**		**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

onsemi, , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales

ENTEGRECİ

Bu belge www.entegreci.com üzerinden sunulmaktadır.

Elektronik komponent tedarikinde Entegreci

Entegreci, Eskişehir merkezli, Türkiye geneline satış yapan bir elektronik komponent mağazasıdır. Entegreler (IC), mikrodenetleyiciler, transistörler, diyotlar, pasif elemanlar, konnektörler, modüller ve geliştirme kartları tek adetten seri üretim adetlerine kadar satılır. Ürün sayfalarında güncel stok durumunu, fiyatı ve datasheet bağlantısını bulabilirsiniz.

Parça koduyla arama

Üretici parça numarasını yazın; stok ve fiyatı hemen görün.

www.entegreci.com

Ürün kategorileri

Entegreden kapasitöre tüm elektronik komponent kategorileri.

Kategorilere göz atın

Üreticiler

Aradığınız üreticinin ürünlerini tek sayfada inceleyin.

Üreticileri görün

Toplu alım ve teklif

Listede olmayan ya da yüksek adetli parçalar için teklif isteyin.

Teklif isteyin

www.entegreci.com | **destek@entegreci.com** | **0850 305 90 34**

Entegreci is an online electronic components store based in Türkiye. Search by manufacturer part number to see stock, prices and datasheets for integrated circuits, microcontrollers, transistors, passive components and connectors, or request a quote for parts that are not listed.

Bu sayfa Entegreci tarafından eklenmiştir. Belgenin önceki sayfaları asıl yayıncısına aittir ve içeriği değiştirilmemiştir; en güncel sürüm için belgenin yayıncısına başvurun.